Visual Basic® 2008

Programmer's Reference

Rod Stephens

Visual Basic® 2008
Programmer's Reference

Rod Stephens

WILEY

Wiley Publishing, Inc.

Visual Basic® 2008
Programmer's Reference

Visual Basic® 2008
Programmer's Reference

Rod Stephens

WILEY

Wiley Publishing, Inc.

Visual Basic® 2008 Programmer's Reference

About the Author

Rod Stephens started out as a mathematician, but while studying at MIT, discovered the joys of programming and has been programming professionally ever since. During his career, he has worked on an eclectic assortment of applications in such fields as telephone switching, billing, repair dispatching, tax processing, wastewater treatment, concert ticket sales, cartography, and training for professional football players.

Rod is a Microsoft Visual Basic Most Valuable Professional (MVP) and ITT adjunct instructor. He has written 18 books that have been translated into half a dozen different languages, and more than 200 magazine articles covering Visual Basic, Visual Basic for Applications, Delphi, and Java. He is currently a regular contributor to DevX (`www.DevX.com`).

Rod's popular *VB Helper* web site `www.vb-helper.com` receives several million hits per month and contains thousands of pages of tips, tricks, and example code for Visual Basic programmers, as well as example code for this book.

Credits

Executive Editor
Robert Elliott

Development Editor
Christopher J. Rivera

Technical Editor
John Mueller

Production Editor
Angela Smith

Copy Editor
Kim Cofer

Editorial Manager
Mary Beth Wakefield

Production Manager
Tim Tate

Vice President and Executive Group Publisher
Richard Swadley

Vice President and Executive Publisher
Joseph B. Wikert

Project Coordinator, Cover
Lynsey Stanford

Proofreader
Nancy Hanger, Windhaven

Indexer
J & J Indexing

Acknowledgments

Contents

Contents

Contents

Contents

Contents

Contents

Contents

Contents

Contents

Contents

Contents

Introduction

It has been said the Sir Isaac Newton was the last person to know everything. He was an accomplished physicist (his three laws of motion were the basis of classical mechanics, which defined astrophysics for three centuries), mathematician (he was one of the inventors of calculus and developed Newton's Method for finding roots of equations), astronomer, natural philosopher, and alchemist. He invented the reflecting telescope, a theory of color, a law of cooling, and studied the speed of sound.

Just as important, he was born before relativity, quantum mechanics, gene sequencing, thermodynamics, parallel computation, and a swarm of other extremely difficult branches of science.

If you ever used Visual Basic 3, you too could have known everything. Visual Basic 3 was a reasonably small but powerful language. Visual Basic 4 added classes to the language and made Visual Basic much more complicated. Versions 4, 5, and 6 added more support for database programming and other topics such as custom controls, but Visual Basic was still a fairly understandable language, and if you took the time you could become an expert in just about all of it.

Visual Basic .NET accelerated the expansion of Visual Basic tremendously. The .NET Framework added powerful new tools to Visual Basic, but those tools came at the cost of increased complexity. Associated technologies have been added to the language at an ever-increasing rate, so, today, it is impossible for anyone to be an expert on every topic that deals with Visual Basic.

To cover every nook and cranny in Visual Basic you would need an in-depth understanding of database technologies, custom controls, custom property editors, XML, cryptography, serialization, two- and three-dimensional graphics, multi-threading, reflection, the code document object model (DOM), diagnostics, globalization, Web Services, inter-process communication, work flow, Office, ASP, and much more.

This book doesn't even attempt to cover all of these topics. Instead, it provides a broad, solid understanding of essential Visual Basic topics. It explains the powerful development environment that makes Visual Basic such a productive language. It describes the Visual Basic language itself and explains how to use it to perform a host of important development tasks.

It also explains the forms, controls, and other objects that Visual Basic provides for building applications in a modern windowing environment.

This book may not cover every possible topic related to Visual Basic, but it does cover the majority of the technologies that developers need to build sophisticated applications.

Should You Use Visual Basic 2008?

Software engineers talk about five generations of languages (so far). A first-generation language (1GL) is machine language: 0s and 1s.

A second-generation language (2GL) is an assembly language that provides terse mnemonics for machine instructions. It provides few additional tools beyond an easier way to write machine code.

Introduction

Third-generation languages (3GLs) are higher-level languages such as Pascal and FORTRAN. They provide much more sophisticated language elements such as subroutines, loops, and data structures.

Fourth-generation languages (4GLs) are "natural languages" such as SQL. They let developers use a language that is sort of similar to a human language to execute programming tasks. For example, the SQL statement "SELECT * FROM Customers WHERE Balance > 50" tells the database to return information about customers that owe more than $50.

Fifth-generation languages (5GLs) provide powerful, highly graphical development environments to allow developers to use the underlying language in more sophisticated ways. The Visual Studio development environment is extremely powerful. It provides graphical editors to make building forms and editing properties easy and intuitive; IntelliSense to help developers remember what to type next; auto-completion so developers can use meaningful variable names without needing to waste time typing them completely by hand; and breakpoints, watches, and other advanced debugging tools that make building applications easier.

Visual Basic uses one of the most powerful development environments ever built, Visual Studio, but it is not the only language that does so. The C# language also uses the Visual Studio development environment. So the question is, should you use Visual Basic or C#?

A Visual Basic programmer's joke asks, "What's the difference between Visual Basic .NET and C#? About three months!" The implication is that Visual Basic .NET syntax is easier to understand, and building applications with it is faster. Similarly, C# programmers have their jokes about Visual Basic .NET, implying that C# is more powerful.

In fact, Visual Basic .NET is *not* a whole lot easier to use than C#, and C# is *not* significantly more powerful. The basic form of the two languages is very similar. Aside from a few stylistic differences (Visual Basic is line-oriented; C# uses lots of braces and semicolons), the languages are comparable. Both use the Visual Studio development environment, both provide access to the .NET Framework of support classes and tools, and both provide similar syntax for performing basic programming tasks.

The main difference between these languages is one of style. If you have experience with previous versions of Visual Basic, you will probably find Visual Basic 2008 easier to get used to. If you have experience with C++ or Java, you will probably find C# (or Visual C++ or Visual J#) easy to learn.

Visual Basic does have some ties with other Microsoft products. For example, Active Server Pages (ASP) uses Visual Basic to create interactive web pages. Microsoft Office applications (Word, Excel, PowerPoint, and so forth) and many third-party tools use Visual Basic for Applications (VBA) as a macro programming language. If you know Visual Basic, you have a big head start in using these other languages. ASP and VBA are based on pre-.NET versions of Visual Basic, so you won't instantly know how to use them, but you'll have an advantage if you need to learn ASP or VBA.

If you are new to programming, either Visual Basic 2008 or C# is a good choice. I think Visual Basic 2008 may be a little easier to learn, but I may be slightly biased because I've been using Visual Basic since long before C# was invented. You won't be making a big mistake either way, and you can easily switch later, if necessary.

Who Should Read This Book

This book is intended for programmers of all levels. It describes the Visual Basic 2008 language from scratch, so you don't need experience with previous versions of the language. The book also covers many intermediate and advanced topics. It covers topics in enough depth that even experienced developers will discover new tips, tricks, and language details. After you have mastered the language, you may still find useful tidbits throughout the book, and the reference appendixes will help you look up easily forgotten details.

The chapters move quickly through the more introductory material. If you have never programmed before and are intimidated by computers, you might want to read a more introductory book first. If you are a beginner who's not afraid of the computer, you should have few problems learning Visual Basic 2008 from this book.

If you have programmed in any other language, fundamentals such as variable declarations, data types, and arrays should be familiar to you, so you should have no problem with this book. The index and reference appendixes should be particularly useful in helping you translate from the languages you already know into the corresponding Visual Basic syntax.

How This Book Is Organized

The chapters in this book are divided into five parts plus appendixes. The chapters in each part are described here. If you are an experienced programmer, you can use these descriptions to decide which chapters to skim and which to read in detail.

Part I: IDE

The chapters in this part of the book describe the Visual Studio integrated development environment (IDE) from a Visual Basic developer's point of view. The IDE is mostly the same for C# and other developers but there are a few differences such as which keyboard shortcuts perform which tasks.

Chapter 1, "Introduction to the IDE," explains how to get started using the Visual Studio integrated development environment. It tells how to configure the IDE for different kinds of development. It defines and describes Visual Basic projects and solutions, and shows how to create, run, and save a new project.

Chapter 2, "Menus, Toolbars, and Windows," describes the most useful and important commands available in the IDE's menus and toolbars. The IDE's menus and toolbars include hundreds of commands, so this chapter covers only those that are the most useful.

Chapter 3, "Customization," explains how to customize the IDE. It tells how you can create, hide, and rearrange menus and toolbars to make it easy to use the tools that you find most useful.

Chapter 4, "Windows Forms Designer," describes the designer that you can use to build Windows Forms. It explains how to create, size, move, and copy controls. It tells how to set control properties and add code to respond to control events. It also explains how to use handy designer tools such as smart tags and command verbs.

Chapter 5, "WPF Designer," explains how to use the Windows Presentation Foundation (WPF) form designer. This chapter is similar to Chapter 4 except that it covers WPF forms instead of Windows Forms.

Chapter 6, "Visual Basic Code Editor," describes one of the most important windows used by developers: the code editor. It explains how to write code, set breakpoints, use code snippets, and get the most out of IntelliSense.

Chapter 7, "Debugging," explains debugging tools provided by Visual Studio. It describes the debugging windows and explains such techniques as setting complex breakpoints to locate bugs.

Part II: Getting Started

The chapters in this part of the book explain the bulk of the Visual Basic language and the objects that support it. They explain the forms, controls, and other objects that a program uses to build a user interface, and they tell how you can put code behind those objects to implement the program's functionality.

Chapter 8, "Selecting Windows Forms Controls," provides an overview of the Windows Forms controls that you can put on a form. It groups the controls by category to help you find the controls you can use for a particular purpose.

Chapter 9, "Using Windows Forms Controls," gives more detail about how you can use Windows Forms controls. It explains how you can build controls at design time or runtime, how to set complex property values, and how to use useful properties that are common to many different kinds of controls. It explains how to add event handlers to process control events and how to validate user-entered data.

Chapter 10, "Windows Forms," describes the forms you use in a Windows Forms application. Forms are just another kind of control, but their unique position in the application's architecture means they have some special properties, and this chapter describes them.

Chapter 11, "Selecting WPF Controls," provides an overview of WPF controls. It groups the controls by category to help you find the controls you can use for a particular purpose. This chapter is similar to Chapter 8 except that it covers WPF controls instead of Windows Forms controls.

Chapter 12, "Using WPF Controls," gives more detail about how you can use WPF controls. This chapter is similar to Chapter 9 except that it deals with WPF controls instead of Windows Forms controls.

Chapter 13, "WPF Windows," describes the windows that WPF applications use in place of Windows Forms. This chapter is similar to Chapter 10 except that it deals with WPF controls instead of Windows Forms controls.

Chapter 14, "Program and Module Structure," describes the most important files that make up a Visual Basic project. It describes some of the hidden files that projects contain and explains some of the structure that you can give to code within a module such as code regions and conditionally compiled code.

Chapter 15, "Data Types, Variables, and Constants," explains the standard data types provided by Visual Basic. It shows how to declare and initialize variables and constants, and explains variable scope.

It discusses value and reference types, passing parameters by value or reference, and creating parameter variables on the fly. It also explains how to create arrays, enumerated types, and structures.

Chapter 16, "Operators," describes the operators a program uses to perform calculations. These include mathematical operators (`+`, `*`, `\`), string operators (`&`), and Boolean operators (`And`, `Or`). The chapter explains operator precedence and type conversion issues that arise when an expression combines more than one type of operator (for example, arithmetic and Boolean).

Chapter 17, "Subroutines and Functions," explains how you can use subroutines and functions to break a program into manageable pieces. It describes routine overloading and scope. It also describes lambda functions and relaxed delegates, two features that are new in Visual Basic 2008.

Chapter 18, "Program Control Statements," describes the statements that a Visual Basic program uses to control code execution. These include decision statements (`If Then Else`, `Select Case`, `IIF`, `Choose`) and looping statements (`For Next`, `For Each`, `Do While`, `While Do`, `Repeat Until`).

Chapter 19, "Error Handling," explains error handling and debugging techniques. It describes the `Try Catch` structured error handler, in addition to the older `On Error` statement inherited from earlier versions of Visual Basic. It discusses typical actions a program might take when it catches an error. It also describes techniques for preventing errors and making errors more obvious when they do occur.

Chapter 20, "Database Controls and Objects," explains how to use the standard Visual Basic database controls. These include database connection components that handle connections to a database, `DataSet` components that hold data within an application, and data adapter controls that move data between data connections and `DataSets`.

Chapter 21, "LINQ," describes language integrated query (LINQ) features. It explains how you can write SQL-like queries to select data from or into objects, XML, or database objects. LINQ is a new feature in Visual Basic 2008.

Chapter 22, "Custom Controls," explains how to build your own customized controls that you can then use in other applications. It covers the three main methods for creating a custom control: derivation, composition, and building from scratch. This chapter also provides several examples that you can use as a starting point for controls of your own.

Chapter 23, "Drag and Drop, and the Clipboard," explains how a Visual Basic program can support drag-and-drop operations. It tells how your program can start a drag to another application, how to respond to drag operations started by another application, and how to receive a drop from another application. This chapter also explains how a program can copy data to and from the clipboard. Using the clipboard is similar to certain types of drag-and-drop operations, so these topics fit naturally in one chapter.

Chapter 24, "UAC Security," describes the User Access security model used by the Vista operating system. With UAC security, all users run with reduced "normal" user privileges. If a program must perform tasks requiring administrator permissions, a UAC dialog box allows you to elevate the application's privilege level. This chapter describes UAC security and explains how you can mark a program for privilege elevation.

Part III: Object-Oriented Programming

This part explains fundamental concepts in object-oriented programming (OOP) with Visual Basic. It also describes some of the more important classes and objects that you can use when building an application.

Chapter 25, "OOP Concepts," explains the fundamental ideas behind object-oriented programming (OOP). It describes the three main features of OOP: encapsulation, polymorphism, and inheritance. It explains the benefits of these features, and tells how you can take advantage of them in Visual Basic.

Chapter 26, "Classes and Structures," explains how to declare and use classes and structures. It explains what classes and structures are, and it describes their differences. It shows the basic declaration syntax and tells how to create instances of classes and structures. It also explains some of the trickier class issues (such as private class scope, declaring events, and shared variables and methods).

Chapter 27, "Namespaces," explains namespaces. It discusses how Visual Studio uses namespaces to categorize code and to prevent name collisions. It describes a project's root namespace, tells how Visual Basic uses namespaces to resolve names (such as function and class names), and demonstrates how you can add namespaces to an application yourself.

Chapter 28, "Collection Classes," explains classes included in Visual Studio that you can use to hold groups of objects. It describes the various collection, dictionary, queue, and stack classes; tells how to make strongly typed versions of those classes; and gives some guidance on deciding which class to use under different circumstances.

Chapter 29, "Generics," explains templates that you can use to build new classes designed to work with specific data types. For example, you can build a generic binary tree, and then later use it to build classes to represent binary trees of customer orders, employees, or work items.

Part IV: Graphics

The chapters in this part of the book describe graphics in Visual Basic 2008. They explain the Graphics Device Interface+ (GDI+) routines that programs use to draw images in Visual Basic. They explain how to draw lines and text; how to draw and fill circles and other shapes; and how to load, manipulate, and save bitmap images. This part also explains how to generate printed output and how to send reports to the screen or to the printer.

Chapter 30, "Drawing Basics," explains the fundamentals of drawing graphics in Visual Basic 2008. It describes the graphics namespaces and the classes they contain. It describes the most important of these classes, `Graphics`, in detail. It also describes the `Paint` event handler and other events that a program should use to keep its graphics up to date.

Chapter 31, "Brushes, Pens, and Paths," explains the most important graphics classes after `Graphics`: `Pen` and `Brush`. It tells how you can use `Pens` to draw solid lines, dashed lines, lines with custom dash patterns, and lines with custom lengthwise stripe patterns. It tells how to use `Brushes` to fill areas with colors, hatch patterns, linear color gradients, color gradients that follow a path, and tiled images. This chapter also describes the `GraphicsPath` class, which represents a series of lines, shapes, curves, and text.

Chapter 32, "Text," explains how to draw strings of text. It shows how to create different kinds of fonts, determine exactly how big text will be when drawn in a particular font, and use GDI+ functions to make positioning text simple. It shows how to use a `StringFormat` object to determine how text is aligned, wrapped, and trimmed, and how to read and define tab stops.

Chapter 33, "Image Processing," explains how to load, modify, and save image files. It shows how to read and write the pixels in an image, and how to save the result in different file formats such as BMP, GIF, and JPEG. It tells how to use images to provide auto-redraw features, and how to manipulate an image pixel by pixel, both using a `Bitmap`'s `GetPixel` and `SetPixel` methods and using "unsafe" access techniques that make pixel manipulation much faster than is possible with normal GDI+ methods.

Chapter 34, "Printing," explains different ways that a program can send output to the printer. It shows how you can use the `PrintDocument` object to generate printout data. You can then use the `PrintDocument` to print the data immediately, use a `PrintDialog` control to let the user select the printer and set its characteristics, or use a `PrintPreviewDialog` control to let the user preview the results before printing.

Chapter 35, "Reporting," provides an introduction to Crystal Reports, a tool that makes generating reports in Visual Basic relatively easy. The chapter explains the basics of Crystal Reports and steps through an example that builds a simple report.

Part V: Interacting with the Environment

The chapters in this part of the book explain how an application can interact with its environment. They show how the program can save and load data in external sources (such as the System Registry, resource files, and text files); work with the computer's screen, keyboard, and mouse; and interact with the user through standard dialog controls.

Chapter 36, "Configuration and Resources," describes some of the ways that a Visual Basic program can store configuration and resource values for use at runtime. Some of the most useful of these include environment variables, the Registry, configuration files, and resource files.

Chapter 37, "Streams," explains the classes that a Visual Basic application can use to work with stream data. Some of these classes are `FileStream`, `MemoryStream`, `BufferedStream`, `TextReader`, and `TextWriter`.

Chapter 38, "File-System Objects," describes classes that let a Visual Basic application interact with the file system. These include classes such as `Directory`, `DirectoryInfo`, `File`, and `FileInfo` that make it easy to create, examine, move, rename, and delete directories and files.

Chapter 39, "Windows Communication Foundation," describes the Windows Communication Foundation (WCF), a library and set of tools that make building service-oriented applications easier. This chapter explains how to use new WCF attributes to easily define a service, how to use configuration files to configure the service, and how to use WCF tools to consume the service.

Chapter 40, "Useful Namespaces," describes some of the more useful namespaces defined by the .NET Framework. It provides a brief overview of some of the most important System namespaces and gives more detailed examples that demonstrate regular expressions, XML, cryptography, reflection, threading, and Direct3D.

Part VI: Appendixes

The book's appendixes provide a categorized reference of the Visual Basic 2008 language. You can use them to quickly review the syntax of a particular command, select from among several overloaded versions of a routine, or refresh your memory of what a particular class can do. The chapters earlier in the book give more context, explaining how to perform specific tasks and why one approach might be preferred over another.

Appendix A, "Useful Control Properties, Methods, and Events," describes properties, methods, and events that are useful with many different kinds of controls.

Appendix B, "Variable Declarations and Data Types," summarizes the syntax for declaring variables. It also gives the sizes and ranges of allowed values for the fundamental data types.

Appendix C, "Operators," summarizes the standard operators such as +, <<, OrElse, and Like. It also gives the syntax for operator overloading.

Appendix D, "Subroutine and Function Declarations," summarizes the syntax for subroutine, function, and property procedure declarations.

Appendix E, "Control Statements," summarizes statements that control program flow, such as If Then, Select Case, and looping statements.

Appendix F, "Error Handling," summarizes both structured and "classic" error handling. It describes some useful exception classes and gives an example showing how to build a custom exception class.

Appendix G, "Windows Forms Controls and Components," describes standard Windows Forms controls and components provided by Visual Basic 2008. It explains the properties, methods, and events that I have found most useful when working with these components.

Appendix H, "WPF Controls," describes the controls that are placed in the Toolbox by default when you build WPF applications. This is a relatively brief list to give you a feel for the kinds of controls that are available, rather than an in-depth description like the one provided for the standard Windows Forms controls in Appendix G.

Appendix I, "Visual Basic Power Packs," lists some additional tools that you can download to make Visual Basic development easier. This appendix describes some Visual Basic 6 compatibility tools provided by Microsoft, and some GotDotNet Power Packs that contain useful controls built in Visual Basic 2003.

Appendix J, "Form Objects," describes forms. In a very real sense, forms are just another type of component. They play such a key role in Visual Basic applications, however, that they deserve special attention in their own appendix.

Appendix K, "Classes and Structures," summarizes the syntax for declaring classes and structures, and defining their constructors and events.

Appendix L, "LINQ," summarizes LINQ syntax.

Appendix M, "Generics," summarizes the syntax for declaring generic classes.

Appendix N, "Graphics," summarizes the objects used to generate graphics in Visual Basic 2008. It covers the most useful graphics namespaces.

Appendix O, "Useful Exception Classes," lists some of the more useful exception classes defined by Visual Basic. You may want to throw these exceptions in your own code.

Appendix P, "Date and Time Format Specifiers," summarizes specifier characters that you can use to format dates and times. For example, they let you display a time using a 12-hour or 24-hour clock.

Appendix Q, "Other Format Specifiers," summarizes formatting for numbers and enumerated types.

Appendix R, "The Application Class," summarizes the `Application` class that provides properties and methods for controlling the current application.

Appendix S, "The My Namespace," describes the My namespace, which provides shortcuts to useful features scattered around other parts of the .NET Framework. It provides shortcuts for working with the application, computer hardware, application forms, resources, and the current user.

Appendix T, "Streams," summarizes the Visual Basic stream classes such as `Stream`, `FileStream`, `MemoryStream`, `TextReader`, `CryptoStream`, and so forth.

Appendix U, "File-System Classes," summarizes methods that an application can use to learn about and manipulate the file system. It explains classic Visual Basic methods such as `FreeFile`, `WriteLine`, and `ChDir`, as well as newer .NET Framework classes such as `FileSystem`, `Directory`, and `File`.

Appendix V, "Index of Examples," briefly describes the 435 example programs that are available for download on the book's web site. You can use this list to see which programs demonstrate particular techniques.

How to Use This Book

If you are an experienced Visual Basic .NET programmer, you may want to skim the language basics covered in the first parts of the book. You may find a few new features that have appeared in Visual Basic 2008, so you probably shouldn't skip these chapters entirely, but most of the basic language features are the same as in previous versions.

Intermediate programmers and those with less experience with Visual Basic .NET should take these chapters a bit more slowly. The chapters in Part III, "Object-Oriented Programming," cover particularly tricky topics. Learning all the variations on inheritance and interfaces can be rather confusing.

Beginners should spend more time on these first chapters because they set the stage for the material that follows. It will be a lot easier for you to follow a discussion of file management or regular expressions if you are not confused by the error-handling code that the examples take for granted.

Programming is a skill best learned by doing. You can pick up the book and read through it quickly if you like, but the information is more likely to stick if you open the development environment and experiment with some programs of your own.

Introduction

Normally, when I read a new programming book, I work through every example myself, modifying the code to see what happens if I try different things not covered by the author. I experiment with new variations and pay particular attention to errors, which are hard to cover completely in a book. It's one thing to read about strongly typed collections; it's another to build one yourself using data that is meaningful to you.

Learning by doing may encourage you to skip sections of the book. For example, Chapter 1 covers the IDE in detail. After you've read for a while, you may want to skip some sections and start experimenting with the environment on your own. I encourage you to do so. Lessons learned by doing stick better than those learned by reading. Later, when you have some experience with the development environment, you can go back and examine Chapter 1 in more detail to see if you missed anything during your experimentation.

The final part of the book is a Visual Basic 2008 reference. These appendixes present more concise, categorized information about the language. You can use these appendixes to recall the details of specific operations. For example, you can read Chapter 8 to learn which controls are useful for different purposes. Then use Appendix G to learn about specific controls' properties, methods, and events.

Throughout your work, you can also refer to the appendixes to get information on specific classes, controls, and syntax. For example, you can quickly find the syntax for declaring a generic class in Appendix M. If you need more information on generics, you can find it in Chapter 29 or the online help. If you just need to refresh your memory of the basic syntax, however, scanning Appendix M will be faster.

Necessary Equipment

To read this book and understand the examples, you will need no special equipment. To use Visual Basic 2008 and to run the examples found on the book's web page, you need any computer that can reasonably run Visual Basic 2008. That means a reasonably modern, fast computer with a lot of memory. See the Visual Basic 2008 documentation for Microsoft's exact requirements and recommendations.

To build Visual Basic 2008 programs, you will also need a copy of Visual Basic 2008. Don't bother trying to run the examples shown here if you have a pre-.NET version of Visual Basic such as Visual Basic 6. The changes between Visual Basic 6 and Visual Basic .NET are huge, and many Visual Basic .NET concepts don't translate well into Visual Basic 6. With some experience in C#, it would be much easier to translate programs into that language.

You can even use the free Visual Basic 2008 Express Edition. For more information, go to `msdn2.microsoft.com/en-us/express/default.aspx`.

Much of the Visual Basic 2008 release is compatible with Visual Basic 2005 and earlier versions of Visual Basic .NET, however, so you can make many of the examples work with earlier versions of Visual Basic .NET. You will not be able to load the example programs downloaded from the book's web site, however. You will need to copy and paste the significant portions of the code into your version of Visual Basic.

To use UAC security, you must have UAC security installed on your computer. UAC is installed and activated by default in the Windows Vista operating system.

Conventions

To help you get the most from the text and keep track of what's happening, a number of conventions have been used throughout the book.

> *Tips, hints, tricks, and asides to the current discussion are offset and placed in italics like this.*

As for styles in the text:

- ❑ Important words are *highlighted* when they are introduced.
- ❑ Keyboard strokes are shown like this: Ctrl+A.
- ❑ File names, URLs, and code within the text are shown like this: `persistence.properties`.
- ❑ Code is presented in the following two different ways:

```
In code examples, new and important code is highlighted with a gray background.
The gray highlighting is not used for code that's less important in the present
context, or has been shown before.
```

The Book's Web Site

Programming environments such as Visual Basic and Windows operating systems are not static so books about them shouldn't be either. Modern programming books are linked with web sites that provide example programs, forums for questions and discussion, lists of corrections and changes, and other supplementary material.

This book is no exception. If you don't visit the book's web sites, you are not getting full value for your money.

To visit the book's Wrox web site, go to `www.wrox.com` and search for the book's title or ISBN, or for the author's name Rod Stephens. This web site includes author information, excerpts, example programs that you can download, any corrections that may be necessary, and a discussion forum.

> *Please visit the book's web sites. Download the example programs so you can try out the code in the book. I monitor the Wrox forum closely and answer questions as quickly as I can.*

The book's author web site, `www.vb-helper.com/vb_prog_ref.htm`, contains similar material, plus some extra examples. The main VB Helper web site also contains thousands of tips, tricks, and examples written in various versions of Visual Basic.

To keep informed of changes to this book or my other books, you can sign up for one of my newsletters at `www.vb-helper.com/newsletter.html`. The newsletters, which are sent approximately once a week, include Visual Basic tips, tricks, and examples, in addition to updates on my books and other thoughts about Visual Basic development.

If you have corrections or comments, please send them to me at `RodStephens@vb-helper.com`. I will do my best to keep the web sites as up-to-date as possible.

Wrox Errata

We make every effort to ensure that there are no errors in the text or in the code. However, no one is perfect, and mistakes do occur. If you find an error in one of our books (such as a spelling mistake or faulty piece of code), we would be very grateful for your feedback. By sending in errata, you may save another reader hours of frustration and, at the same time, you will be helping us provide even higher quality information.

To find the errata page for this book, go to `www.wrox.com` and locate the title using the Search box or one of the title lists. Then, on the book details page, click the Book Errata link. On this page, you can view all errata that has been submitted for this book and posted by Wrox editors. A complete book list including links to each book's errata is also available at `www.wrox.com/misc-pages/booklist.shtml`.

If you don't spot "your" error on the Book Errata page, go to `www.wrox.com/contact/techsupport .shtml` and complete the form there to send us the error you have found. We'll check the information and, if appropriate, post a message to the book's errata page and fix the problem in subsequent editions of the book.

p2p.wrox.com

For author and peer discussion, join the P2P forums at `p2p.wrox.com`. The forums are a Web-based system for you to post messages relating to Wrox books and related technologies, and to interact with other readers and technology users. The forums offer a subscription feature to e-mail you topics of interest of your choosing when new posts are made to the forums. Wrox authors, editors, other industry experts, and your fellow readers are present on these forums.

At `p2p.wrox.com`, you will find a number of different forums that will help you not only as you read this book, but also as you develop your own applications. To join the forums, just follow these steps:

1. Go to `p2p.wrox.com` and click the Register link.

2. Read the terms of use and click Agree.

3. Complete the required information to join, as well as any optional information you wish to provide, and click Submit.

4. You will receive an e-mail with information describing how to verify your account and complete the joining process.

You can read messages in the forums without joining P2P, but to post your own messages, you must join.

When you join, you can post new messages and respond to messages other users post. You can read messages at any time on the Web. If you would like to have new messages from a particular forum e-mailed to you, click the Subscribe to this Forum icon by the forum name in the forum listing.

For more information about how to use the Wrox P2P, be sure to read the P2P FAQs for answers to questions about how the forum software works, as well as many common questions specific to P2P and Wrox books. To read the FAQs, click the FAQ link on any P2P page.

Visual Basic 2008 Version 1 Warning

Due to a configuration error when shipping the first versions of Visual Basic 2008, when you create a new WPF project the result contains a bug. The template project tries to return a `System.Windows.Application` object from a function that should return a `WpfApplication1.Application` object. The error is:

```
Option Strict On disallows implicit conversions from
'System.Windows.Application' to 'WpfApplication1.Application'.
```

The error occurs in the `Return` statement in this code:

```
<Global.System.Diagnostics.CodeAnalysis.SuppressMessageAttribute( _
 "Microsoft.Performance", "CA1811:AvoidUncalledPrivateCode")>  _
Friend ReadOnly Property Application() As Application
    Get
        Return Global.System.Windows.Application.Current
    End Get
End Property
```

To fix the problem, hover over the red box displayed by Visual Basic to get the Error Correction Options dropdown. Accept the error correction suggestion to get this fix:

```
Return CType(Global.System.Windows.Application.Current, _
    WpfApplication1.Application)
```

This error should be fixed in the first service packs and later releases of Visual Basic 2008.

Meanwhile be aware of this issue when you read Chapters 5, 11, 12, and 13. For more information on this issue, see `support.microsoft.com/default.aspx/kb/945756`.

Part I
IDE

Introduction to the IDE

The chapters in the first part of this book describe the Visual Studio integrated development environment (IDE). They explain the most important windows, menus, and toolbars that make up the environment, and show how to customize them to suit your needs. They explain some of the tools that provide help while you are writing Visual Basic applications and how to use the IDE to debug programs.

Even if you are an experienced Visual Basic programmer, you should at least skim this material. The IDE is *extremely* complex and provides hundreds (if not thousands) of commands, menus, toolbars, windows, context menus, and other tools for editing, running, and debugging Visual Basic projects. Even if you have used the IDE for a long time, there are sure to be some features that you have overlooked.

> *When I teach Visual Basic, for example, I cover the IDE's keyboard shortcuts (such as Alt+Space to open IntelliSense, and Ctrl+C, Ctrl+X, and Ctrl+V to copy, cut, and paste) early in the class. The students don't really write enough code to take full advantage of these tools for several weeks, however, so we revisit the topic later.*

These chapters describe some of the most important of those features, and you may discover something useful that you've never noticed before.

Even after you've read these chapters, you should periodically spend some time wandering through the IDE to see what you've missed. Every month or so, spend a few minutes exploring little-used menus and right-clicking things to see what their context menus contain. As you become a more proficient Visual Basic programmer, you will find uses for tools that you may have previously dismissed or not understood before.

> *It's also useful to save links to tips you discover online. You can make a Visual Basic Tips folder in your browser's favorites list to make finding tips easier.*

This chapter explains how to get started using the IDE. It tells how to configure the IDE for different kinds of development. It explains Visual Basic projects and solutions, and shows how to create, run, and save new projects. This chapter is mostly an introduction to the chapters that

follow. The other chapters in this part of the book provide much more detail about particular tasks such as using the IDE's menus, customizing menus and toolbars, and using the Windows Form Designer to build forms.

Different IDE Appearance

Before you start reading about the IDE and viewing screen shots, it's important to understand that the Visual Studio IDE is extremely customizable. You can move, hide, or modify the menus, toolbars, and windows; create your own toolbars; dock, undock, or rearrange the toolbars and windows; and change the behavior of the built-in text editors (change their indentation, colors for different kinds of text, and so forth). These chapters describe the basic Visual Studio development environment as it is initially installed. After you've moved things around to suit your needs, your IDE may look nothing like the pictures in this book.

To avoid confusion, you should probably not customize the IDE's basic menus and toolbars too much. Removing the help commands from the Help menu and adding them to the Edit menu will only cause confusion later. Moving or removing commands will also make it more difficult to follow the examples in this and other books, and will make it more difficult to follow instructions given by others who might be able to help you when you have problems.

Instead of making drastic changes to the default menus and toolbars, hide the menus and toolbars that you don't want and create new customized toolbars to suit your needs. Then you can find the original standard toolbars if you decide you need them later. Chapter 3, "Customization," has more to say about rearranging the IDE's components.

There are several other reasons why Visual Studio on your system may not look exactly like the screens shown in this book. Visual Studio looks different on different operating systems. The figures in this book were taken on a computer running Windows Vista so they display the distinctive Vista look and feel. This computer was using the Aero Glass style, so the forms use large, translucent borders and other Aero decorations. You may see a different appearance, even if you are using Vista and you have selected another style, or if Vista thinks your hardware won't support Aero nicely. Additionally, some commands may not behave exactly the same way on different operating systems.

> *In addition to its new Aero appearance, new features in Vista also include a new User Account Control (UAC) security model. When you first log on, all accounts get a* normal *level of user privileges. Later, when you try to run certain applications that require increased permissions, a UAC privilege elevation dialog box appears where you can enter an administrator password. The examples in this book were tested using a normal user account, so you should not see that dialog while running them, but you may see it if you use other development tools. Chapter 24, "UAC Security," provides more details about UAC.*

Visual Studio will also look different depending on which version you have installed. The free Visual Basic 2008 Express Edition product has fewer tools than other editions such as the high-end Visual Studio 2008 Team Suite. The figures in this book were captured while using Visual Studio 2008 Team Suite, so, if you have another version, you may not see all of the tools shown here.

> *You can learn about Visual Studio's free Express editions at* `msdn2.microsoft.com/en-us/` `express/default.aspx`*. Learn about Visual Basic in general at the Visual Basic home page* `msdn2.microsoft.com/en-us/vbasic/default.aspx`*.*

Finally, you may be using different configuration settings from the ones used while writing this book. You can configure Visual Studio to use settings customized for developing projects using Visual Basic, C#, Web tools, and other technologies. This book assumes your installation is configured for Visual Basic development and the screen shots may look different if you have selected a different configuration. The following section says more about different IDE configurations and tells how you can select a particular configuration.

IDE Configurations

When you install it, Visual Studio asks you what kind of development settings you want to use. The most obvious choice for a Visual Basic developer is Visual Basic Development Settings. This choice customizes Visual Studio to work more easily with Visual Basic, and is a good choice if you will focus on Visual Basic development.

Another reasonable choice is General Development Settings. This option makes Visual Studio behave more like Visual Studio 2003. It's a good choice if you are used to Visual Studio 2003, or if you expect to use other Visual Studio languages, such as C#, fairly regularly because these settings are fairly effective for C# development as well as Visual Basic development.

This book assumes that you have configured Visual Studio for Visual Basic development. If you have chosen a different configuration, some of the figures in this book may look different from what you see on your screen. Some of the menu items available may be slightly different, or may appear in a different order. Usually, the items are available somewhere, but you may have to search a bit to find them.

If you later decide that you want to switch configurations, open the Tools menu and select Import and Export Settings to display the Import and Export Settings Wizard. Select the Reset all settings option button and click Next. In the second page, tell the wizard whether to save your current settings and click Next. On the wizard's final page (shown in Figure 1-1), select the type of configuration you want and click Finish. When the wizard is done saving the new settings, click Close.

Figure 1-1: Use the Tools menu's Import and Export Settings command to change the Visual Studio configuration.

Projects and Solutions

Before you can understand how to use the IDE effectively to manage Visual Basic projects and solutions, you should know what projects and solutions are.

A *project* is a group of files that produces some specific output. This output may be a compiled executable program, a dynamic-link library (DLL) of classes for use by other projects, or a control library for use on other Windows forms.

A *solution* is a group of one or more projects that should be managed together. For example, suppose that you are building a server application that provides access to your order database. You are also building a client program that each of your sales representatives will use to query the server application. Because these two projects are closely related, it might make sense to manage them in a single solution. When you open the solution, you get instant access to all the files in both projects.

Both projects and solutions can include associated files that are useful for building the application but that do not become part of a final compiled product. For example, a project might include the application's proposal and architecture documents. These are not included in the compiled code, but it is useful to associate them with the project so that they are easy to find, open, and edit while working on the project.

When you open the project, Visual Studio lists those documents along with the program files. If you double-click one of these documents, Visual Studio opens the file using an appropriate application. For example, if you double-click a file with a .doc extension, Visual Studio normally opens it with Microsoft Word.

To associate one of these files with a project or solution, right-click the project in the Solution Explorer (more on the Solution Explorer shortly). Select the Add command's Add New Item entry, and use the resulting dialog box to select the file you want to add.

Often a Visual Basic solution contains a single project. If you just want to build a small executable program, you probably don't need to include other programming projects in the solution.

Another common scenario is to place Visual Basic code in one project and to place documentation (such as project specifications and progress reports) in another project within the same solution. This keeps the documentation handy whenever you are working on the application but keeps it separate enough that it doesn't clutter the Visual Studio windows when you want to work with the code.

Although you can add any file to a project or solution, it's not a good idea to load dozens of unrelated files. Although you may sometimes want to refer to an unrelated file while working on a project, the extra clutter brings additional chances for confusion. It will be less confusing to shrink the Visual Basic IDE to an icon and open the file using an external editor such as Word or WordPad. If you won't use a file very often with the project, don't add it to the project.

Starting the IDE

When you launch Visual Studio, it initially displays the Start Page shown in Figure 1-2 by default. The Start Page's Recent Projects section lists projects that you have worked on recently and provides links that let you open an existing project or Web site, or create a new project or web site. The Getting Started section contains links to help topics that may be useful to beginners.

Depending on your network connection, the Visual Studio Headlines and Visual Studio Developer News sections display developer-related news. In Figure 1-2 the computer wasn't connected to the Internet so the Start Page doesn't show developer news.
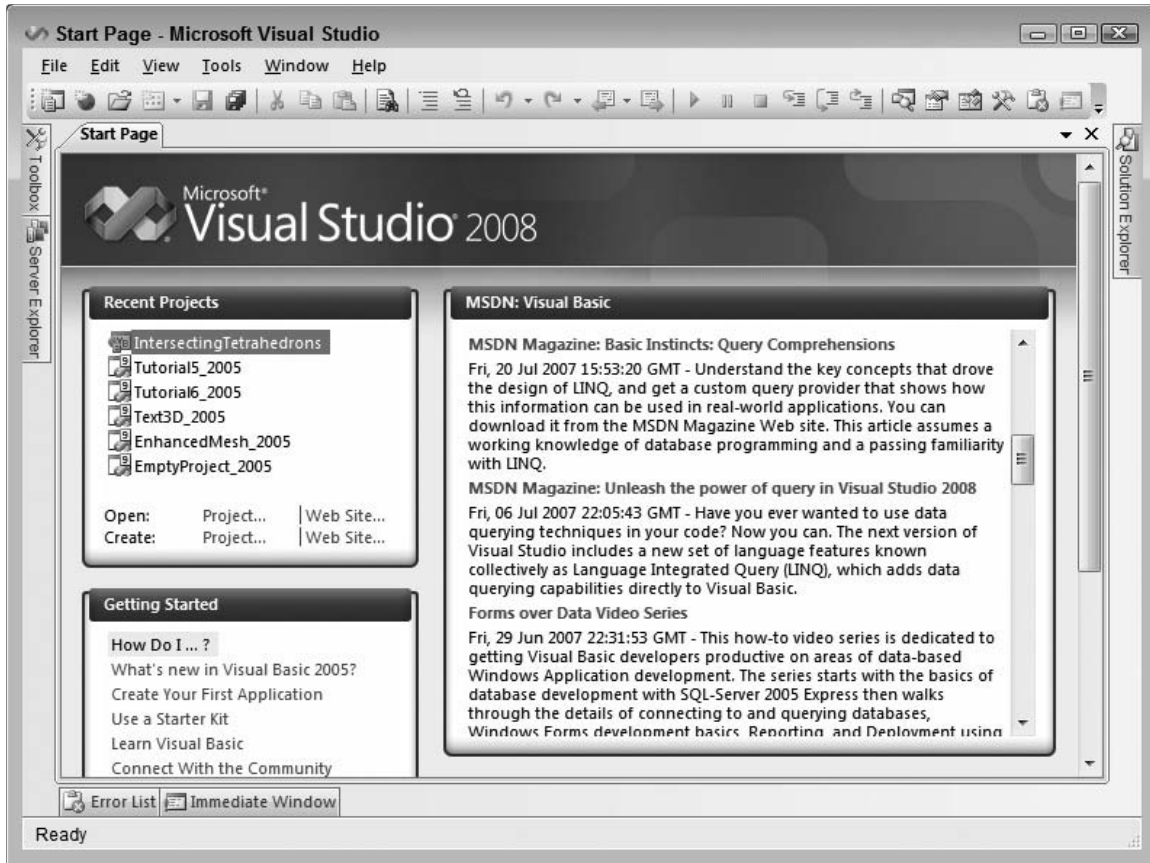
Figure 1-2: By default, Visual Studio displays the Start Page.

Visual Studio downloads the news section from an RSS feed. To change the URL Visual Studio uses, open the Tools menu, select Options, open the Environment folder, and select the Startup item. Enter the new URL in the "Start Page news channel" text box.

Instead of the Start Page, Visual Studio can take one of several other actions when it starts. To change Visual Studio's startup action, select the Options command in the Tools menu. Then select the Show all settings check box so you can see all of the options and open the Environment folder's Startup item. In the "At startup" dropdown, you can select one of the following options:

❑   Open Home Page

❑   Load last loaded solution

❑   Show Open Project Dialog Box

❑   Show New Project Dialog Box

❑   Show empty environment

❑   Show Start Page

Creating a Project

After you open Visual Studio, you can use the Start Page's Create Project link or the File menu's New Project command to open the New Project dialog shown in Figure 1-3. Use the Project Types tree view on the left to select the project category that you want. Then select a specific project type on the right. In Figure 1-3, the Windows Forms Application project type is selected. Enter a name for the new project in the text box below, and click OK.
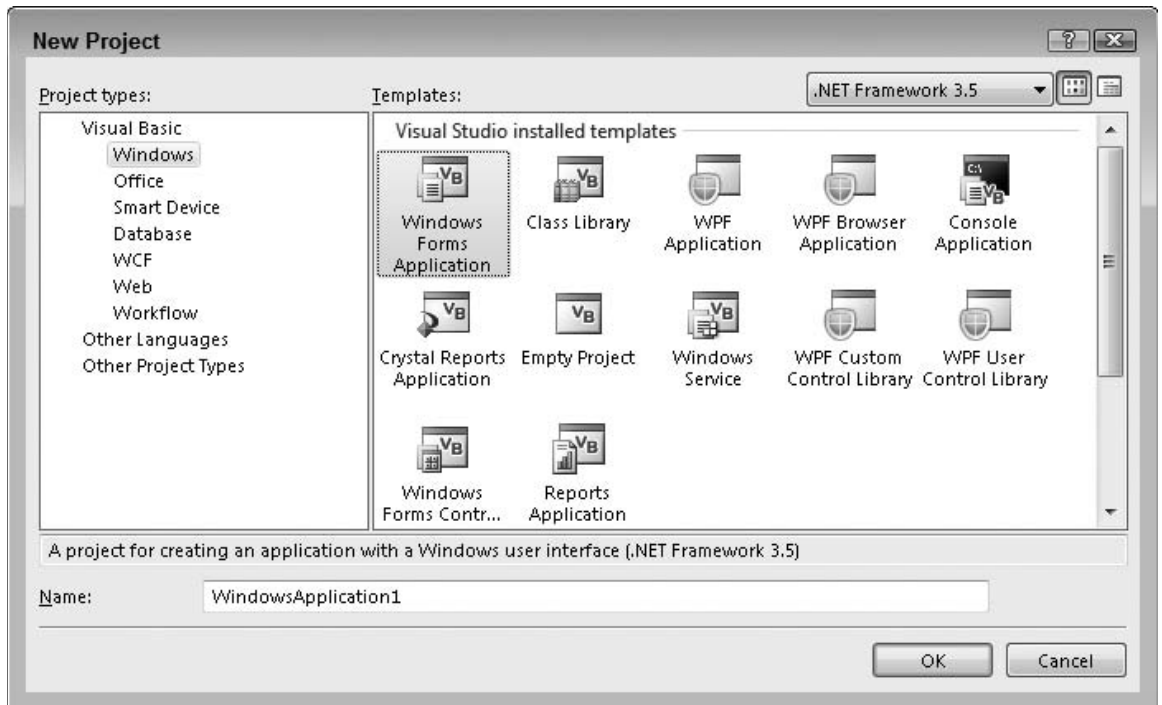
Figure 1-3: The New Project dialog lets you start a new project.

Figure 1-4 shows the IDE immediately after starting a new Windows Forms Application project. Remember that the IDE is extremely configurable, so it may not look much like Figure 1-4 after you have rearranged things to your liking.
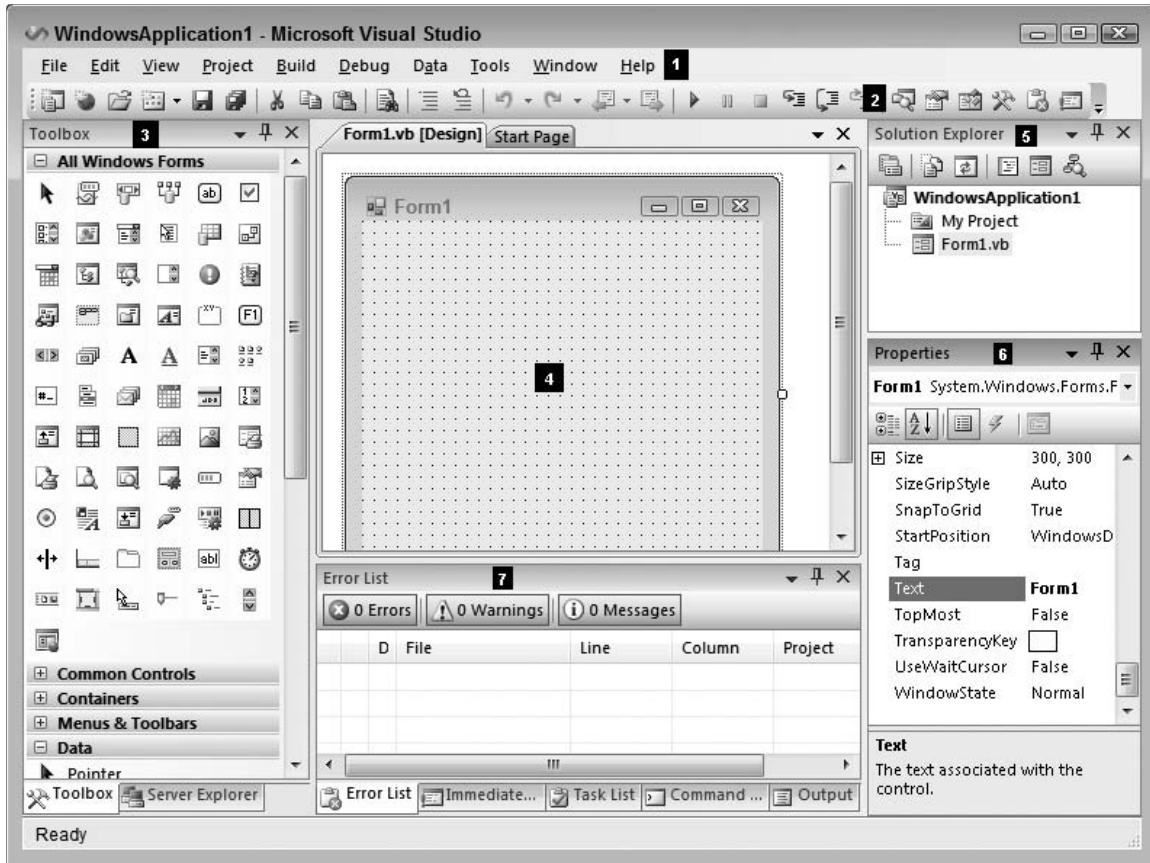
Figure 1-4: Initially the IDE looks more or less like this.

The key pieces of the IDE are labeled with numbers in Figure 1-4. The following list briefly describes each of these pieces:

1. *Menus* — The menus contain standard Visual Studio commands. These generally manipulate the current solution and the modules it contains, although you can customize the menus as needed. Visual Studio changes the menus and their contents depending on the object you currently have selected. In Figure 1-4, a Form Designer (marked with the number 4) is open so the IDE is displaying the menus for editing forms.

2. *Toolbars* — Toolbars contain tools that you can use to perform frequently needed actions. The same commands may be available in menus, but they are easier and faster to use in toolbars. The IDE defines several standard toolbars such as Formatting, Debug, and Image Editor. You can also build your own custom toolbars to hold your favorite tools. Visual Studio changes the toolbars displayed to match the object you currently have selected.

3. *Toolbox* — The Toolbox contains tools appropriate for the item that you currently have selected and for the project type that you are working on. In Figure 1-4, a Form Designer is selected in a

Windows Forms application so the Toolbox contains tools appropriate for a Form Designer. These include Windows Forms controls and components, plus tools in the other Toolbox tabs: Crystal Reports, Data, and Components (plus the General tab is scrolled off the bottom of the Toolbox). You can add other customized tabs to the Toolbox to hold your favorite controls and components. Other project types may display other tools. For example, a Web project would display web controls and components instead of Windows Forms components.

4. *Form Designer* — A Form Designer enables you to modify the graphical design of a form. Select a control tool from the Toolbox, and click and drag to place an instance of the control on the form. Use the Properties window (marked with the number 6) to change the new control's properties. In Figure 1-4, no control is selected, so the Properties window shows the form's properties.

5. *Solution Explorer* — The Solution Explorer lets you manage the files associated with the current solution. For example, in Figure 1-4, you could select Form1.vb in the Project Explorer and then click the View Code button (the third icon from the right at the top of the Solution Explorer) to open the form's code editor. You can also right-click an object in the Solution Explorer to get a list of appropriate commands for that object.

6. *Properties* — The Properties window lets you change an object's properties at design time. When you select an object in a Form Designer or in the Solution Explorer, the Properties window displays that object's properties. To change a property's value, simply click the property and enter the new value.

7. *Error List* — The Error List window shows errors and warnings in the current project. For example, if a variable is used and not declared, this list will say so.

If you look at the bottom of Figure 1-4, you'll notice that the Error List window has a series of tabs. The Task List tab displays items flagged for further action such as To Do items. The Command window lets you execute Visual Studio commands such as those invoked by menu items. The Immediate window lets you type and execute Visual Basic commands, possibly while a program is running, but paused.

The Output tab shows output printed by the application. Usually an application interacts with the user through its forms and dialog boxes, but it can display information here to help you debug the code. The Output window also shows informational messages generated by the IDE. For example, when you compile an application, the IDE sends messages here to tell you what it is doing and whether it succeeded.
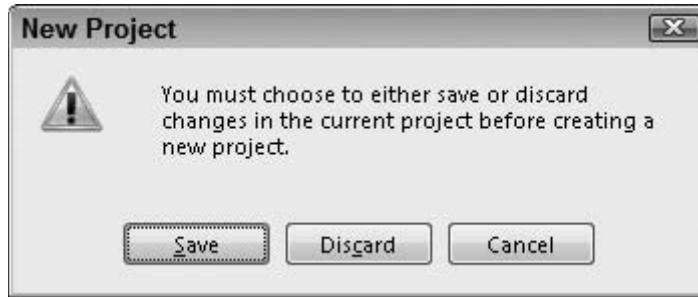
As soon as you create a new project, it is ready to run. If you open the Debug menu and select Start Debugging, the program will run. It displays only an empty form containing no controls, but the form automatically handles a multitude of mundane windowing tasks for you. For example, before you write a single line of code, the form lets the user resize, minimize, restore, maximize, and close the form. The form draws its title bar, borders, and system menu, and repaints itself as needed when it is covered and restored. The operating system also automatically handles many tasks such as displaying the form in the Windows taskbar and Task Manager. Vista automatically generates thumbnail previews for its Flip and Flip 3D tools that you display by pressing Alt+Tab or Windows+Tab, respectively.

The form contains no controls, can't open files, doesn't process data, in fact doesn't really do anything unique but a lot of the setup is done for you. It handles the windowing chores for you so you can focus on the application domain.

Saving a Project

Later chapters explain in depth how to add controls to a form and how to write code to interact with the form. For now, suppose you have built a project complete with controls and code.

If you try to close Visual Studio or start a new project, the dialog shown in Figure 1-5 appears. Click Save to make the Save Project dialog shown in Figure 1-6 appear. Click Discard to throw away the existing project and start a new one. Click Cancel to continue editing the current project.

Figure 1-5: Before closing Visual Studio or starting a new project, you must decide what to do with the previous project.

As you work with the new project, Visual Studio saves its form definitions and code in a temporary location. Each time you run the program, Visual Studio updates the files so it doesn't lose everything if it crashes. The files are still temporary, however.

When you are ready to make the new project permanent, open the File menu and select Save All to display the Save Project dialog shown in Figure 1-6.
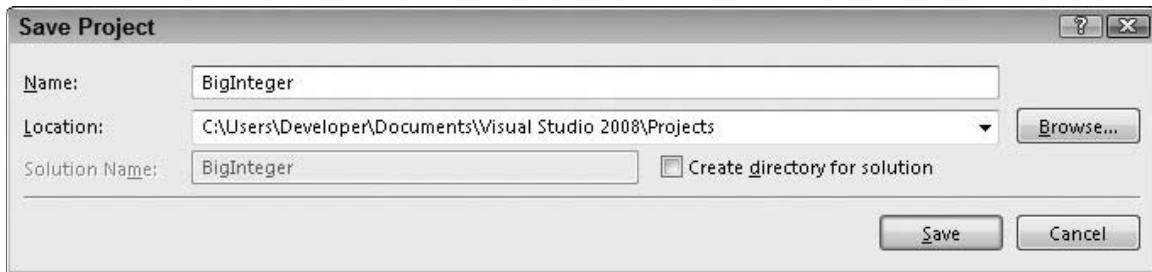
Figure 1-6: Use this dialog to save a new project.

The Name field shows the name that you originally gave the project when you created it. Verify that the name is okay or change it.

Next, enter the location where you want the project saved. The default location is similar to the rather non-intuitive value shown in Figure 1-6. This image was taken while I was logged in as the user named

Developer. When you save a project, the "Developer" part of the location would be replaced with your user name.

Be sure to pick a good location before you click Save. The next time you build a project, the default will be the location you specify now so you won't need to be quite as careful in the future, assuming you want to build a lot of projects inside the same directory.

If you check the "Create directory for solution" box, Visual Studio enables the Solution Name text box and adds an extra directory above the project directory to hold the solution. This is most useful when you want to include more than one project in a single solution.

For example, suppose you are building a graphical office furniture layout tool — a CAD system for arranging desks and chairs. You want the solution to include an executable main project and a drawing tool DLL project. In that case, you could name the solution OfficeArranger and call the executable project OfficeArrangerMain. Visual Studio would make a directory named OfficeArranger and place the executable project inside a subdirectory named OfficeArrangerMain. Later you could add a DLL project called OfficeArrangerTools to the solution and place it also inside the OfficeArranger solution directory.

After you have entered the project name and location, and optionally specified a separate solution directory, click Save.

The File menu's Save As commands let you save particular pieces of the solution in new files. For example, if you have a project named OfficeArrangerMain selected in Project Explorer, then the File menu contains a command named "Save OfficeArrangerMain As." This command lets you save the project file with a new name. Unfortunately it doesn't make a new copy of the whole project; it just makes a copy of the project file. That file contains information about the project on a high level such as references used by the project, files imported by the project, and the names of the forms included in the project. It does not contain the forms themselves.

Many beginners try to use the File menu's Save As commands to make copies of a project or a solution but it doesn't work. Instead, use Windows Explorer to find the directory containing the whole project or solution and make a copy of the entire directory.

Summary

This chapter explained how to get started using the Visual Studio integrated development environment. It tells how to configure the IDE for different kinds of development and explains that different configurations might make your version of Visual Studio look different from the screen shots shown in this book. It explains what Visual Basic projects and solutions are, and shows how to create, run, and save a new project.

The next few chapters describe parts of the IDE in greater detail. Chapter 2, "Menus, Toolbars, and Windows," describes the commands available in the IDE and the menus, toolbars, and secondary windows that hold them.

Menus, Toolbars, and Windows

The Visual Studio IDE is incredibly powerful and provides hundreds of tools for building and modifying projects. The price you pay for all of these powerful tools is extra complexity. Because there are so many tools available, it can take some digging to find the tool you want, even if you know exactly what you need.

This chapter describes the menus, toolbars, and windows that contain the tools provided by the IDE. It explains some of the most useful tools provided by the IDE and tells where to find them, provided you haven't moved them while customizing the IDE.

This chapter also tells how you can customize the menus and toolbars to give you easy access to the commands that you use most frequently and how to hide those that you don't need.

Menus

The IDE's menus contain standard Visual Studio commands. These are generally commands that manipulate the project and the modules it contains. Some of the concepts are similar to those used by any Windows application (File ⇨ New, File ⇨ Save, Help ⇨ Contents), but many of the details are specific to Visual Studio programming, so the following sections describe them in a bit more detail.

The menus are customizable, so you can add, remove, and rearrange the menus and the items they contain. This can be quite confusing, however, if you later need to find a command that you have removed from its normal place in the menus. Some developers place extra commands in standard menus, particularly the Tools menu, but it is generally risky to remove standard menu items. Usually it is safest to leave the standard menus alone and make custom toolbars to hold customizations. For more information on this, see Chapter 3, "Customization."

Many of the menus' most useful commands are also available in other ways. Many provide shortcut key combinations that make using them quick and easy. For example, Ctrl+N opens the New Project dialog box just as if you had selected the File ⇨ New Project menu command. If you

find yourself using the same command very frequently, look in the menu and learn its keyboard shortcut to save time later.

Many menu commands are also available in standard toolbars. For example, the Debug toolbar contains many of the same commands that are in the Debug menu. If you use a set of menu commands frequently, you may want to display the corresponding toolbar to make using the commands easier.

Visual Studio also provides many commands through context menus. For example, if you right-click a project in the Solution Explorer, the context menu includes an Add Reference command that displays the Add Reference dialog box just as if you had invoked Project ⇨ Add Reference. Often it is easier to find a command by right-clicking an object related to whatever you want to do than it is to wander through the menus.

The following sections describe the general layout of the standard menus. You might want to open the menus in Visual Studio as you read these sections, so you can follow along.

> *Visual Studio displays different menus and different commands in menus depending on what editor is active. For example, when you have a form open in the form editor, Visual Studio displays a Format menu that you can use to arrange controls on the form. When you have a code editor open, the Format menu is hidden because it doesn't apply to code.*

File

The File menu contains commands that deal with creating, opening, saving, and closing projects and project files. The following list describes the most important commands contained in the File menu and its submenus:

❑ **New Project** — This command closes the current project and displays the dialog box shown in Figure 2-1. This dialog box lets you create new Windows applications, class libraries, console applications, control libraries, and more. Select the type of project you want to start and click OK.

❑ **New Web Site** — This command closes the current project and lets you start a new web site project. It displays a dialog box where you can select the type of web site to create from among choices such as ASP.NET Web Site, ASP.NET Web Service, and Personal Web Site.

❑ **Open Project** — This command closes the current project and lets you open an existing project.

❑ **Open Web Site** — This command closes the current project and lets you open an existing web site project.

❑ **Open File** — This command displays the dialog box shown in Figure 2-2 and lets you select a file to open. The IDE uses integrated editors to let you edit the new file. For example, the simple bitmap editor lets you set a bitmap's size, change its number of colors, and draw on it. When you close the file, Visual Studio asks if you want to save the file and lets you decide where to put it. Note that this doesn't automatically add the file to your current project. You can save the file and use the Project ⇨ Add Existing Item command if you want to do so.
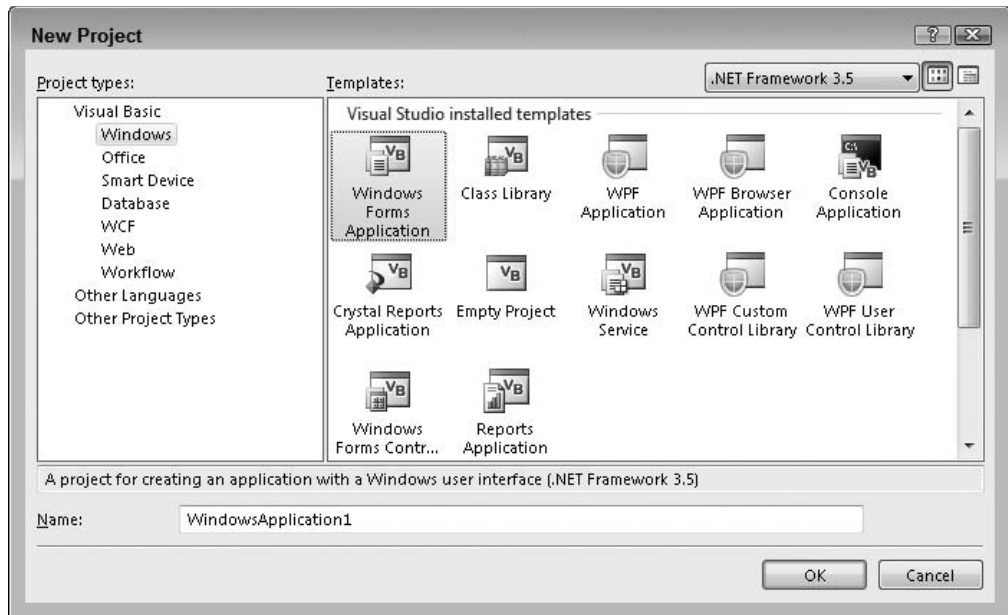
Figure 2-1: The New Project dialog box lets you start various kinds of new projects.
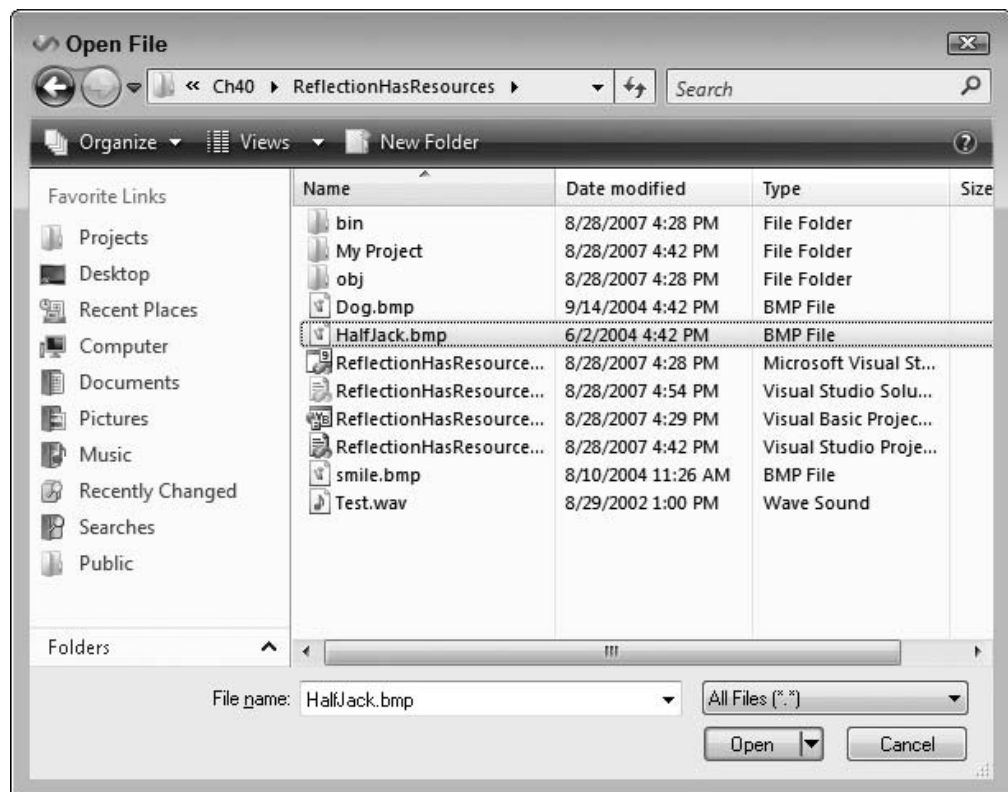
Figure 2-2: The Open File dialog box lets you select files to view and edit.

❑ **Add** — This submenu lets you add new items to the current solution. This can be very useful when you are building two closely related projects. For example, if you have a Windows Forms application that calls routines written in a class library, you can load both projects into the same solution and work on them together. This submenu's most useful commands for Visual Basic developers are New Project and Existing Project, which add a new or existing Visual Basic project to the solution.

❑ **Close** — This command closes the current editor. For example, if you were editing a form's controls in the Form Designer, this command would close the Form Designer.

❑ **Close Project** — This command closes the entire project and all of the files it contains. If you have a solution open, this command is labeled Close Solution and it closes the entire application.

❑ **Save Form1.vb** — This command saves the currently open file, in this example, `Form1.vb`.

❑ **Save Form1.vb As** — This command lets you save the currently open file in a new file.

❑ **Save All** — This command saves all modified files. When you start a new project, the files are initially stored in a temporary location. This command allows you to pick a directory where the project should be saved permanently.

❑ **Export Template** — This command displays the dialog box shown in Figure 2-3. The Export Template Wizard enables you to create project or item templates that you can use later when making a new project.

❑ **Page Setup and Print** — The Page Setup and Print commands let you configure printer settings and print the current document. These commands are enabled only when it makes sense to print the current file. For example, if you are viewing a source code file or a configuration file (which is a text file), you can use these commands. If you are viewing a bitmap or a form in design mode, these commands are disabled.

❑ **Recent Files and Recent Projects** — The Recent Files and Recent Projects submenus let you quickly reopen files, projects, and solutions that you have opened recently.

Edit

The Edit menu contains commands that deal with manipulating text and other objects. These include standard commands such as the Undo, Redo, Cut, Copy, Paste, and Delete commands that you've seen in other Windows applications.

The following list describes other commands contained in the Edit menu:

❑ **Find Symbol** — This command lets you search the application for a program symbol rather than a simple string. You can search for such items as namespaces, types, interfaces, properties, methods, constants, and variables.

❑ **Quick Find** — This command displays a find dialog box where you can search the project for specific text. A drop-down menu lets you indicate whether the search should include only the current document, all open documents, the current project, or the current block. Options let you determine such things as whether the text must match case or whole words.

❑ **Quick Replace** — This command displays the same dialog box as the Quick Find command except with some extra controls. It includes a text box where you can specify replacement text, and buttons that let you replace the currently found text or all occurrences of the text.

Export Template Wizard

Choose Template Type

This wizard will allow you to export a project or project item from the current solution to a template which future projects can then be based upon.

Which type of template would you like to create?

○ Project template

A project template will allow a user to create a new project based on your exported project. A user will be able to utilize your template from the New Project dialog box for client projects and from the New Website dialog box for websites.

○ Item template

An item template will allow a user to add your item to one of their existing project. Your template will be available to the user from the Add New Item dialog box.

From which project would you like to create a template?

WindowsApplication1 ▼

< Previous   Next >   Finish   Cancel

Figure 2-3: The File/Export Template command displays this dialog box to help you create project or items templates that you can easily use in other projects.

Be careful when using Quick Replace. Often it gets carried away and replaces substrings of larger strings so they don't make sense anymore. For example, suppose you want to replace the variable name "hand" with "handed." If you let Quick Replace run, it will change Handles clauses into "handedles" clauses, which will confuse Visual Basic. To reduce the chances of this type of error, keep the scope of the replacement as small as possible and check the result for weird side effects.

❑ **Go To** — This command lets you jump to a particular line number in the current file.

❑ **Insert File As Text** — This command lets you select a file and insert its text into the current location. This can be useful if the file contains a code snippet.

❑ **Advanced** — The Advanced submenu contains commands for performing more complex document formatting such as converting text to upper- or lowercase, controlling word wrap, and commenting and uncommenting code.

❑ **Bookmarks** — The Bookmarks submenu lets you add, remove, and clear bookmarks, and move to the next or previous bookmark. You can use bookmarks to move quickly to specific pieces of code that you have marked.

❑ **Outlining** — The Outlining submenu lets you expand or collapse sections of code, and turn outlining on and off. Collapsing code that you are not currently editing can make the rest of the code easier to read.

❑ **IntelliSense** — The IntelliSense submenu gives access to IntelliSense features. For example, its List Members command makes IntelliSense display the current object's properties, methods, and events.

❑ **Next Method/Previous Method** — The Next Method and Previous Method commands move to the next or previous method or class in the current document.

View

The View menu contains commands that let you hide or display different windows and toolbars in the Visual Studio IDE. The following list describes the commands contained in the View menu:

❑ **Code** — The Code command opens the selected file in a code editor window. For example, to edit a form's code, you can click the form in the Solution Explorer and then select View ⇨ Code.

❑ **Designer** — The Designer command opens the selected file in a graphical editor if one is defined for that type of file. For example, if the file is a form, this command opens the form in a graphical form editor. If the file is a class module or a code module, the View menu hides this command because Visual Studio doesn't have a graphical editor for those file types.

❑ **Standard windows** — The next several commands in this menu display the standard IDE windows Server Explorer, Solution Explorer, Object Browser, Error List, Properties window, and Toolbox. These commands are handy if you have removed one of the windows and want to get it back. The most useful of these windows are described later in this chapter.

❑ **Other Windows** — The Other Windows submenu lists other standard menus that are not listed in the View menu itself. These include the Bookmark window, Class View, Command window, Document Outline, Output, Task List, Macro Explorer, Start Page, and many others. Like the standard windows commands, these commands are useful for recovering lost or hidden windows.

❑ **Tab Order** — If the currently visible document is a Windows Form that contains controls, the Tab Order command displays the tab order on top of each control. You can click the controls in the order you want them to have to set their tab orders quickly and easily. (If you are working with a WPF form, you must currently use the controls' TabIndex properties to set their tab order.)

❑ **Toolbars** — The Toolbars submenu lets you hide or display the currently defined toolbars. This submenu lists the standard toolbars in addition to any custom toolbars you have created.

Rather than modifying standard menus and toolbars, hide them and create new ones to customize. Then you can later restore the original standard menus and toolbars if necessary.

❑ **Full Screen** — The Full Screen command hides all toolbars and windows except for any editor windows that you currently have open. It also hides the Windows taskbar so that the IDE

occupies as much space as possible. This gives you the most space possible for working with the files you have open. The command adds a small box to the title bar containing a Full Screen button that you can click to end full-screen mode.

❑ **Property Pages** — This command displays the current item's property pages. For example, if you select an application in Solution Explorer, this command displays the application's property pages similar to those shown in Figure 2-4.
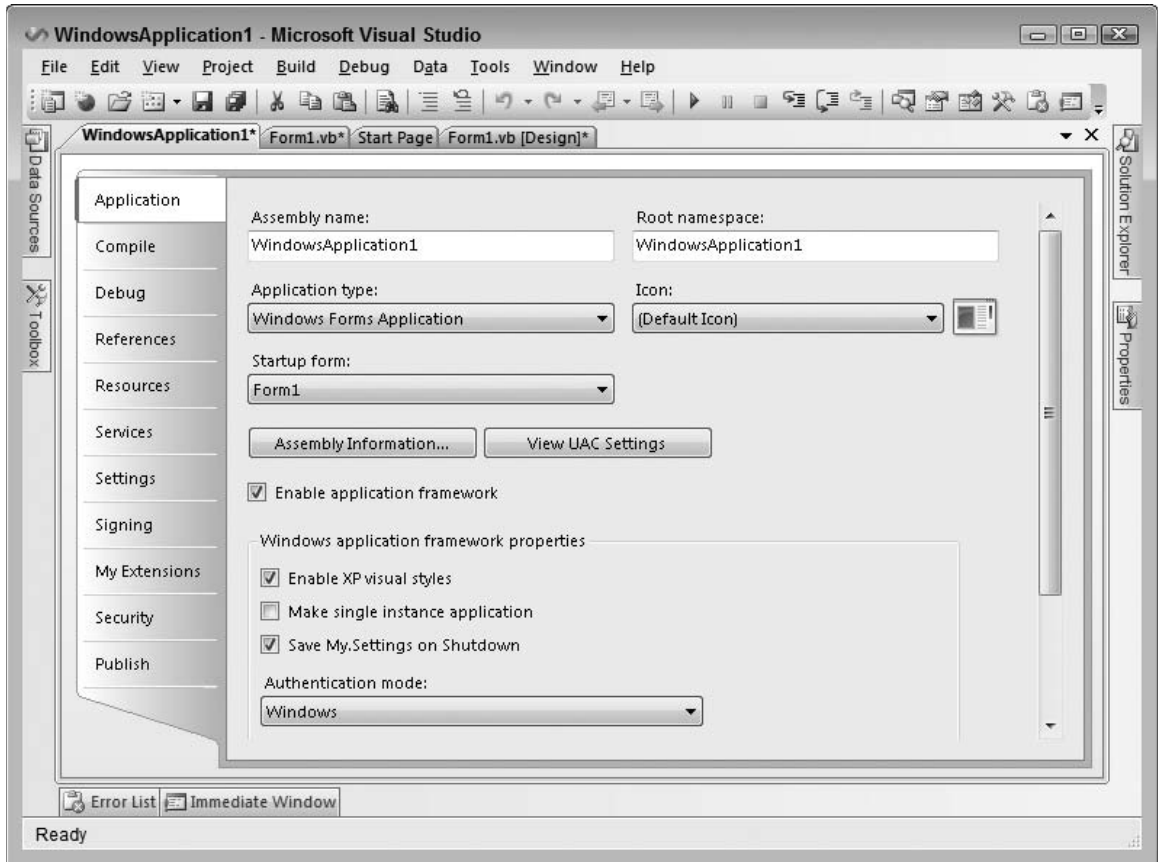
Figure 2-4: The View menu's Property Pages command displays an application's property pages.

Project

The Project menu contains commands that let you add and remove items to and from the project. Which commands are available depends on the currently selected item.

The following list describes commands on the Project menu:

❑ **New items** — The first several commands let you add new items to the project. These commands are fairly self-explanatory. For example, the Add Class command adds a new class module to the project. Later chapters explain how to use each of these file types.

❑ **Add New Item** — The Add New Item command displays the dialog shown in Figure 2-5. The dialog lets you select from a wide assortment of items such as about boxes, text files, bitmap files, and class modules.

❑ **Add Existing Item** — The Add Existing Item command lets you browse for a file and add it to the project. This may be a Visual Basic file (such as a module, form, or class), or some other related file (such as a related document or image file).

❑ **Exclude From Project** — This command removes the selected item from the project. Note that this does not delete the item's file; it just removes it from the project.
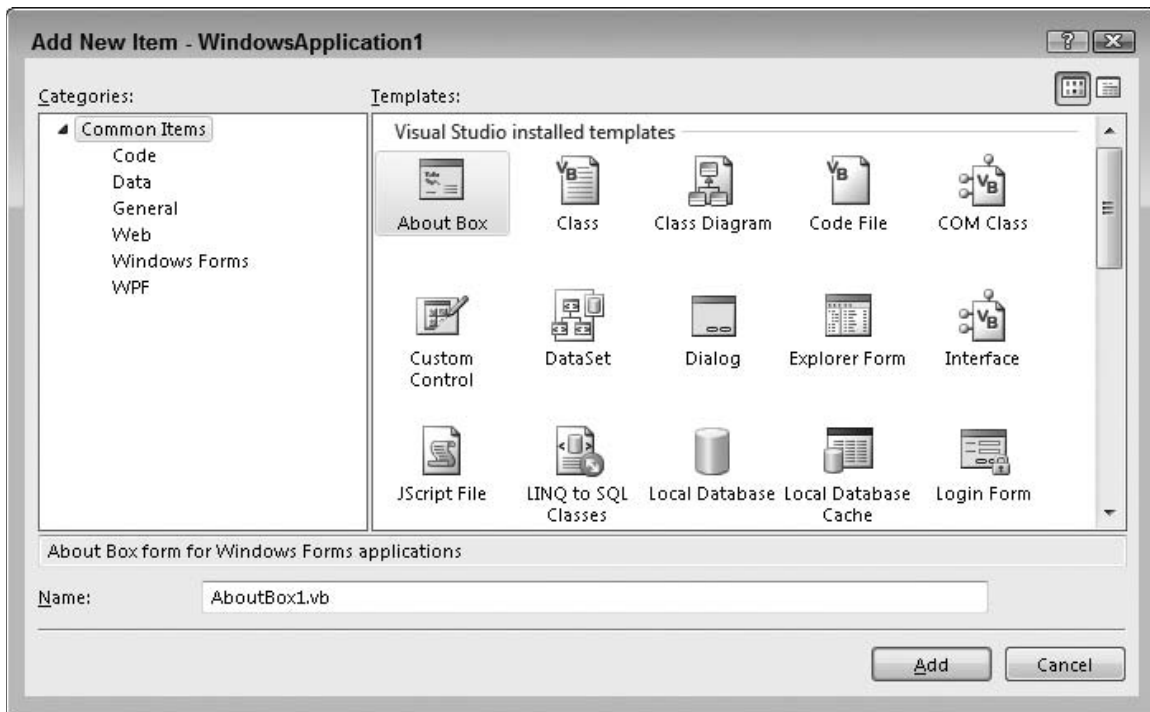
Figure 2-5: The Project menu's Add New Item command lets you add a wide variety of items to the project.

❑ **Show All Files** — The Show All Files command makes Solution Explorer list files that are normally hidden. These include resource files corresponding to forms, hidden partial classes such as designer-generated form code, resource files, and files in the `obj` and `bin` directories that are automatically created by Visual Studio when it compiles your program. Normally, you don't need to work with these files, so they are hidden. Select this command to show them. Select the command again to hide them.

❑ **Add Reference** — The Add Reference command displays the dialog shown in Figure 2-6. Select the category of the external object, class, or library that you want to find. For a .NET component, select the .NET tab. For a Component Object Model (COM) component such as an ActiveX library or control built using Visual Basic 6, select the COM tab. Select the Projects tab to add a reference to another Visual Studio project. Click the Browse tab to manually locate the file you want to reference.

Scroll through the list of references until you find the one you want and select it. You can use Shift+Click and Ctrl+Click to select more than one library at the same time. When you have made your selections, click OK to add the references to the project. After you have added a reference to the project, your code can refer to the reference's public objects. For example, if the file `MyMathLibrary.dll` defines a class named `MathTools` and that class defines a public function `Fibonacci`, a project with a reference to this DLL could use the following code:

```
Dim math_tools As New MyMathLibrary.MathTools
MsgBox("Fib(5) = " & math_tools.Fibonacci(5))
```
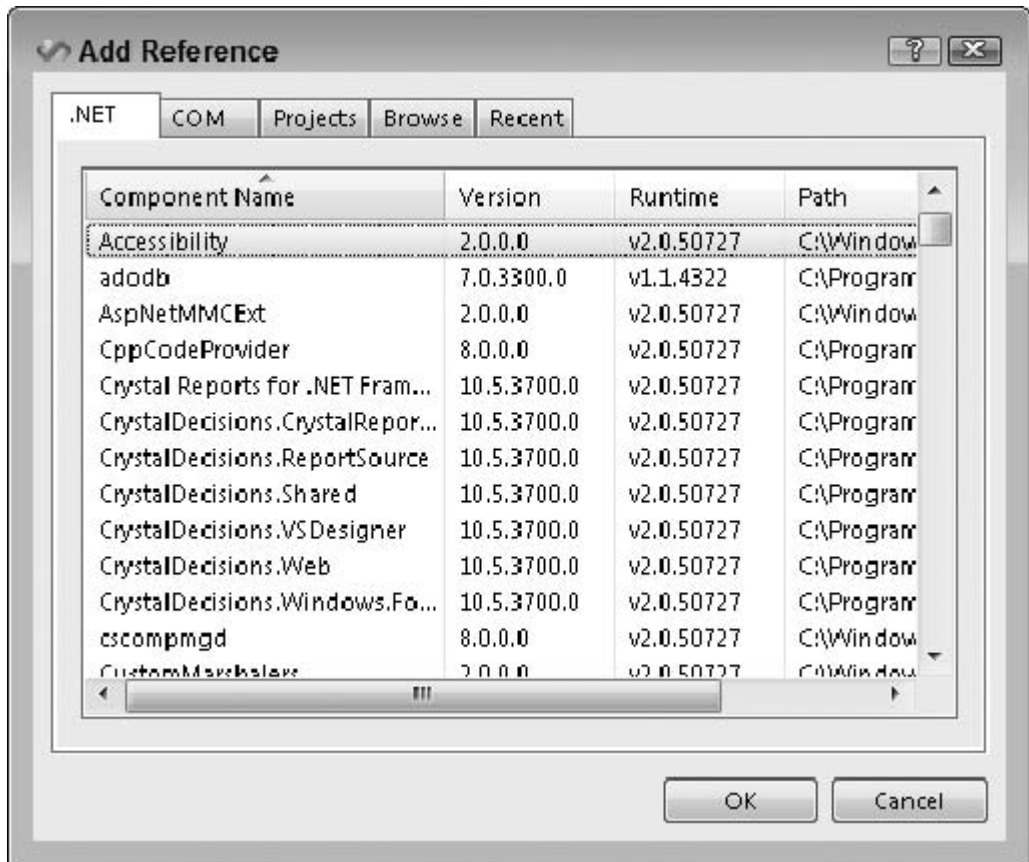

Figure 2-6: Use the Add Reference dialog box to add references to libraries.

❑ **Add Service Reference** — The Add Service Reference command displays the dialog shown in Figure 2-7. You can use this dialog to find Web services and add references to them so your project can invoke them across the Internet. Figure 2-7 shows a service reference for the TerraServer map and aerial photography service. For more information, go to `terraserver.microsoft.com`.

❑ **WindowsApplication1 Properties** — This command displays the application's property pages shown in Figure 2-4.
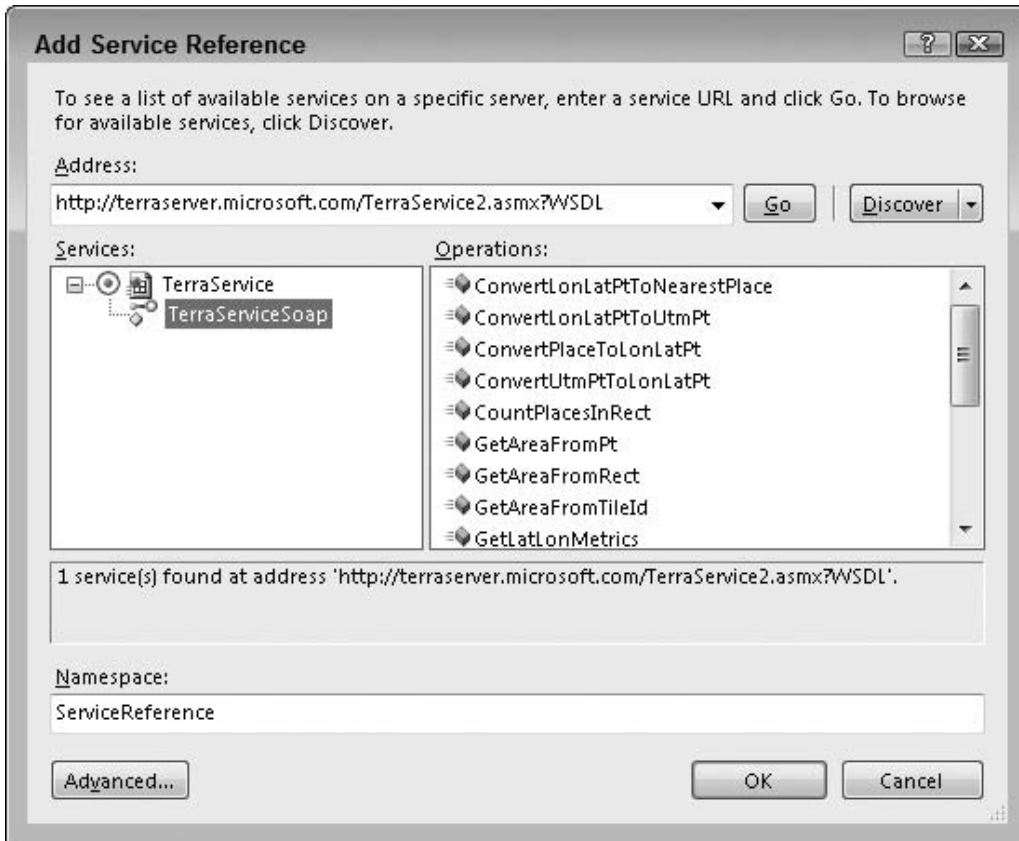
Figure 2-7: Use the Add Service Reference dialog to add references to Web services.

Use the tabs on the left of the application's property pages to view and modify different types of application settings. You can leave many of the property values alone and many are set in other ways. For example, by default, the Assembly name and Root namespace values shown in Figure 2-4 are set to the name of the project when you first create it.

Figure 2-8 shows the Compile property page. This page holds four properties that deserve special mention.
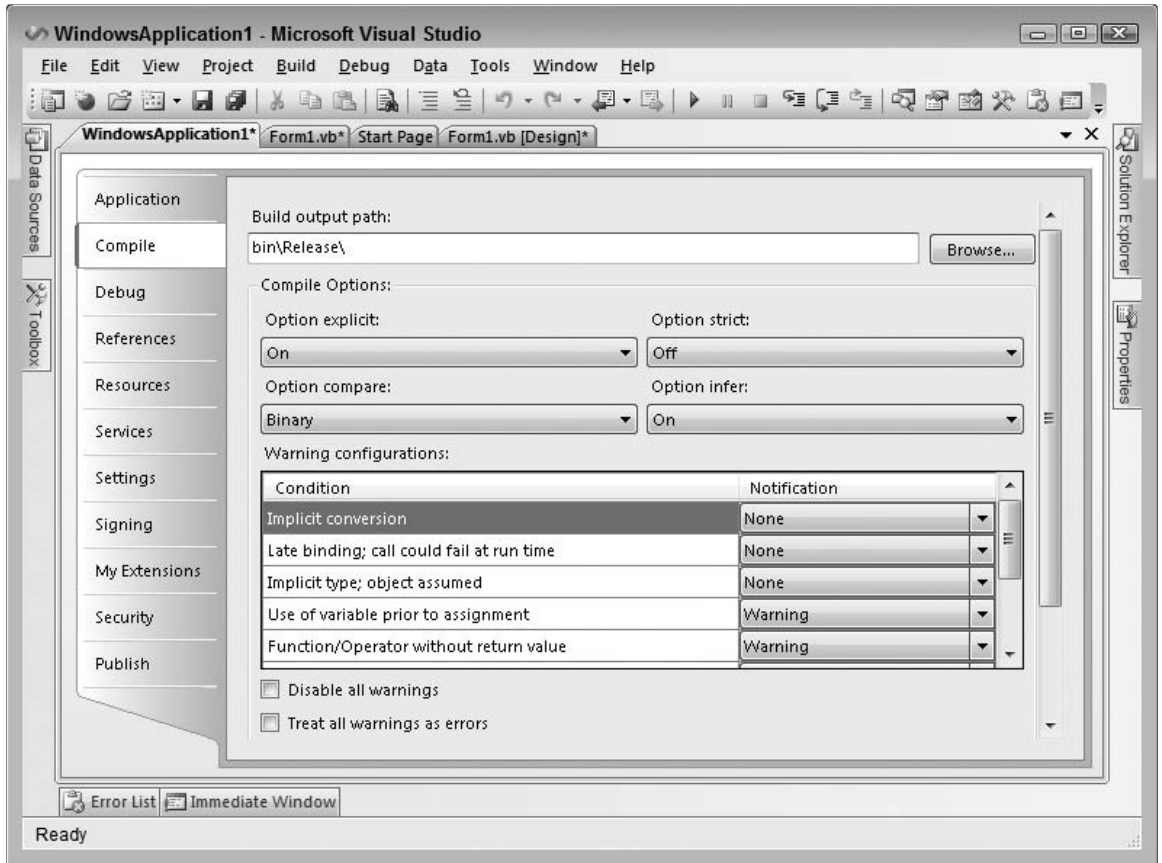
Figure 2-8: The Compile tab contains important properties for controlling code generation.

First, Option Explicit determines whether Visual Basic requires you to declare all variables before using them. Leaving this option turned off can sometimes lead to subtle bugs. For example, the following code is intended to print a list of even numbers between 0 and 10. Unfortunately, a typographical error makes the `Debug.WriteLine` statement print the value of the variable j not i. Because j is never initialized, the code prints out a bunch of blank values. If you set Option Explicit to On, the compiler complains that the variable j is not declared and the problem is easy to fix.

```
For i = 1 To 10
    If i Mod 2 = 0 Then Debug.WriteLine(j)
Next i
```

The second compiler option is Option Strict. When this option is turned off, Visual Studio allows your code to implicitly convert from one data type to another, even if the types are not always compatible. For example, Visual Basic will allow the following code to try to copy the string s into the integer i. If the value in the string happens to be a number, as in the first case, this works. If the string is not a number, as in the second case, this fails at runtime.

```
Dim i As Integer
Dim s As String
s = "10"
i = s          ' This works.
s = "Hello"
i = s          ' This Fails.
```

If you set Option Strict to On, the IDE warns you that the two data types are incompatible, so you can easily resolve the problem while you are writing the code. You can still use conversion functions such as `CInt`, `Int`, and `Integer.Parse` to convert a string into an Integer, but you must take explicit action to do so. This makes you think about the code and reduces the chances that the conversion is just an accident. This also helps you use the correct data types and avoid unnecessary conversions that may make your program slower.

The third compiler directive, Option Compare, can take the values `Binary` or `Text`. If you set Option Compare to `Binary`, Visual Basic compares strings using their binary representations. If you set Option Compare to `Text`, Visual Basic compares strings using a case-insensitive method that depends on your computer's localization settings. Option Compare Binary is faster, but may not always produce the result you want.

The final compiler directive, Option Infer, determines whether you can omit the data type when declaring a variable and let Visual Basic deduce its data type from the context. For example, the first statement in the following code declares the variable x, explicitly declaring it as a Single. The second statement declares variable y without specifying a data type. Because y's initialization value looks like a Double, Visual Basic infers that the variable should be a Double.

```
Dim x As Single
Dim y = 3.14159265
```

The problem with inferred data types is that it is not obvious from the code what data type Visual Basic should use. In the previous code, you need to know Visual Basic's inference rules to know whether variable y is a Single, Double, or Decimal.

You can use an `Option` statement to set the values for each of these options at the top of a code module. For example, the following code turns Option Explicit on and Option Infer off for a module:

```
Option Explicit On
Option Explicit Off
```

Instead of using `Option` statements in a file, you can use the property page shown in Figure 2-8 to set these options for all of the files in the application.

> *To avoid confusion and long debugging sessions, I recommend that you use the Compile property page to set Option Explicit On, Option Strict On, and Option Infer Off to make Visual Basic as restrictive as possible. Then if you must loosen these restrictions in a particular file, you can add an* `Option` *statement at the top of the file. For example, you may need to set Option Infer On for a module that uses LINQ. See Chapter 21, "LINQ," for more information about LINQ.*

Build

The Build menu contains commands that let you compile projects within a solution. The following list describes commands contained in the Build menu:

❑ **Build WindowsApplication1** — This command compiles the currently selected project, in this case the project `WindowsApplication1`. Visual Studio examines the project's files to see if any have changed since the last time it compiled the project. If any of the files have changed, Visual Studio recompiles those files to update the result.

❑ **Rebuild WindowsApplication1** — This command recompiles the currently selected project from scratch. The Build WindowsApplication1 command compiles only the files that you have modified since they were last built. This command rebuilds every file.

❑ **Clean WindowsApplication1** — This command removes temporary and intermediate files that were created while building the application, leaving only the source files and the final result `.exe` and `.dll` files.

❑ **Publish WindowsApplication1** — This command displays the Publish Wizard shown in Figure 2-9. It can walk you through the process of making your application available for distribution on a local file, file share, FTP site, or web site.

❑ **Run Code Analysis on WindowsApplication1** — This command makes Visual Studio perform a code analysis of your project and describe potential problems. Many of the warnings describe globalization issues that Visual Basic does not handle automatically.

❑ **Generate Code Metrics for WindowsApplication1** — This command makes Visual Studio generate metrics that estimate the complexity of your code. It creates numbers representing the code's maintainability, complexity, inheritance depth, class coupling, and lines of code.
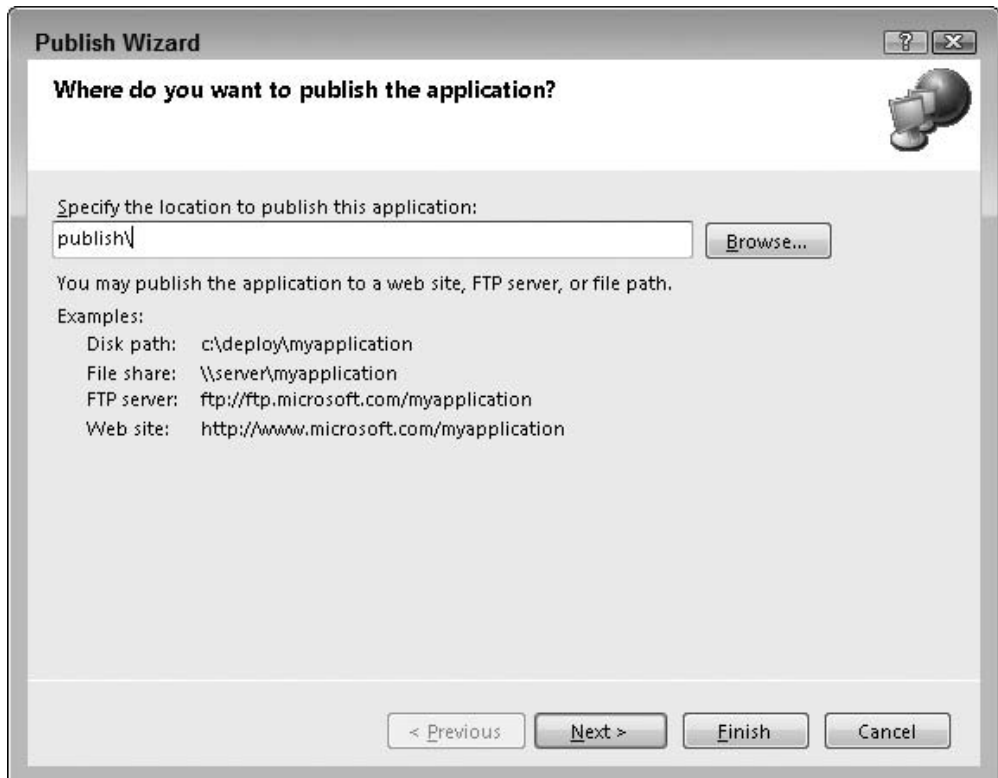
Figure 2-9: The Publish Wizard helps you deploy an application.

Debug

The Debug menu contains commands that help you debug a program. These commands help you run the program in the debugger, move through the code, set and clear breakpoints, and generally follow the code's execution to see what it's doing and hopefully what it's doing wrong.

For more information about the Debug menu and debugging Visual Basic code, see Chapter 7, "Debugging."

Data

The Data menu contains commands that deal with data and data sources. Some of the commands in this menu are only visible and enabled if you are designing a form and that form contains the proper data objects.

The following list describes the most useful Data menu commands:

❑ **Show Data Sources** — This command displays the Data Sources window, where you can work with the program's data sources. For example, you can drag and drop tables and fields from this window onto a form to create controls bound to the data.

❑ **Add New Data Source** — This command displays the Data Source Configuration Wizard, which walks you through the process of adding a data source to the project.

❑ **Preview Data** — This command displays a dialog box that lets you load data into a `DataSet` and view it at design time.

❑ **Add Query** — This command is available when you are designing a form and have selected a data-bound control such as a `DataGridView` or bound `TextBox`. This command opens a dialog where you can specify a query to add to the form. This places a `ToolStrip` on the form containing `ToolStripButtons` that populate the bound control by executing the query.

Format

The Format menu contains commands that arrange controls on a form. The commands are grouped into submenus containing related commands. The following list describes the Format menu's submenus:

❑ **Align** — This submenu contains commands that align the controls you have selected in various ways. It contains the commands Lefts, Centers, Rights, Tops, Middles, Bottoms, and to Grid. For example, the Lefts command aligns the controls so their left edges line up nicely. The to Grid command snaps the controls to the nearest grid position. This is useful if you have moved some controls off of the alignment grid, possibly by using one of the other Align commands or by changing a control's Location property in the Properties window.

❑ **Make Same Size** — This submenu contains commands that change the size of the controls you have selected. It contains the commands Width, Height, Both, and Size to Grid. The Size to Grid command adjusts the selected controls' widths so that they are a multiple of the alignment grid size. The other commands give the selected controls the same width, height, or both.

❑ **Horizontal Spacing** — This submenu contains commands that change the spacing between the controls you have selected. It contains the commands Make Equal, Increase, Decrease, and

Remove. For example, if you have selected three controls, the Make Equal command makes the spacing between the first two the same as the spacing between the second two. This can be handy for making columns that line up nicely.

❑ **Vertical Spacing** — This submenu contains the same commands as the Horizontal Spacing submenu except it adjusts the controls' vertical spacing rather than their horizontal spacing.

❑ **Center in Form** — This submenu contains commands that center the selected controls on the form. It contains the commands Horizontally and Vertically. Note that the selected controls are centered as a group; they are not centered individually on top of each other.

❑ **Order** — This submenu contains the commands Bring to Front and Send to Back, which move the selected controls to the top or bottom of the stacking order.

❑ **Lock Controls** — This command locks all of the controls on the form so that they cannot be moved or resized by clicking and dragging. You can still move and resize the controls by changing their Location and Size properties in the Properties window. Invoking this command again unlocks the controls. Locking the controls can be useful if you have spent a long time positioning them precisely. After they are locked, you can work on the controls without fear of accidentally messing up your careful design.

Tools

The Tools menu contains miscellaneous tools that do not fit particularly well in the other menus. It also contains a few duplicates of commands in other menus and commands that modify the IDE itself.

The following list describes the Tools menu's most useful commands. Note that some of these commands only appear when a particular type of editor is open.

❑ **Attach to Process** — This command displays a dialog box to let you attach the debugger to a running process. Select the process to which you want to attach and click Attach.

❑ **Connect to Device** — This command lets you connect to a physical device or emulator such as Pocket PC or Smartphone devices or emulators. You can use the devices and emulators to test software you are writing for devices other than the Windows platform where you are building the application.

❑ **Connect to Database** — This command displays the Connection Properties dialog box, where you can define a database connection. The connection is added to the Server Explorer window. You can later use the connection to define data adapters and other objects that use a database connection.

❑ **Connect to Server** — This command displays a dialog box that lets you connect to a database server.

❑ **Code Snippets Manager** — This command displays the Code Snippets Manager, which you can use to add and remove code snippets.

❑ **Choose Toolbox Items** — This command displays a dialog box that lets you select the tools displayed in the Toolbox. For instance, by default the `OleDbDataAdapater` and `OleDbConnection` components are not included in the Toolbox. You can use this command to add them if you will use them frequently.

❑ **Add-in Manager** — This command displays the Add-in Manager, which lists the add-in projects registered on the computer. You can use the Add-in Manager to enable or disable these add-ins.

❑ **Macros** — The Macros submenu contains commands that help you create, edit, and execute macros. See the section "Macros" later in this chapter for details.

❑ **External Tools** — This command displays a dialog box that lets you add and remove commands from the Tools menu. For example, you could add a command to launch WordPad, MS Paint, WinZip, and other handy utilities from the Tools menu.

❑ **Performance Tools** — This submenu contains performance profiling commands such as Performance Wizard, New Performance Session, and New Diff Report.

❑ **Device Emulation Manager** — This command displays the Device Emulation Manager, which lets you connect, reset, shut down, and otherwise manipulate device emulators.

❑ **Import/Export Settings** — This command displays a dialog box that you can use to save, restore, or reset your Visual Studio IDE settings. Use this dialog box to configure your development environments for general development, team test, Visual Basic, C#, C++, or Web development.

❑ **Customize** — This command allows you to customize the Visual Studio IDE. See Chapter 3, "Customization," for details.

❑ **Options** — This command allows you to specify options for the Visual Studio IDE. See the "Options" section later in this chapter for details.

Macros

The Macros submenu provides commands that help you create, edit, and execute macros that automate repetitive Visual Studio programming chores. If you must perform a series of actions many times, you can record a macro that performs them. Then you can call the macro repeatedly to perform the actions rather than executing them manually.

> *Some examples of macros that I've used in the past include code that: arranges controls in unusual ways, such as spacing picture boxes around the edge of a circle; generates a long series of statements that does the same thing to a collection of text values (for example, makes* `Select Case` *statements for a series of text values); sets up a new dialog box by creating the OK and Cancel buttons, positioning them, setting their* `DialogResult` *properties, and setting the form's* `AcceptButton` *and* `CancelButton` *properties; and building a name and address form with labels and text boxes that have appropriate Anchor properties. Author John Mueller (*`www.mwt.net/~jmueller`*) uses similar macros to set up dialog boxes, create standard menus, and build standard event handlers. There are other ways to do these things, such as saving a pre-built dialog box for use as a template, or by using code snippets described later in this chapter, but macros are quick and easy.*

After you have recorded a macro, you can edit the macro's code and make changes. For example, if you want to run the code a certain number of times, you can include it in a `For` loop. Often, a quick inspection of the code lets you figure out how to modify the code to perform actions similar to (but not exactly the same as) the actions you originally recorded.

Most of the commands in the Macros submenu are self-explanatory. Use the Record TemporaryMacro command to record a macro for quick temporary use. When you select this command, a small window

pops up that contains buttons you can click to suspend, finish, or cancel recording. Visual Studio saves the commands you execute in a macro named `TemporaryMacro`.

Select Run TemporaryMacro to run this macro. If you record a new `TemporaryMacro`, it overwrites the existing one without warning you. Select the Save TemporaryMacro command to rename the macro so you can record a new `TemporaryMacro` without destroying this one.

Select the Macro Explorer command to display the window shown in Figure 2-10. If you right-click a macro, the resulting pop-up menu lets you run, edit, rename, or delete the macro. Notice the Macro Explorer's predefined Samples section, which contains example macros that you can use or modify for your own use.
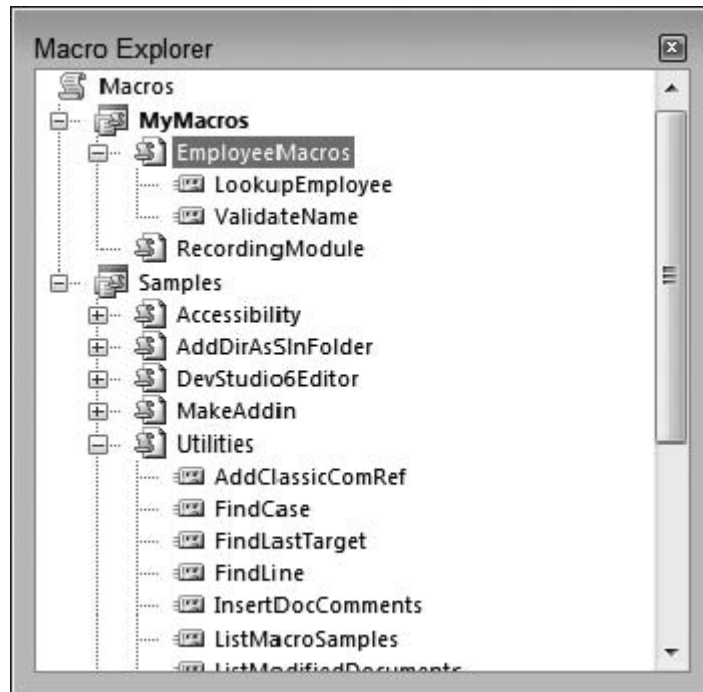
Figure 2-10: The Macro Explorer lets you edit, run, and delete macros.

Sometimes when you perform a series of programming tasks many times, there are better ways to approach the problem than writing a macro. For example, you may be able to make your program repeat the steps inside a loop. Or you may be able to extract the common code into a subroutine and then call it repeatedly rather than repeating the code many times. In these cases, your application doesn't need to contain a long sequence of repetitive code that may be hard to debug and maintain.

Macros are generally most useful when you must write similar pieces of code that cannot be easily extracted into a routine that can be shared by different parts of the application. For example, suppose that you need to write event handlers for several dozen TextBox controls. You could record a macro while you write one of them. Then you could edit the macro to make it generate the others in a loop using different control names for each event handler. You could place the bulk of the event-handling code in a separate subroutine that each event handler would call. That would avoid the need for extensive duplicated code. (In fact, you could even use the AddHandler statement to make all the controls use the same event handler. Then you wouldn't even need to write all of the separate event handlers.)

Macros are also useful for manipulating the IDE and performing IDE-related tasks. For example, you can write macros to show and hide your favorite toolbars, or to change whether the current file is opened read-only.

Options

The Tools menu's Options command displays the dialog box shown in Figure 2-11. This dialog box contains a huge number of pages of options that configure the Visual Studio IDE.
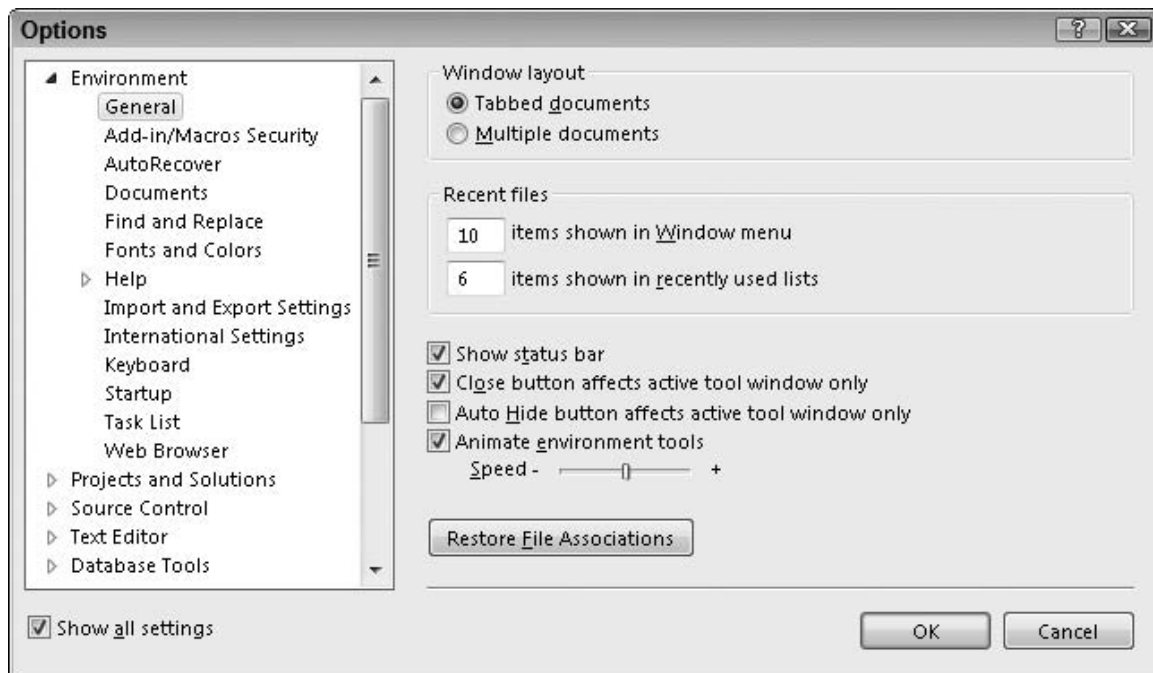
Figure 2-11: The Options dialog box lets you specify IDE options.

The following list describes the Options dialog box's most important categories:

❑ **Environment** — Contains general IDE settings such as whether the IDE uses a Multiple Document Interface (MDI) or Single Document Interface (SDI), the number of items shown in the MRU lists, and how often the IDE saves AutoRecover information. The Fonts and Colors subsection lets you determine the colors used by the editors for different types of text. For example, comments are shown in green by default, but you can change this color.

❑ **Performance Tools** — Contains settings for performance testing such as a flag indicating whether times should be displayed in clock ticks or milliseconds.

❑ **Projects and Solutions** — Contains the default settings for Option Explicit, Option Strict, and Option Compare.

❑ **Source Control** — Contains entries that deal with the source code control system (for example, Visual SourceSafe). These systems provide file locking and differencing tools that let multiple developers work on the same project without interfering with each other's changes.

❑ **Text Editor** — Contains entries that specify the text editor's features. For example, you can use these pages to determine whether delimiters are highlighted, whether the editor provides drag-and-drop editing, whether scroll bars are visible, whether long lines are automatically wrapped, whether line numbers are displayed, and whether the editor provides smart indentation. The Basic ⇨ VB Specific subsection lets you specify options such as whether the editor uses outlining, whether it displays procedure separators, and suggested corrections for errors.

❑ **Database Tools** — Contains database parameters such as default lengths for fields of various types.

❑ **Debugging** — Contains debugging settings such as whether the debugger displays messages as modules are loaded and unloaded, whether it should make you confirm when deleting all breakpoints, and whether it should allow Edit-and-Continue.

❑ **Device Tools** — Contains options for development on devices such as Smartphones, Pocket PCs, or Windows CE.

❑ **HTML Designer** — Contains options for configuring HTML Designer. These options determine such settings as whether the designer starts in source or design view, and whether it displays Smart Tags for controls in design view.

❑ **Microsoft Office Keyboard Settings** — Contains settings that specify how the keyboard should work when you use Excel or Word files within Visual Studio.

❑ **Test Tools** — Contains settings that determine how testing tools behave.

❑ **Windows Forms Designer** — Contains settings that control the Form Designer. For example, this section lets you determine whether the designer uses a snap-to grid or snap lines.

Test

The Test menu contains commands that control the Visual Studio testing tools. These tools let you perform such actions as coverage testing (to see if every line of code is executed), regression testing (to see if changes to the code broke anything), and load testing (to see how the application performs with a lot of simulated users running at the same time).

The following list briefly describes the Test menu's commands:

❏ **New Test** — Displays a dialog box to let you create various kinds of tests for the application.

❏ **Load Metadata File** — Lets you load a test metadata file. These files contain XML data that describes test lists, each of which can contain tests. This command lets you load test lists into different projects.

❏ **Create New Test List** — Lets you make a new test list. Test lists let you group related tests so that you can execute them together. For example, you might have test lists for user interface testing, print tests, database tests, and so forth.

❏ **Debug Tests** — Starts executing the test project that is currently active in Solution Explorer with the debugger.

❏ **Run Tests** — Starts executing the test project that is currently active in Solution Explorer without the debugger.

❏ **Administer Test Controllers** — Lets you manage test controllers. Test controllers manage test agents and gather test results. Test agents run the tests.

❏ **Select Active Test Run Configuration** — Lets you select the active test run configuration. Test run configurations determine testing parameters (such as what files are associated with the tests and whether unit tests produce coverage information).

❏ **Edit Test Run Configurations** — Lets you edit test run configurations.

❏ **Windows** — Displays test-related windows including Test View, Test List Editor, Test Results, Code Coverage Results, and Test Runs.

Window

The Window menu contains commands that control the Visual Studio windows. Which commands are enabled depends on the type of window that has the focus. For example, if focus is on a code editor window, the New Window command is enabled and the Floating, Dockable, and Tabbed Document commands are disabled, but when the Solution Explorer window has the focus, the opposite is true.

The following list briefly describes these commands:

❏ **New Window** — Creates a new window displaying the contents of the current code window.

❏ **Split** — Splits a code window into two panes that can display different parts of the code at the same time. This command changes to Remove Split when you use it.

❏ **Floating, Dockable, Tabbed Document** — Secondary windows such as the Toolbox, Solution Explorer, and Properties windows can be displayed as dockable, as floating, or as tabbed documents. A dockable window can be attached to the edges of the IDE or docked with other secondary windows. A floating window stays in its own independent window even if you drag it to a position where it would normally dock. A tabbed document window is displayed in the main editing area in the center of the IDE with the forms, classes, and other project files.

❏ **Auto Hide** — Puts a secondary window in Auto Hide mode. The window disappears, and its title is displayed at the IDE's nearest edge. When you click the title or hover over it, the window reappears so that you can use it. If you click another window, this window hides itself again automatically.

❑ **Hide** — Removes the window.

❑ **Auto Hide All** — Makes all secondary windows enter Auto Hide mode.

❑ **New Horizontal Tab Group** — Splits the main document window horizontally so that you can view two different documents at the same time.

❑ **New Vertical Tab Group** — Splits the main document window vertically so that you can view two different documents at the same time.

❑ **Close All Documents** — Closes all documents.

❑ **Reset Window Layout** — Resets the window layout to a default configuration.

❑ **Form1.vb** — The bottom part of the Window menu lists open documents such as form, code, and bitmap editors. The menu displays a checkmark next to the currently active document.

❑ **Windows** — If you have too many open documents to display in the Window menu, select this command to see a list of windows in a dialog. This dialog box lets you switch to another document, close one or more documents, or save documents. By pressing Ctrl+Click or Shift+Click you can select more than one document and quickly close them.

Community

The Community menu provides links to various pages on the `go.Microsoft.com` web site. These commands only work if you are connected to the Internet.

If you point your browser at `go.microsoft.com`, you'll find a search page where you can search for community help.

Help

The Help menu displays the usual assortment of help commands. You should be familiar with most of these from previous experience.

One new item in the Help menu is the How Do I command. This command opens the help system and displays a page full of links to common programming topics. These topics lead to a hierarchical series of categorized tutorials on various programming topics. For example, the Visual Basic ⇨ Language ⇨ Basics ⇨ Data Types ⇨ Data Type Summary topic describes the Visual Basic data types, their storage requirements, and their ranges of allowed values.

Toolbars

The Visual Studio toolbars are easy to rearrange. Simply grab the four gray dots on a toolbar's left or upper edge and drag the toolbar to its new position. If you drag a toolbar to one of the IDE's edges, it will dock there either horizontally (on the IDE's top or bottom edge) or vertically (on the IDE's left or

right edge). If you drop a toolbar away from the IDE's edges, it becomes a floating window not docked to the IDE.

You can use the IDE's menu commands to determine which toolbars are visible, to determine what they contain, and to make custom toolbars of your own. See Chapter 3, "Customization," for more details.

Many menu commands are also available in standard toolbars. For example, the Debug toolbar contains many of the same commands that are in the Debug menu. If you use a set of menu commands frequently, you may want to display the corresponding toolbar to make using the commands easier. Alternatively, you can make your own custom toolbar and fill it with your favorite commands.

Secondary Windows

You can rearrange secondary windows such as the Toolbox and Solution Explorer almost as easily as you can rearrange toolbars. Click and drag the window's title bar to move it. As the window moves, the IDE displays little blue icons to help you dock the window, as shown in Figure 2-12. This figure probably looks somewhat confusing, but it's fairly easy to use.

The IDE displays four docking icons near the edges of the IDE. You can see these icons near the edges of Figure 2-12. If you drop the window on one of these icons, the window docks to the corresponding edge of the IDE.

When you drag the window over another window, the IDE displays docking icons for the other window. In Figure 2-12, these are the five icons near the mouse in the middle of the screen. The four icons on the sides dock the window to the corresponding edge of the other window.

The center icon places the dropped window in a tab within the other window. If you look closely at Figure 2-12, you can see a little image of a document with two tabs on the bottom in this icon.

When you drag the mouse over one of the docking icons, the IDE displays a pale blue rectangle to give you an idea of where the window will land if you drop it. In Figure 2-12, the mouse is over the main document window's right docking icon, so the grayed rectangle shows the dropped window taking up the right half of the main document window.

If you drop a window somewhere other than on a docking icon, the window becomes free-floating.

When you drop a window on the main document area, it becomes a tabbed document, and you cannot later pull it out. To free the window, select it and use the Window menu's Dockable or Floating command.

Sometimes the IDE is so cluttered with windows that it's hard to figure out exactly where the window will be dropped. It's usually fairly easy to just move the mouse around a bit and watch the pale blue rectangle to see what's happening.
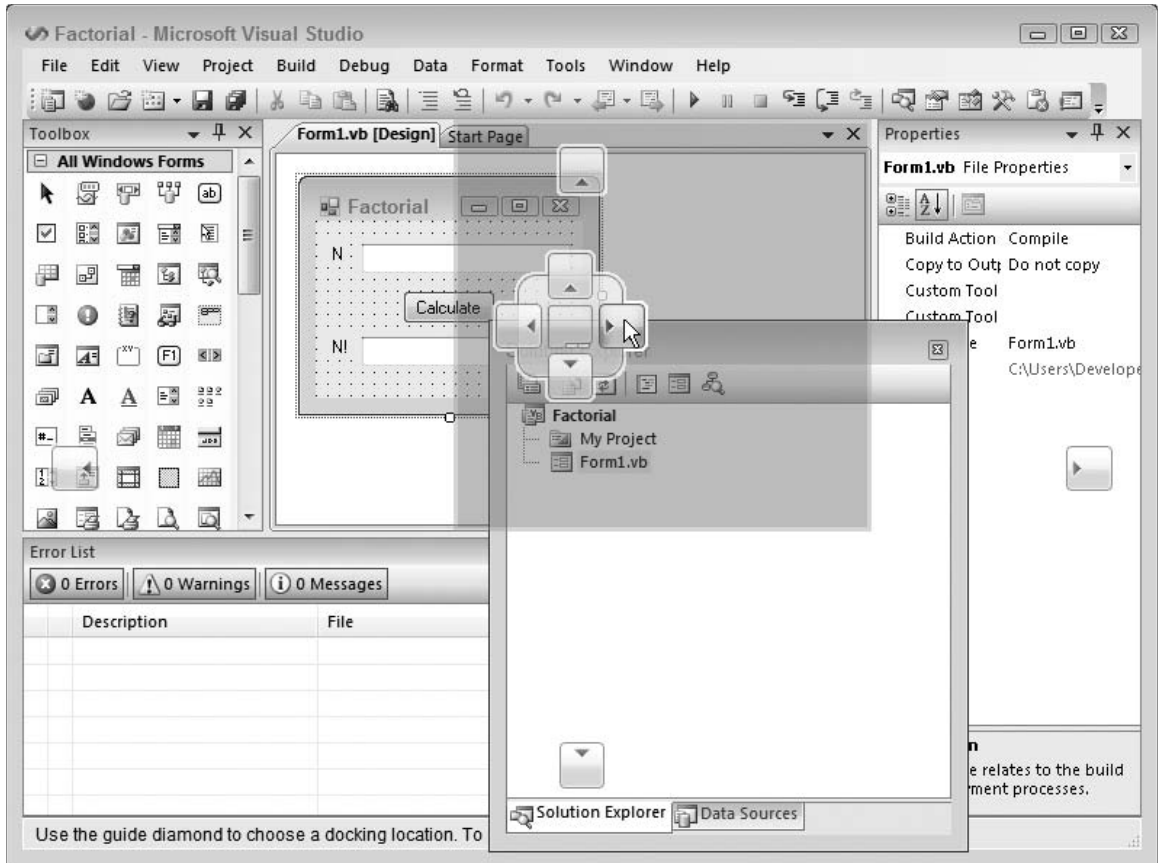
Figure 2-12: Use the IDE's docking icons to help you dock windows.

The windows in the Microsoft Document Explorer used by the MSDN Library and other external help files provide the same arranging and docking tools for managing its subwindows such as Index, Contents, Help Favorites, Index Results, and Search Results.

This section describes some of the general features of the IDE's secondary windows. The following sections describe two of the most important of those secondary windows: the Toolbox and the Properties window.

Toolbox

The Toolbox window displays tools that you can with the currently active document. The tools are available when you are editing a Windows Form, WPF Form, UserControl, web page, or other item that can contain objects such as controls and components.

The tools are grouped into sections called *tabs*, although they don't look much like the tabs on most documents. The Toolbox in Figure 2-13 displays tools for the Windows Form Designer. The All Windows Forms section shows its tools as icons while it lists the tools in the Data section by name. Other tabs are hidden. In this figure, the Toolbox was enlarged greatly to show most of its contents. Most developers keep this window much smaller and docked to the left edge of the IDE.

You can customize the Toolbox by right-clicking a tab and selecting one of the commands in the context menu. The following list briefly describes these commands:

❑ **List View** — Toggles the current tab to display tools either as a list of names (as in the Data section in Figure 2-13) or a series of icons (as in the All Windows Forms section in Figure 2-13).

❑ **Show All** — Shows or hides less commonly used tool tabs such as XML Schema, Dialog Editor, DataSet, Login, WPF Interoperability, Windows Workflow, Device Controls, and many others.

❑ **Choose Items** — Displays the dialog box shown in Figure 2-14. Use the .NET Framework Components tab to select .NET tools, and use the COM Components tab to select COM tools. Click the Browse button to locate tools that are not in either list.

❑ **Sort Items Alphabetically** — Sorts the items within a Toolbox tab alphabetically.

❑ **Reset Toolbox** — Restores the Toolbox to a default configuration. This removes any items you may have added by using the Choose Items command.

❑ **Add Tab** — Creates a new tab where you can place your favorite tools. You can drag tools from one tab to another. Hold down the Ctrl key while dragging to add a copy of the tool to the new tab without removing it from the old tab.

❑ **Delete Tab** — Deletes a tab.

❑ **Rename Tab** — Lets you rename a tab.

❑ **Move Up, Move Down** — Moves the clicked tab up or down in the Toolbox. You can also click and drag the tabs to new positions.

If you right-click a tool in the Toolbox, the context menu contains these commands plus Cut, Copy, Paste, Delete, and Rename Item.

Properties Window

When you are designing a form, the Properties window allows you to view and modify the properties of the form and of the controls that it contains. Figure 2-15 shows the Properties window displaying properties for a Button control named `btnCalculate`. You can see in the figure that the control's Text property is "Calculate" so that's what the button displays to the user.

Figure 2-15 shows some important features of the Properties window that deserve special mention. At the top of the window is a drop-down list that holds the names of all of the controls on the form. To select a control, you can either click it on the Windows Form Designer or select it from this list.

Figure 2-13: The Toolbox window can display tools by name or icon.

The buttons in the row below the dropdown determine what items are displayed in the window and how they are arranged. If you click the leftmost button, the window lists properties grouped by category. For example, the Appearance category contains properties that affect the control's appearance such as BackColor, Font, and Image. If you click the second icon that holds the letters A and Z, the window lists the control's properties alphabetically. This arrangement seems to make finding properties easier for most developers.

The third icon makes the window display the control's properties and the fourth icon (which displays a lightening bolt) makes the window display the control's events instead. (Yes, it's a little odd that the Properties window displays either properties or events, but there is no Events window.)
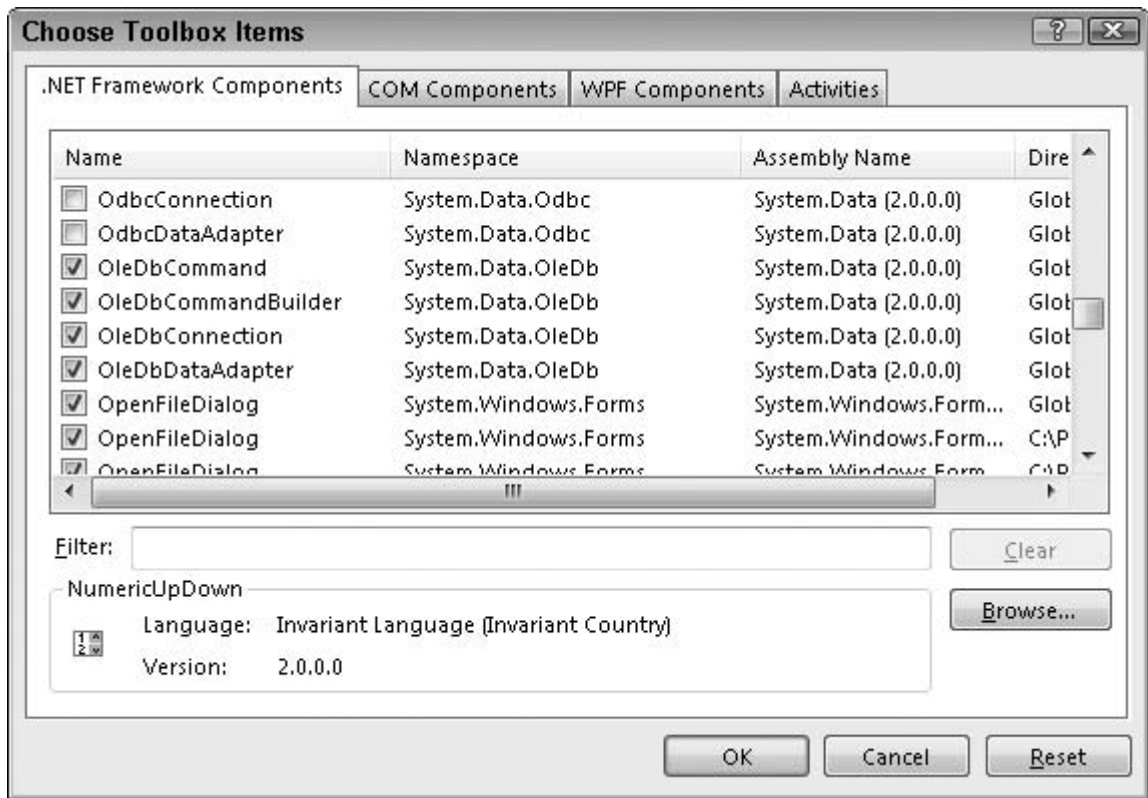
Figure 2-14: Use the Choose Toolbox Items dialog box to select the tools in the Toolbox.

For more information on using the Properties window to edit properties and create event handlers in the Windows Form Designer, see Chapter 4, "Windows Form Designer."

Figure 2-15 shows the Properties window as it appears when you are editing a Windows Form. The Properties window behaves differently when you are editing a Windows Presentation Form. In that case, the window does not display a row of icons at the top. It only displays the controls' properties, not events, and it always arranges the properties by category, not alphabetically, so it can sometimes be difficult to find the property you want. Many of the categories include a special "More Properties" entry at the bottom of the category that lets you hide or expand less commonly used properties in that category.

For more information on using the Properties window to edit properties in the WPF Forms Designer, see Chapter 5, "WPF Designer."
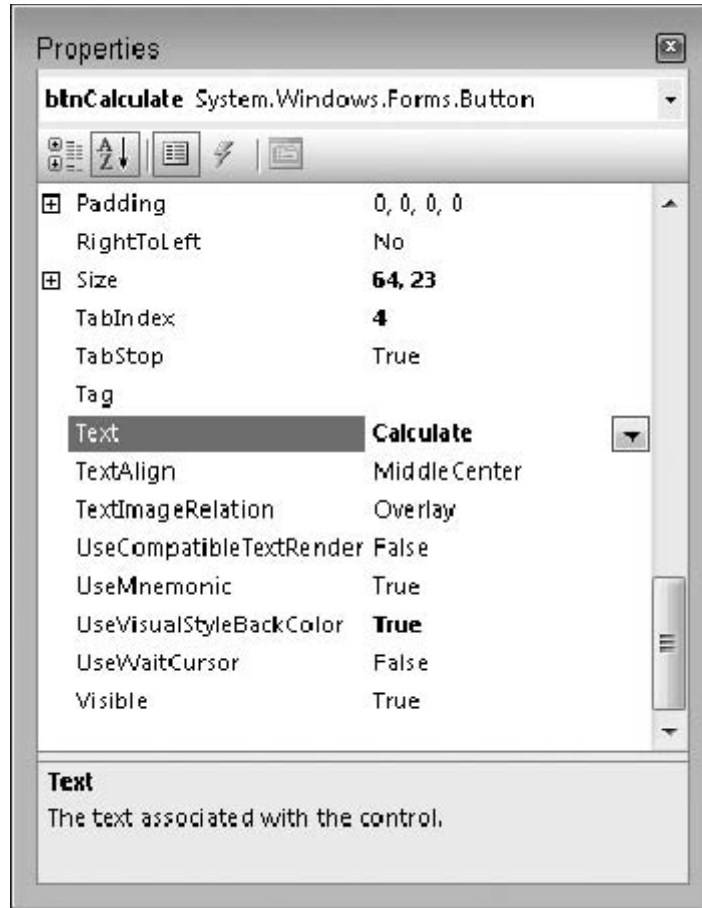
Figure 2-15: The Properties window lets you view and modify control properties.

Summary

The Visual Studio integrated development environment provides a huge number of tools for manipulating the currently loaded project. Menus and toolbars contain hundreds if not thousands of commands for creating, loading, saving, and editing different kinds of projects and files.

This chapter described the most useful and important commands available in the IDE's menus and toolbars. The kinds of menus, toolbars, and commands that are available depend on the type of window that currently has focus, in addition to the project's current state. For example, the Format menu contains commands that arrange controls on a form so it is only available when you are using a Form Designer window.

Chapter 3, "Customization," explains in greater detail how you can rearrange Visual Studio's toolbars and menus to meet your needs. It explains how you can make your own toolbar and menus and fill them with the commands that you find most useful during your day-to-day development.

3

Customization

The Visual Studio IDE is packed with thousands of tools that are available through toolbar and menu commands. There are so many tools available that the IDE would be practically useless if every tool were displayed at the same time. In the interests of usability, the IDE displays only the tools that the Microsoft Visual Studio developers thought would be most useful when you were performing a particular task.

Unfortunately, the Microsoft developers didn't know exactly what you would be doing while developing applications, so they made their best guesses about which tools you would need. Under some circumstances, you may find that a completely different set of tools would be more useful. In those cases, you may want to customize the IDE.

This chapter explains how you can customize the IDE. It explains how to make new toolbars and menus, add commands to them, and determine the commands' appearances. It also tells how you can define keyboard shortcuts to make the commands you use most often really easy to access.

Adding Commands

The Tools menu's Customize command displays the dialog box shown in Figure 3-1. On the Toolbars tab, select the check boxes next to the toolbars that you want to be visible. Click New to create a new toolbar where you can add your favorite tools. You can leave the toolbar floating or drag it to the edge of the IDE and dock it. If you drag it to the top, it joins the other toolbars.

Click the Commands tab to see a list of categories as shown in Figure 3-2. Select a category on the left. Then click and drag a command from the list on the right. If you drop the command on a toolbar, the command is added to the toolbar. Hover over a menu to open the menu so that you can drop the command in it.
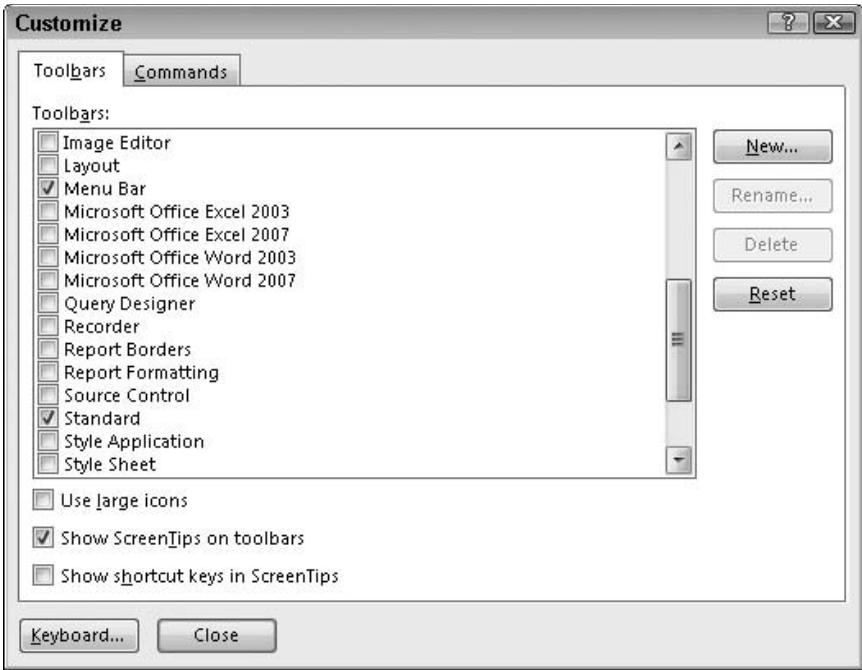
Figure 3-1: The Customize dialog box's Toolbars tab lets you determine which toolbars are visible.
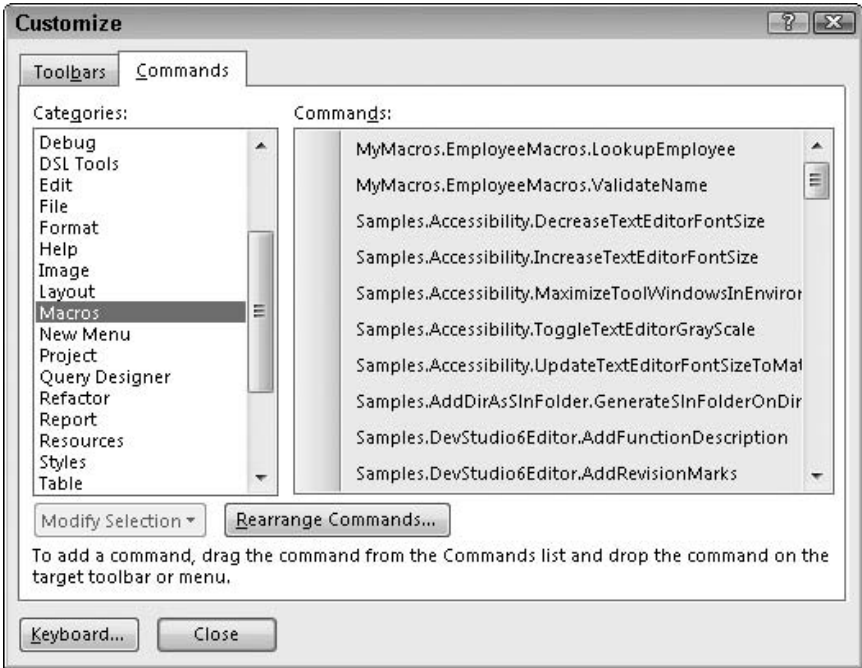
Figure 3-2: The Customize dialog box's Commands tab lets you add commands to toolbars and menus.

To create a new menu, select the New Menu item in the list on the left. Then drag and drop the New Menu entry from the right list onto the IDE's menu area.

To make a command that executes a macro you have created, select the Macros category in the list on the left. Find the macro you want to use in the list on the right, and drag it onto a toolbar or menu.

Removing Commands

To remove a command from a toolbar or menu, right-click it and select Delete. Alternatively, you can click and drag the command somewhere that it cannot be placed. For example, you can drop it on the Customize dialog box or most places in the IDE other than on a menu or toolbar (code editors, the Properties window, the Toolbox). The mouse cursor changes to a box with an X beside it when the mouse is over one of these areas.

Modifying the IDE's standard menus and toolbars can cause confusion later. You may later discover that you need a command that you have removed from a menu, and it may take you quite a while to find it again. A better approach to modifying standard commands is to create a new custom toolbar or menu. Add the commands you want to use to the new toolbar and then hide the standard toolbar that you are replacing. Later you can restore the hidden standard toolbar if necessary.

Modifying Commands

If you right-click a command in a menu or toolbar while the Customize dialog box is open, Visual Studio displays the pop-up menu shown in Figure 3-3. Click the Name text box and enter a new name to change the text displayed in the menu or toolbar.

Use the Copy Button Image command to copy the button's image to the clipboard. Use Paste Button Image to paste a copied image onto a button. Usually you will use these two commands to copy the image from an existing button to one you are adding. However, the Paste Button Image command will paste any graphical image from the clipboard. For example, you can open a bitmap using Microsoft Paint, press Ctrl+A to select the whole image, and press Ctrl+C to copy it to the clipboard. Then you can use the Paste Button Image command to paste the image into a button. Note that the buttons are 16×16 pixels. If the image you copy is larger, Visual Studio shrinks it to fit, and the result may look pretty strange. To avoid weird results, design a 16×16 icon in the first place.

Select the Reset Button Image command to restore the button to its default image. For a command tied to a macro, this erases the image.

Select the Edit Button Image command to display the simple button editor shown in Figure 3-4. When you click a pixel that is not the selected foreground color (black in Figure 3-4), the editor changes the pixel to the foreground color. When you hold the mouse down and drag it, the editor gives the pixels you cross that color, too. When you click a pixel that is already the foreground color, the editor erases the pixel and any others that you drag over.

When you click the Change Button Image command, a menu containing several dozen standard images pops out. Click one to assign that image to the button. A useful technique is to start with one of these images and then edit it to customize it for your command.
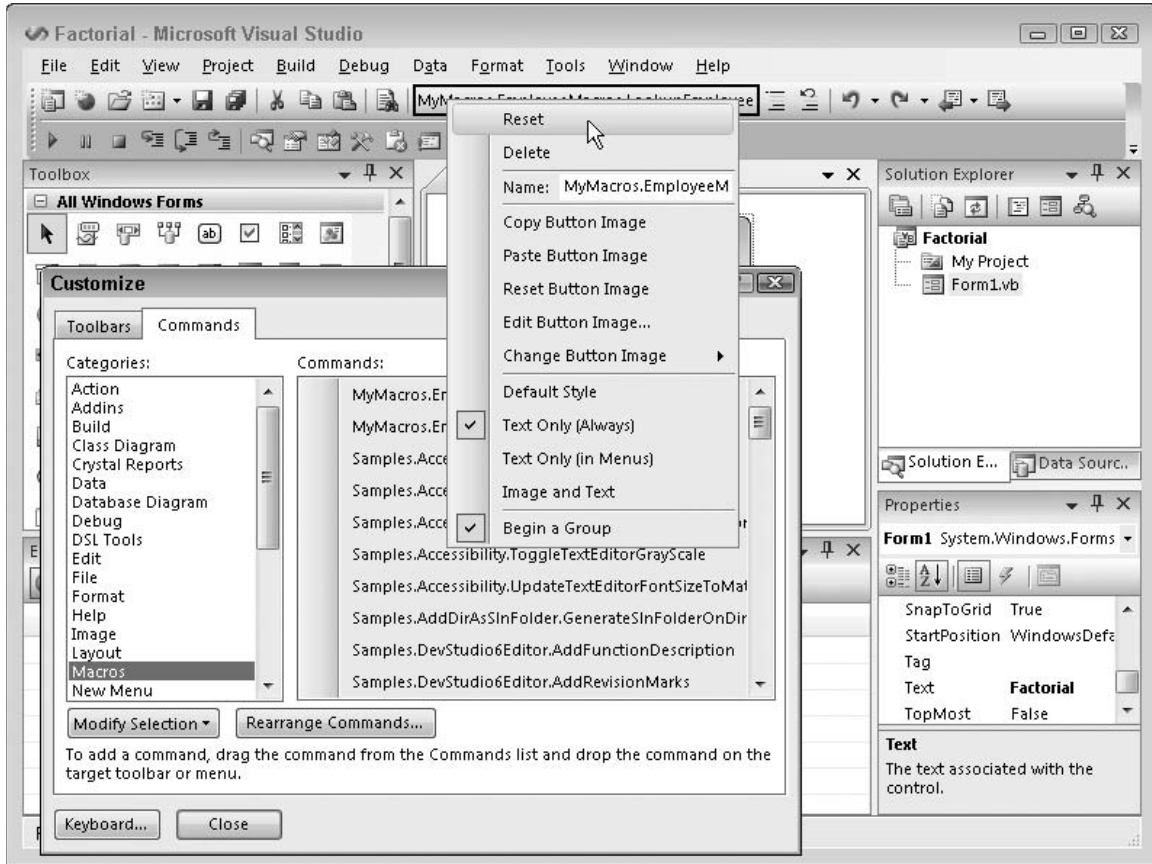
Figure 3-3: Right-click the menu and toolbar commands to change their appearances.

The pop-up menu's Default Style command makes the command use a style that depends on whether it is in a menu or toolbar. In a menu, the command displays a button and text. In a toolbar, the command displays only a button. Ironically, a new button's default style is not Default Style. When you create a new toolbar or menu command, the button initially displays only text. You need to use the Default Style command to make the button use this style.

Text Only (Always) makes the command display only text. Text Only (in Menus) makes a command in a toolbar display a button and a command in a menu display text.
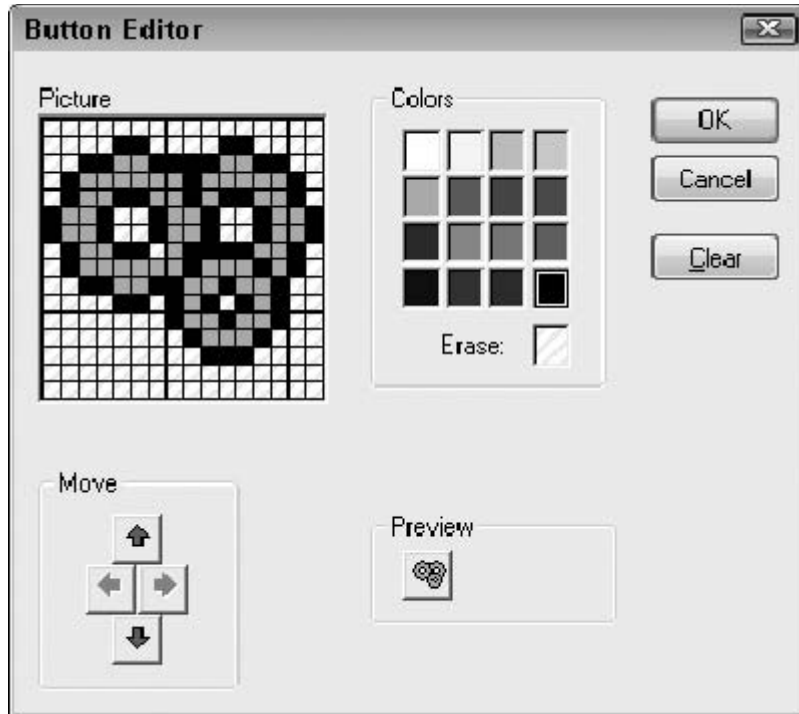
Figure 3-4: You can use Visual Studio's simple button editor to change a command's button.

Image and Text makes the command display both an icon and text whether it is in a toolbar or a menu.

Finally, the Begin a Group command makes the IDE insert a group separator before the button.

The Customize dialog box's Rearrange Commands button displays a dialog that lets you rearrange the commands in an existing menu or toolbar, and change the appearance of those commands. It's usually easier to just click and drag the commands on its menu or toolbar, however.

Making Keyboard Shortcuts

The Customize dialog box's Keyboard button displays the dialog box shown in Figure 3-5. You can use this display to view and edit keyboard shortcuts.

Enter words in the Show commands containing text box to filter the commands. When you click a command, the dialog box displays any keyboard shortcuts associated with it.

To make a new shortcut, click the Press shortcut key(s) text box and press the keys that you want to use as a shortcut. The Shortcut currently used by drop-down list displays any commands that already use the shortcut you entered. To make the assignment, click the Assign button.
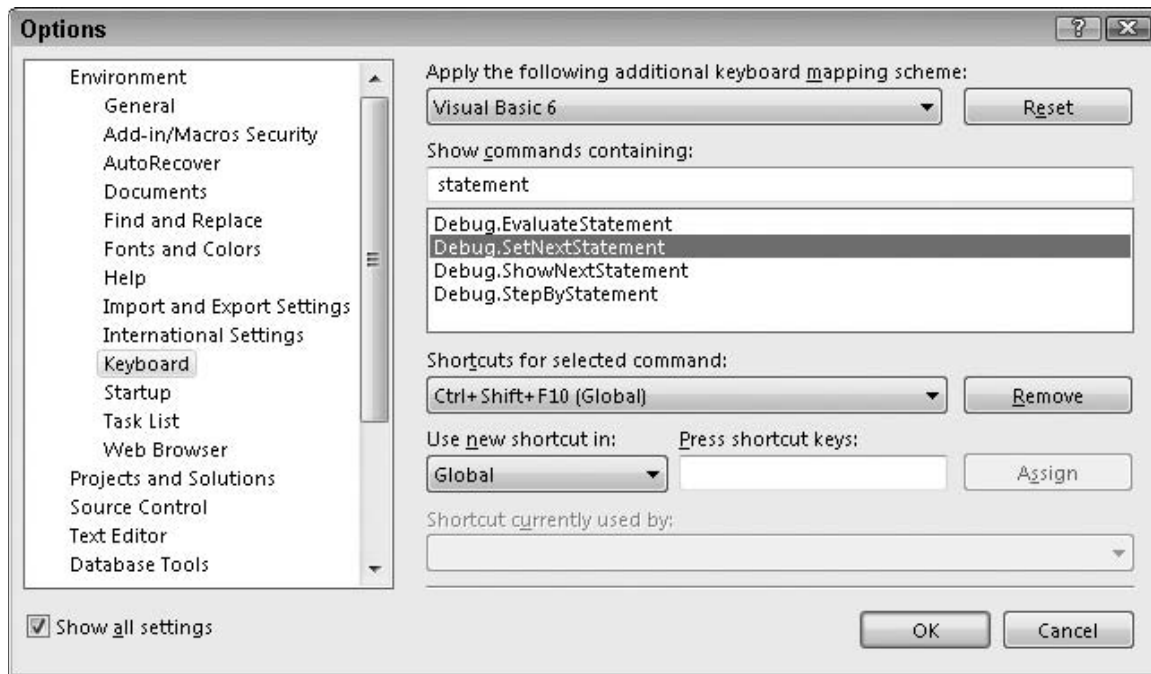
Figure 3-5: The Options dialog's Keyboard section lets you view and modify keyboard shortcuts.

Summary

The Visual Studio IDE comes with a huge assortment of tools. Initially the IDE's menus and toolbars are arranged to make it easy to access the tools that developers use most often, but if you need to use some other tool frequently, you are not limited to the initial IDE layout. This chapter explained how you could create, hide, and rearrange menus and toolbars to make it easy to use the tools that you find most useful.

In addition to its many menus and toolbars, the IDE contains dozens of windows that contain tools or that allow you to view and modify different aspects of an application. Of all the windows displayed by the IDE, one of the first that Visual Basic developers use when building a new application is the Windows Form Designer. This window allows you to add controls to a form, arrange them to create a user interface, and set their properties to determine their appearances and behaviors.

Chapter 4, "Windows Form Designer," explains how to use the Windows Form Designer to build the forms that make up most Windows applications.

4

Windows Form Designer

The Windows Form Designer allows you to design forms for typical Windows applications. It lets you add, size, and move controls on a form. Together with the Properties window, it also lets you change a control's properties to determine its appearance and behavior.

This chapter provides an introduction to the Windows Form Designer. It explains how to add controls to a form, move and size controls, set control properties, and add code to respond to control events. It also describes tips and tricks that make working with controls easier.

Setting Designer Options

When you first install Visual Studio, the Windows Form Designer is configured to be quite usable. You can immediately open a form and use the Toolbox to place controls on it. You can use the mouse to move and resize controls. You can use the Format menu to arrange and size controls. Overall the Windows Form Designer provides a first-class intuitive WYSIWYG ("what you see is what you get") experience.

Behind the scenes, however, there are a few configuration options that control the Designer's behavior and that you should know about to get the most out of the Designer.

To view the Designer's options, open the Tools menu, select Options, open the Windows Form Designer branch, and select the General page to display the dialog shown in Figure 4-1.
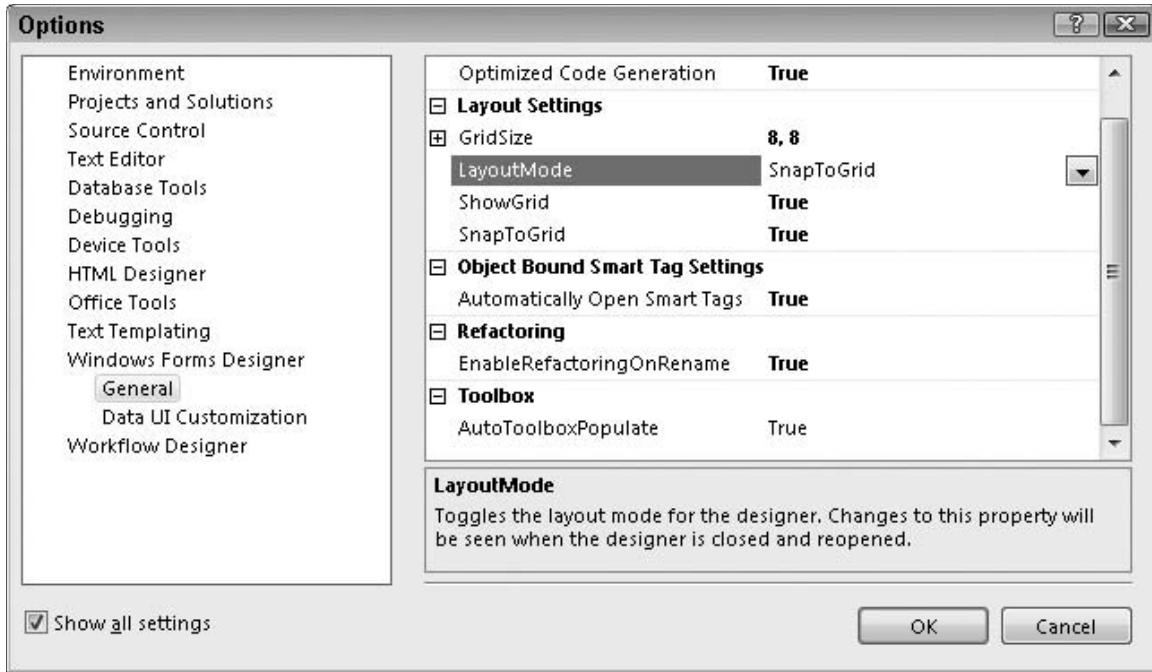
Figure 4-1: This dialog lets you control the Windows Form Designer's behavior.

The following list describes these settings.

❑ **Optimized Code Generation** — Determines whether Visual Studio generates optimized code. This setting is here instead of some more code-oriented part of the Options dialog because some controls may be incompatible with code optimization.

❑ **Grid Size** — Determines the horizontal and vertical dimensions of the sizing grid for use when LayoutMode is SnapToGrid.

❑ **LayoutMode** — Determines whether Visual Studio uses a snap-to grid or grid lines. If this is SnapToGrid, objects automatically snap to the nearest grid point when you drag or resize them. When this is SnapLines, resized controls automatically snap to lines that align with the edges or centers of other controls, or with the form's margins. Both of these options make it easy to build controls that are consistently sized and that align along their edges. The two options have a very different feels, however, so you might want to experiment with both to see which one you like best.

❑ **Automatically Open Smart Tags** — Determines whether Visual Studio displays smart tags by default.

❑ **EnableRefactoringOnRename** — Determines whether Visual Studio performs refactoring when you rename a control. If this is True and you change a control's name, Visual Studio updates any code that uses that control so it uses the new name. If this setting is False and you rename a control, any code that refers to the control still uses its old name so the code will no longer work.

❑ **AutoToolboxPopulate** — Determines whether Visual Studio adds components built by the solution to the Toolbox window.

Which LayoutMode you should use is a matter of preference. I know many developers who use each style. The EnableRefactoringOnRename option can save you a lot of trouble when you rename controls so it's almost always worth leaving True.

Adding Controls

The Windows Form Designer allows you to add controls to a form in several ways.

First, if you double-click a control on the Toolbox, Visual Studio places an instance of the control on the form in a default location and at a default size. You can then use the mouse to move and resize the control.

When you use this method, the new control is placed inside the currently selected container on the form. If the currently selected control is a GroupBox, the new control is placed inside the GroupBox. If the currently selected control is a TextBox that is inside a Panel, the new control is placed inside the Panel.

Second, if you click a control in the Toolbox, the mouse cursor changes while the mouse is over the form. The new cursor looks like a plus sign with a small image of the control's Toolbox icon next to it. If you click the form, Visual Studio adds a control at that location with a default size. Instead of just clicking, you can click and drag to specify the new control's location and size.

If you hold the Control key down when you click or click and drag on the form, the Designer adds the new control to the form and keeps the control's Toolbox tool selected so you can add another instance of the control. For example, suppose you need to create a series of TextBoxes to hold a user's name, street, city, state, and ZIP code. Select the TextBox tool in the Toolbox. Then you can quickly use Ctrl+Click five times to create the TextBoxes. Press the Escape key to stop adding TextBoxes.

Selecting Controls

When you first create a control, the Designer selects it. The Designer indicates that the control is selected by surrounding it with white boxes. In Figure 4-2, the Button2 control is selected.
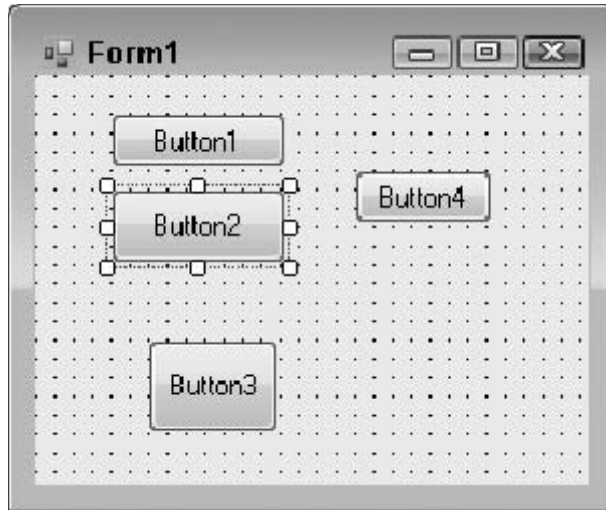
Figure 4-2: The Designer surrounds a selected control
with white boxes.

To select a control on the Designer later, simply click it.

You can click and drag to select a group of controls. As you drag the mouse, the Designer displays a rectangle so you can tell which controls will be selected. When you release the mouse button, all of the controls that overlap the rectangle at least partly are selected.

When you select a group of controls, the Designer surrounds most of them with black boxes. It surrounds a special "master" control with white boxes. In Figure 4-3, four buttons are selected. Button1 is the "master" control so it is surrounded by white boxes.
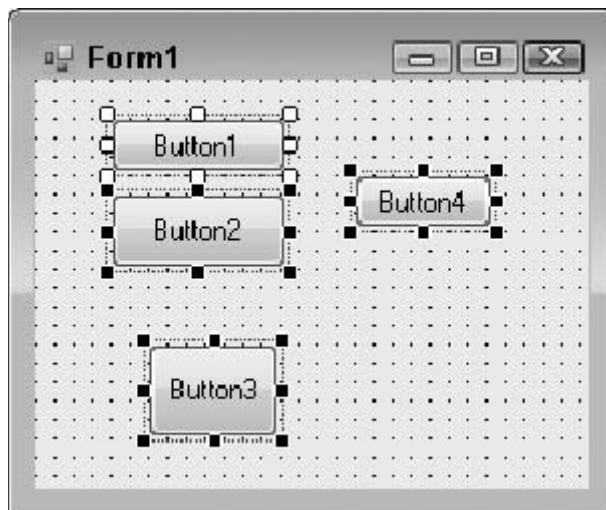
Figure 4-3: The selection's "master" control is surrounded
by white boxes.

The Designer uses the "master" control to adjust the others if you use the Format menu's commands. For example, if you use the Format ⇨ Make Same Size ⇨ Height command, the Designer gives the "black box" controls the same height as the "master" control. Similarly the Format ⇨ Align ⇨ Tops command moves the "black box" controls so their tops are the same as the top of the "master" control.

To change the "master" control, simply click the control that you want to use as the "master."

After you have selected some controls, you can Shift+Click or Ctrl+Click to add and remove single controls from the selection. You can Shift+Click-and-drag or Ctrl+Click-and-drag to add and remove groups of controls from the selection.

> *Under some circumstances, the Designer will not remove its selection even if you click on the form off of the selected controls. To deselect all of the controls, either click a control that is not selected or press the Escape key.*

Copying Controls

A particularly useful technique for building a series of similar controls is to build one and then use copy and paste to make others.

For example, to build the name, street, city, state, and ZIP code TextBoxes described in the previous section, you could start by adding the Name TextBox to the form. Next, set all of the properties for the control that will be shared by the other controls. For example, you may want to adjust the TextBox's width, set its MaxLength property to 20, and set its Anchor property to "Top, Left, Right" so it resizes horizontally when its container resizes. Now select the control on the Designer and press Ctrl+C to copy it. Then press Ctrl+V to make copies for the other controls. Drag the controls into position and you have quickly built all of the controls with their shared properties already set.

> *When you paste a copied control, the new control is placed inside whatever container is currently selected on the form. This can be confusing if you quickly copy and paste a container. For example, suppose you want to make three GroupBoxes. You build one and size it the way you want it. Then you press Ctrl+C, Ctrl+V, Ctrl+V. The first GroupBox is copied and the first copy is pasted inside the original GroupBox. Then the second copy is placed inside the first copy. The result is somewhat confusing and you'll probably need to drag the copies out onto the form before you can place them where you want.*

You can also use copy and paste to copy a group of controls. For example, suppose you want to make name, street, city, state, and ZIP code TextBoxes but you also want Label controls to the left of the TextBoxes. First create the name Label and TextBox, set their properties, and position them so they are lined up vertically and the Label is to the left of the TextBox as desired. Click and drag to select both controls and then press Ctrl+C to copy them both. Now when you press Ctrl+V, the Designer makes a copy of the Label and TextBox. The copies are lined up vertically and the Label is to the left of the TextBox as in the originals. The new controls are even both selected so you can use the mouse to grab them both and drag them into position.

Moving and Sizing Controls

Moving a control in the Windows Form Designer is easy. Simply click and drag the control to its new position.

To move a group of controls, select the controls that you want. Then click one of the controls and drag to move the whole group.

Note that you can drag controls in and out of container controls such as the FlowLayoutPanel, Group-Box, Panel, and PictureBox. When you drag a control into a new container, the mouse cursor acquires a little fuzzy rectangle on the lower right. If you are dragging a control and you see this appear, you know that dropping the control at the current position will move it into a new container. The new container indicator appears if you are dragging a control from the form into a container, from a container onto the form, or from one container to another.

Resizing a control is almost as easy as moving one. Click a control to select it. Then click and drag one of the white boxes surrounding the control to change its size. Use the boxes at the corners to change the control's size both vertically and horizontally. Use the boxes along the control's left and right edges to change its width, or use the boxes along its top and bottom edges to change its height.

To resize a group of controls, select the group. Then click and drag one of the boxes surrounding one of the controls. When you drag the mouse, the control beside the box you picked is resized as if it were the only control selected. The other selected controls resize in the same manner. For example, if you widen the clicked control by eight pixels, all of the other controls widen by eight pixels, too.

Arranging Controls

The Format menu contains several submenus that hold tools that make arranging controls easier. For example, the Format menu's Align submenu contains commands that let you align controls vertically and horizontally along their edges or centers.

For a description of this menu's commands, see the section "Format" in Chapter 2, "Menus, Toolbars, and Windows." (Or just experiment with these commands — they aren't too complicated.)

For more information about how the selection's "white box master" control determines how other controls are adjusted, see the section "Selecting Controls" earlier in this chapter.

Setting Properties

When you select a control, the Properties window allows you to view and edit the control's properties. For most properties, you can simply click the property and type a new value for the control. Some properties are more complex than others and provide drop-down lists or special dialogs to set the property's value. Most of the editors provided for setting property values are fairly self-explanatory, so they are not described in detail here.

In addition to using the Properties window to set a single control's properties one at a time, there are a couple of ways you can quickly set property values. The following sections describe some of the most useful of these techniques.

Setting Group Properties

If you select a group of controls, you can sometimes use the Properties window to give all of the controls the same property value all at once. For example, suppose you select a group of TextBoxes. Then you can use the Properties window to give them the same values to the Anchor, Text, MultiLine, Font, and other properties simultaneously.

Sometimes, this even works when you select different kinds of controls at the same time. For example, if you select some TextBoxes and some Labels, you can set all of the controls' Text properties at the same time. You cannot set the TextBoxes' MultiLine properties because the Labels do not have a MultiLine property.

One particular use for this technique is to set the Text property to a blank string for a group of TextBox controls. Unfortunately, if the selected TextBoxes have different Text values, the Properties window displays a blank value for the Text property. If you then try to make the property blank, the Properties window doesn't think you've changed the value, so it doesn't blank the controls' Text properties.

To work around this restriction, first set the Text property to any non-blank value ("x" will do) to give all of the controls the same value. Then delete the Text value to blank all of the controls' Text values.

Setting Properties for Several Controls

When you select a control on the Windows Form Designer, the Properties window initially selects a property for the control. The property selected depends on the kind of control that you selected and the kind of control that was selected before.

If the newly selected and previously selected controls both have the property that was previously selected, then the Properties window keeps that property selected. Otherwise the Properties window selects the default property for the newly selected control.

For example, suppose you select a Label control on the Designer and then click on the TabIndex property in the Properties window. Now suppose you select a TextBox in the Designer. Because the TextBox also has a TabIndex property, that property remains selected in the Properties window.

Actually, this doesn't always work. If you next select a ListBox, the Properties window selects the control's Items property even though it also has a TabIndex property. It does work for most controls, however, and it works if you select another control of the same type. For example, if you select a ListBox control's TabIndex property, then the TabIndex property remains selected if you select a different ListBox.

Because the Properties window tries to keep the same property selected, you can easily give a series of controls different values for the same property. For example, suppose you copy and paste to make a series of TextBoxes with the same Size and Anchor properties, and you want to give them good names. Select one TextBox, click its Name property in the Properties window, and type the new name (for example, txtName). Now click a different TextBox on the Windows Form Designer. The Name property

is still selected in the Properties window. If you immediately type this control's name (for example, txtStreet), the Properties window assigns the control the new name. You can repeat this process of selecting a new TextBox and typing its name very quickly.

Using Smart Tags

Many controls display a *smart tag* when you select them on the Designer. The smart tag looks like a little box containing a right-pointing triangle. When you click the smart tag, a small dialog appears to let you perform common tasks for the control quickly and easily.

Figure 4-4 shows a PictureBox with the smart tag expanded. Because the smart tag's dialog is visible, the smart tag indicator shows a left-pointing triangle. If you click this, the dialog disappears.
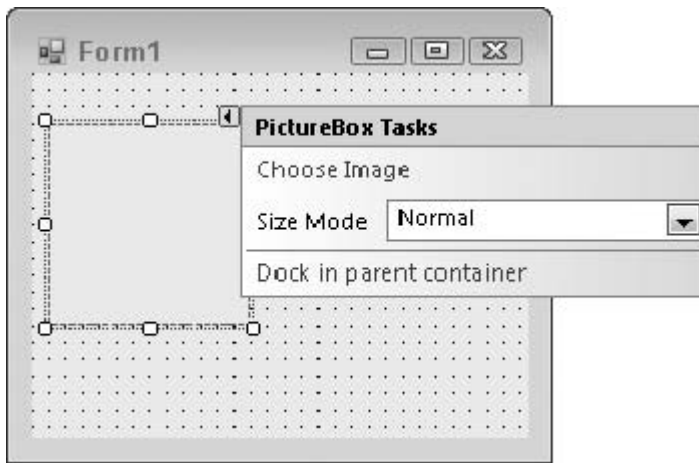
Figure 4-4: The PictureBox control's smart tag lets you choose an image, set the control's SizeMode, or dock the control in its container.

The PictureBox control's smart tag dialog lets you choose an image for the control, set the control's SizeMode, or dock the control in its container. These actions set the control's Image, SizeMode, and Dock properties.

Many controls, particularly the more complicated kinds, provide smart tags to let you perform common actions without using the Properties window.

Using Command Verbs

Some controls also provide links at the bottom of the Properties window to perform common actions on the control. These actions are called *command verbs*.

Figure 4-5 shows the Properties window when a PictureBox is selected on the Windows Form Designer. Below the properties is a "Choose Image" command verb. If you click this link, an image selection dialog appears just as it does if you click the "Choose Image" link on the smart tag in Figure 4-4 or if you click the ellipsis to the right of the Image property in the Properties window.
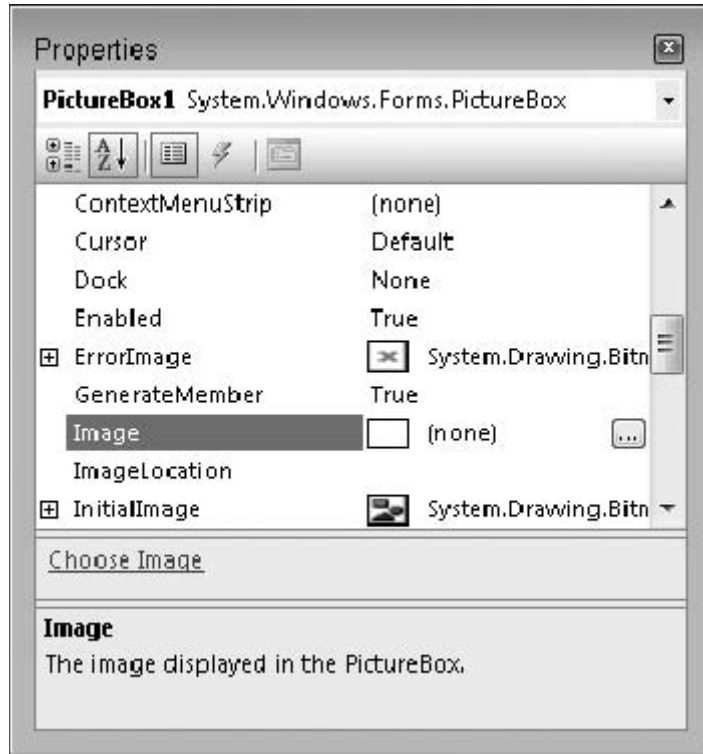
Figure 4-5: The Choose Image link below the properties lets you set a PictureBox's Image property.

My book *Expert One-on-One Visual Basic Design and Development* (Stephens, Wrox, 2007) explains how to add smart tags and command verbs to your own controls, as well as how to build custom property editors. These are advanced topics so they are not covered in this book.

Adding Code to Controls

After you have added the appropriate controls to a form and set their properties, the next step is to add code to the form that responds to control events and manipulates the controls.

You use the Code Editor to write code that responds to control events. The Code Editor is described in Chapter 6, "Visual Basic Code Editor," but you can open the Code Editor from the Windows Form Designer.

If you double-click a control on the Windows Form Designer, Visual Studio creates an empty event handler to handle the control's default event and it opens the event handler in the Code Editor. For example, the following code shows the event handler the IDE built for a Button control. The default event for a Button is Click so this code is a Click event handler. Note that I added the line continuation in the first line so it would fit in the book. Visual Studio makes that all one long line.

```
Private Sub Button1_Click(ByVal sender As System.Object, _
 ByVal e As System.EventArgs) Handles Button1.Click

End Sub
```

Another way to build an event handler and open the Code Editor is to select the control on the Windows Form Designer. Then click the Events icon (the lightening bolt) near the top of the Properties window to make the window show a list of events for the control as shown in Figure 4-6. Double-click an event in the window to create an event handler for it and to open it in the Code Editor.
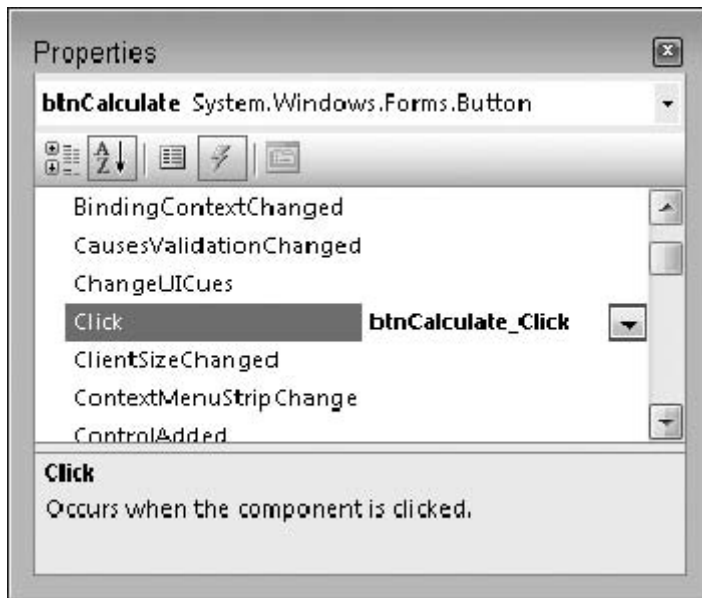
Figure 4-6: Click the Events icon to make the Properties window display a control's events.

If you select more than one control in the Windows Form Designer and then double-click an event, Visual Studio makes an event handler that catches the event for all of the selected controls. To create the following event handler, I selected three Buttons and double-clicked their Click event:

```
Private Sub Button2_Click(ByVal sender As System.Object, _
  ByVal e As System.EventArgs) _
  Handles Button3.Click, Button2.Click, Button1.Click

End Sub
```

The event handler's name is Button2_Click instead of Button1_Click or some other name because Button2 was the "white box master" control for the selected controls. See the section "Selecting Controls" earlier in this chapter for more information about a selection's "master" control.

Summary

The Windows Form Designer allows you to build forms for use in Windows applications. It lets you add controls to a form, and to resize and move the controls. Together with the Properties window, it lets you view and modify control properties, and create event handlers to interact with the controls.

This chapter introduced the Windows Form Designer and explained how you can take advantage of its features. Future chapters provide much more detail necessary for building forms. Chapter 8, "Selecting Windows Forms Controls," and Chapter 9, "Using Windows Forms Controls," provide more information about the kinds of controls you can use with the Windows Form Designer. Chapter 10, "Windows Forms," says a lot more about how Windows Forms work and what you can do with them.

Chapter 5, "WPF Designer," describes the designer that you use to build Windows Presentation Foundation forms. In some ways it is similar to the Windows Form Designer. For example, you use the Toolbox to place controls on the form, and you use the Properties window to view and edit control properties much as you do when using the Windows Form Designer. This chapter described some of the most significant differences between the two types of form designers.

WPF Designer

The WPF (Windows Presentation Foundation) Designer allows you to build WPF windows interactively much as the Windows Form Designer lets you build Windows Forms. It provides a WYSIWYG (what you see is what you get) surface where you can add controls to a window. If you select one or more controls on the designer's surface, the Properties window displays the objects' properties and lets you edit many of them.

In addition to the WYSIWYG design surface, the designer provides an XAML (Extensible Application Markup Language) code editor. Here you can view and edit the XAML code that defines the user interface. This lets you edit properties and arrange controls in ways that are impossible using the WYSIWYG designer.

This chapter provides an introduction to the WPF Designer. It explains how to add controls to a window, move and size controls, set control properties, and add code to respond to control events.

Note that the initial build of Visual Basic 2008 introduces a bug in new WPF projects. For more information, see the section "Visual Basic 2008 Version 1 Warning" in the Introduction on page xxxix.

Early Version Warning

The version of the WPF Designer included in Visual Studio 2008 is really only the second version. (The first version was released as part of the "additive" release of the .NET Framework version 3.0. For more information, see `msdn2.microsoft.com/library/aa480198.aspx` and `www.microsoft.com/downloads/details.aspx?FamilyID=c2b1e300-f358-4523-b479-f53d234cdccf`.)

Many products don't really become fully formed until at least their third version, and this one seems to be no exception. Although the WPF Designer is a WYSIWYG tool, it has a lot of weak spots. A small sampling of these weaknesses include:

❑ You cannot graphically put controls inside controls that are not primarily used as containers. For example, you cannot graphically put a `Grid` control inside a `Button`. You need to resort to XAML to do this.

❑ The Properties window does not provide editors for many types of objects, and many of the editors it does provide are incomplete. For example, the Properties window provides no editors for selecting brushes (not even for picking solid colors), has no dialog for selecting fonts (it doesn't even list available font names), and provides no graphical tools at all to help you build styles or templates.

❑ The Properties window provides no descriptions for the selected property, so you must look in the documentation for help.

❑ The Properties window lets you change many properties by typing a new value into a text box. It doesn't provide dropdowns for enumerated choices and gives you no help at determining the allowed values. You need to know what values you can type.

❑ The Properties window cannot display properties sorted alphabetically.

❑ The designer surface has no snap-to-grid mode.

❑ The XAML code editor's IntelliSense is incomplete and doesn't provide help in many places where it is necessary.

The WYSIWYG designer has enough weaknesses that it is often easier to build parts of a user interface by using the XAML code editor. For example, the designer provides no methods for making resources, styles, and templates, three items that are essential for building a maintainable interface. It also provides no method for building gradient brushes, which are practically mandatory in Vista-style applications. Fortunately, these things are not too difficult to build in the XAML code editor.

The designer also contains some obvious bugs, such as controls being unable to contain certain other kinds of controls and displaying error messages that are incorrect. By far the worst issue is that the designer sometimes crashes the entire Visual Studio development environment, usually while trying to redraw the designer surface, losing all of your unsaved work. To protect yourself, be sure to save your work often.

The designer surface often becomes confused and requires you to click a button to redraw. This isn't a huge burden, but it's disappointing after using the excellent Windows Form Designer for so many years. On the whole, the WPF Designer is woefully inadequate when compared to the extraordinarily powerful Windows Form Designer.

Just to be safe, let me say this again: save your work frequently. The Windows Form Designer has become safe enough that many developers have become lazy about saving their work often. Until the WPF Designer proves itself, save often so you don't lose a lot of work if the designer crashes Visual Studio.

All of these issues aside, the WPF Designer is a powerful tool. It lets you quickly build the basic structures of a WPF window and layout controls. You may need to rearrange controls somewhat and build additional elements such as resources and styles in the XAML editor, but the WYSIWYG surface can get you started.

Though the XAML editor also has shortcomings, it does provide the tools you need to fine-tune the user interface initially built by the designer surface. Together the two pieces of the WPF Designer give you everything you need to build aesthetically pleasing and compelling WPF user interfaces.

Recognizing Designer Windows

Figure 5-1 shows the Visual Studio IDE displaying the WPF Designer. You can rearrange the IDE's windows, but normally the Toolbox is on the left and the Properties window is on the right, below Solution Explorer. The WPF Designer is shown in the middle with its WYSIWYG design surface on top and its XAML code editor on the bottom.
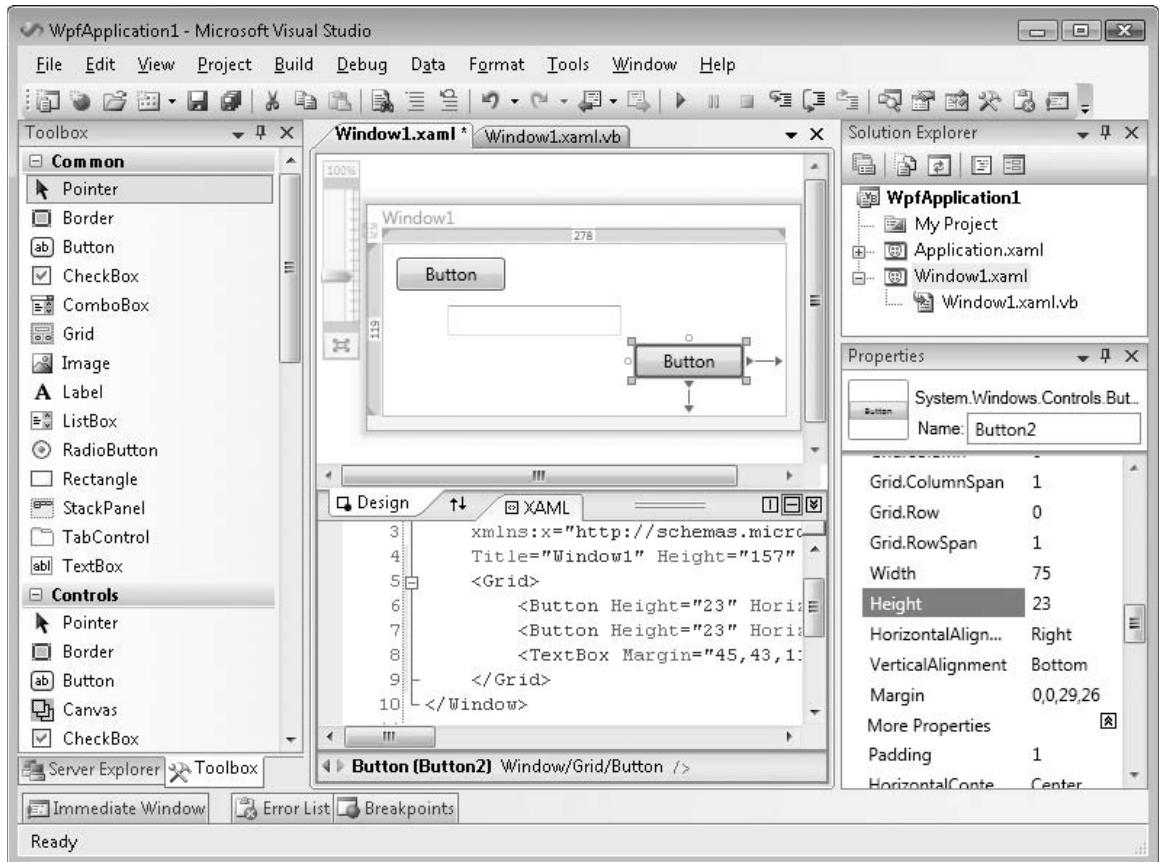
Figure 5-1: The WPF Designer includes a WYSIWYG design surface and a XAML code editor.

You can click the up and down arrow label between the WYSIWYG designer and the XAML editor to make the two switch panes. This is useful if you make one pane large and the other small. Then you can quickly switch back and forth as you move from using the WYSIWYG designer and the XAML editor.

Sometimes, particularly if you change the code in the XAML editor, the WYSIWYG designer window gets confused and cannot draw the window's controls. In that case, the window may display a message at its top indicating that the editor is confused and that you can click the label to make the designer reload the XAML code.

To save time, finish editing the XAML code before you refresh the designer. If you are in the middle of typing something and the XAML is inconsistent, clicking the label at the top of the designer will just display error messages anyway.

If there is an error in the XAML code, the designer may display a message at its top indicating that there are errors. You can double-click that label to open the Error list to see the types of errors. You can then fix them in the XAML editor and refresh the designer.

Occasionally the WYSIWYG surface redraws incompletely or not at all, or leaves rectangles or other artifacts on the screen. When that happens, you can usually refresh the designer simply by clicking it.

Adding Controls

The Windows Form Designer allows you to add controls to a form in several ways. This is very similar to the way the Windows Form Designer lets you add controls to a form. If you are familiar with that topic you might want to skip this section.

First, if you double-click a control on the Toolbox, Visual Studio places an instance of the control on the window in a default location and at a default size. You can then use the mouse to move and resize the control.

When you use this method, the new control is placed inside the currently selected container on the window. If the currently selected control is a StackPanel, the new control is placed inside the Stack-Panel. If the currently selected control is a TextBox that is inside a Grid, the new control is placed inside the Grid.

Second, if you click a control in the Toolbox, the mouse cursor changes to a crosshair while the mouse is over the window. If you click on the window, Visual Studio adds a control at that location with a default size. Instead of just clicking, you can click and drag to specify the new control's location and size.

If you hold the Ctrl key down when you select a tool from the Toolbox, that tool remains selected even after you create a control on the window so you can add another instance of the control. For example, suppose you need to create a series of TextBoxes to hold a user's name, street, city, state, and ZIP code. Hold the Ctrl key and click the TextBox tool in the Toolbox. Then you can quickly click five times to create the TextBoxes. Click another tool or the arrow tool in the Toolbox to stop adding TextBoxes.

Selecting Controls

When you first create a control, the designer selects it. The designer indicates that the control is selected by surrounding it with light gray boxes. In Figure 5-1, the button in the lower right is selected.

To select a control on the designer later, simply click it. You can also click and drag to select a group of controls. As you drag the mouse, the designer displays a rectangle so you can tell which controls will be selected. When you release the mouse button, all of the controls that overlap the rectangle at least partly are selected.

When you select a group of controls, the designer surrounds them with little marks that look like crop marks or frame marks. In Figure 5-2, the text box and the lower-right button are selected.
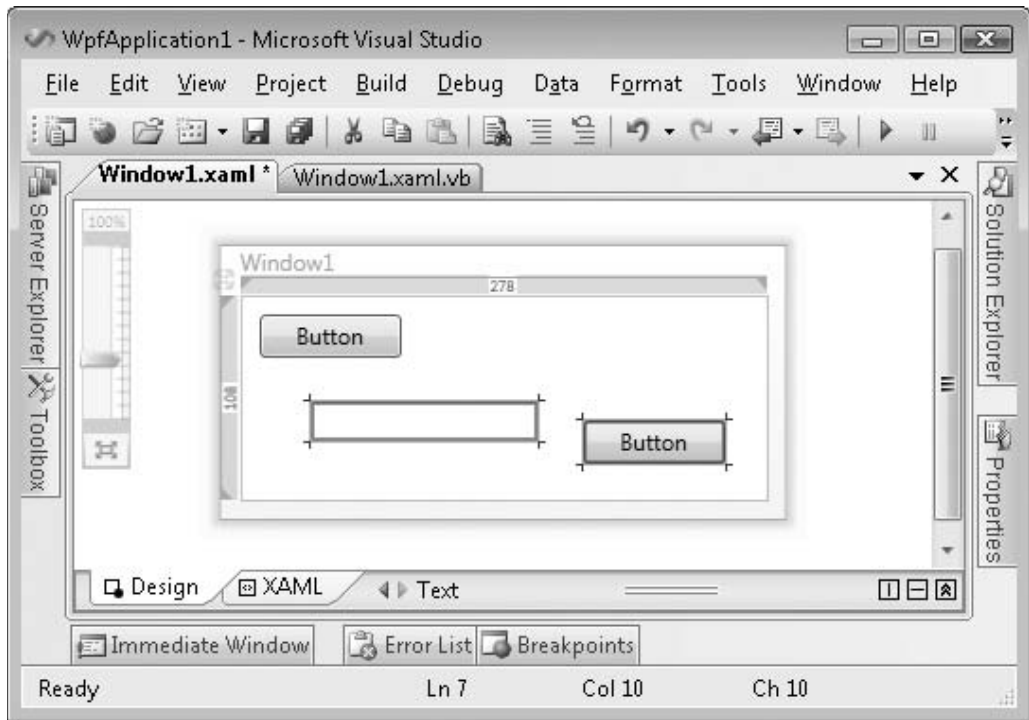
Figure 5-2: Selected controls are surrounded by frame marks.

After you have selected some controls, you can Shift+Click to add new controls to the selection or Ctrl+Click to toggle a control's membership in the selection. You can also Shift+Click-and-drag or Ctrl+Click-and-drag to add or toggle groups of controls from the selection.

You can quickly deselect all controls by pressing the Escape key.

Copying Controls

A particularly useful technique for building a series of similar controls is to build one and then use copy and paste to make others.

For example, suppose you want to build a contact form with fields for name, street, city, state, and ZIP code. You could build a Label control that contains the text "Name" and a TextBox next to it. You can set the TextBox's properties such as its size, MaxLength, and MaxLines properties. Then you can click and drag to select both controls, copy them to the clipboard, and paste new copies of the controls onto the window. The new TextBox will have the same size, MaxLength, and MaxLines properties as the original TextBox, and will be next to the new Label. You can then drag the two controls into position and paste again to make two more.

Moving and Sizing Controls

Moving most controls in the Windows Form Designer is easy. Simply click and drag the control to its new position.

Container controls work slightly differently. When you select a container such as a `Grid`, `StackPanel`, or `WrapPanel`, the designer displays a drag handle above and to the left of the control. This handle looks like a small box containing an arrow pointing up, down, left, and right. Click and drag this handle to move the container and the controls it holds.

To move a group of controls, select the controls that you want. Then click one of the controls and drag to move the whole group. If one of the controls is a container, you can click and drag its move handle to reposition the group.

Note that you can drag controls in and out of container controls such as the Grid or StackPanel. When you drag a control over a new container, the designer grays out the rest of the window's controls and only the new container is white so you can see where the control will land if you drop it.

As you drag a control, the designer displays "snap lines" to show how the control lines up with other controls. It displays lines when the control's edges align with another control's edges. For some controls, it displays lines when the control's text baseline aligns with the text baseline of other controls.

Figure 5-3 shows the designer dragging the lower button. Four snap lines show that this control's edges line up with the left and right edges of the upper button, the left edge of the `GroupBox` control at the bottom, and the upper edge of the `Ellipse` control to the right. Numbers on each snap line show the distance between the moving control and the controls with which it is aligned.
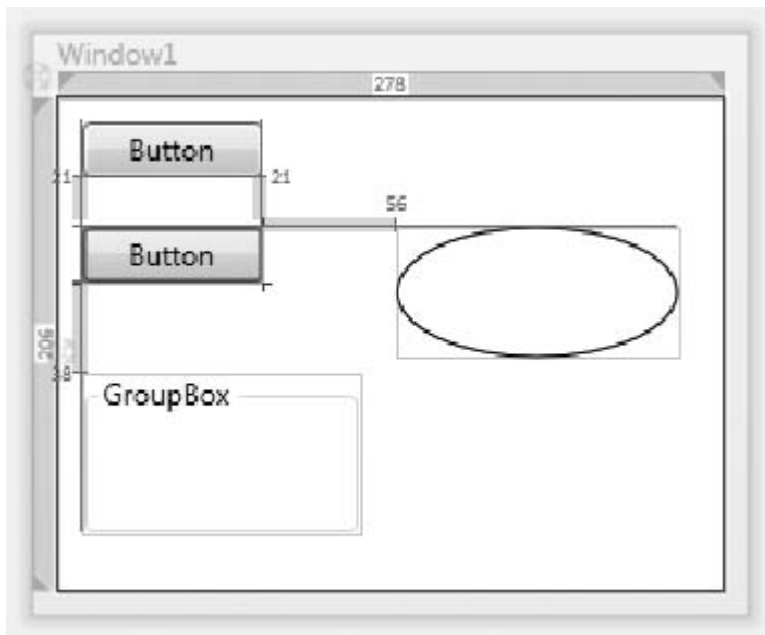
Figure 5-3: Snap lines show how moving controls align with other controls.

Resizing a control is almost as easy as moving one. Click a control to select it. Then click and drag one of its edges or one of the light gray boxes surrounding the control to change its size. Use the boxes at the corners to change the control's size, both vertically and horizontally. Use the edges to change its width or height.

WPF controls provide a fairly complex set of properties to determine how they are anchored to their containers. Fortunately, the visual designer provides aids to make understanding control anchoring easier.

When you select a control, the designer displays symbols next to the control's edges showing how it is anchored. An arrow from the control's edge to the corresponding container edge means the control's edge remains the same distance from the container's edge even when the container resizes. In Figure 5-1, the selected button's lower and right edges are connected to its container's lower and right edges. When the window resizes, the button moves to stay the same distance from those edges.

A circle near the selected control's edge means that edge remains the same distance from the control's opposite edge. In Figure 5-1, the circles mean the selected button's left and top edges move when its lower and right edges move, so the control stays the same width and height.

If the button's left and top edges were also connected to the container with arrows, the button would grow when the container grew.

> *The designer will not allow you to remove the attachment from all of a control's edges (so they display circles). If you remove an arrow, the designer changes the opposite side's anchor symbol to a circle if it isn't one already.*

You can easily change a control's edge anchors by simply clicking the symbol. If you click a circle, the designer changes that anchor to an arrow and vice versa.

Setting Properties

When you select a control, the Properties window allows you to view and edit the control's properties. For Boolean properties, the Properties window displays a check box where you can set the property's value.

For many other properties, you can simply click the property and type a new value for the control in a text box. Unfortunately, the Properties window doesn't give you much help, and you need to know what to type.

For example, you can set a control's `Margin` property to a blank string to indicate no margins; to a single number to make its left, top, right, and bottom margins the same; to two numbers separated by commas to set the control's left/right and top/bottom margins; or to four numbers separated by commas to set the control's left, top, right, and bottom margins, respectively. You cannot set this property to three numbers or more than four numbers, but the Properties window doesn't give you any hints that this is the case.

For another example, the `Background` property indicates how a control should be filled. You can set this to a numeric value such as #FF0000FF (blue). You can also set it to a pre-defined color name such as Green, in which case the Properties window translates the values into a numeric value #FF00FF00. You enter this value in a plain text box with no drop-down list, color selection popup, or any other help.

Numeric color values are specified using the ARGB (Alpha, Red, Green, Blue) system. The value is hexadecimal with two digits representing each of the color's alpha (opacity), red, green, and blue components on a 0 to 255 scale. For example, #FF0080FF has opacity FF (completely opaque), red 00 (no red), green 80 (half green), and blue FF (as blue as possible). The result is a shade of blue.

The Properties window does not offer any help for more complicated properties. For example, you can also set a control's `Background` property to a gradient brush, but you cannot do that in the Properties window. Instead, you need to write XAML code to give a control such a background.

Setting Group Properties

If you select a group of controls, you can sometimes use the Properties window to give all of the controls the same property value all at once. For example, suppose you select a group of TextBoxes. Then you can use the Properties window to give them the same values for their `Width`, `Height`, `Margin`, `MaxLength`, and many other properties.

Sometimes, this even works if you select different kinds of controls at the same time. For example, if you select some TextBoxes and some Labels, you can set all of the controls' `Width`, `Height`, and `Margin` properties at the same time. You cannot set the controls' `MaxLength` properties because the Labels do not have a `MaxLength` property.

Adding Code to Controls

After you have added the appropriate controls to a form and set their properties, the next step is to add code to the form that responds to control events and manipulates the controls.

You can add some code declaratively in the XAML editor. For example, you can make a trigger respond to a change in a control's property or to a control's event.

You can also write Visual Basic source code to respond to control events just as you would in a Windows Forms application. If you double-click a control on the WPF Designer, Visual Studio creates an empty event handler to handle the control's default event, and it opens the event handler in the code editor. For example, the following code shows the event handler the IDE built for a Button control. The default event for a Button is Click so this code is a Click event handler. Note that I added the line continuation in the first line so that it would fit in the book. Visual Studio makes that all one long line.

```
Private Sub Button1_Click(ByVal sender As System.Object, _
 ByVal e As System.Windows.RoutedEventArgs) Handles Button1.Click

End Sub
```

Relaxed delegates let you remove the parameters from the event handler's declaration if you want. For example, for a button, the fact that the Click event handler is running is often enough to let the program know what is happening, so that you don't need the parameters. In that case you can remove them to simplify the code.

You can also create a new event handler within the code editor. The upper-left part of the code editor displays a dropdown listing the window's controls. If you select a control from the list, you can then pick an event for that control from another dropdown in the code editor's upper right. If you select an event, the code editor makes the corresponding event handler.

Summary

The WPF Designer allows you to build windows for use in WPF applications. It lets you add controls to the window, and to resize and move the controls. Together with the Properties window, it lets you view and modify control properties, and create event handlers to interact with the controls.

This chapter introduced the WPF Designer and explained how you can take advantage of its features. Other chapters provide much more detail that is necessary for building windows. Chapter 11, "Selecting WPF Controls," and Chapter 12, "Using WPF Controls," provide more information about the kinds of controls you can use with the WPF Designer. Chapter 13, "WPF Windows," says more about WPF windows and pages.

Chapter 6, "Visual Basic Code Editor," describes the code editor that you can use to edit the code that sits behind Windows Forms and WPF control events. Later chapters explain the Visual Basic language that you can use within the code editor.

Visual Basic Code Editor

The Visual Studio IDE includes editors for many different kinds of documents, including several different kinds of code. For example, it has Hypertext Markup Language (HTML), Extensible Markup Language (XML), Extensible Application Markup Language (XAML), and Visual Basic editors. These editors share some common features, such as displaying comments and keywords in different colors.

As a Visual Basic developer, you will use the Visual Basic code editor frequently, so you should spend a few minutes learning about its specialized features. The most obvious feature of the code editor is that it lets you type code into a module, but the code editor is far more than a simple text editor such as Notepad. It provides many features to make writing correct Visual Basic code easier. This chapter describes some of the most important of these features.

The Visual Basic code editor provides many features that are not provided by other Visual Studio editors. For example, the HTML, XML, and XAML editors do not provide breakpoints or features that let you step through executing code. Even the C# code editor is missing some of the features in the Visual Basic editor, such as immediately updated error indicators as you type.

Figure 6-1 shows the code editor displaying some Visual Basic code at runtime. To make referring to the code lines easier, this figure displays line numbers. To display line numbers, invoke the Tools menu's Options command, navigate to the Text Editor ⇨ Basic ⇨ General page, and check the Line Numbers box.
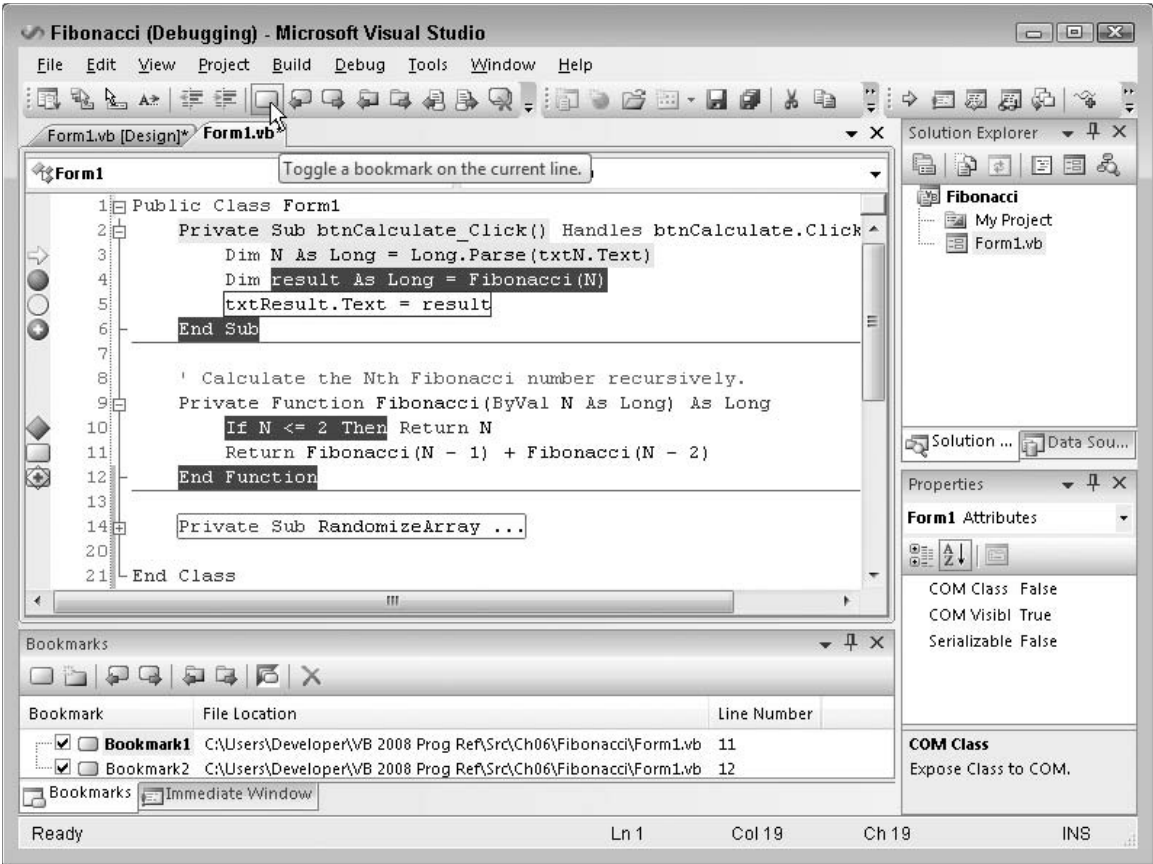
Figure 6-1: The Visual Basic code editor provides many features, including line numbers and icons that indicate breakpoints and bookmarks.

Margin Icons

The gray margin to the left of the line numbers contains icons giving information about the corresponding lines of code. The following table describes the icons on lines 3 through 11.

Line	Icon	Meaning
3	Yellow arrow	Indicates that execution is paused at this line
4	Red circle	Indicates a breakpoint
5	Hollow red circle	Indicates a disabled breakpoint

Line	Icon	Meaning
6	Red circle with plus sign	Indicates a breakpoint with a condition or hit count test
10	Red diamond	Indicates a breakpoint that executes an action when reached
11	Blue and white rectangle	Indicates a bookmark

These icons can combine to indicate more than one condition. For example, line 12 shows a blue and white rectangle to indicate a bookmark, a hollow red diamond to indicate a disabled breakpoint that performs an action, and a plus sign to indicate that the breakpoint has a condition or hit count test.

Note that the editor marks some of these lines in other ways than just an icon. It highlights the currently executing line with a yellow background. It marks lines that hold enabled breakpoints with white text on a red background.

To add or remove a simple breakpoint, click in the gray margin.

To make a more complex breakpoint, click in the margin to create a simple breakpoint. Then right-click the breakpoint icon and select one of the context menu's commands. The following list describes these commands:

❑ **Delete Breakpoint** — Removes the breakpoint.

❑ **Disable Breakpoint** — Disables the breakpoint. When the breakpoint is disabled, this command changes to Enable Breakpoint.

❑ **Location** — Lets you change the breakpoint's line number. Usually it is easier to click in the margin to remove the old breakpoint and then create a new one.

❑ **Condition** — Lets you place a condition on the breakpoint. For example, you can make the breakpoint stop execution only when the variable `num_employees` has a value greater than 100.

❑ **Hit Count** — Lets you set a hit count condition on the breakpoint. For example, you can make the breakpoint stop execution when it has been reached a certain number of times.

❑ **Filter** — Lets you restrict the breakpoint so it is only set in certain processes or threads.

❑ **When Hit** — Lets you specify the action that the breakpoint performs when it triggers. For example, it might display a message in the Output window or run a macro.

To add or remove a bookmark, place the cursor on a line and then click the Toggle Bookmark tool. You can find this tool, which looks like the blue and white bookmark icon, in the Text Editor toolbar (under

the mouse in Figure 6-1) and at the top of the Bookmarks window. Other bookmark tools let you move to the next or previous bookmark, the next or previous bookmark in the current folder, or the next or previous bookmark in the current document. The final bookmark command clears all bookmarks.

Outlining

By default, the code editor displays an outline view of code. If you look at the first line in Figure 6-1, you'll see a box with a minus sign in it just to the right of the line number. That box represents the outlining for the `Form1` class. If you click this box, the editor collapses the class's definition and displays it as a box containing a plus sign. If you then click the new box, the editor expands the class's definition again.

The gray line leading down from the box leads to other code items that are outlined, and that you can expand or collapse to give you the least cluttered view of the code you want to examine. Near the bottom of Figure 6-1, you can see that the `RandomizeArray` subroutine has been collapsed. The ellipsis and rectangle around the routine name provide an extra indication that this code is hidden.

The editor automatically creates outlining entries for namespaces, classes and their methods, and modules and their methods. You can also use the `Region` statement to group a section of code for outlining. For example, you can place several related subroutines in a region so you can collapse and expand the routines as a group.

Figure 6-2 shows more examples of outlining. Line 36 begins a region named `Randomization Functions` that contains three collapsed subroutines. Notice that the corresponding `End Region` statement includes a comment that I added giving the region's name. This is not required but it makes the code easier to understand when you are looking at the end of a region.

Line 89 contains a collapsed region named `Utility Functions`.

Line 95 starts a module named `HelperRoutines` that contains one collapsed subroutine.

Finally, Line 114 holds the collapsed `ImageResources` namespace.

Notice that the line numbers skip values for any collapsed lines. For example, the `RandomizeIntegerArray` subroutine is collapsed on line 38. This subroutine contains 15 lines (including the `Sub` statement), so the next visible line is labeled 53.

Also notice that comments before a subroutine are not collapsed with the subroutine. You can make reading collapsed code easier by placing a short descriptive comment before each routine.
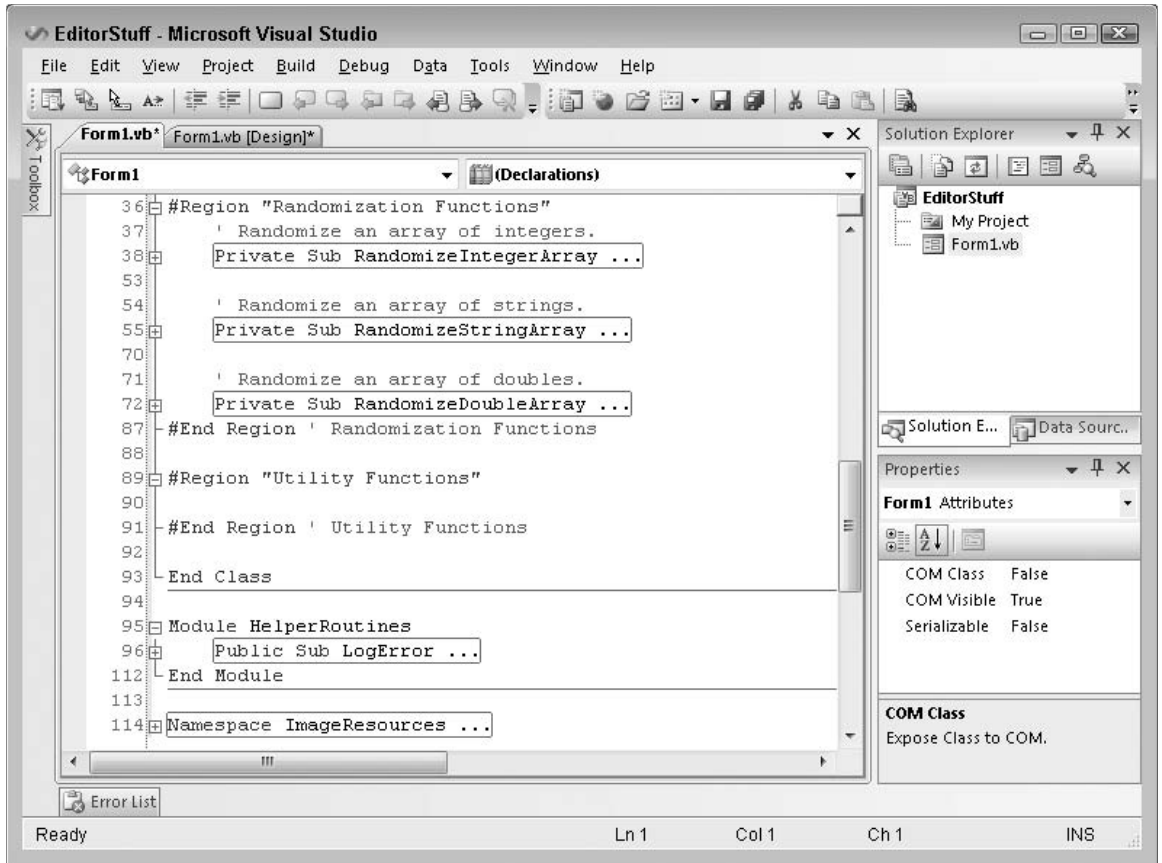
Figure 6-2: The code editor outlines namespaces, classes and their methods, modules and their methods, and regions.

Tooltips

If you hover the mouse over a variable at design time, the editor displays a tooltip describing the variable. For example, if you hovered over an integer variable named num_actions, the tooltip would display "Dim num_actions As Integer."

If you hover over a subroutine or function call, the tooltip displays information about that method. For example, if you hover over the RandomizeArray subroutine (which takes an array of integers as a parameter), the tooltip will read, "Private Sub RandomizeArray(arr() As Integer)."

At runtime, if you hover over a variable, the tooltip displays the variable's value. If the variable is complex (such as an array or structure), the tooltip displays the variable's name and a plus sign. If you click or hover over the plus sign, the tooltip expands to show the variable's members.

In Figure 6-3, the mouse hovered over variable `arr`. The editor displayed a plus sign and the text `arr {Length = 100}`. When the mouse hovered over the plus sign, the editor displayed the values shown in the figure. Moving the mouse over the up and down arrows at the top and bottom of the list makes the values scroll.
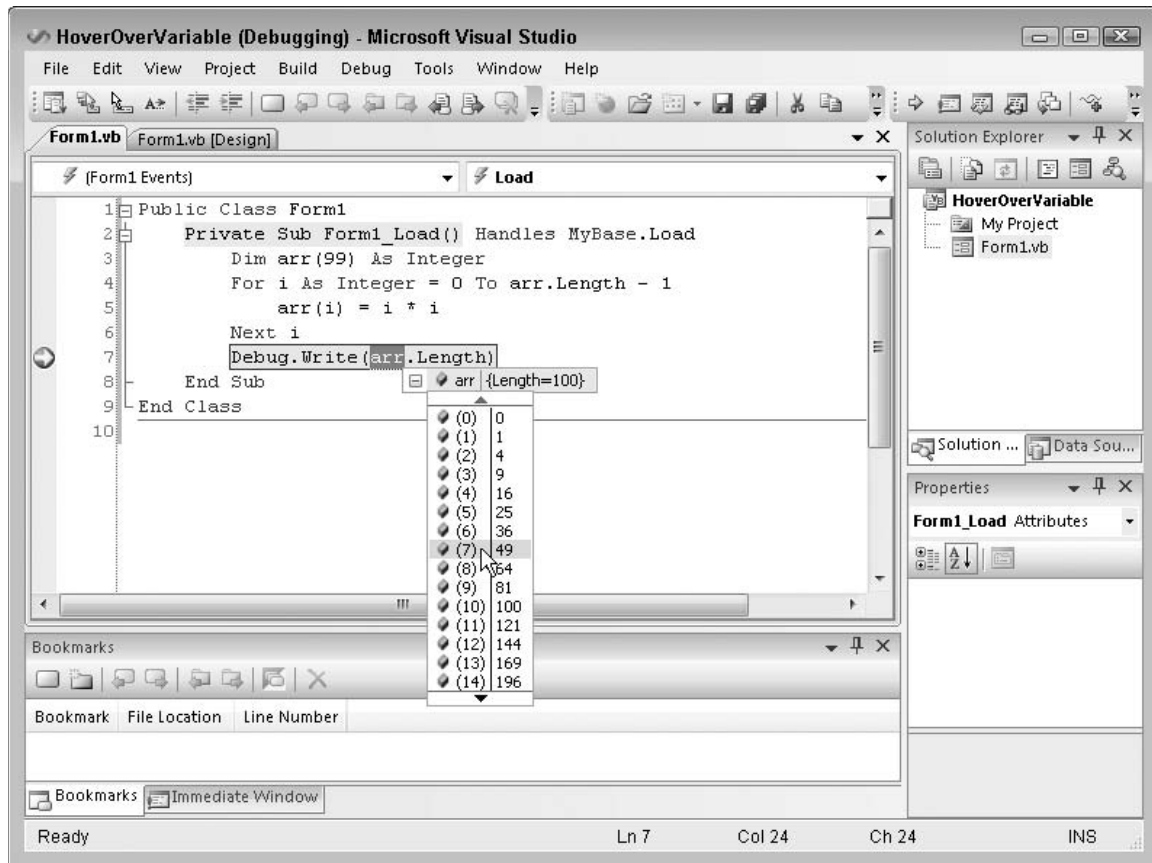
Figure 6-3: You can hover the mouse over a variable at runtime to see its value.

If a variable has properties that are references to other objects, you can hover over their plus signs to expand those objects. You can continue following the plus signs to drill into the variable's object hierarchy as deeply as you like.

IntelliSense

If you start typing a line of code, the editor tries to anticipate what you will type. For example, if you typed **Me.** then the editor would know that you are about to use one of the current object's properties or methods.

IntelliSense displays a list of the properties and methods that you might be trying to select. As you type more of the property or method, IntelliSense scrolls to show the choices that match what you have typed.

In Figure 6-4, the code includes the text me.Set, so IntelliSense is displaying the current object's methods that begin with the string Set.
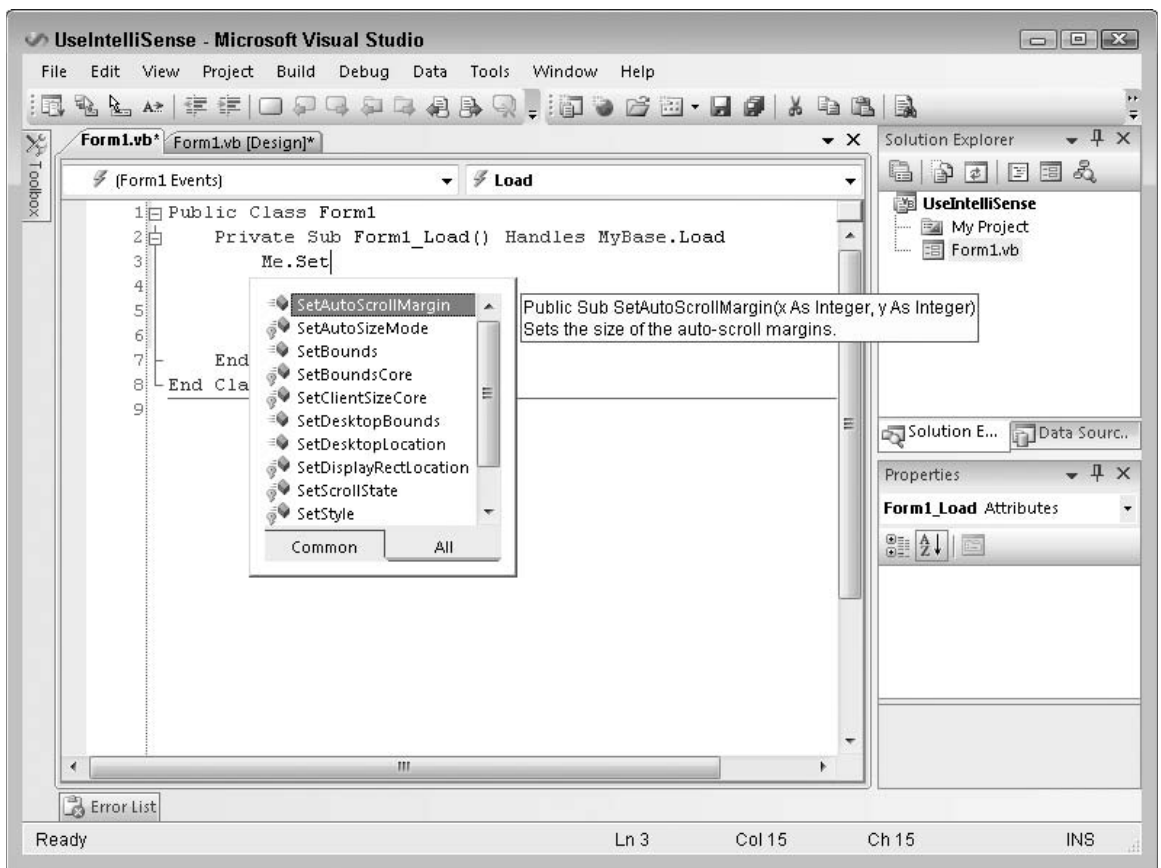
Figure 6-4: IntelliSense displays a list of properties and methods that you might be trying to type.

While the IntelliSense window is visible, you can use the up and down arrows to scroll through the list. While IntelliSense is displaying the item that you want to use, you can press the Tab key to accept that item. Press the Escape key to close the IntelliSense window and type the rest manually.

After you finish typing a method and its opening parenthesis, IntelliSense displays information about the method's parameters. Figure 6-5 shows parameter information for a form object's SetBounds method. This method takes four parameters: x, y, width, and height.

IntelliSense shows a brief description of the current parameter x. As you enter parameter values, IntelliSense moves on to describe the other parameters.

IntelliSense also indicates whether there are overloaded versions of the method. In Figure 6-5, IntelliSense is describing the first version of two available versions. You can use the up and down arrows on the left to move through the list of overloaded versions.
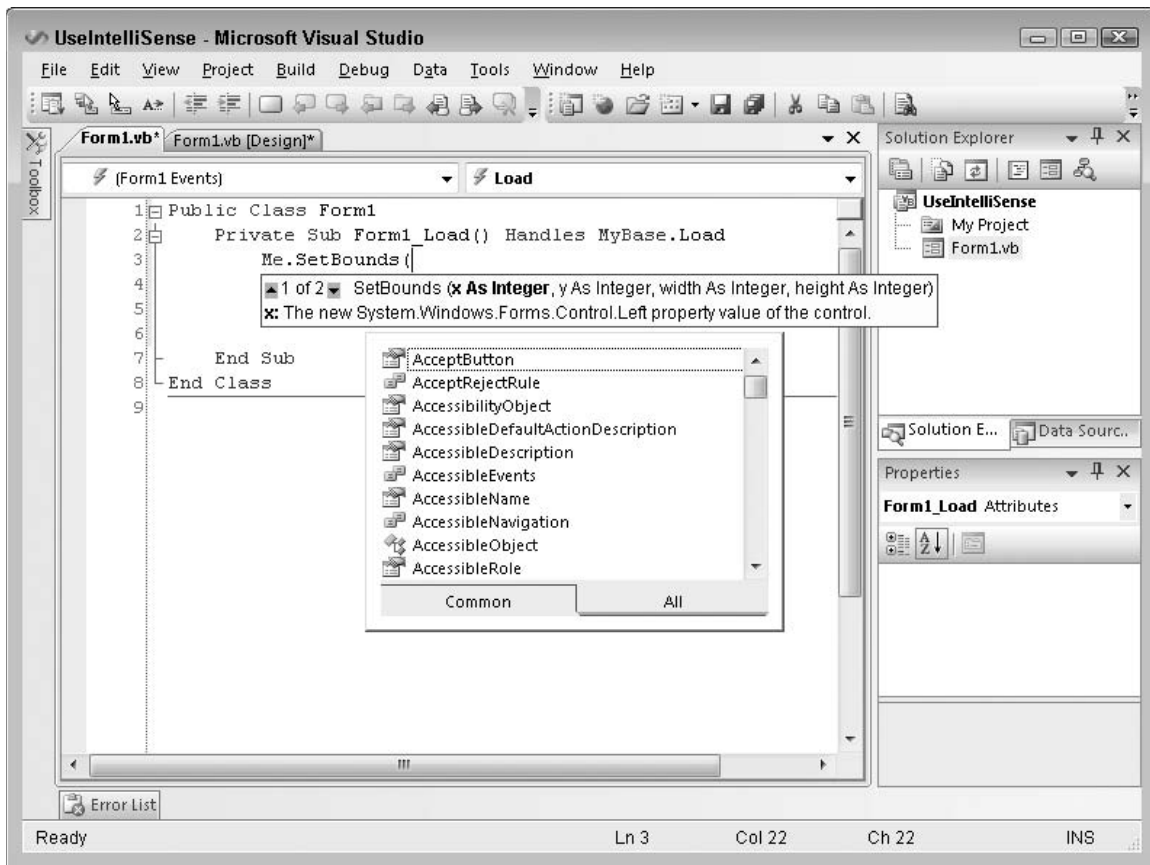
Figure 6-5: IntelliSense displays information about a method's parameters.

Code Coloring and Highlighting

The code editor displays different types of code items in different colors. You can change the colors used for different items by selecting the Tools menu's Options command, and opening the Environment ⇨ Fonts and Colors option page. To avoid confusion, however, you should probably leave the colors alone unless you have a good reason to change them.

The following table describes some of the default colors that the code editor uses to highlight different code elements.

Item	Highlighting
Comment	Green text
Compiler error	Underlined with a wavy blue underline
Keyword	Blue text
Other error	Underlined with a wavy purple underline
Preprocessor keyword	Blue text
Read-only region	Light gray background
Stale code	Purple text
User types	Navy text
Warning	Underlined with a wavy green underline

A few other items that may be worth changing have white backgrounds and black text by default. These include identifiers (variable names, types, object properties and methods, namespace names, and so forth), numbers, and strings.

When the code editor finds an error in your code, it highlights the error with a wavy underline. If you hover over the underline, the editor displays a tooltip describing the error. If Visual Studio can guess what you are trying to do, it adds a small flat rectangle to the end of the wavy error line to indicate that it may have useful suggestions.

The assignment statement `i = "12"` shown in Figure 6-6 has an error because it tried to assign a string value to an integer variable and that violates the Option Strict On setting. The editor displays the wavy error underline and a suggestion indicator because it knows a way to fix this error. The Error List window at the bottom also shows a description of the error.

If you hover over the suggestion indicator, the editor displays a tooltip describing the problem and an error icon. If you click the icon, Visual Studio displays a dialog box describing the error and listing the actions that you may want to take. Figure 6-7 shows the suggestion dialog box for the error in Figure 6-6. If you click the text over the revised sample code, or if you double-click the sample code, the editor makes the change.
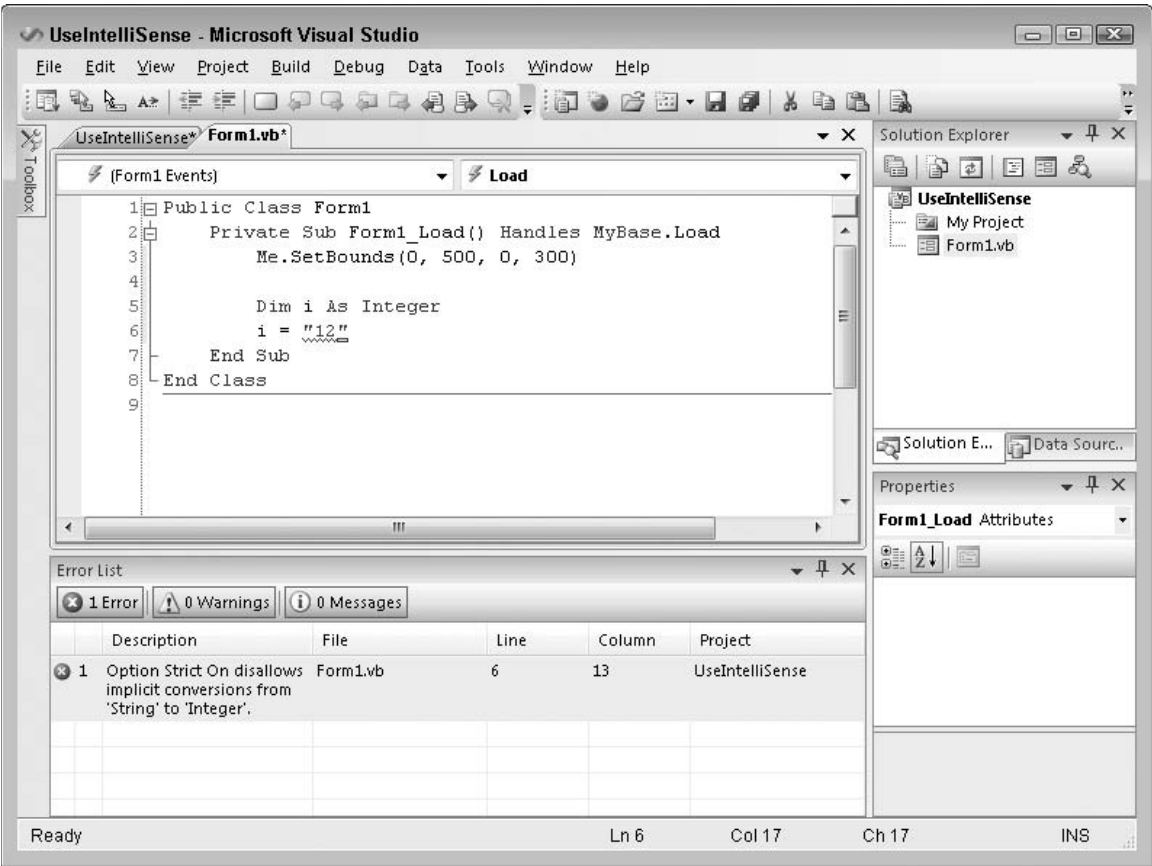
Figure 6-6: If the code editor can figure out what's wrong, it displays a suggestion indicator.
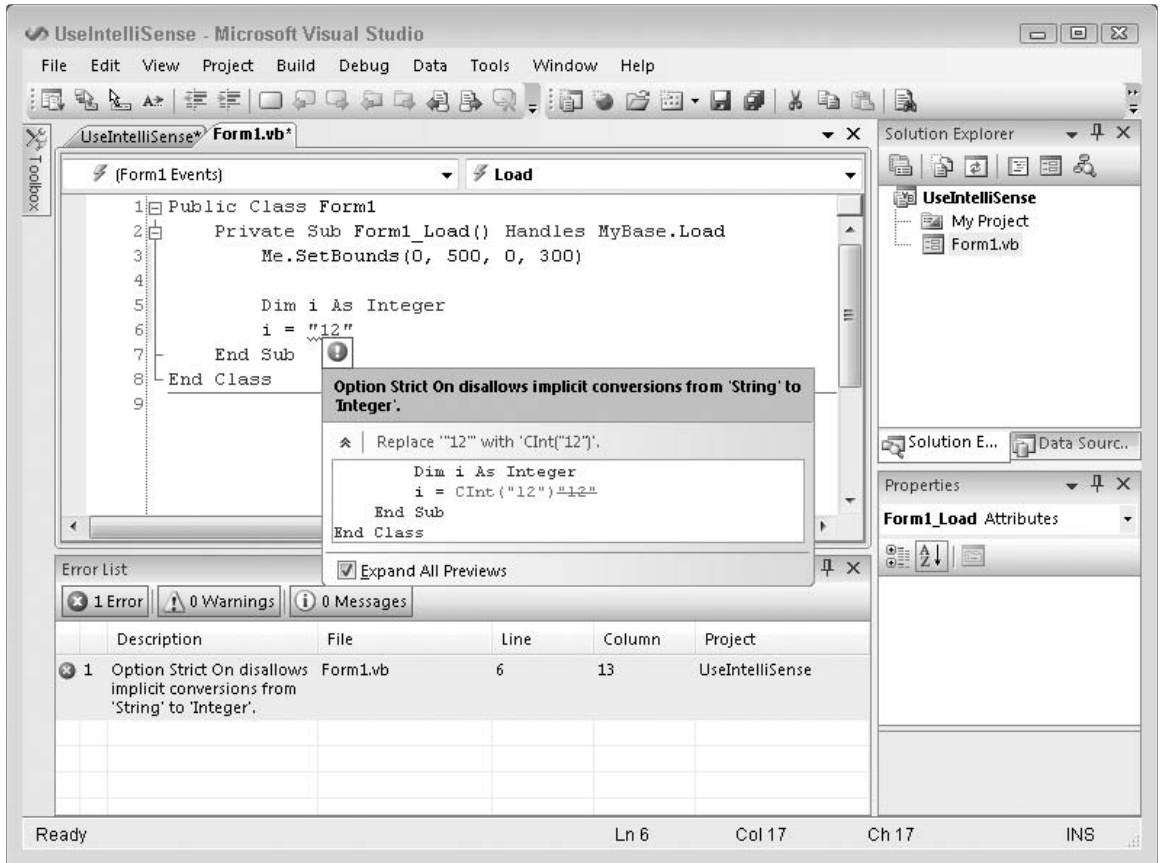
Figure 6-7: The error suggestion dialog box proposes likely solutions to an error.

Code Snippets

A code snippet is a piece of code that you might find useful in many applications. It is stored in a snippet library so that you can quickly insert it into a new application.

Visual Studio comes with hundreds of snippets for performing standard tasks. Before you start working on a complicated piece of code, you should take a look at the snippets that are already available to you. In fact, it would be worth your time to use the Snippet Manager available from the Tools menu to take a good look at the available snippets right now before you start a new project. There's little point in you reinventing methods for calculating statistical values if someone has already done it and given you the code.

Snippets are stored in simple text files with XML tags, so it is easy to share snippets with other developers. Go to the book's supplemental web page, www.vb-helper.com/vb_prog_ref.htm to contribute snippets and to download snippets contributed by others.

The following sections explain how to use snippets in your applications and how to create new snippets.

Using Snippets

To insert a snippet, right-click where you want to insert the code and select Insert Snippet to make the editor display a list of snippet categories. Double-click a category to find the kinds of snippets that you want. If you select a snippet, a tooltip pops up to describe it. Figure 6-8 shows the editor preparing to insert the snippet named `Create a public property` from the `VbProgRef Code Snippets` category.

Double-click the snippet to insert it into your code. The snippet may include values that you should replace in your code. These replacement values are highlighted with a light green background, and the first value is initially selected. If you hover the mouse over one of these values, a tooltip appears to describe the value. You can use the Tab key to jump between replacement values.

Figure 6-9 shows the inserted code for this example. The text `An Integer Property` is highlighted and selected. Other selected text includes `Integer`, `0`, and `MyProperty`. The mouse is hovering over the value `An Integer Property`, so the tooltip explains that value's purpose.
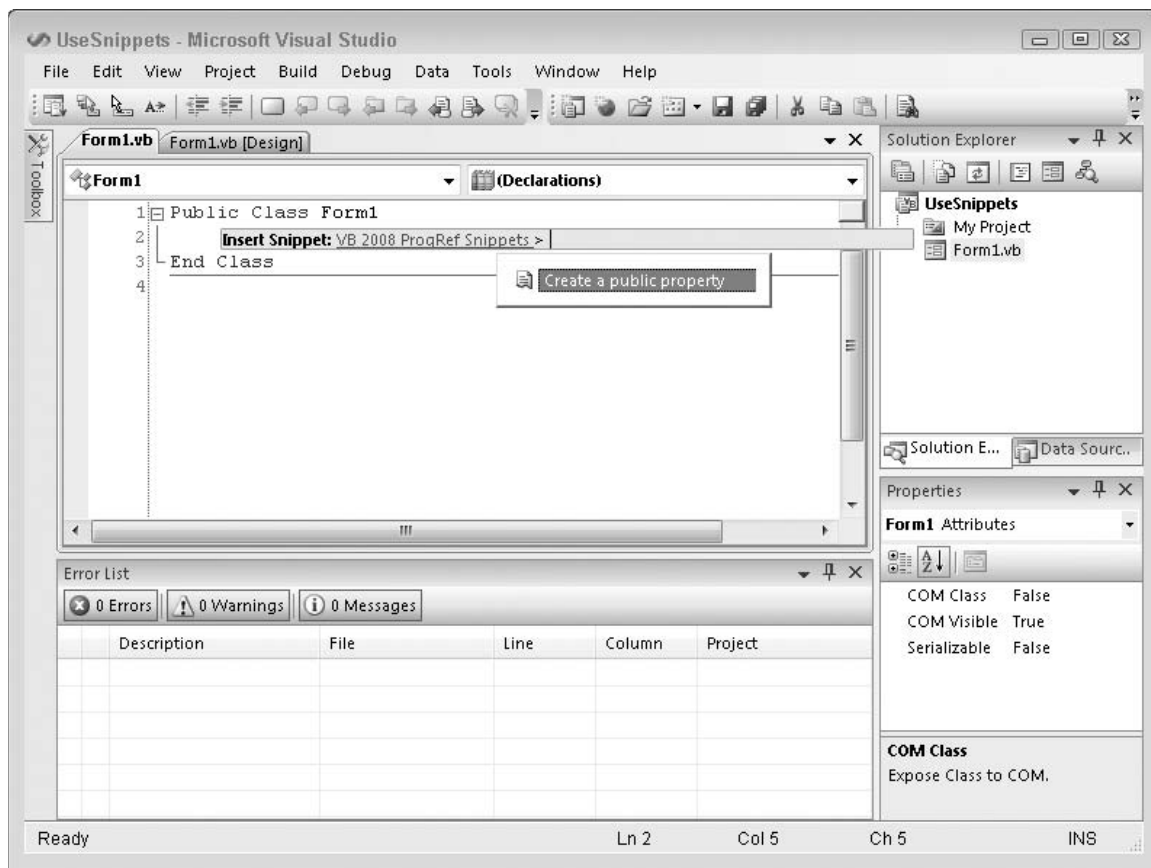
Figure 6-8: When you select a code snippet, a pop-up describes it.
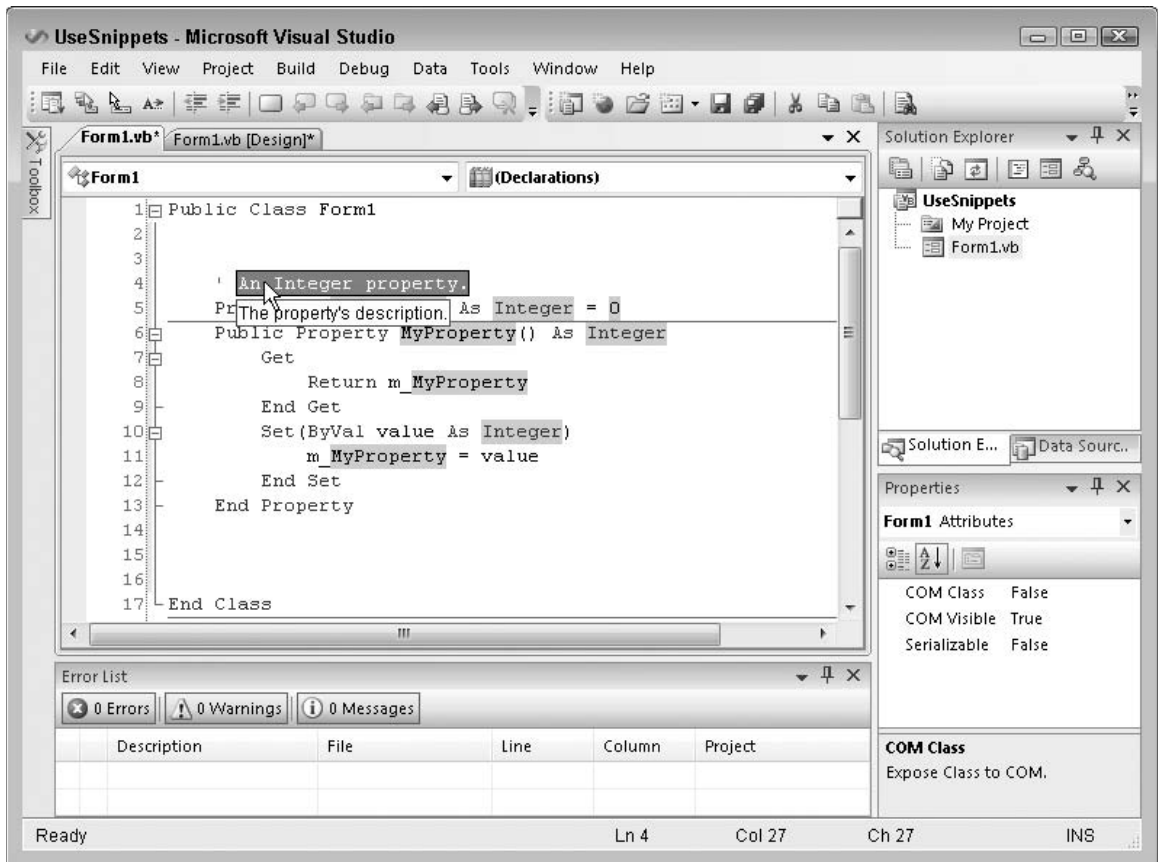
Figure 6-9: Values that you should replace in a snippet are highlighted.

Creating Snippets

To create a new snippet, you need to build an XML file containing the property tags to define the snippet and any replacements that the user should make. The following code shows the `Create a public property` snippet used in the previous section. The outer `CodeSnippets` and `CodeSnippet` tags are standard and you should not change them.

Use the `Title` tag in the `Header` section to describe the snippet.

Inside the `Snippet` tag, build a `Declarations` section describing any literal text that the user should replace. This example defines `DataType`, `Description`, `DefaultValue`, and `PropertyName` symbols. Each literal definition includes an `ID`, and can include a `ToolTip` and `Description`.

After the declarations, the `Code` tag contains the snippet's source code. The syntax `<![CDATA[...]]>` tells XML processors to include any characters including carriage returns between the `<![CDATA[` and the `]]>` in the enclosing tag.

```
<CodeSnippets
 xmlns="http://schemas.microsoft.com/VisualStudio/2005/CodeSnippet">
    <CodeSnippet Format="1.0.0">
        <Header>
            <Title>Create a public property</Title>
        </Header>
        <Snippet>
            <Declarations>
                <Literal>
                    <ID>DataType</ID>
                    <ToolTip>The property's data type.</ToolTip>
                    <Default>Integer</Default>
                </Literal>
                <Literal>
                    <ID>Description</ID>
                    <ToolTip>The property's description.</ToolTip>
                    <Default>An Integer property.</Default>
                </Literal>
                <Literal>
                    <ID>DefaultValue</ID>
                    <ToolTip>The property's default value.</ToolTip>
                    <Default>0</Default>
                </Literal>
                <Literal>
                    <ID>PropertyName</ID>
                    <ToolTip>The property's name.</ToolTip>
                    <Default>MyProperty</Default>
                </Literal>
            </Declarations>
            <Code Language="VB">
                <![CDATA[
' $Description$
Private m_$PropertyName$ As $DataType$ = $DefaultValue$
Public Property $PropertyName$() As $DataType$
    Get
        Return m_$PropertyName$
    End Get
    Set(ByVal value As $DataType$)
        m_$PropertyName$ = value
    End Set
End Property
]]>
            </Code>
        </Snippet>
    </CodeSnippet>
</CodeSnippets>
```

Save the snippet's XML definition in a directory that you create to hold snippets. To add the directory to the list of usable snippet locations, select the Tools menu's Code Snippets Manager command to display the tool shown in Figure 6-10. Click the Add button, browse to the new snippet directory, and click OK. Now the directory and the snippets that it contains will be available in the Insert Snippet pop-ups.
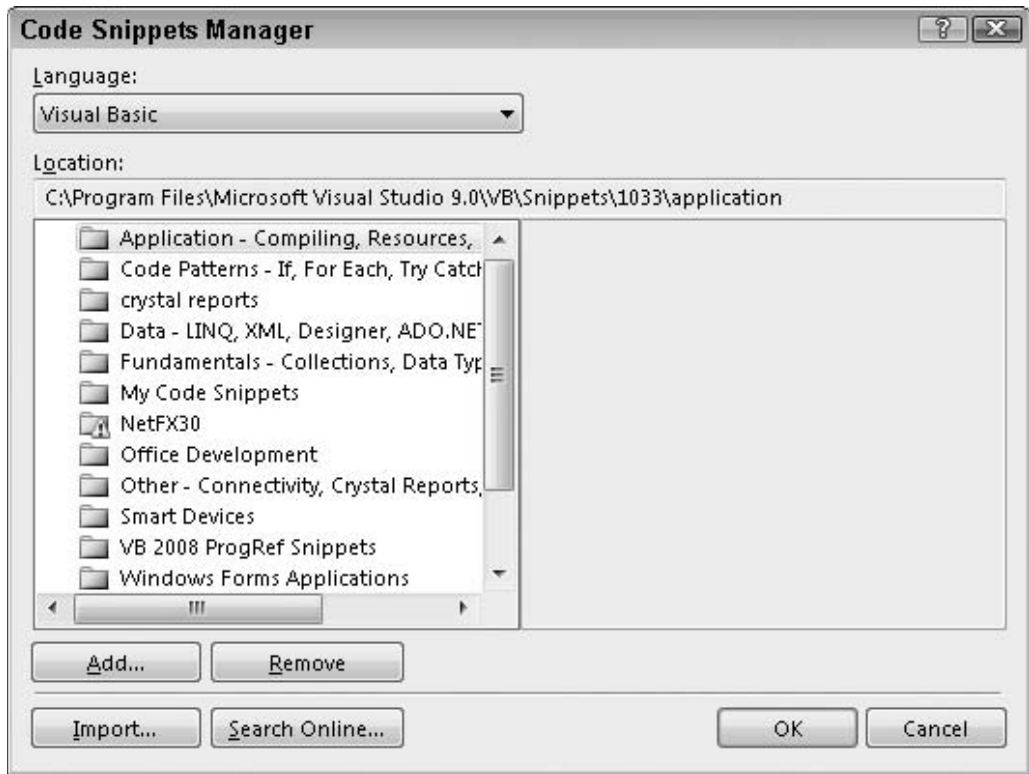
Figure 6-10: The Code Snippets Manager lets you add and remove snippet directories.

The Code Editor at Runtime

The code editor behaves slightly differently at runtime and design time. Many of its design time features still work. Breakpoints, bookmarks, IntelliSense, and snippets still work.

At runtime, the editor adds new tools for controlling the program's execution. Right-click a value and select Add Watch or QuickWatch to examine and monitor the value. Use the Stop Into, Step Over, and Step Out commands on the Debug menu or toolbar to make the program walk through the code. Hover the mouse over a variable to see a tooltip giving the variable's value (see the section "Tooltips" earlier in this chapter for more information).

Right-click a statement and select Show Next Statement to move the cursor to the next statement that the program will execute. Select Run To Cursor to make the program continue running until it reaches the cursor's current line.

Right-click and select Set Next Statement to make the program skip to a new location. You can also drag the yellow arrow indicating the next statement to a new location in the left margin. There are some restrictions on where you can move the execution position. For example, you cannot jump out of one routine and into another.

By using all of these runtime features, you can walk through the code while it executes and learn exactly what it is doing at each step. You can see the values of variables, follow paths of execution through `If Then` statements, step in and out of routines, and run until particular conditions are met. For more information on the Debug menu and its submenus, see the section "Debug" in Chapter 2, "Menus, Toolbars, and Windows." For more information on debugging techniques, see Chapter 7, "Debugging."

You can discover other runtime features by exploring the editor at runtime. Right-click different parts of the editor to see which commands are available in that mode.

Summary

The Visual Basic code editor is one of the most important IDE windows for Visual Basic developers. Though you can use the Windows Form Designer alone to place controls on a form, the form can't do much without code behind those controls.

The Visual Basic code editor lets you type code into a module, but it also provides much more. It provides tooltips that let you view variable values; outlining that lets you expand and collapse code, so you can focus on your current tasks; IntelliSense that helps you remember what methods are available and what their parameters are; code coloring and highlighting that immediately flags errors; and code snippets that let you save and reuse complex pieces of code that perform frequent tasks.

Many of these tools help you understand how the code works as you write it. Chapter 7, "Debugging," explains IDE tools that help you understand the code when it runs. Those tools let you walk through the code as it executes to see exactly what it is doing and what it is doing wrong.

7

Debugging

The Visual Basic Code Editor described in Chapter 6, "Visual Basic Code Editor," provides tools that make writing Visual Basic applications relatively easy. Features such as error indicators, tooltips, and IntelliSense help you write code that obeys the rules of Visual Basic syntax.

No code editor or any other tool can guarantee that the code you write actually does what you want it to do. Debugging is the process of modifying the code to make it run and produce correct results.

> *Testing tools such as NUnit* (www.nunit.org) *can do a lot to ensure that your code runs correctly, but they only work if the code you write does the right things. If you need a billing system but write an inventory application, no tool will save you.*

Depending on the application's complexity, debugging can be extremely difficult. Although Visual Studio cannot do your debugging for you, it does include features that make debugging easier. It allows you to stop execution while the program is running so you can examine and modify variables, explore data structures, and step through the code to follow its execution path.

This chapter explains Visual Basic's most important debugging tools. It describes the tools available in the Debug menu and the other IDE windows that are most useful for debugging.
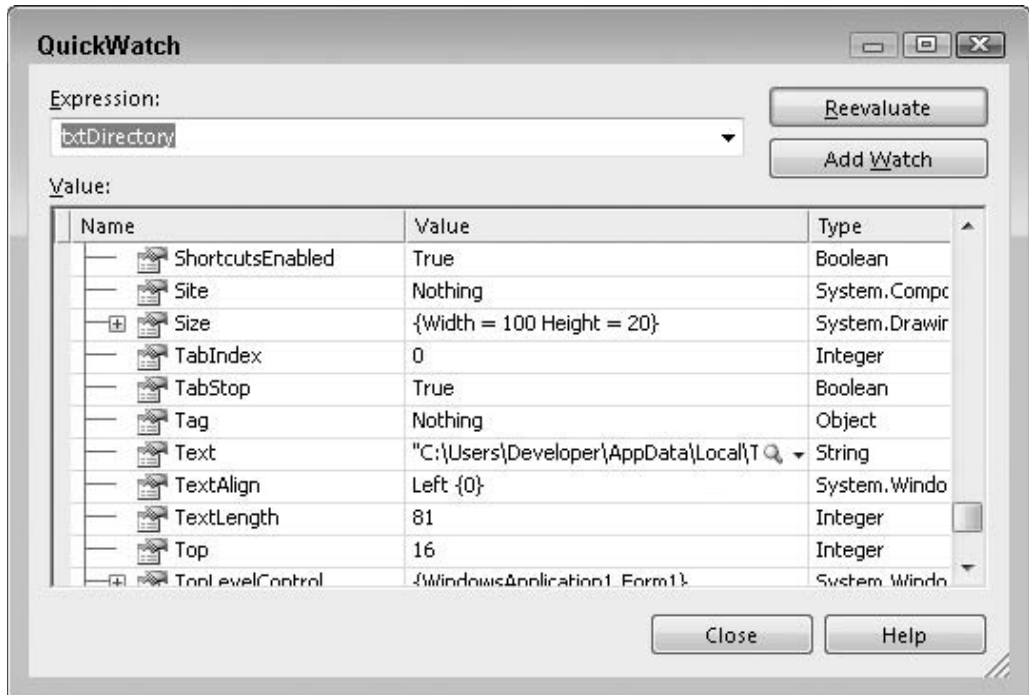
The Debug Menu

The Debug menu contains commands that help you debug a program. These commands help you run the program in the debugger, move through the code, set and clear breakpoints, and generally follow the code's execution to see what it's doing and hopefully what it's doing wrong.

Effectively using these debugging tools can make finding problems in the code much easier, so you should spend some time learning how to use these tools. They can mean the difference between finding a tricky error in minutes, hours, or days.

The commands visible in the Debug window change, depending on several conditions such as the type of file you have open, whether the program is running, the line of code that contains the cursor, and whether that line contains a breakpoint. The following list briefly describes the menu items available while execution is stopped at a line of code that contains a breakpoint. You will see other menu items under different circumstances.

❑ **Windows** — This submenu's commands display other debugging-related windows. This submenu is described in more detail in the following section, "The Debug ➪ Windows Submenu."

❑ **Continue** — This command resumes program execution. The program runs until it finishes, it reaches another breakpoint, or you stop it.

❑ **Break All** — This command stops execution of all programs running within the debugger. This may include more than one program if you are debugging more than one application at the same time. This can be useful, for example, if two programs work closely together.

❑ **Stop Debugging** — This command halts the program's execution and ends its debugging session. The program stops immediately, so it does not get a chance to execute any cleanup code.

❑ **Step Into** — This command makes the debugger execute the current line of code. If that code invokes a function, subroutine, or some other procedure, the point of execution moves into that procedure. It is not always obvious whether a line of code invokes a procedure. For example, a line of code that sets an object's property may be simply setting a value or invoking a property procedure.

❑ **Step Over** — This command makes the debugger execute the current line of code. If that code invokes a function, subroutine, or some other procedure, the debugger calls that routine but does not step into it, so you don't need to step through its code. However, if a breakpoint is set inside that routine, execution will stop at the breakpoint.

❑ **Step Out** — This command makes the debugger run until it leaves the routine it is currently executing. Execution pauses when the program reaches the line of code that called this routine.

❑ **QuickWatch** — This command displays a dialog box that gives information about the selected code object. Figure 7-1 shows the dialog box displaying information about a `TextBox` control named `txtDirectory`. If you look closely, you can see some of the control's properties including `TabIndex`, `TabStop`, `Tag`, and `Text`.

Figure 7-1: The QuickWatch dialog box lets you examine an object's properties and optionally set a new watch on it.

When you right-click a property's value and select Edit Value, you can change it within the dialog box. If you click the Add Watch button, the debugger adds the expression to the Watch window shown in Figure 7-2. You can also highlight a variable's name in the code and drag and drop it into a Watch window to create a watch very quickly. Right-click a watch in this window and select Delete Watch to remove it.

❑   **Exceptions** — This command displays the dialog box shown in Figure 7-3. When you select a Thrown check box, the debugger stops whenever the selected type of error occurs. If you select a User-unhandled check box, the debugger stops when the selected type of error occurs and the program does not catch it with error-handling code. For example, suppose that your code calls a subroutine that causes a divide-by-zero exception. Use the dialog box to select Common Language Runtime Exceptions/System/System.DivideByZeroException (use the Find button to find it quickly). When you select the Thrown check box, the debugger stops in the subroutine when the divide-by-zero exception occurs, even if the code is protected by an error handler. When you select the User-unhandled check box, the debugger stops only if no error handler is active when the error occurs.
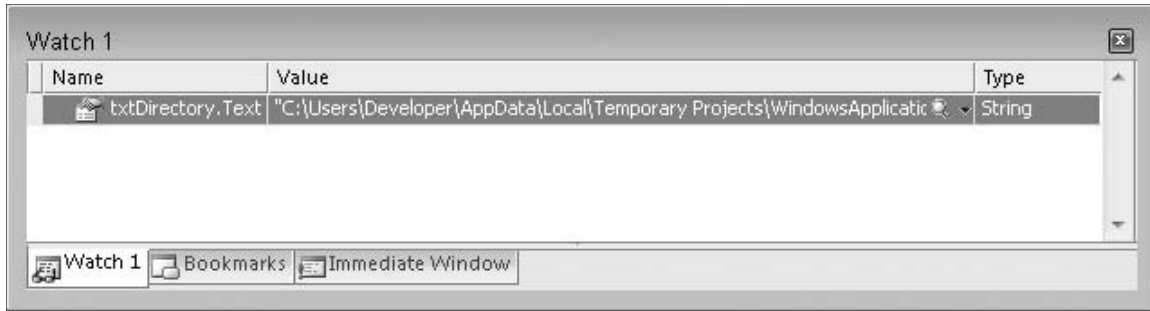
Figure 7-2: The Watch window lets you easily track expression values.
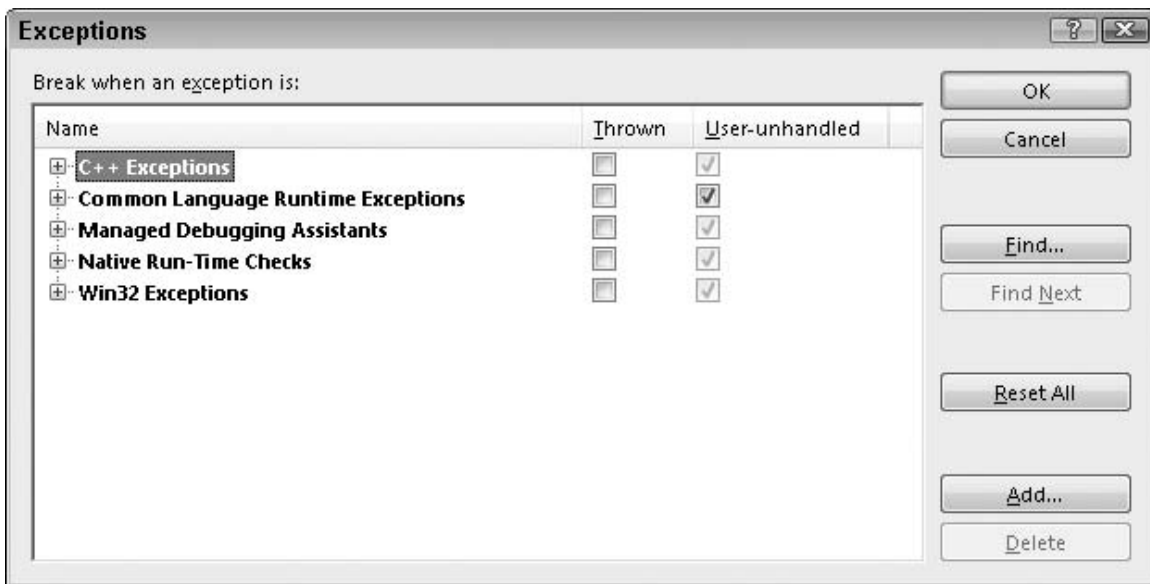
Figure 7-3: The Exceptions dialog box lets you determine how Visual Basic handles uncaught exceptions.

❑ **Toggle Breakpoint** — This command toggles whether the current code line contains a break-point. When execution reaches a line with an active breakpoint, execution pauses so you can examine the code and program variables. You can also toggle a line's breakpoint by clicking the margin to the left of the line in the code editor or by placing the cursor in the line of code and pressing F9.

❑ **New Breakpoint** — This submenu contains the Break At Function command. This command displays a dialog box that lets you specify a function where the program should break.

❑ **Delete All Breakpoints** — This command removes all breakpoints from the entire solution.

The Debug ⇨ Windows Submenu

The Debug menu's Windows submenu contains commands that display debugging-related windows. The following list briefly describes the most useful of these commands. The two sections that follow this one provide more detail about the Breakpoints, Command, and Immediate windows.

❑ **Immediate** — This command displays the Immediate window, where you can type and execute ad hoc Visual Basic statements. The section "The Command and Immediate Windows" later in this chapter describes this window in a bit more detail.

❑ **Locals** — This command displays the Locals window shown in Figure 7-4. The Locals window displays the values of variables defined in the local context. To change a value, click it and enter the new value. Click the plus and minus signs to the left of a value to expand or collapse it. For example, the Me entry shown in Figure 7-4 is an object with lots of properties that have their own values. Click the plus sign to expand the object's entry and view its properties. Those properties may also be objects, so you may be able to expand them further.

❑ **Breakpoints** — This command displays the Breakpoints window shown in Figure 7-5. This dialog box shows the breakpoints, their locations, and their conditions. Select or clear the check boxes on the left to enable or disable breakpoints. Right-click a breakpoint to edit its location, condition, hit count, and action. Use the dialog box's toolbar to create a new function breakpoint, delete a breakpoint, delete all breakpoints, enable or disable all breakpoints, go to a breakpoint's source code, and change the columns displayed by the dialog. Right-click a breakpoint to change its condition (a condition that determines whether the breakpoint is activated), hit count (a count that determines whether the breakpoint is activated), and When Hit (action to take when activated). See the section "The Break-points Window" later in this chapter for more detail.

Locals			
Name	Value	Type	
⊞ ● Me	{DebugWindows.Form1}	DebugWir	
⊞ ● base_rate	{Length=12}	Single()	
⊞ ● e	{X = 56 Y = 18 Button = System.Windows.Forms.MouseButt	System.E	
⊞ ● ex	{"Attempted to divide by zero."}	System.E	
● i	0	Integer	
● j	287	Integer	
⊞ ● sender	{Text = "Locals"}	Object	
⊟ ● values	{Length=6}	Integer()	
— ● (0)	8237	Integer	
— ● (1)	4378	Integer	
— ● (2)	901987	Integer	
— ● (3)	3287	Integer	
— ● (4)	17843	Integer	
— ● (5)	328797	Integer	
● x	365.2136	Double	
● y	-1.3278E+16	Double	
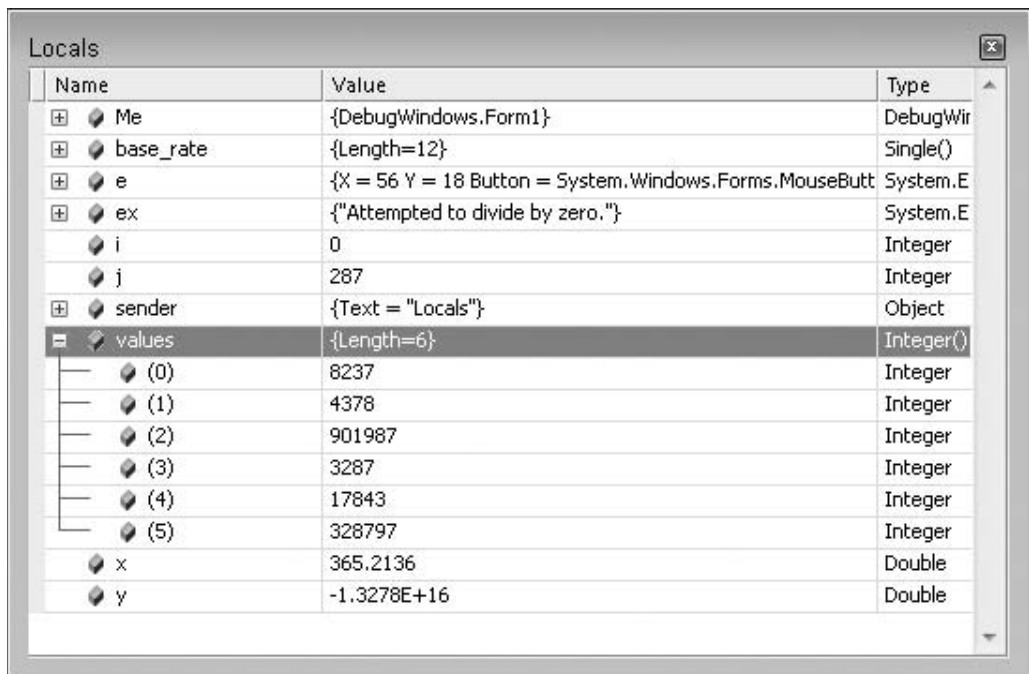
Figure 7-4: The Locals window displays the values of variables defined in the local context.
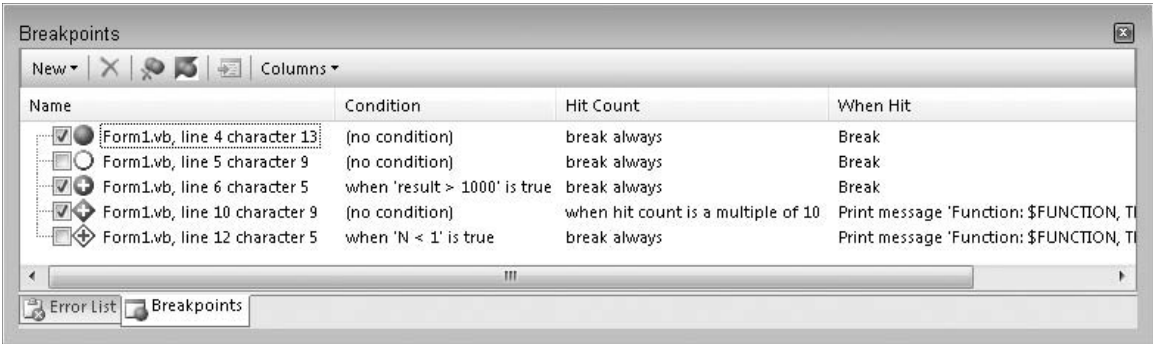
Figure 7-5: The Breakpoints window helps you manage breakpoints.

- ❑ **Output** — This command displays the Output window. This window displays compilation results and output produced by Debug and Trace statements.

- ❑ **Autos** — This command displays the Autos window shown in Figure 7-6. This window displays the values of local and global variables used in the current line of code and in the three lines before and after it.

- ❑ **Call Stack** — This command displays the Call Stack window shown in Figure 7-7. This window lists the routines that have called other routines to reach the program's current point of execution. In this example, the program is at line 26 in the function FindEmployee. That function was called by function SearchDatabase at line 14, and that function was called by the btnLocals_Click event handler. Double-click a line to jump to the corresponding code in the program's call stack. This technique lets you move up the call stack to examine the code that called the routines that are running. This can be a very effective technique when you need to find out what code is calling a particular routine.

- ❑ **Threads** — This command displays the Threads window shown in Figure 7-8. A *thread* is a separate execution path that is running. A multithreaded application can have several threads running to perform more than one task at the same time. The Threads window lets you control the threads' priority and suspended status. The last line has the location WindowsApplication1 .Form1.FindEmployee, indicating that this thread is executing the FindEmployee routine in the Form1 module in program WindowsApplication1. The arrow on the left indicates that this is the currently active thread.

Right-click a thread and select Freeze to suspend it. Right-click the thread again and select Thaw to make it resume execution. Double-click a thread or right-click it and select Switch To Thread to activate that thread.
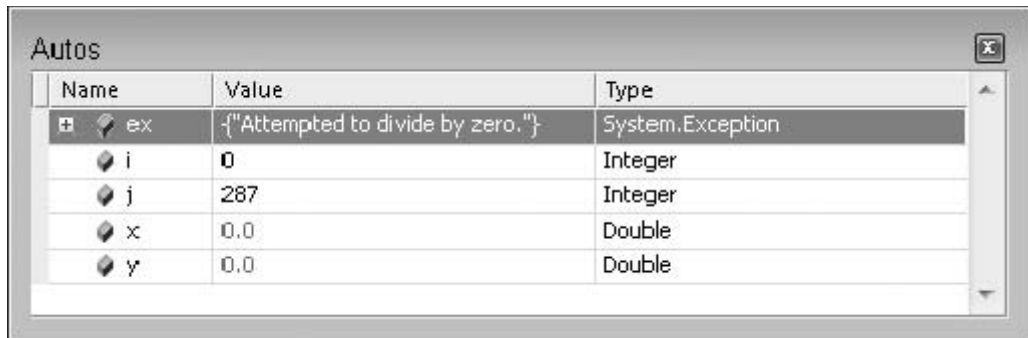
Figure 7-6: The Autos window displays the variables used in the current code statement and the three statements before and the three after.
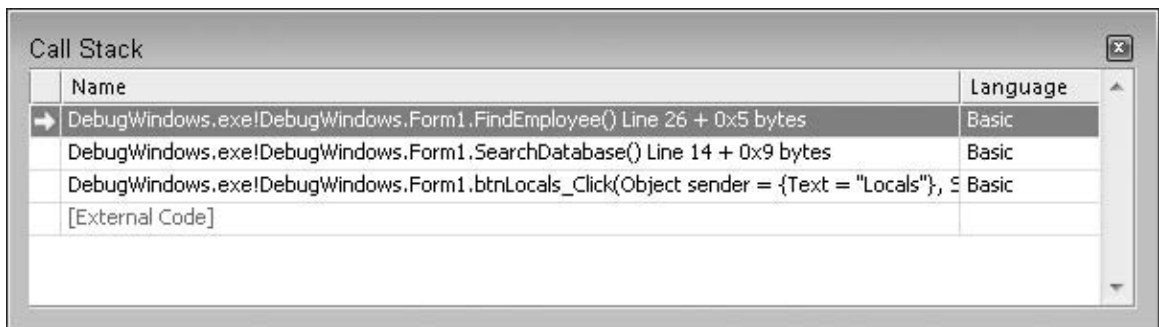
Figure 7-7: The Call Stack window shows which routines have called which to get to the program's current point of execution.
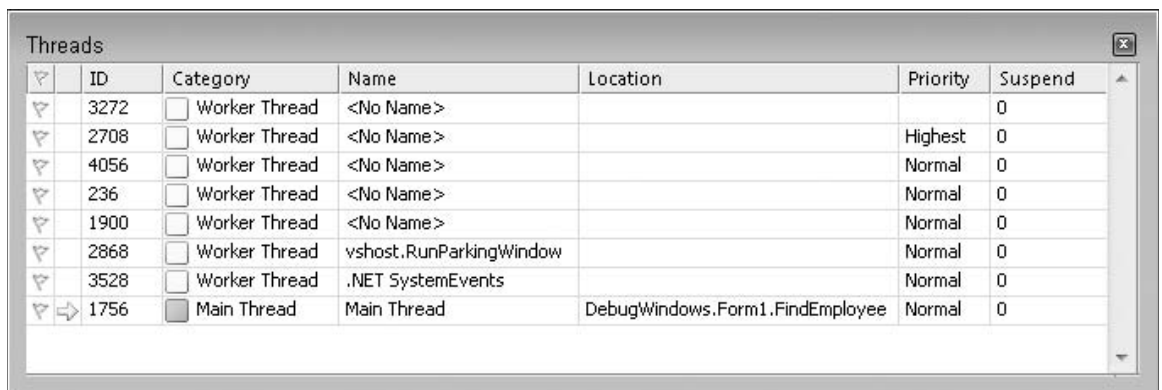
Figure 7-8: The Threads window displays information about the program's threads of execution.

❑ **Watch** — The Watch submenu contains the commands Watch 1, Watch 2, Watch 3, and Watch 4. These commands display four different watch windows. When you create a watch using the Debug menu's QuickWatch command described earlier, the new watch is placed in the Watch 1 window (shown in Figure 7-2). You can click and drag watches from one watch window to another to make a copy of the watch in the second window. You can also click the Name column in the empty line at the bottom of a watch window and enter an expression to watch. One useful IDE trick is to drag watch windows 2, 3, and 4 onto Watch 1 so that they all become tabs on the same window. Then you can easily use the tabs to group and examine four sets of watches.

❑ **Modules** — This command displays the Modules window shown in Figure 7-9. This window displays information about the DLL and EXE files used by the program. It shows each module's file name and path. It indicates whether the module is optimized, whether it is your code (versus an installed library), and whether debugging symbols are loaded. The window shows each module's load order (lower-numbered modules are loaded first), the version, and timestamp. Click a column to sort the modules by that column.

	Name	Path	Optimized	User Code	Symbol Status	Symbol File	Or...	Version	Timestamp
	mscorlib.dll	C:\Windows\assembly...	Yes	No	Skipped loading ...		1	2.0.50727.1...	6/8/2007 3:58
	Microsoft.Visu...	C:\Windows\assembly...	Yes	No	Skipped loading ...		2	9.0.20706.1	7/6/2007 12:2
	System.Windo...	C:\Windows\assembly...	Yes	No	Skipped loading ...		3	2.0.50727.1...	6/8/2007 4:11
	System.dll	C:\Windows\assembly...	Yes	No	Skipped loading ...		4	2.0.50727.1...	6/8/2007 4:10
	System.Drawin...	C:\Windows\assembly...	Yes	No	Skipped loading ...		5	2.0.50727.1...	6/8/2007 4:10
	Microsoft.Visu...	C:\Windows\assembly...	Yes	No	Skipped loading ...		6	9.0.20706.1	7/6/2007 12:2
	Microsoft.Visu...	C:\Windows\assembly...	Yes	No	Skipped loading ...		7	9.0.20706.1	7/5/2007 11:5
	DebugWindow...	C:\Users\Developer\V...	Yes	No	Skipped loading ...		8	9.0.20706.1	7/6/2007 12:2
	System.Data.dll	C:\Windows\assembly...	Yes	No	Skipped loading ...		9	2.0.50727.1...	6/8/2007 4:10
	System.Deploy...	C:\Windows\assembly...	Yes	No	Skipped loading ...		10	2.0.50727.1...	6/8/2007 4:12
	System.Xml.dll	C:\Windows\assembly...	Yes	No	Skipped loading ...		11	2.0.50727.1...	6/8/2007 4:09
	System.Core.dll	C:\Windows\assembly...	Yes	No	Skipped loading ...		12	3.5.20706.1...	7/5/2007 9:19
	System.Xml.Lin...	C:\Windows\assembly...	Yes	No	Skipped loading ...		13	3.5.20706.1...	7/5/2007 9:20
	System.Data.Da...	C:\Windows\assembly...	Yes	No	Skipped loading ...		14	3.5.20706.1...	7/5/2007 9:20
	Microsoft.Visu...	C:\Windows\assembly...	Yes	No	Skipped loading ...		15	8.0.50727.1...	6/8/2007 7:04
	DebugWindow...	C:\Users\Developer\V...	No	Yes	Symbols loaded.	C:\Users\...	16	1.0.0.0	9/5/2007 9:06
	System.Runtim...	C:\Windows\assembly...	Yes	No	Skipped loading ...		17	2.0.50727.1...	6/8/2007 4:08

Figure 7-9: The Modules window displays information about the modules used by the program.

❑ **Processes** — This window lists processes that are attached to the Visual Studio session. This includes any programs launched by Visual Studio and processes that you attached to using the Debug menu's Attach to Process command.

Usually, when these debug windows are visible at runtime, they occupy separate tabs in the same area at the bottom of the IDE. That lets you switch between them quickly and easily without making them take up too much space.

The Breakpoints Window

A *breakpoint* is a line of code that you have flagged to stop execution. When the program reaches that line, execution stops and Visual Studio displays the code in a code editor window. This lets you examine or set variables, see which routine called the one containing the code, and otherwise try to figure out what the code is doing.

The Breakpoints window lists all the breakpoints you have defined for the program. This is useful for a couple of reasons. First, if you define a lot of breakpoints, it can be hard to find them all later. While other commands let you disable, enable, or remove all of the breakpoints at once, there are times when you may need to find a particular breakpoint.

A common debugging strategy is to comment out broken code, add new code, and set a breakpoint near the modification so that you can see how the new code works. When you have finished testing the code, you probably want to remove either the old or new code, so you don't want to blindly remove all of the program's breakpoints. The Breakpoints window lists all of the breakpoints and, if you double-click a breakpoint in the list, you can easily jump to the code that holds it.

> Source code controls systems such as Visual SourceSafe track the entire change history of your code. Later, if you find a problem with the code, you can compare the current version to previous versions to see what has changed. In the worst case, you can back out the changes and recover an earlier version. This can be a lot easier than manually trying to remember and remove the changes.

The Breakpoints window also lets you modify the breakpoints you have defined. Select or clear the boxes on the left to enable or disable breakpoints. Use the dialog's toolbar to enable or disable all breakpoints, clear all breakpoints, or jump to a breakpoint's source code.

Right-click a breakpoint and select Condition to display the dialog shown in Figure 7-10. By default, a breakpoint stops execution whenever it is reached. You can use this dialog box to add an additional condition that determines whether the breakpoint activates when reached. In this example, the breakpoint stops execution only if the expression `(i = j) And (i > 20)` is `True` when the code reaches the breakpoint. Note that specifying a breakpoint condition can slow execution considerably.

Right-click a breakpoint and select Hit Count to display the Breakpoint Hit Count dialog box shown in Figure 7-11. Each time the code reaches a breakpoint, it increments the breakpoint's hit count. You can use this dialog box to make the breakpoint's activation depend on the hit count's value.
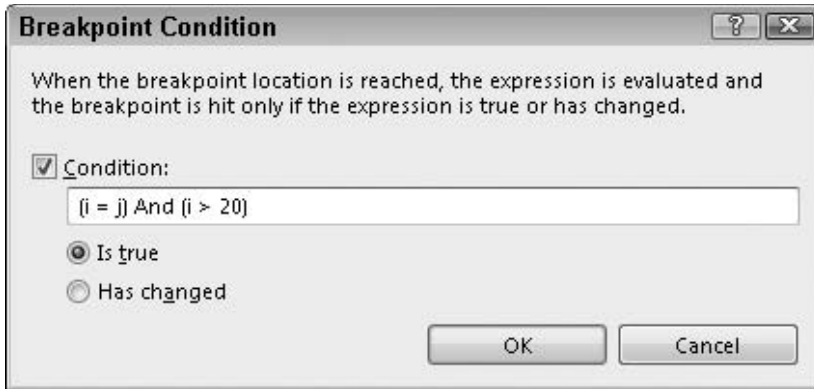
Figure 7-10: The Breakpoint Condition dialog box lets you specify a condition
that determines whether Visual Studio stops at the breakpoint.

From the drop-down list you can select the options "break always," "break when the hit count is equal to," "break when the hit count is a multiple of," or "break when the hit count is greater than or equal to." If you select any but the first option, you can enter a value in the text box and the program will pause execution when the breakpoint has been reached the appropriate number of times. For example, if you select the option "break when the hit count is a multiple of" and enter 2 into the text box, then execution will pause every other time it reaches the breakpoint.

Right-click a breakpoint and select When Hit to display the When Breakpoint Is Hit dialog box shown in Figure 7-12. This dialog box lets you specify the actions that Visual Basic takes when the breakpoint is activated. Select the Print a message check box to make the program display a message in the Output window. Select the Run a macro check box to make the program execute a VBA macro. Select the Continue execution check box to make the program continue running without stopping.
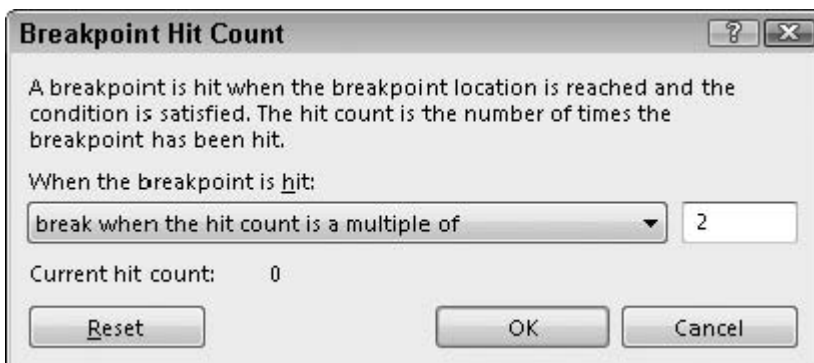
Figure 7-11: The Breakpoint Hit Count dialog box lets you make a breakpoint's
activation depend on the number of times the code has reached it.
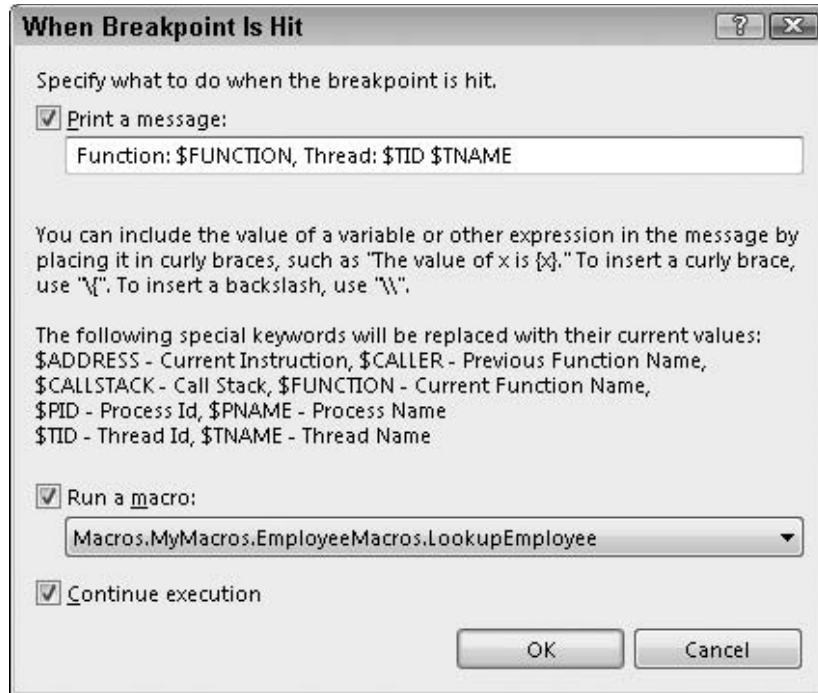
Figure 7-12: The When Breakpoint Is Hit dialog box lets you determine what actions Visual Basic takes when the breakpoint is activated.

The Command and Immediate Windows

The Command and Immediate windows enable you to execute commands while the program is stopped in the debugger. One of the more useful commands in each of these windows is the `Debug.Print` statement. For example, the command `Debug.Print x` displays the value of the variable x.

You can use a question mark as an abbreviation for `Debug.Print`. The following text shows how the command might appear in the Command window. Here the > symbol is the command prompt provided by the window and `123` is the result: the value of variable x. In the Immediate window, the statement would not include the > character.

```
>? x
123
```

The command >`immed` tells the Command window to open the Immediate window. Conversely, the command >`cmd` tells the Immediate window to open the Command window.

Although there is some overlap between these two windows, they serve two mostly different purposes. The Command window can issue commands to the Visual Studio IDE. Typically, these are commands that appear in menus or toolbars, or that could appear in menus and toolbars. For example, the following command uses the Debug menu's QuickWatch command to open a QuickWatch window for the variable `first_name`:

```
>Debug.QuickWatch first_name
```

One particularly useful command is `Tools.Alias`. This command lists command aliases defined by the IDE. For example, it indicates that ? is the alias for `Debug.Print` and that ?? is the alias for `Debug.QuickWatch`.

The Command window includes some IntelliSense support. If you type the name of a menu, for example Debug or Tools, IntelliSense will display the commands available within that menu.

While the Command window issues commands to the IDE, the Immediate window executes Visual Basic statements. For example, suppose that you have written a subroutine named `CheckPrinter`. Then the following statement in the Immediate window executes that subroutine:

```
CheckPrinter
```

Executing subroutines in the Immediate window lets you quickly and easily test routines without writing user interface code to handle all possible situations. You can call a subroutine or function, passing it different parameters to see what happens. If you set breakpoints within the routine, the debugger will pause there.

Similarly, you can also set the values of global variables and then call routines that use them. The following Immediate window commands set the value of the `m_PrinterName` variable and then call the `CheckPrinter` subroutine:

```
m_PrinterName = "LP_REMOTE"
CheckPrinter
```

You can execute much more complex statements in the Command and Immediate windows. For example, suppose that your program uses the following statement to open a file for reading:

```
Dim fs As FileStream = File.OpenRead( _
    "C:\Program Files\Customer Orders\Summary" & _
    datetime.Now().ToString("yymmdd") & ".dat")
```

Suppose that the program is failing because some other part of the program is deleting the file. You can type the following code (all on one line) into the Immediate window to see if the file exists. As you step through different pieces of the code, you can use this statement again to see if the file has been deleted.

```
?System.IO.File.Exists("C:\Program Files\Customer Orders\Summary" & _
DateTime.Now().ToString("yymmdd") & ".dat")
```

The window evaluates the complicated string expression to produce a file name. It then uses the `System.IO.File.Exists` command to determine whether the file exists and displays `True` or `False` accordingly.

Summary

Although Visual Basic cannot debug your applications for you, it does provide tools to make debugging a lot easier. By using the tools in the Debug menu and the IDE's debugging-related windows, you can get a good idea about what your program is doing or doing wrong.

The chapters in the first part of the book described the basic pieces of the development environment. They described the windows, menus, and toolbars that you use to build and debug Visual Basic applications.

The next part of the book provides more detail about the steps you follow to build an application. Chapter 8, "Selecting Windows Forms Controls," describes the most common controls that you can use to build Windows Forms applications.

Part II
Getting Started

Selecting Windows Forms Controls

Controls are an extremely important part of any interactive application. They give information to the user (`Label`, `ToolTip`, `TreeView`, `PictureBox`) and organize the information so that it's easier to understand (`GroupBox`, `Panel`, `TabControl`). They enable the user to enter data (`TextBox`, `RichTextBox`, `ComboBox`, `MonthCalendar`), select options (`RadioButton`, `CheckBox`, `ListBox`), control the application (`Button`, `MenuStrip`, `ContextMenuStrip`), and interact with objects outside of the application (`OpenFileDialog`, `SaveFileDialog`, `PrintDocument`, `PrintPreviewDialog`). Some controls also provide support for other controls (`ImageList`, `ToolTip`, `ContextMenuStrip`, `ErrorProvider`).

This chapter provides only a very brief description of the standard Windows Forms controls and some tips that can help you decide which control to use for different purposes. Appendix G covers the controls in much greater detail, describing each control's most useful properties, methods, and events.

Controls Overview

Figure 8-1 shows the Visual Basic Toolbox displaying the standard Windows Forms controls. Because you can add and remove controls on the Toolbox, you may see a slightly different selection of tools on your computer.

The following table briefly describes the controls shown in Figure 8-1 in the order in which they appear in the figure (starting at the top, or row 1, and reading from left to right).
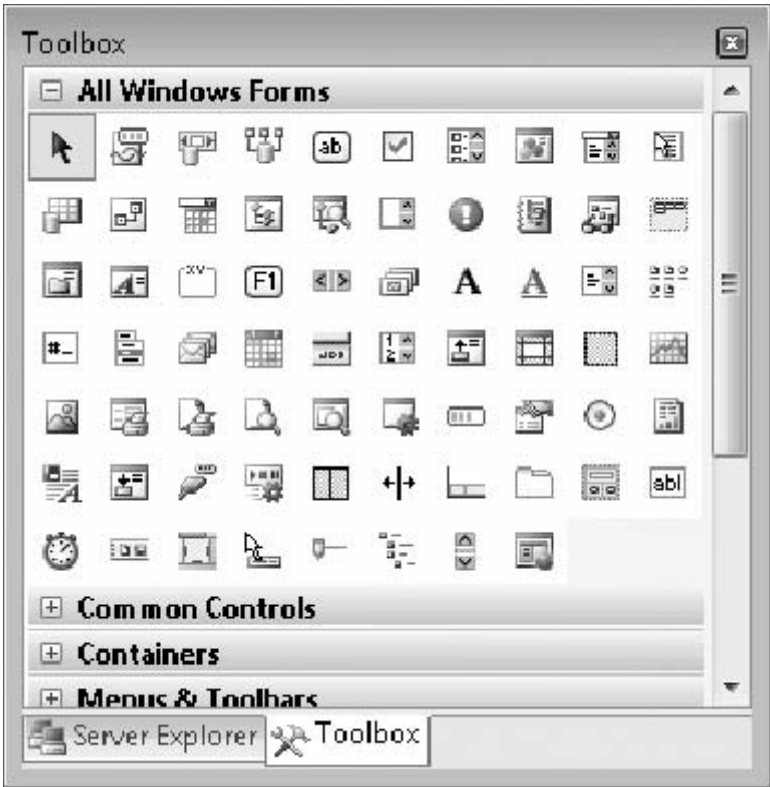
Figure 8-1: Visual Basic provides a large number of standard controls for Windows Forms.

Control	Purpose
Row 1	
Pointer	This is the pointer tool, not a control. Click this tool to deselect any selected controls on a form. Then you can select new controls.
BackgroundWorker	Executes a task asynchronously and notifies the main program when it is finished.
BindingNavigator	Provides a user interface for navigating through a data source. For example, it provides buttons that let the user move back and forth through the data, add records, delete records, and so forth.
BindingSource	Encapsulates a form's data source and provides methods for navigating through the data.

Control	Purpose
Button	A simple push button. When the user clicks it, the program can perform some action.
CheckBox	A box that the user can check and clear.
CheckedListBox	A list of items with check boxes that the user can check and clear.
ColorDialog	Lets the user pick a standard or custom color.
ComboBox	A text box with an attached list or drop-down list that the user can use to enter or select a textual value.
ContextMenuStrip	A menu that appears when the user right-clicks a control. You set a control's ContextMenuStrip property to this control, and the rest is automatic.
Row 2	
DataGridView	A powerful grid control that lets you display large amounts of complex data with hierarchical or Web-like relationships relatively easily.
DataSet	An in-memory store of data with properties similar to those of a relational database. It holds objects representing tables containing rows and columns, and can represent many database concepts such as indexes and foreign key relationships.
DateTimePicker	Lets the user select a date and time in one of several styles.
DirectoryEntry	Represents a node in an Active Directory hierarchy.
DirectorySearcher	Performs searches of an Active Directory hierarchy.
DomainUpDown	Lets the user scroll through a list of choices by clicking up-arrow and down-arrow buttons.
ErrorProvider	Displays an error indicator next to a control that is associated with an error.
EventLog	Provides access to Windows event logs.
FileSystemWatcher	Notifies the application of changes to a directory or file.
FlowLayoutPanel	Displays the controls it contains in rows or columns. For example, when laying out rows, it places controls next to each other horizontally in a row until it runs out of room and then it starts a new row.
Row 3	
FolderBrowserDialog	Lets the user select a folder.
FontDialog	Lets the user specify a font's characteristics (name, size, boldness, and so forth).

(continued)

105

Control	Purpose
GroupBox	Groups related controls for clarity. It also defines a default RadioButton group for any RadioButtons that it contains.
HelpProvider	Displays help for controls that have help if the user sets focus on the control and presses F1.
HScrollBar	A horizontal scroll bar.
ImageList	Contains a series of images that other controls can use. For example, the images that a TabControl displays on its tabs are stored in an associated ImageList control. Your code can also pull images from an ImageList for its own use.
Label	Displays text that the user cannot modify or select by clicking and dragging.
LinkLabel	Displays a label, parts of which may be hyperlinks. When the user clicks a hyperlink, the program can take some action.
ListBox	Displays a list of items that the user can select. Depending on the control's properties, the user can select one or several items.
ListView	Displays a list of items in one of four possible views: LargeIcon, SmallIcon, List, and Details.
Row 4	
MaskedTextBox	A text box that requires the input to match a specific format (such as a phone number or ZIP code format).
MenuStrip	Represents the form's main menus, submenus, and menu items.
MessageQueue	Provides communication between different applications.
MonthCalendar	Displays a calendar that allows the user to select a range of dates.
NotifyIcon	Displays an icon in the system tray or status area.
NumericUpDown	Lets the user change a number by clicking up-arrow and down-arrow buttons.
OpenFileDialog	Lets the user select a file for opening.
PageSetupDialog	Lets the user specify properties for printed pages. For example, it lets the user specify the printer's paper tray, page size, margins, and orientation (portrait or landscape).
Panel	A control container. Using the control's Anchor and Dock properties, you can make the control resize itself so that its child controls resize themselves in turn. The control can automatically provide scroll bars and defines a RadioButton group for any RadioButtons that it contains.
PerformanceCounter	Provides access to Windows performance counters.

Control	Purpose
Row 5	
PictureBox	Displays a picture. Also provides a useful drawing surface.
PrintDialog	Displays a standard print dialog box. The user can select the printer, pages to print, and printer settings.
PrintDocument	Represents output to be sent to the printer. A program can use this object to print and display print previews.
PrintPreviewControl	Displays a print preview within one of the application's forms.
PrintPreviewDialog	Displays a print preview in a standard dialog box.
Process	Allows the program to interact with processes, and to start and stop them.
ProgressBar	Displays a series of colored bars to show the progress of a long operation.
PropertyGrid	Displays information about an object in a format similar to the one used by the Properties window at design time.
RadioButton	Represents one of an exclusive set of options. When the user selects a RadioButton, Visual Basic deselects all other RadioButton controls in the same group. Groups are defined by GroupBox and Panels controls and the Form class.
ReportViewer	Displays a report generated either locally or remotely on a report server. Remote processing requires Microsoft SQL Server 2005 report server.
Row 6	
RichTextBox	A text box that supports Rich Text extensions. The control can display different pieces of text with different font names, sizes, bolding, and so forth. It also provides paragraph-level formatting for justification, bullets, hanging indentation, and more.
SaveFileDialog	Lets the user select the name of a file where the program will save data.
SerialPort	Represents a serial port and provides methods for controlling, reading, and writing it.
ServiceController	Represents a Windows service and lets you manipulate services.
SplitContainer	Lets the user drag a divider vertically or horizontally to split available space between two areas within the control.

(continued)

Control	Purpose
Splitter	Provides a divider that the user can drag to split available space between two controls. The Dock properties and stacking orders of the controls and the Splitter determine how the controls are arranged and resized. The SplitContainer control automatically provides a Splitter between two containers, so it is usually easier and less confusing to use.
StatusStrip	Provides an area (usually at the bottom of the form) where the application can display status messages, small pictures, and other indicators of the application's state.
TabControl	Displays a series of tabs attached to pages that contain their own controls. The user clicks a tab to display the associated page.
TableLayoutPanel	Displays the controls it contains in a grid.
TextBox	Displays some text that the user can edit.
Row 7	
Timer	Triggers an event periodically. The program can take action when the event occurs.
ToolStrip	Displays a series of buttons, dropdowns, and other tools that let the user control the application.
ToolStripContainer	A container that allows a ToolStrip control to dock to some or all of its edges. You might dock a ToolStripContainer to a form to allow the user to dock a ToolStrip to each of the form's edges.
ToolTip	Displays a tooltip if the user hovers the mouse over an associated control.
TrackBar	Allows the user to drag a pointer along a bar to select a numeric value.
TreeView	Displays hierarchical data in a graphical, treelike form.
VScrollBar	A vertical scroll bar.
WebBrowser	A web browser in a control. You can place this control on a form and use its methods to navigate to a web page. The control displays the results exactly as if the user were using a standalone browser. One handy use for this control is displaying Web-based help.

Example program UseToolStripContainer, which is available for download on the book's web site, contains a `ToolStripContainer` that holds two `ToolStrip` controls that you can drag and dock to the sides of the `ToolStripContainer`.

See Appendix G, "Windows Forms Controls and Components," for detailed descriptions of the controls.

Choosing Controls

Keeping all of the intricacies of each of these controls in mind at once is a daunting task. With so many powerful tools to choose from, it's not always easy to pick the one that's best for a particular situation.

To simplify error-handling code, you should generally pick the most restrictive control that can accomplish a given task, because more restrictive controls give the user fewer options for entering invalid data.

Restrictive controls also make the application more secure. By presenting users with a list of choices rather than letting them type in whatever they like, the program can protect itself from attack. For example, two of the most common attacks on web sites are buffer overflow attacks, in which the attacker enters far more text than intended in a text box, and SQL injection attacks, in which the attacker enters carefully designed gibberish into a text box to confuse a database. Requiring the user to select options rather than typing defuses both of these attacks.

For example, suppose that the user must pick from the choices Small, Medium, and Large. The application could let the user type a value in a `TextBox` control, but then the user could type Weasel. The program would need to verify that the user typed one of the valid choices and display an error message if the text was invalid. The program might also need to use precious screen real estate to list the choices so that the user can remember what to type.

A better idea would be to use a group of three `RadioButton` controls or a `ComboBox` with `DropDownStyle` set to `DropDownList`. Then the user can easily see the choices available and can only select a valid choice. If the program initializes the controls with a default value rather than leaving them initially undefined, it knows that there is always a valid choice selected.

The following sections summarize different categories of controls and provide some tips about when to use each.

Containing and Arranging Controls

These controls contain, group, and help arrange other controls. These controls include `FlowLayoutPanel`, `TableLayoutPanel`, `GroupBox`, `Panel`, `TabControl`, and `SplitContainer`.

The `FlowLayoutPanel` arranges the controls it contains in rows or columns. For example, when its `FlowDirection` property is `LeftToRight`, the control arranges its contents in rows from left to right. It positions its contents in a row until it runs out of room and then it starts a new row. `FlowLayoutPanel` is particularly useful for toolboxes and other situations where the goal is to display as many of the contained controls as possible at one time, and the exact arrangement of the controls isn't too important.

The `TableLayoutPanel` control displays its contents in a grid. All the cells in a particular row have the same height, and all the cells in a particular column have the same width. In contrast, the `FlowLayoutPanel`, control simply places controls next to each other until it fills a row and then starts a new one. Example program LayoutPanels, which is available for download on the book's web site, is shown in Figure 8-2 displaying these two controls side by side.
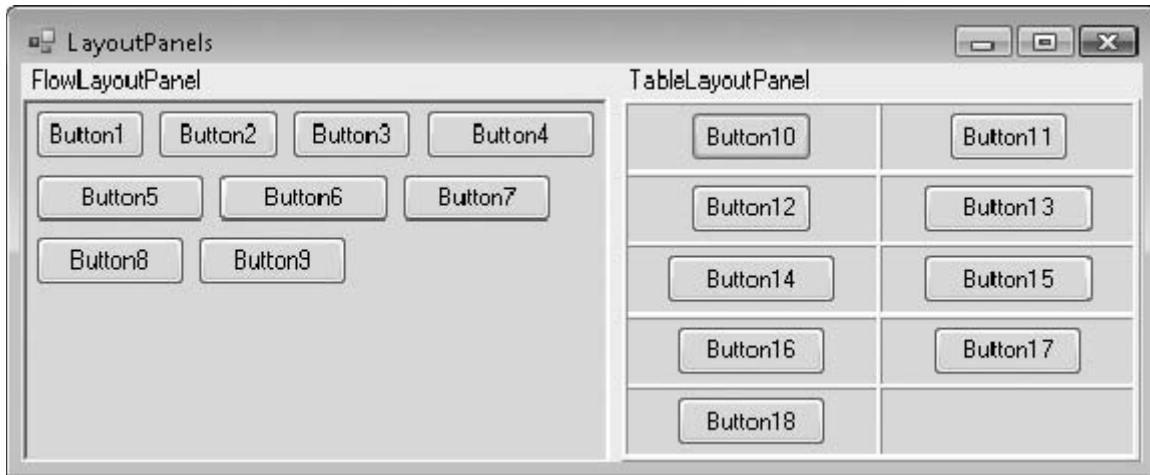
Figure 8-2: FlowLayoutPanel places controls close together. TableLayoutPanel arranges controls in a grid.

A `GroupBox` control is good for grouping related controls or the `RadioButton` controls in a `RadioButton` group. (The `RadioButton` control is discussed later in this chapter in the section "Making Selections.") It provides a visible border and caption so that it can help the user make sense out of a very complicated form.

The rule of thumb in user interface design is that a user can evaluate seven items plus or minus two at any given time. A list of five or six choices is manageable, but a list containing dozens of options can be confusing. By placing choices into categories visibly separated in `GroupBox` controls, you can make the interface much easier for the user to understand. Rather than trying to keep dozens of options straight all at once, the user can mentally break the problem into smaller pieces and consider each group of options separately.

The `Panel` control can also contain the `RadioButton` controls in a `RadioButton` group. It doesn't display a visible border, however, so you must use some other method to ensure that the user can tell that the buttons form a group. For example, you could use several `Panel`s in a row, each containing a column of `RadioButton` controls. Then the user would select one option from each column.

One of the `Panel` control's more powerful features is its ability to automatically display scroll bars. If you set a `Panel` control's `AutoScroll` property to `True` and the `Panel` resizes so that all of its contents cannot fit, it automatically displays the scroll bars so the user can still see all of the content. Scrolling

back and forth can be cumbersome for the user, however, so this is not the best way to display data if the user must view it all frequently. If the user must jump back and forth between different controls inside a scrolling `Panel`, it may be better to use a `TabControl`.

`TabControl` displays data grouped by pages. The tabs enable the user to quickly jump from page to page. The control can display scroll bars if necessary, although that makes using the control much more awkward. `TabControl` works well if the data falls into natural groupings that you can use for the tab pages. It doesn't work as well if the user must frequently compare values on one page with those on another, forcing the user to jump back and forth.

The `SplitContainer` control allows the user to divide an area between two adjacent regions. `SplitContainer` contains two `Panel` controls in which you can place your own controls. When the user drags the splitter between the two panels, the control resizes the panels accordingly. You can set the `Panels'AutoScroll` properties to `True` to make them automatically provide scroll bars when necessary.

`SplitContainer` is helpful when the form isn't big enough to hold all the data the program must display, and the user can trade area in one part of the form for area in another. It is particularly useful when the user must compare values in the two areas by viewing them at the same time.

Though you can nest `SplitContainers` inside other `SplitContainers`, they are easiest to use when they separate only two areas. Large groups of `SplitContainers` separating many areas are usually clumsy and confusing.

Example program UseSpltter, which is available for download on the book's web site, uses a `Splitter` control to divide its form into two regions covered by `Panel` controls. To make the `Splitter` work, the program contains a `Panel` with `Dock` = Left at the bottom of the stacking order, the `Splitter` next in the stacking order, and then another `Panel` with `Dock` = Fill at the top of the stacking order.

Example program UseSplitContainer, which is also available for download, uses a `SplitContainer` control to divide its form into two regions. The `SplitContainer` includes two `Panel` controls and a `Splitter` so it's all set to divide an area into two regions. Because you don't need to worry about `Dock` properties and stacking order as you do with a `Splitter` control, the `SplitContainer` is easier to use.

These container controls help arrange the controls they contain. The `Anchor` and `Dock` properties of any controls inside the containers work relative to the containers. For example, suppose that you place a series of buttons with `Anchor` = `Top, Left, Right` inside a `SplitContainer` so that they are as wide as the `Panel` containing them. When you drag the splitter, the buttons automatically resize to fit the width of their `Panel`.

Making Selections

Selection controls enable the user to choose values. If you use them carefully, you can reduce the chances of the user making an invalid selection, so you can reduce the amount of error-handling code you need to write.

These controls include `CheckBox`, `CheckedListBox`, `ComboBox`, `ListBox`, `RadioButton`, `DateTimePicker`, `MonthCalendar`, `DomainUpDown`, `NumericUpDown`, `TrackBar`, `HScrollBar`, and `VScrollBar`.

`CheckBox` enables the user to select an option or not, independently of all other selections. If you want the user to select only one of a series of options, use a `RadioButton` instead. If a form requires more than, say, five to seven `CheckBox` controls that have related purposes, consider using a `CheckedListBox` instead.

The `CheckedListBox` control enables the user to select among several independent options. It is basically a series of `CheckBox` controls arranged in a list that provides scroll bars if necessary.

The `ComboBox` control enables the user to make one brief selection. This control is particularly useful when its `DropDownStyle` property is set to `DropDownList` because then the user must pick a value from a list. If you want to allow the user to select a value or enter one that is not on the list, set the control's `DropDownStyle` to `Simple` or `DropDown`. This control does roughly the same things as a simple `ListBox` but takes less space.

The `ListBox` control displays a list of items that the user can select. You can configure the control to let the user select one or more items. A `ListBox` takes more room than a `ComboBox` but can be easier to use if the list is very long. If you have a long list and want to allow the user to select many items, it is relatively easy for the user to accidentally deselect all of the previous selections by clicking a new item. To make things easier for the user, you should consider using a `CheckedListBox`, which doesn't have that problem.

The `RadioButton` control lets the user pick one of a set of options. For example, three `RadioButton` controls might represent the choices `Small`, `Medium`, and `Large`. If the user selects one, Visual Basic automatically deselects the others. This control is useful when the list of choices is relatively small, and there is a benefit to allowing the user to see all the choices at the same time. If the list of choices is long, consider using a `ListBox` or `ComboBox`.

The `DateTimePicker` and `MonthCalendar` controls enable the user to select dates and times. They validate the user's selections, so they are generally better than other controls for selecting dates and times. For example, if you use a `TextBox` to let the user enter month, date, and year, you must write extra validation code to ensure that the user doesn't enter February 29, 2007.

The `DomainUpDown` and `NumericUpDown` controls let the user scroll through a list of values. If the list is relatively short, a `ListBox` or `ComboBox` may be easier for the user. The `DomainUpDown` and `NumericUpDown` controls take very little space, however, so they may be helpful on very crowded forms. By holding down one of the controls' arrow buttons, the user can scroll very quickly through the values, so these controls can also be useful when they represent a long list of choices.

The `TrackBar` control lets the user drag a pointer to select an integer value. This is usually a more intuitive way to select a value than a `NumericUpDown` control, although it takes a lot more space on the form. It also requires some dexterity if the range of values allowed is large.

The `HScrollBar` and `VScrollBar` controls let the user drag a "thumb" across a bar to select an integral value much as the `TrackBar` does. `HScrollBar`, `VScrollBar`, and `TrackBar` even have similar properties. The main difference is in the controls' appearances. On one hand, the two scroll bar controls allow more flexible sizing (the `TrackBar` has definite ideas about how tall it should be for a given width), and they may seem more elegant to some users. On the other hand, users are familiar with their normal purpose of scrolling an area on the form, so using them as numeric selection bars may sometimes be confusing.

Entering Data

Sometimes it is impractical to use the selection controls described in the previous section. For example, the user cannot reasonably enter a long work history or comments using a `ComboBox` or `RadioButton`.

The `RichTextBox`, `TextBox`, and `MaskedTextBox` controls let the user enter text with few restrictions. These controls are most useful when the user must enter a large amount of textual data that doesn't require any validation.

The `TextBox` control is less complex and easier to use than the `RichTextBox` control, so you may want to use it unless you need the `RichTextBox` control's extra features. If you need those features (such as multiple fonts, indentation, paragraph alignment, superscripting and subscripting, multiple colors, more than one level of undo/redo, and so forth), then you need to use a `RichTextBox`.

The `MaskedTextBox` control is a `TextBox` control that requires the user to enter data in a particular format. For example, it can help the user enter a phone number of the form 234-567-8901. This is useful only for short fields where the format is tightly constrained. In those cases, however, it reduces the chances of the user making mistakes.

Displaying Data

These controls display data to the user. They include `Label`, `DataGridView`, `ListView`, `TreeView`, and `PropertyGrid`.

The `Label` control displays a simple piece of text that the user can view but not select or modify. Because you cannot select the text, you cannot copy it to the clipboard. If the text contains a value that you think the user might want to copy to the clipboard and paste into another application (for example, serial numbers, phone numbers, e-mail addresses, Web URLs, and so forth), you can use a `TextBox` control with its `ReadOnly` property set to `True` to allow the user to select and copy the text.

The `DataGridView` control can display table-like data. The control can also display several tables linked with master/detail relationships and the user can quickly navigate through the data. You can also configure this control to allow the user to update the data.

The `ListView` control displays data that is naturally viewed as a series of icons or as a list of values with columns providing extra detail. With a little extra work, you can sort the data by item or by detail columns.

The `TreeView` control displays hierarchical data in a treelike format similar to the directory display provided by Windows Explorer. You can determine whether the control allows the user to edit the nodes' labels.

The `PropertyGrid` control displays information about an object in a format similar to the one used by the Properties window at design time. The control enables the user to organize the properties alphabetically or by category and lets the user edit the property values. Example program EmployeePropertyGrid, which is available for download on the book's web site, is shown in Figure 8-3 displaying information about an `Employee` object in a `PropertyGrid` control.
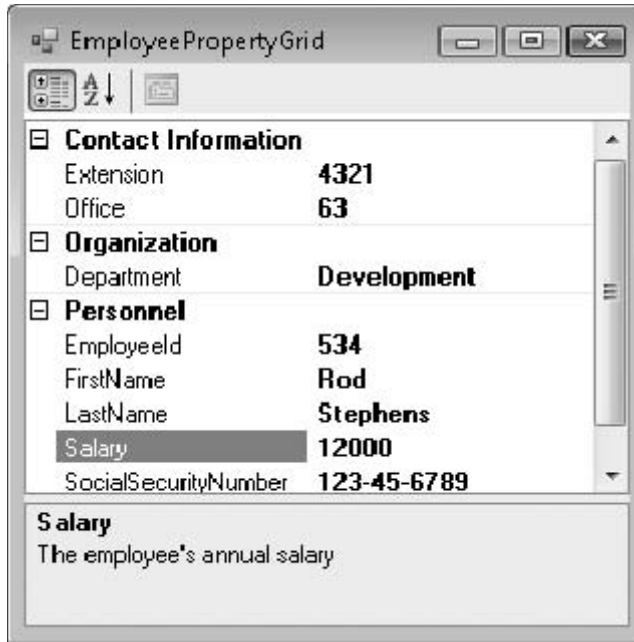
Figure 8-3: The PropertyGrid control displays an object's
properties.

Providing Feedback

These controls provide feedback to the user. These controls include `ToolTip`, `HelpProvider`,
`ErrorProvider`, `NotifyIcon`, `StatusStrip`, and `ProgressBar`. Their general goal is to tell the user
what is going on without becoming so obtrusive that the user cannot continue doing other things. For
example, the `ErrorProvider` flags a field as incorrect but doesn't prevent the user from continuing to
enter data in other fields.

The `ToolTip` control provides the user with a brief hint about a control's purpose when the user hovers
the mouse over it. The `HelpProvider` provides the user with more detailed help about a control's
purpose when the user sets focus to the control and presses F1. A high-quality application provides both
tooltips and F1 help for every control that could confuse the user. These features are unobtrusive and
only appear if the user needs them, so it is better to err on the side of providing too much help rather
than not enough.

The `ErrorProvider` control flags a control as containing invalid data. It is better to use selection
controls that do not allow the user to enter invalid data, but this control is useful when that is
not possible.

The `NotifyIcon` control can display a small icon in the taskbar notification area to let the user easily
learn the application's status. This is particularly useful for applications that run in the background
without the user's constant attention. If the application needs immediate action from the user, it should
display a dialog or message box rather than relying on a `NotifyIcon`.

The taskbar notification area, also called the Windows system tray, is the small area in the taskbar usually on the right that displays the current time and icons indicating the status of various running applications.

The `StatusStrip` control displays an area (usually at the bottom of the form) where the program can give the user some information about its state. This information can be in the form of small images or short text messages. It can contain a lot more information than a `NotifyIcon`, although it is visible only when the form is displayed.

The `ProgressBar` indicates how much of a long task has been completed. Usually, the task is performed synchronously, so the user is left staring at the form while it completes. The `ProgressBar` lets the user know that the operation is not stuck.

Initiating Action

Every kind of control responds to events, so every control can initiate an action. Nevertheless, users only expect certain kinds of controls to perform actions. For example, users expect pushing a button to start an action, but they don't expect clicking a label or check box to start a long process.

To prevent confusion, you should start actions from the controls most often used to start actions. These controls include `Button`, `MenuStrip`, `ContextMenuStrip`, `ToolStrip`, `LinkLabel`, `TrackBar`, `HScrollBar`, `VScrollBar` and `Timer`. All except the `Timer` control let the user initiate the action.

All of these controls interact with the program through event handlers. For example, the `Button` control's `Click` event handler normally makes the program perform some action when the user clicks the button.

Other controls also provide events that can initiate action. For example, the `CheckBox` control provides `CheckChanged` and `Click` events that you could use to perform some action. By catching the proper events, you can use almost any control to initiate an action. Because the main intent of those controls is not to execute code, they are not listed in this section.

The `Button` control allows the user to tell the program to execute a particular function. A button is normally always visible on its form, so it is most useful when the user must perform the action frequently or the action is part of the program's central purpose. For actions less frequently performed, use a `MenuStrip` or `ContextMenuStrip` control.

Items in a `MenuStrip` control also enable the user to make the program perform an action. You must perform more steps to open the menu, find the item, and select it than you must to click a button, so a `Button` control is faster and easier. On the other hand, menus take up less form real estate than buttons. You can also assign keyboard shortcuts (such as F5 or Ctrl+S) to frequently used menu items, making them even easier to invoke than buttons.

A `ContextMenuStrip` control provides the same advantages and disadvantages as a `MenuStrip` control. `ContextMenuStrip` is available only from certain controls on the form, however, so it is useful for commands that are appropriate only within specific contexts. For example, a Save command applies to all the data loaded by a program, so it makes sense to put it in a `MenuStrip`. A command that deletes a particular object in a drawing only applies to that object. By placing the command in a `ContextMenuStrip` control attached to the object, the program keeps the command hidden when the

user is working on other things. It also makes the relationship between the action (delete) and the object clear to both the user and the program.

The `ToolStrip` control combines some of the best features of menus and buttons. It displays a series of buttons so they are easy to use without navigating through a menu. The buttons are small and grouped at the top of the form, so they don't take up as much space as a series of larger buttons.

It is common to place buttons or `ToolStrip` buttons on a form to duplicate frequently used menu commands. The menu commands provide keyboard shortcuts for more advanced users, and the buttons make it easy to invoke the commands for less-experienced users.

The `LinkLabel` control displays text much as a `Label` control does. It also displays some text in blue with an underline, displays a special cursor when the user moves over that text, and raises an event if the user clicks the text. That makes the control appropriate when clicking a piece of text should perform some action. For example, on a web page, clicking on a link typically navigates to the link's web page.

The `TrackBar`, `HScrollBar`, and `VScrollBar` controls let the user drag a "thumb" across a bar to select an integral value. As mentioned in the section "Making Selections" earlier in this chapter, you can use these controls to let the user select a numeric value. However, they can also be used to perform some action interactively. For example, the scroll bars are often used to scroll an area on the form. More generally, they are used to make the program take action based on some new value. For example, you could use a scroll bar to let the user select new red, green, and blue color components for an image. As the user changed a scroll bar's value, the program would update the image's colors.

The `Timer` control triggers some action at a regular interval. When the `Timer` control raises its `Timer` event, the program takes action.

Displaying Graphics

These controls display graphics, either on the screen or on a printout. These controls include `Form`, `PictureBox`, `PrintPreviewControl`, `PrintDocument`, and `PrintPreviewDialog`.

A `Form` (which can also display graphics) provides methods for drawing, but it's often better to draw in a `PictureBox` control instead of the form itself. That makes it easier to move the drawing if you later need to redesign the form. For example, if you decide that the picture might be too big, it is easy to move a `PictureBox` control into a scrolling `Panel` control. It would be much harder to rewrite the code to move the drawing from the `Form` into a `PictureBox` control later.

`PrintPreviewControl` displays a print preview for a `PrintDocument` object. The program responds to events raised by the `PrintDocument` object. `PrintPreviewControl` displays the results within a control on one of the program's forms.

The `PrintPreviewDialog` control displays graphics from a `PrintDocument` object much as a `PrintPreviewControl` does, but it provides its own dialog box. Unless you need to arrange the print preview in some special way, it is easier to use a `PrintPreviewDialog` rather than build your own preview dialog box with a `PrintPreviewControl`. The `PrintPreviewDialog` control provides many features that enable the user to zoom, scroll, and move through the pages of the preview document. Implementing those features yourself would be a lot of work.

Displaying Dialog Boxes

Visual Basic provides a rich assortment of dialog boxes that enable the user to make standard selections. Figuring out which of these dialog boxes to use is usually easy because each has a very specific purpose. The following table lists the dialog boxes and their purposes.

Dialog	Purpose
ColorDialog	Select a color.
FolderBrowserDialog	Select a folder (directory).
FontDialog	Select a font.
OpenFileDialog	Select a file to open.
PageSetupDialog	Specify page set up for printing.
PrintDialog	Print a document.
PrintPreviewDialog	Display a print preview.
SaveFileDialog	Select a file for saving.

Example program UseDialogs, which is available for download on the book's web site, demonstrates each of these dialogs.

Supporting Other Controls

Many of the Visual Basic controls require the support of other controls. The two controls used most by other controls are ImageList and PrintDocument. These controls also include DataConnector and DataNavigator.

The ImageList control holds images for other controls to display. Your code can also take images from an ImageList control to use in whatever way it needs.

The PrintDocument control provides support for printing and print previewing. It generates the graphics sent to the printer, PrintPreviewDialog, or PrintPreviewControl.

The DataConnector control provides a link between a data source and controls bound to the connector. The program can use the DataConnector's methods to navigate, sort, filter, and update the data, and the control updates its bound controls appropriately.

The DataNavigator control provides methods for navigating through a data source such as DataConnector.

Third-Party Controls

Visual Basic comes with a large number of useful controls ready to go, but there are many other controls you can use if you need them. If you right-click the Toolbox and select Choose Items, you can select from a huge list of .NET Framework and COM components available on your system.

You can also obtain other controls provided by other companies and available for purchase and sometimes for free on the Web. Many of these controls perform specialized tasks such as generating bar codes, making shaped forms, warping images, and providing special graphical effects.

Other controls extend the standard controls to provide more power or flexibility. Several controls are available that draw two- and three-dimensional charts and graphs. Other controls provide more powerful reporting services than those provided by Visual Studio's own tools.

If you use any major web search engine to search for "windows forms controls," you will find lots of web sites where you can download controls for free or for a fee. A few places you might like to explore include:

❑ MVPs.org (`www.mvps.org`), a site leading to resources provided by people related to Microsoft's Most Valuable Professional (MVP) program. The Common Controls Replacement Project (`ccrp .mvps.org`) provides controls that duplicate and enhance standard Visual Basic 6 controls. Development on this project has stopped but some of the old Visual Basic 6 controls may give you some ideas for building controls of your own. MVPs.org is also a good general resource.

❑ Windows Forms .NET (`windowsclient.net`), Microsoft's official Windows Forms .NET community.

❑ ASP.NET (`www.asp.net`), Microsoft's official ASP.NET community.

❑ Download.com (`www.download.com`)

❑ Shareware.com (`www.shareware.com`)

❑ Shareware Connection (`www.sharewareconnection.com`)

You should use these as a starting point for your own search, not as a definitive list. You can download controls from hundreds (if not thousands) of web sites.

You should also show some restraint in downloading third-party controls and products in general. Every time you add another control to a project, you make the project depend on that control. If you later move the project to a newer version of Visual Basic, you must ensure that the control works with that version. Similarly, if the vendor makes a new version of the control, you must find out if it works with your version of Visual Basic. If it doesn't, you may be stuck using an older, unsupported version of the control.

If controls and tools interact with each other, the problem becomes much more difficult. If anything changes, you must find a set of versions for all of the tools that can work correctly together.

I try to keep my use of third-party controls to a bare minimum because, when I write a book, I generally cannot assume that you have a particular third-party control. I use tools such as WinZip (`www.WinZip.com`) and Internet Download Manager (`www.InternetDownloadManager.com`) outside of projects, but nothing inside them.

Use a third-party control if it will save you a lot of work. But, before you do, ask yourself how much work would it be to do without the control and how much work it will be to replace it if you need to move to a new version of Visual Basic.

Summary

Controls form the main connection between the user and the application. They allow the application to give information to the user, and they allow the user to control the application. Controls are everywhere in practically every Windows application. Only a tiny percentage of applications that run completely in the background can do without controls.

This chapter briefly described purposes of the standard Visual Basic controls and provided a few tips for selecting the controls appropriate for different purposes. Appendix G describes the controls in much greater detail.

Even knowing all about the controls doesn't guarantee that you can produce an adequate user interface. There's a whole science to designing user interfaces that are intuitive and easy to use. A good design enables the user to get a job done naturally and with a minimum of wasted work. A bad interface can encumber the user and turn even a simple job into an exercise in beating the application into submission.

For more information on building usable applications, read some books on user-interface design. They explain standard interface issues and solutions. You can also learn a lot by studying other successful applications. Look at the layout of their forms and dialog boxes. You shouldn't steal their designs outright, but you can try to understand why they arrange their controls in the way they do. Look at applications that you like and find particularly easy to use. Compare them with applications that you find awkward and confusing.

This chapter provided an introduction to Windows Forms controls to help you decide which controls to use for different purposes. Chapter 9, "Using Windows Forms Controls," explains in greater detail how you can use the controls you select. It tells how to add a control to a form at design time or runtime, and explains how to use a control's properties, methods, and events.

Using Windows Forms Controls

A *control* is a programming object that has a graphical component. A control sits on a form and interacts with the user, providing information and possibly allowing the user to manipulate it. Text boxes, labels, buttons, scroll bars, drop-down lists, menu items, toolstrips, and just about everything else that you can see and interact with in a Windows application is a control.

A *component* is similar to a control, except it is not visible at runtime. When you add a component to a form at design time, it appears in the *component tray* below the bottom of the form. You can select the component and use the Properties window to view and change its properties. At runtime, the component is invisible to the user, although it may display a visible object such as a menu, dialog box, or status icon.

This chapter explains controls and components in general terms. It describes different kinds of controls and components. It explains how your program can use them at design time and runtime to give the user information and to allow the user to control your application. It also explains in general terms how a control's properties, methods, and events work, and it lists some of the most useful properties, methods, and events provided by the Control class. Other controls that are derived from this class inherit the use of those properties, methods, and events unless they are explicitly overridden.

Appendix G, "Windows Forms Controls and Components," describes some of the most commonly used controls in greater detail.

Controls and Components

Most controls are graphic by nature. Buttons, text boxes, and labels provide graphical input and feedback for the user. They display data and let the user trigger program actions. Some controls (such as grid controls, tree view controls, and calendar controls) are quite powerful and provide a rich variety of tools for interacting with the user.

In contrast, components are represented by graphical icons at design time and are hidden at runtime. They may display some other object (such as a dialog box, menu, or graphical indicator), but the component itself is hidden from the user.

Many components display information to the user. Others provide information needed by graphical controls. For example, a program can use connection, data adapter, and data set components to define data that should be selected from a database. Then a grid control could display the data to the user. Because the connection, data adapter, and data set objects are components, you can define their properties at design time without writing code.

Figure 9-1 shows a form at design time that contains several components. The components appear in the component tray at the bottom of the form, not on the form's graphical surface.
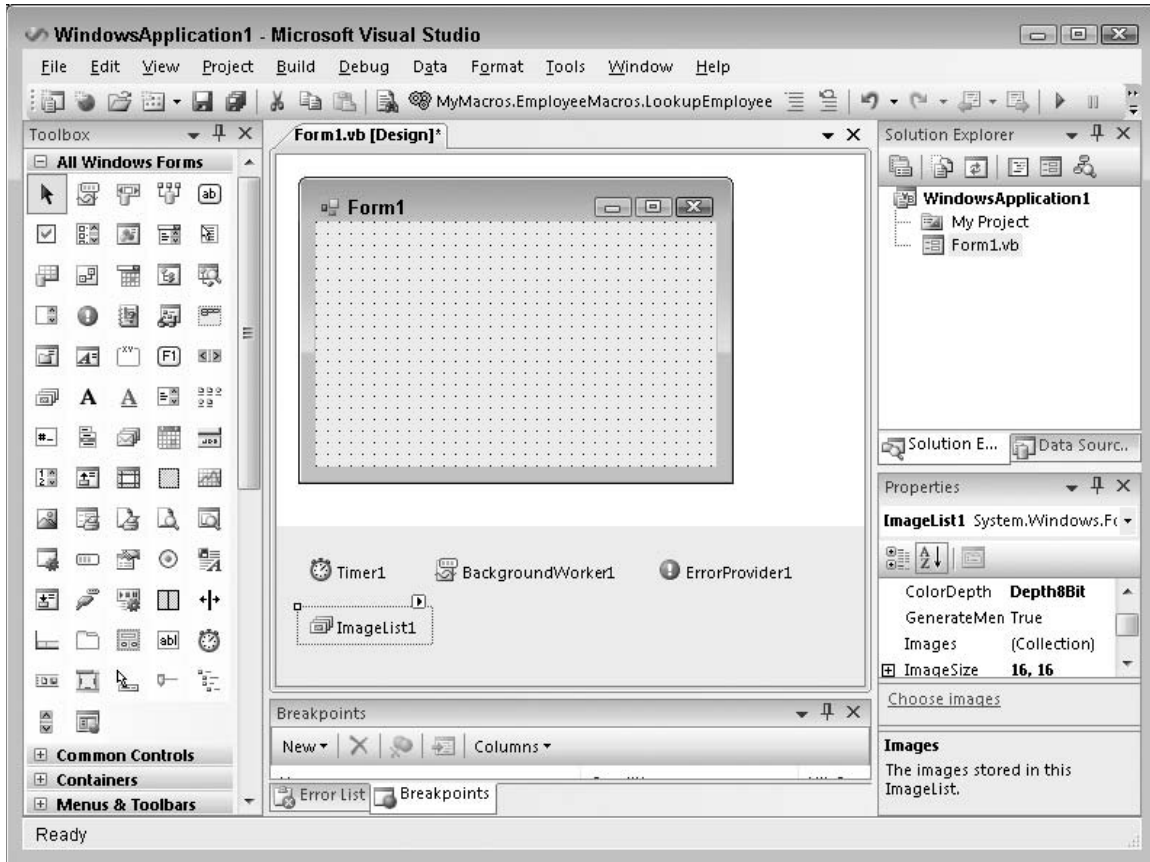
Figure 9-1: Some components provide data for graphical controls.

This example contains four components. `Timer1` fires an event periodically so the program can take some action at specified time intervals. `ErrorProvider1` displays an error icon and error messages for certain controls on the form such as `TextBoxes`. `BackgroundWorker1` performs tasks asynchronously while the main program works independently. The `ImageList1` contains a series of images for use by another control. Usually an `ImageList` is associated with a control such as a `Button`, `ListView`, or `TreeView`, and provides images for that control. For example, a `ListView` control can use the images in an `ImageList` to display icons for the items it contains.

Aside from the lack of a graphical component on the form, working with components is very similar to working with controls. You use the Properties window to set components' properties, the code editor to define event handlers, and code to call their methods. The rest of this chapter focuses on controls, but the same concepts apply just as well to components.

Creating Controls

Usually you add controls to a form graphically at design time. In some cases, however, you may want to add new controls to a form at runtime when the program is running. This gives you a bit more flexibility so that you can change the program's appearance at runtime in response to the program's needs or the user's commands.

For example, suppose an application might need between 1 and 100 text boxes. Most of the time it needs only a few, but depending on the user's input, it might need a lot. You could give the form 100 text boxes and then hide the ones it didn't need, but that would be a waste of memory most of the time. By creating only the number of text boxes actually needed, you can conserve memory in the most common cases.

The following sections explain how to create controls both at design time and at runtime.

Creating Controls at Design Time

To create a control at design time, double-click a form in Solution Explorer to open it in the form editor. Decide which control you want to use from the Toolbox. If the Toolbox tab you are using is in List View mode, it displays the controls' names. If the tab displays only control icons, you can hover the mouse over a tool to see a tooltip that gives the control's name and a brief description. For example, Figure 9-2 shows the `HelpProvider` component's tooltip.

Figure 9-2: Some components provide data for graphical controls.

After you have chosen a control, there are several ways you can add it to the form. First, you can double-click the tool to place an instance of the control on the form at a default size in a default location. After adding the control to the form, the IDE deselects the tool and selects the pointer tool (the upper leftmost tool in the Toolbox's current tab).

Second, you can select the tool in the Toolbox, and then click and drag to place it on the form. If you click the form without dragging, the IDE adds a new control at that position with a default size. After you add the control, the IDE deselects the tool and selects the pointer tool.

Third, if you click and drag a tool from the Toolbox onto the form, Visual Basic makes a new control with a default size at the position where you dropped the tool.

Fourth, if you plan to add many copies of the same type of control to the form, hold down the Ctrl key and click the tool. Now the tool remains selected even after you add a control to the form. When you click and drag on the form, the IDE creates a new control at that position and keeps the tool selected so that you can immediately create another control. When you click the form without dragging the mouse, the IDE adds a new control at that position with a default size. When you are finished adding instances of that control type, click the pointer tool to stop adding new controls.

Adding Controls to Containers

Some controls can contain other controls. For example, the `GroupBox` and `Panel` controls can hold other controls.

There are several ways you can place a control in a container. If you select the container and then double-click a control's tool in the Toolbox, Visual Basic places the new control inside the container.

When you select a tool and click and drag inside a container, Visual Basic also places the new control inside the container, whether it is selected or not.

You can also click and drag a Toolbox tool onto the container, or click and drag controls from one part of the form onto the container. If you hold down the Ctrl key when you drop the controls, Visual Basic makes new copies of the controls instead of moving the existing controls.

Two common mistakes programmers make with containers are placing a control *above* a container when they want it *inside* the container, and vice versa. For example, you can place groups of controls inside different `Panel` controls and then hide or display the `Panels` to show different controls at different times. If a control lies above a `Panel` but is not inside it, the control remains visible even if the `Panel` is not.

To tell if a control is inside a container, move the container slightly. If the control also moves, it is inside the container. If the control doesn't move, it is above the container but not inside it.

Creating Controls at Runtime

Normally, you create controls interactively at design time. Sometimes, however, it's more convenient to create new controls at runtime. For example, you may not know how many pieces of data you will need to display until runtime. Sometimes you can display unknown amounts of data using a list, grid, or other control that can hold a variable number of items, but other times you might like to display the data in a series of labels or text boxes. In cases such as these, you need to create new controls at runtime.

The following code shows how a program might create a new Label control. First it declares a variable of type Label and initializes it with the New keyword. It uses the label's SetBounds method to position the label and sets its Text property to "Hello World!" The code then adds the label to the current form's Controls collection.

```
Dim lbl As New Label
lbl.SetBounds(10, 50, 100, 25)
lbl.Text = "Hello World!"
Me.Controls.Add(lbl)
```

To place a control inside a container other than the form, add the control to the container's Controls *collection. For example, to add the previous* Label *to a* GroupBox *named* grpLabels, *you would use the statement* grpLabels.Controls.Add(lbl).

Usually, a label just displays a message so you don't need to catch its events. Other controls such as buttons and scroll bars, however, are not very useful if the program cannot respond to their events.

There are two approaches you can take to catching a new control's events. First, you can declare the control's variable with the WithEvents keyword. Then you can open the form in the code editor, select the variable's name from the left drop-down list, and select an event from the right drop-down list to give the control an event handler.

The following code demonstrates this approach. It declares a class-level variable btnHi using the WithEvents keyword. When you click the btnMakeHiButton button, its event handler initializes the variable. It sets the control's position and text, and adds it to the form's Controls collection. When the user clicks this button, the btnHi_Click event handler executes and displays a message.

```
' Declare the btnHi button WithEvents.
Private WithEvents btnHi As Button

' Make the new btnHi button.
Private Sub btnMakeHiButton_Click() Handles btnMakeHiButton.Click
    btnHi = New Button
    btnHi.SetBounds(96, 50, 75, 23)
    btnHi.Text = "Say Hi"
    Me.Controls.Add(btnHi)
End Sub

' The user clicked the btnHi button.
Private Sub btnHi_Click() Handles btnHi.Click
    MessageBox.Show("Hi")
End Sub
```

This first approach works if you know how many controls you need. Then you can define variables for them all using the WithEvents keyword. If you don't know how many controls you need to create, however, this isn't practical. For example, suppose that you want to create a button for each file in a directory. When the user clicks a button, the file should open. If you don't know how many files the directory will hold, you don't know how many variables you'll need.

One solution to this dilemma is to use the AddHandler statement to add event handlers to the new controls. The following code demonstrates this approach. When you click the btnMakeHelloButton button, its Click event handler creates a new Button object, storing it in a locally declared variable.

125

It sets the button's position and text and adds it to the form's `Controls` collection as before. Next, the program uses the `AddHandler` statement to make subroutine `Hello_Click` an event handler for the button's `Click` event. When the user clicks the new button, subroutine `Hello_Click` displays a message.

```
' Make a new Hello button.
Private Sub btnMakeHelloButton_Click() Handles btnMakeHelloButton.Click
    ' Make the button.
    Dim btnHello As New Button
    btnHello.SetBounds(184, 50, 75, 23)
    btnHello.Text = "Say Hello"
    Me.Controls.Add(btnHello)

    ' Add a Click event handler to the button.
    AddHandler btnHello.Click, AddressOf Hello_Click
End Sub

' The user clicked the Hello button.
Private Sub Hello_Click()
    MessageBox.Show("Hello")
End Sub
```

You can use the same routine as an event handler for more than one button. In that case, the code can convert the sender parameter into a `Button` object and use the button's `Name`, `Text`, and other properties to determine which button was pressed.

To remove a control from the form, simply remove it from the form's `Controls` collection. To free the resources associated with the control, set any variables that refer to it to `Nothing`. For example, the following code removes the `btnHi` control created by the first example:

```
Me.Controls.Remove(btnHi)
btnHi = Nothing
```

This code can remove controls that you created interactively at design time, as well as controls you create during runtime.

Example program MakeButtons, available on the book's web site, demonstrates techniques for adding and removing buttons.

Properties

A *property* is some value associated with a control. Often, a property corresponds in an obvious way to the control's appearance or behavior. For example, the `Text` property represents the text that the control displays, `BackColor` represents the control's background color, `Top` and `Left` represent the control's position, and so forth.

Many properties, including `Text`, `BackColor`, `Top`, and `Left`, apply to many kinds of controls. Other properties only work with certain specific types of controls. For example, the `ToolStrip` control has an `ImageList` property that indicates the `ImageList` control containing the images the `ToolStrip` should display. Only a few controls such as the `ToolStrip` have an `ImageList` property.

The following sections explain how you can manipulate a control's properties interactively at design time or using code at runtime.

Properties at Design Time

To modify a control's properties at design time, open its form in the Form Designer and click the control. The Properties window displays the control's properties. Figure 9-3 shows the Properties window displaying a Button control's properties. For example, the control's Text property has the value Make Hi Button, and its TextAlign property (which determines where the button displays its text) is set to MiddleCenter.

The drop-down list at the top of the Properties window, just below the Properties title, indicates that this control is named btnMakeHiButton and that it is of the System.Windows.Forms.Button class.

You can set many properties by clicking a property's value in the Properties window and then typing the new value. This works with simple string and numeric values such as the controls'Name and Text properties, and it works with some other properties where typing a value makes some sense.

For example, the HScrollBar control (horizontal scrollbar) has Minimum, Maximum, and Value properties that determine the control's minimum, maximum, and current values. You can click those properties in the Properties window and enter new values. When you press the Enter key or move to another property, the control validates the value you typed. If you entered a value that doesn't make sense (for example, if you typed ABC instead of a numeric value), the IDE reports the error and lets you fix it.
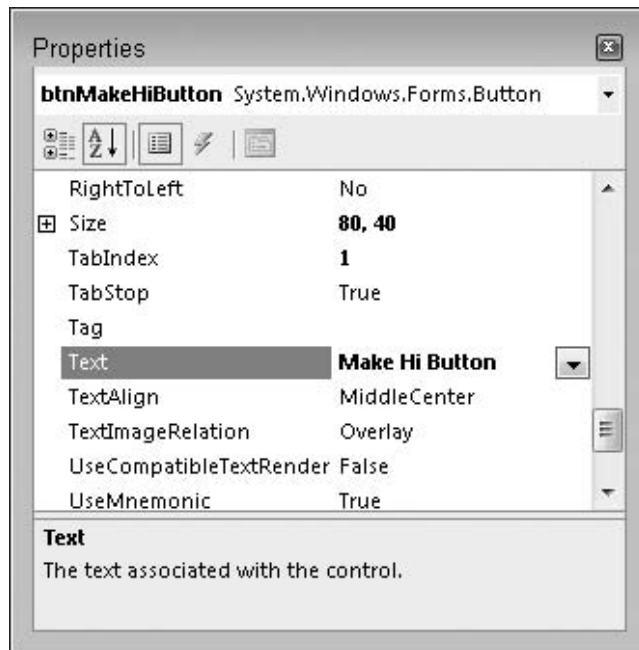
Figure 9-3: The Properties window lets you change a control's properties at design time.

Compound Properties

A few properties have compound values. The `Location` property includes the X and Y coordinates of the control's upper-left corner. The `Size` property contains the control's width and height. The `Font` property is an object that has its own font name, size, boldness, and other font properties.

The Properties window displays these properties with a plus sign on the left. When you click the plus sign, the window expands the property to show the values that it contains. Figure 9-4 shows the same Properties window shown in Figure 9-3 with the `Font` property expanded. You can click the `Font` property's subvalues and set them independently just as you can set any other property value.

When you expand a compound property, a minus sign appears to the left (see the `Font` property in Figure 9-4). Click this minus sign to collapse the property and hide its members.

Some compound properties provide more sophisticated methods for setting the property's values. If you click the ellipsis button to the right of the `Font` property shown in Figure 9-4, the IDE presents a font selection dialog that lets you set many of the font's properties.
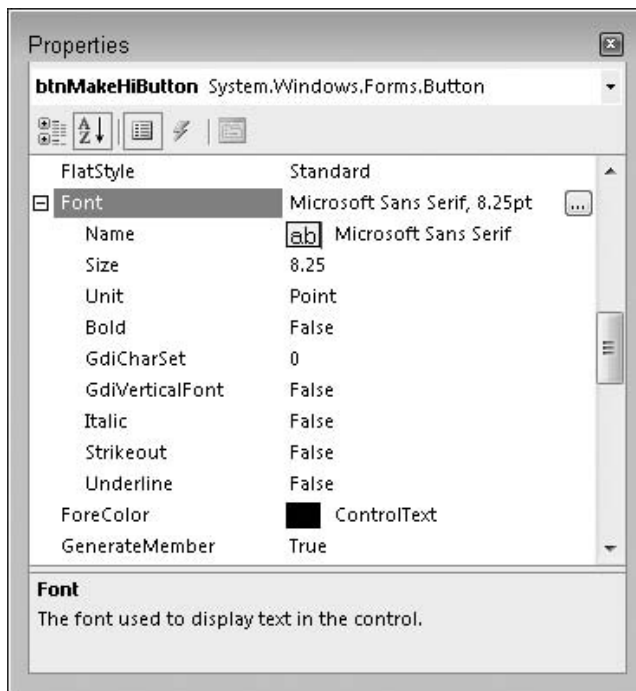
Figure 9-4: The Properties window lets you change complex properties at design time.

Restricted Properties

Some properties allow more restricted values. For example, the `Visible` property is a Boolean, so it can only take the values `True` and `False`. When you click the property, a drop-down arrow appears on the right. When you click this arrow, a drop-down list lets you select one of the choices, `True` or `False`.

Many properties have enumerated values. The `Button` control's `FlatStyle` property allows the values `Flat`, `Popup`, `Standard`, and `System`. When you click the drop-down arrow to the right of this property, a drop-down list appears to let you select one of those values.

You can also double-click the property to cycle through its allowed values. After you select a property, you can use the up and down arrows to move through the values.

Some properties allow different values at different times. For example, some properties contain references to other controls. The `Button` control's `ImageList` property is a reference to an `ImageList` component that contains the picture that the `Button` should display. If you click the drop-down arrow to the right of this value, the Properties window displays a list of the `ImageList` components on the form that you might use for this property. This list also contains the entry (none), which you can select to remove any previous control reference in the property.

Many properties take very specialized values and provide specialized property editors to let you select values easily. For example, the `Anchor` property lets you anchor a control's edges to the edges of its container. Normally, a control is anchored to the top and left edges of the container so that it remains in the same position even if the container is resized. If you also anchor the control on the right, its right edge moves in or out as the container gets wider or narrower. This lets you make controls that resize with their containers in certain useful ways.

If you select the `Anchor` property and click the drop-down arrow on the right, the Properties window displays the small graphical editor shown in Figure 9-5. Click the skinny rectangles on the left, top, right, or bottom to anchor or unanchor (sometimes called *float*) the control on those sides. Press the Enter key to accept your choices or press Escape to cancel them.

Other complex properties may provide other editors. These are generally self-explanatory. Click the ellipsis or drop-down arrow to the right of a property value to open the editor, and experiment to see how these editors work.

You can right-click any property's name and select Reset to reset the property to a default value. Many complex properties can take the value "(none)," and for those properties, selecting Reset usually sets the value to "(none)."
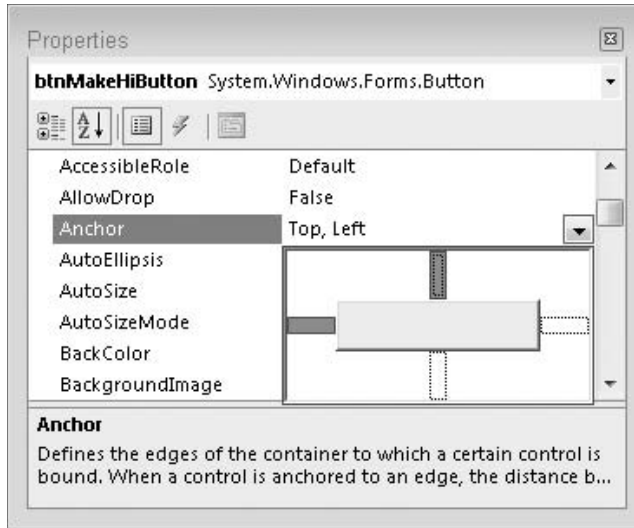
Figure 9-5: Some properties, such as Anchor, provide specialized editors to let you select their values.

Collection Properties

Some properties represent collections of objects. For example, the ListBox control displays a list of items. Its Items property is a collection containing those items. The Properties window displays the value of this property as "(Collection)." If you select this property and click the ellipsis to the right, the Properties window displays a simple dialog box where you can edit the text displayed by the control's items. This dialog box is quite straightforward: Enter the items' text on separate lines and click OK.

Other properties are much more complex. For example, to create a TabControl that displays images on its tabs, you must also create an ImageList component. Select the ImageList component's Images property, and click the ellipsis to the right to display the dialog box shown in Figure 9-6. When you click the Add button, the dialog box displays a file selection dialog box that lets you add an image file to the control. The list on the left shows you the images you have loaded and includes a small thumbnail picture of each image. The values on the right show you the images' properties.

After you add pictures to the ImageList control, create a TabControl. Select its ImageList property, click the drop-down arrow on the right, and select the ImageList control you created. Next, select the TabControl's TabPages property, and click the ellipsis on the right to see the dialog box shown in Figure 9-7.
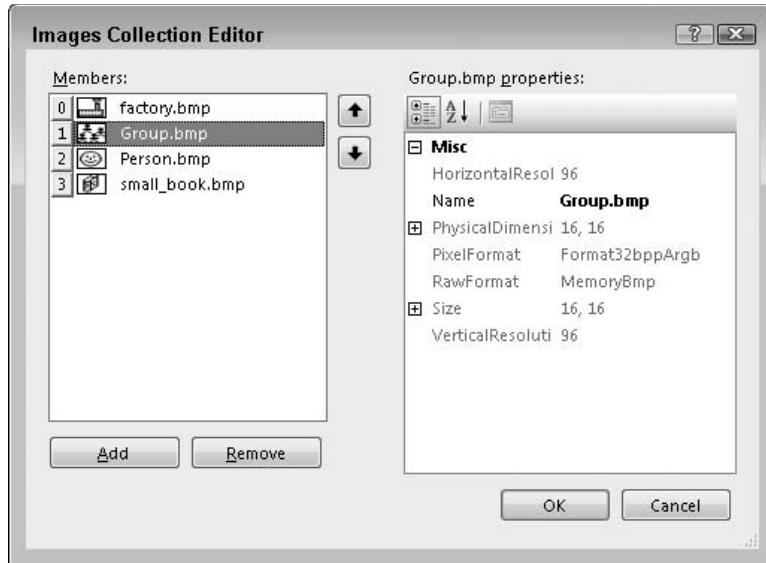
Figure 9-6: This dialog box lets you load images into an ImageList control at design time.
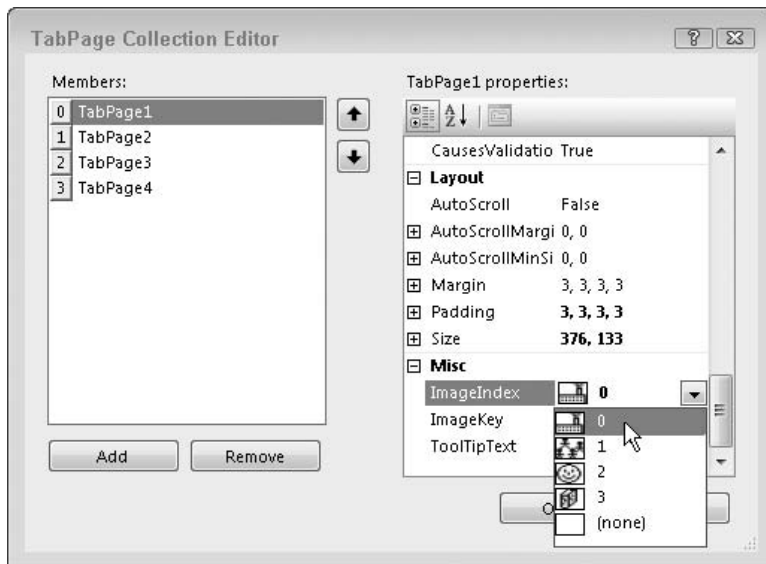
Figure 9-7: This dialog box lets you edit a TabControl's tab pages.

Use the Add button to add tab pages to the control. Select a tab page, click its ImageIndex property, click the drop-down arrow to the right, and pick the number of the image in the ImageList that you want to use for this tab. Figure 9-8 shows the resulting ImageTabs example program, which is available for download on the book's web site.

Some properties even contain a collection of objects, each of which contains a collection of objects. For example, the `ListView` control has an `Items` property that is a collection. Each item in that collection is an object that has a `SubItems` property, which is itself a collection. When you display the `ListView` control as a list with details, an object in the `Items` collection represents a row in the view and its `SubItems` values represent the secondary values in the row.
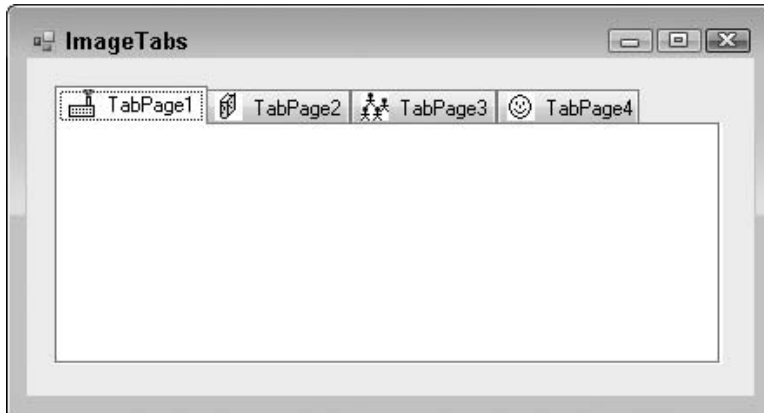
Figure 9-8: A TabControl displays the images stored in an ImageList component on its tabs.

To set these values at design time, select the `ListView` control and click the ellipsis to the right of the control's `Items` property in the Properties window. Create an item in the editor, and click the ellipsis to the right of the item's `SubItems` property.

Other complicated properties provide similarly complex editors. Although they may implement involved relationships among various controls and components, they are usually easy enough to figure out with a little experimentation.

Properties at Runtime

Visual Basic lets you set most control properties at design time, but often you will need to get and modify property values at runtime. For example, you might need to change a label's text to tell the user that something has changed, disable a button because it is not applicable at a particular moment, or read the value selected by the user from a list.

As far as your code is concerned, a property is just like any other public variable defined by an object. You get or set a property by using the name of the control, followed by a dot, followed by the name of the property. For example, the following code examines the text in the `TextBox` named `txtPath`. If the text doesn't end with a `/` character, the code adds one. This code both reads and sets the `Text` property:

```
If Not txtPath.Text.EndsWith("/") Then txtPath.Text &= "/"
```

If a property contains a reference to an object, you can use the object's properties and methods in your code. The following code displays a message box indicating whether the `txtPath` control's font is bold.

It examines the `TextBox` control's `Font` property. That property returns a reference to a `Font` object that has a `Bold` property.

```
If txtPath.Font.Bold Then
    MessageBox.Show("Bold")
Else
    MessageBox.Show("Not Bold")
End If
```

Note that a `Font` *object's properties are read-only, so the code cannot set the value of* `txtPath.Font` `.Bold`*. To change the* `TextBox` *control's font, the code would need to create a new font as shown in the following code. This code passes the* `Font` *object's constructor a copy of the* `TextBox` *control's current font to use as a template, and a value indicating that the new font should be bold:*
`txtPath.Font = New Font(txtPath.Font, FontStyle.Bold)`

If a property represents a collection or array, you can loop through or iterate over the property just as if it were declared as a normal collection or array. The following code lists the items the user has selected in the `ListBox` control named `lstChoices`:

```
For Each selected_item As Object In lstChoices.SelectedItems()
    Debug.WriteLine(selected_item.ToString)
Next selected_item
```

A few properties are read-only at runtime, so your code can examine them but not change their values. For example, a `Panel` control's `Controls` property returns a collection holding references to the controls inside the `Panel`. This property is read-only at runtime so you cannot set it equal to a new collection. (The collection provides methods for adding and removing controls so you don't really need to replace the whole collection, you can change the controls that it contains instead.)

Note also that at design time, this collection doesn't appear in the Properties window. Instead of explicitly working with the collection, you add and remove controls interactively by moving them in and out of the `Panel` control.

A control's `Bottom` property is also read-only and not shown in the Properties window. It represents the distance between the top of the control's container and the control's bottom edge. This value is really just the control's `Top` property plus its `Height` property (`control.Bottom = control.Top + control` `.Height`), so you can modify it using those properties instead of setting the `Bottom` property directly.

In theory, a property can also be write-only at runtime. Such a property is really more like a method than a property, however, so most controls use a method instead. In practice, read-only properties are uncommon and write-only properties are extremely rare.

Useful Control Properties

This section describes some of the most useful properties provided by the `Control` class. Appendix A, "Useful Control Properties, Methods, and Events," summarizes these and other `Control` properties for quick reference. Appendix A doesn't cover every property, just those that are most useful.

All controls (including the `Form` control) inherit directly or indirectly from the `Control` class. That means they inherit the `Control` class's properties, methods, and events (unless they take explicit action to override the `Control` class's behavior).

Although these properties are available to all controls that inherit from the `Control` class, many are considered advanced, so they are not shown by the IntelliSense pop-up's Common tab. For example, a program is intended to set a control's position by using its `Location` property not its `Left` and `Top` properties, so `Location` is in the Common tab while `Left` and `Top` are only in the Advanced tab.

Figure 9-9 shows the Common tab on the IntelliSense pop-up for a `Label` control. It shows the `Location` property but not the `Left` property. If you click the All tab, you can see `Left` and the other advanced properties.

When you type the control's name and enough of the string `Left` to differentiate it from the `Location` property (in this case "`lblDirectory.Le`"), the pop-up automatically switches to show a smaller version of the IntelliSense pop-up listing only the `Left` property.

Many of the `Control` class's properties are straightforward, but a few deserve special attention. The following sections describe some of the more confusing properties in greater detail.
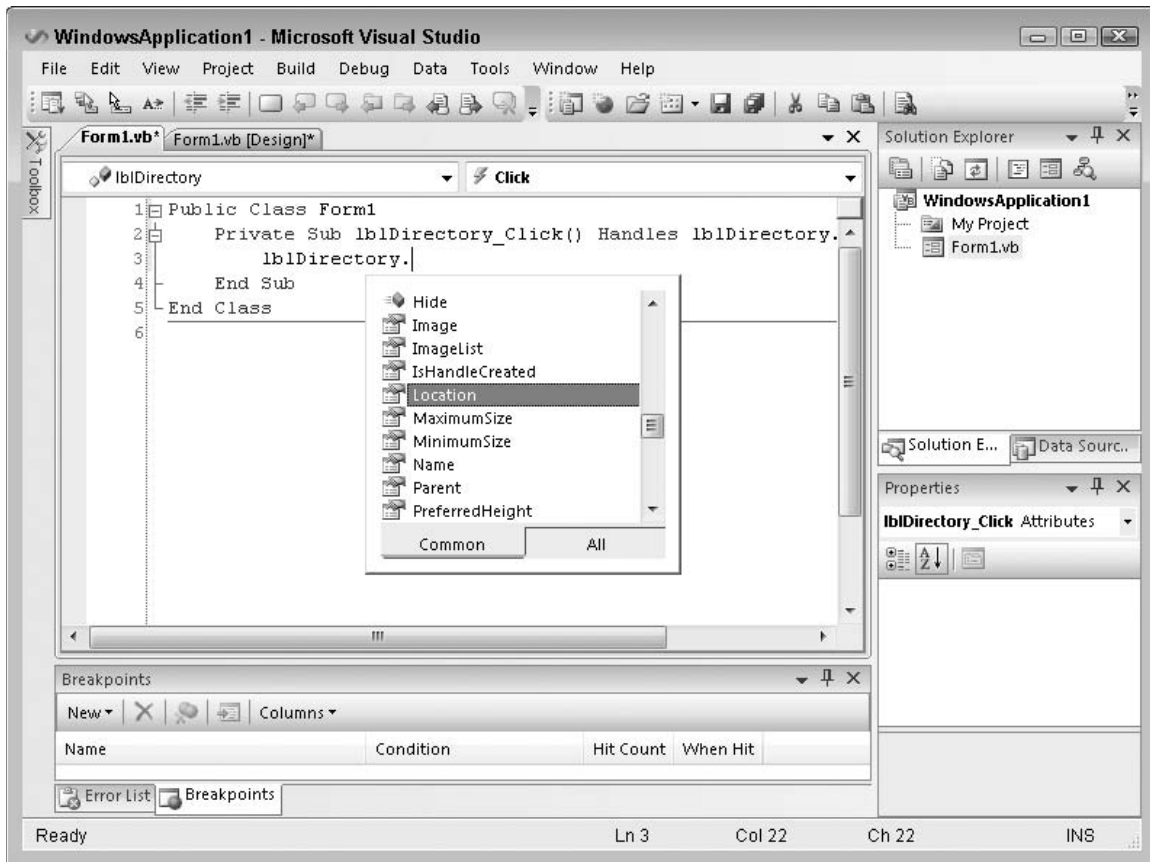
Figure 9-9: The Location property is on the IntelliSense Common tab but the Left property is not.

Anchor and Dock

The `Anchor` and `Dock` properties allow a control to automatically resize itself when its container is resized. The `Anchor` property determines which of the control's edges should remain a fixed distance from the corresponding edges of the container.

For example, normally a control's `Anchor` property is set to `Top`, `Left`. That means the control's `top` and `left` positions remain fixed when the container resizes. If the control's upper-left corner is at the point (8, 16) initially, it remains at the position (8, 16) when you resize the container. This is the normal control behavior, and it makes the control appear fixed on the container.

For another example, suppose that you set a control's `Anchor` property to `Top`, `Right`, and you place the control in the container's upper-right corner. When you resize the container, the control moves, so it remains in the upper-right corner.

If you set two opposite `Anchor` values, the control resizes itself to satisfy them both. For example, suppose that you make a button that starts 8 pixels from its container's left, right, and top edges. Then suppose that you set the control's `Anchor` property to `Top`, `Left`, `Right`. When you resize the container, the control resizes itself so that it is always 8 pixels from the container's left, right, and top edges.

In a more common scenario, you can place `Label` controls on the left with `Anchor` set to `Top`, `Left` so they remain fixed on the form. On the right, you can place `TextBoxes` and other controls with `Anchor` set to `Top`, `Left`, `Right`, so they resize themselves to take advantage of the resizing form's new width.

Similarly, you can make controls that stretch vertically as the form resizes. For example, if you set a `ListBox` control's `Anchor` property to `Top`, `Left`, `Bottom`, the control stretches vertically to take advantage of the form's height and display as much of its list of items as possible.

If you do not provide any `Anchor` value for either the vertical or horizontal directions, the control anchors its center to the container's center. For example, suppose you position a button in the bottom middle of the form and you set its `Anchor` property to `Bottom` only. Because you placed the control in the middle of the form, the control's center coincides with the form's center. When you resize the form, the control moves so it remains centered horizontally.

If you place other controls on either side of the centered one, they will all move so they remain together centered as a group as the form resizes. You may want to experiment with this property to see the effect.

At runtime, you can set a control's `Anchor` property to `AnchorStyles.None` or to a Boolean combination of the values `AnchorStyles.Top`, `AnchorStyles.Bottom`, `AnchorStyles.Left`, and `AnchorStyles.Right`. For example, Example program AnchorButton, available for download on the book's web site, uses the following code to move the `btnAnchored` control to the form's lower-right corner and set its `Anchor` property to `Bottom`, `Right`, so it stays there:

```
Private Sub Form1_Load() Handles MyBase.Load
    btnAnchored.Location = New Point( _
        Me.ClientRectangle.Width - Button1.Width, _
        Me.ClientRectangle.Height - Button1.Height)
    btnAnchored.Anchor = AnchorStyles.Bottom Or AnchorStyles.Right
End Sub
```

Dock

The `Dock` property determines whether a control attaches itself to one or more of its container's sides. For example, if you set a control's `Dock` property to `Top`, the control docks to the top of its container. It fills the container from left to right and is flush with the top of the container. If the container is resized, the control remains at the top, keeps its height, and resizes itself to fill the container's width. This is how a typical toolbar behaves. The effect is similar to placing the control at the top of the container so that it fills the container's width and then setting its `Anchor` property to `Top`, `Left`, `Right`.

You can set a control's `Dock` property to `Top`, `Bottom`, `Left`, `Right`, `Fill`, or `None`. The value `Fill` makes the control dock to all of its container's remaining interior space. If it is the only control in the container, it fills the whole container.

If the container holds more than one control with `Dock` set to a value other than `None`, the controls are arranged according to their stacking order (also called the Z-order). The control that is first in the stacking order (would normally be drawn first at the back) is positioned first using its `Dock` value. The control that comes next in the stacking order is arranged second, and so on until all of the controls are positioned.

Figure 9-10 shows example program Docking, which is available for download on the book's web site. It contains four `TextBoxes` with `Dock` set to different values. The first in the stacking order has `Dock` set to `Left` so it occupies the left edge of the form. The next control has `Dock` set to `Top`, so it occupies the top edge of the form's remaining area. The third control has `Dock` set to `Right`, so it occupies the right edge of the form's remaining area. Finally, the last control has `Dock` set to `Fill` so it fills the rest of the form.
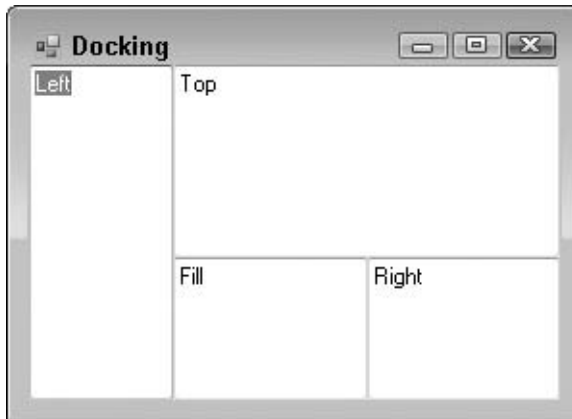
Figure 9-10: Docked controls are arranged according to their stacking order.

Controls docked to an edge resize to fill the container in one dimension. For example, a control with `Dock` set to `Top` fills whatever width the container has available. A control with `Dock` set to `Fill` resizes to fill all of the form's available space.

Other than that, the Dock property does not arrange controls very intelligently when you resize the container. For example, suppose that you have two controls, one above the other. The first has Dock set to Top and the second has Dock set to Fill. You can arrange the controls so that they evenly divide the form vertically. When you make the form taller, however, the second control, with Dock set to Fill, takes up all of the new space, and the other control remains the same size.

You cannot use the Dock property to make the controls divide the form evenly when it is resized. You cannot use the Anchor property to evenly divide the form either. Instead, you need to use code similar to the following. When the form resizes, this code moves and sizes the two controls TextBox1 and TextBox2 to fill the form, evenly dividing it vertically.

```
Private Sub Form1_Load() Handles Me.Load
    ArrangeTextBoxes()
End Sub
Private Sub Form1_Resize() Handles Me.Resize
    ArrangeTextBoxes()
End Sub

Private Sub ArrangeTextBoxes()
    Dim wid As Integer = Me.ClientRectangle.Width
    Dim hgt1 As Integer = Me.ClientRectangle.Height \ 2
    Dim hgt2 As Integer = Me.ClientRectangle.Height - hgt1
    txtTop.SetBounds(0, 0, wid, hgt1)
    txtBottom.SetBounds(0, hgt1, wid, hgt2)
End Sub
```

Example program DivideForm, available for download on the book's web site, uses similar code to divide its form between two text boxes.

When you want to divide a form, the SplitterContainer control can also be useful. The SplitterContainer contains two panels that can hold other controls. The user can drag the divider between the two panels to adjust the size allocated to each.

Position and Size Properties

Controls contain many position and size properties, and the differences among them can be confusing. Some of the more bewildering aspects of controls are the ideas of client area, non-client area, and display area.

A control's *client area* is the area inside the control where you can draw things or place other controls. A control's *non-client area* is everything else. In a typical form, the borders and title bar are the non-client area. The client area is the space inside the borders and below the title bar where you can place controls or draw graphics.

> *A form's menus can make the client and non-client areas a bit confusing. Logically, you might think of the menus as part of the non-client area because you normally place controls below them. Nevertheless, the menus are themselves controls and you can even place other controls above or below the menus (although that would be very strange and confusing to the user), so they are really contained in the client area.*

A control's *display area* is the client area minus any internal decoration. For example, a `GroupBox` control displays an internal border and a title. Although you can place controls over these, you normally wouldn't. The display area contains the space inside the `GroupBox`'s borders and below the space where the title sits.

The following table describes properties related to the control's size and position.

Property	Data Type	Read/Write	Purpose
Bounds	Rectangle	Read/Write	The control's size and position within its container including non-client areas.
ClientRectangle	Rectangle	Read	The size and position of the client area within the control.
ClientSize	Size	Read/Write	The size of the client area. If you set this value, the control adjusts its size to make room for the non-client area, while giving you this client size.
DisplayRectangle	Rectangle	Read	The size and position of the area within the control where you would normally draw or place other controls.
Location	Point	Read/Write	The position of the control's upper-left corner within its container.
Size	Point	Read/Write	The control's size including non-client areas.
Left, Top, Width, Height	Integer	Read/Write	The control's size and position within its container including non-client areas.
Bottom, Right	Integer	Read	The position of the control's lower-right corner within its container.

Methods

A *method* executes code associated with a control. The method can be a function that returns a value or a subroutine that does something without returning a value. Methods can take parameters just like any other function or subroutine.

Because methods execute code, you cannot invoke them at design time. You can only invoke them by using code at runtime.

Appendix A summarizes the `Control` class's most useful methods. Controls that inherit from the `Control` class also inherit these methods unless they have overridden the `Control` class's behavior.

Events

A control or other object raises an *event* to let the program know about some change in circumstances. Sometimes raising an event is also called *firing* or *throwing* the event. Specific control classes provide events that are relevant to their special purposes. For example, the `Button` control provides a `Click` event to let the program know when the user clicks on the button.

The program responds to an event by creating an event handler that *catches* the event and takes whatever action is appropriate. Each event defines its own event-handler format and determines the parameters that the event handler will receive. Often, these parameters give additional information about the event.

For example, when part of the form is covered and exposed, the form raises its `Paint` event. The `Paint` event handler takes as a parameter an object of type `PaintEventArgs`. That object's `gr` property is a reference to a `Graphics` object that the program can use to redraw the form's contents.

Some event handlers take parameters that are used to send information about the event back to the object that raised it. For example, the `Form` class's `FormClosing` event handler has a parameter of type `FormClosingEventArgs`. That parameter is an object that has a property named `Cancel`. If the program sets `Cancel` to `True`, the `Form` cancels the `FormClosing` event and remains open. For example, the event handler can verify that the data entered by the user was properly formatted. If the values didn't make sense, the program can display an error message and keep the form open.

Although many of a control's most useful events are specific to the control type, controls do inherit some common events from the `Control` class. Appendix A summarizes the `Control` class's most important events. Controls that inherit from the `Control` class also inherit these events unless they have overridden the `Control` class's behavior.

Creating Event Handlers at Design Time

There are a couple of ways that you can create an event handler at design time. If you open a form in the Form Designer and double-click a control, the code editor opens and displays the control's default event handler. For example, a `TextBox` control opens its `TextChanged` event handler, a `Button` control opens its `Click` event handler, and the form itself opens its `Load` event handler.

To create some other non-default event handler for a control, select the control and then click the Properties window's Events button (which looks like a lightening bolt). This makes the Properties window list the control's most commonly used events. If you have defined event handlers already, possibly for other controls, you can select them from the events' drop-down lists. Double-click an event's entry to create a new event handler.

To create other non-default event handlers or to create event handlers inside the code editor, open the code window, select the control from the left drop-down list, and then select the event handler from

the right drop-down list, as shown in Figure 9-11. To create an even handler for the form itself, select "(Form1 Events)" from the left dropdown and then select an event from the right dropdown.

The code window creates an event handler with the correct parameters and return value. For example, the following code shows an empty TextBox control's Click event handler (note that the first two lines are wrapped in this text but appear on one line in the code editor). Now you just need to fill in the code that you want to execute when the event occurs.

Because Visual Basic supports relaxed delegates, you can omit the parameters from the event handler's declaration if you don't need to use them. To make the code easier to read, this book omits these parameters wherever they are not needed.

```
Private Sub TextBox1_Click(ByVal sender As Object, _
 ByVal e As System.EventArgs) Handles TextBox1.Click

End Sub
```
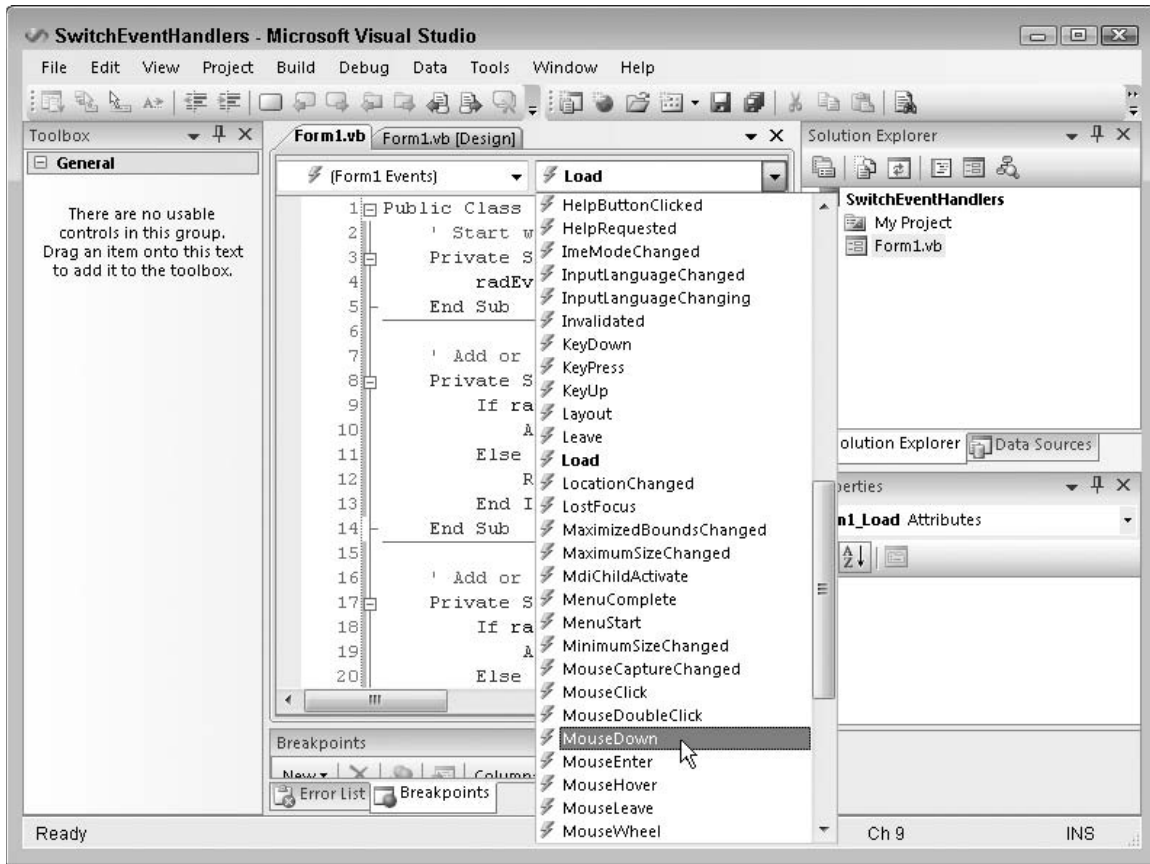

Figure 9-11: To create an event handler in the code window, select a control from the left dropdown, and then select an event from the right dropdown.

WithEvents Event Handlers

If you declare an object variable using the `WithEvents` keyword, you can catch its events. After you declare the variable, you can select it in the code designer's left dropdown, just as you can select any other control. Then you can pick one of the object's events from the right dropdown.

When the code assigns an instance of an object to the variable, any event handlers defined for the variable receive the object's events. Later, if you set the variable to `Nothing`, the event handlers no longer receive events.

Usually, you don't need to create `WithEvents` variables for controls because Visual Basic does it for you. However, using a variable declared `WithEvents` lets you enable and disable events quickly and easily. For example, suppose a program wants to track a `PictureBox`'s mouse events at some times, but not at others. It declares a `PictureBox` variable as shown in the following code:

```
Private WithEvents m_Canvas As PictureBox
```

When the program wants to receive events, it sets this variable equal to its `PictureBox` control as in the following code. Now the variable's event handlers such as `m_Canvas_MouseDown`, `m_Canvas_MouseMove`, and `m_Canvas_MouseUp` are enabled.

```
m_Canvas = PictureBox1
```

When it no longer wants to receive these events, the program sets `m_Canvas` to `Nothing` as in the following statement. While `m_Canvas` is `Nothing`, it has no associated control to generate events for it.

```
m_Canvas = Nothing
```

Setting Event Handlers at Runtime

Not only can you create event handlers at design time, but you can also assign them at runtime. First create the event handler. You must get the routine's parameters exactly correct for the type of event handler you want to create. For example, a `TextBox` control's `Click` event handler must take two parameters with types `System.Object` and `System.EventArgs`.

To ensure that you get the details right, you can start by creating an event handler for a normal control at design time. Select the control from the code designer's left dropdown, and then select the event from the right. Change the resulting event handler's name to something more appropriate (for example, you might change `Button1_Click` to `ToolClicked`) and remove the `Handles` statement that ties the event handler to the control. You can also delete the original control if you don't need it for anything else.

After you build the event handler, you can use the `AddHandler` and `RemoveHandler` statements to add and remove the event handler from a control. The following code shows how example program SwitchEventHandlers, available for download on the book's web site, switches the event handler that a button executes when it is clicked:

```
' Add or remove event handler 1.
Private Sub radEventHandler1_CheckedChanged() _
 Handles radEventHandler1.CheckedChanged
    If radEventHandler1.Checked Then
```

141

```
                AddHandler btnClickMe.Click, AddressOf EventHandler1
        Else
                RemoveHandler btnClickMe.Click, AddressOf EventHandler1
        End If
    End Sub

    ' Add or remove event handler 2.
    Private Sub radEventHandler2_CheckedChanged() _
     Handles radEventHandler2.CheckedChanged
        If radEventHandler2.Checked Then
                AddHandler btnClickMe.Click, AddressOf EventHandler2
        Else
                RemoveHandler btnClickMe.Click, AddressOf EventHandler2
        End If
    End Sub

    ' Display a message telling which event handler this is.
    Private Sub EventHandler1(ByVal sender As System.Object, _
     ByVal e As System.EventArgs)
        MessageBox.Show("EventHandler1")
    End Sub

    Private Sub EventHandler2(ByVal sender As System.Object, _
     ByVal e As System.EventArgs)
        MessageBox.Show("EventHandler2")
    End Sub
```

When the user selects or clears radio button `radEventHandler1`, the control's `CheckedChanged` event handler adds or removes the `EventHandler1` event handler from the `btnClickMe` control's `Click` event. Similarly, when the user selects or clears `radEventHandler2`, its `CheckedChanged` event handler adds or removes the `EventHandler2` event handler from the `btnClickMe` control's `Click` event.

The `EventHandler1` and `EventHandler2` event handlers simply display a message telling you which is executing.

`AddHandler` and `RemoveHandler` allow you to switch one or two events relatively easily. If you must switch many event handlers for the same control at once, however, it may be easier to use a variable declared using the `WithEvents` keyword.

Control Array Events

Visual Basic 6 and earlier versions allowed you to use control arrays. A *control array* was an array of controls with the same name that shared the same event handlers. A parameter to the event handlers gave the index of the control in the array that fired the event. If the controls perform closely related tasks, the common event handler may be able to share a lot of code for all of the controls. Visual Basic .NET does not allow control arrays, but you can get similar effects in a couple of ways.

First, suppose that you add a control to a form and give it event handlers. Then you copy and paste the control to make other controls on the form. By default, all of these controls share the event handlers that you created for the first control. If you look at the event handlers' code, you'll see the `Handles`

statements list all of the copied controls. You can also modify an event handler's `Handles` clause manually to attach it to more than one control.

Another way to make controls share event handlers is to attach them to the controls by using the `AddHandler` statement.

An event handler's first parameter is a variable of the type `System.Object` that contains a reference to the object that raised the event. The program can use this object and its properties (for example, its `Name` or `Text` property) to determine which control raised the event and take appropriate action.

Validation Events

Data validation is an important part of many applications. Visual Basic provides two events to make validating data easier: `Validating` and `Validated`. The following sections describe three approaches to using those events to validate data.

Integrated Validation

The `Validating` event fires when the code should validate a control's data. This happens when the control has the input focus and the form tries to close, or when focus moves from the control to another control that has its `CausesValidation` property set to `True`. Integrated validation uses the `Validating` event to perform all validation.

The `Validating` event handler can verify that the data in a control has a legal value and take appropriate action if it doesn't. For example, consider the FiveDigits example program, which is available for download on the book's web site and shown in Figure 9-12. The first `TextBox` control's `Validating` event handler checks that the control's value contains exactly five digits. If the value does not contain five digits, as is the case in the figure, the program uses an `ErrorProvider` control to flag the `TextBox`'s value as being in error and moves the input focus back to the `TextBox`. The `ErrorProvider` displays the little exclamation mark icon to the right of the control and makes the icon blink several times to get the user's attention. When the user hovers the mouse over the icon, the `ErrorProvider` displays the error text in a tooltip.
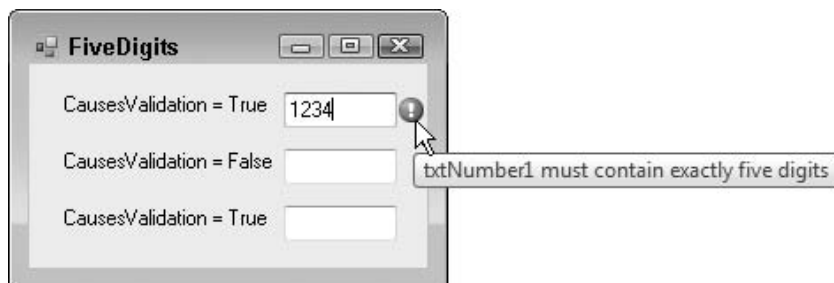
Figure 9-12: The Validating event fires when the focus moves to a control that has CausesValidation set to True.

The second `TextBox` control in this example has a `CausesValidation` property value of `False`. When the user moves from the first `TextBox` control to the second one, the `Validating` event does not fire and the `TextBox` control is not flagged. The third `TextBox` control has `CausesValidation` set to `True` so, when the user moves into that `TextBox` control, the first `TextBox`'s `Validating` event fires, and the value is flagged if it is invalid. The `Validating` event also fires if the user tries to close the form.

The following code shows the `Validating` event handler used by this example. Notice that the `Handles` clause lists all three `TextBoxes`'`Validating` events so this event handler catches the `Validating` event for all three controls.

```
    'Validate the TextBox's contents.
    Private Sub txtNumber_Validating(ByVal sender As Object, _
     ByVal e As System.ComponentModel.CancelEventArgs) _
     Handles txtNumber1.Validating, txtNumber2.Validating, txtNumber3.Validating
     ' Get the TextBox.
        Dim text_box As TextBox = DirectCast(sender, TextBox)

     ' Validate the control's value.
     ValidateFiveDigits(text_box, e.Cancel)
    End Sub

    ' Verify that the TextBox contains five digits.
    Private Sub ValidateFiveDigits(ByVal text_box As TextBox, _
     ByRef cancel_event As Boolean)
        If text_box.Text.Length = 0 Then
            ' Allow a zero-length string.
            cancel_event = False
        Else
            ' Allow five digits.
            cancel_event = Not (text_box.Text Like "#####")
        End If

        ' See if we're going to cancel the event.
        If cancel_event Then
            ' Invalid. Set an error.
            errBadDigits.SetError(text_box, _
                text_box.Name & " must contain exactly five digits")
        Else
            ' Valid. Clear any error.
            errBadDigits.SetError(text_box, "")
        End If
    End Sub
```

The event handler receives the control that raised the event in its sender parameter. It uses `DirectCast` to convert that generic `Object` into a `TextBox` object and passes it to the `ValidateFiveDigits` subroutine to do all of the interesting work. It also passes the `e.Cancel` parameter, so the subroutine can cancel the action that caused the event if necessary.

`ValidateFiveDigits` checks the `TextBox` control's contents and sets its `cancel_event` parameter to `True` if the text has nonzero length and is not exactly five digits. This parameter is passed by reference, so this changes the original value of `e.Cancel` in the calling event handler. That will restore focus to the `TextBox` that raised the event and that contains the invalid data.

If `cancel_event` is `True`, the value is invalid, so the program uses the `ErrorProvider` component named `errBadDigits` to assign an error message to the `TextBox` control.

If `cancel_event` is `False`, the value is valid so the program blanks the `ErrorProvider` component's error message for the `TextBox`.

Separated Validation

A control's `Validated` event fires after the focus successfully leaves the control, either to another control with `CausesValidation` set to `True` or when the form closes. The control should have already validated its contents in its `Validating` event, hence the event name `Validated`.

This event doesn't really have anything directly to do with validation, however, and it fires whether or not the code has a `Validating` event handler and even if the control's value is invalid. The only time it will not execute is if the validation does not complete. That happens if the `Validating` event handler cancels the event causing the validation.

The previous section shows how to set or clear a control's error in its `Validating` event handler. An alternative strategy is to set errors in the `Validating` event handler and clear them in the `Validated` event handler, as shown in the following code. If the control's value is invalid, the `Validating` event handler cancels the event causing the validation so the `Validated` event does not occur. If the control's value is valid, the `Validating` event handler does not cancel the event and the `Validated` event handler executes, clearing any previous error.

```
' Validate the TextBox's contents.
Private Sub txtNumber_Validating(ByVal sender As Object, _
 ByVal e As System.ComponentModel.CancelEventArgs) _
 Handles txtNumber1.Validating, txtNumber2.Validating, txtNumber3.Validating
    ' Validate the control's value.
    ValidateFiveDigits(DirectCast(sender, TextBox), e.Cancel)
End Sub

' Verify that the TextBox contains five digits.
Private Sub ValidateFiveDigits(ByVal text_box As TextBox, _
 ByRef cancel_event As Boolean)
    ' Cancel if nonzero length and not five digits.
    cancel_event = (text_box.Text.Length <> 0) And _
        Not (text_box.Text Like "#####")

    ' See if we're going to cancel the event.
    If cancel_event Then
        ' Invalid. Set an error.
        ErrorProvider1.SetError(text_box, _
            text_box.Name & " must contain exactly five digits")
    End If
End Sub

' Validation succeeded. Clear any error.
Private Sub txtNumber_Validated(ByVal sender As Object, _
 ByVal e As System.EventArgs) _
 Handles txtNumber1.Validated, txtNumber2.Validated, txtNumber3.Validated
    ' Valid. Clear any error.
    ErrorProvider1.SetError(DirectCast(sender, TextBox), "")
End Sub
```

Example program FiveDigitsSeparate, available for download on the book's web site, demonstrates this approach.

Deferred Validation

By keeping focus in the control that contains the error, the previous approaches force the user to fix problems as soon as possible. In some applications, it may be better to let the user continue filling out other fields and fix the problems later. For example, a user who is touch-typing data into several fields may not look up to see the error until much later, after entering a series of invalid values in the first field and wasting a lot of time.

The following code shows one way to let the user continue entering values in other fields:

```
' Validate the TextBox's contents.
Private Sub txtNumber_Validating(ByVal sender As Object, _
 ByVal e As System.ComponentModel.CancelEventArgs) _
 Handles txtNumber1.Validating, txtNumber2.Validating, txtNumber3.Validating
    ' Validate the control's value.
    ValidateFiveDigits(DirectCast(sender, TextBox))
End Sub

' Verify that the TextBox contains five digits.
Private Sub ValidateFiveDigits(ByVal text_box As TextBox)
    ' See if the data is valid.
    If (text_box.Text.Length <> 0) And _
        Not (text_box.Text Like "#####") _
    Then
        ' Invalid. Set an error.
        errBadDigits.SetError(text_box, _
            text_box.Name & " must contain exactly five digits")
    Else
        ' Valid. Clear the error.
        errBadDigits.SetError(text_box, "")
    End If
End Sub

' See if any fields have error messages.
Private Sub Form1_FormClosing(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.FormClosingEventArgs) _
 Handles Me.FormClosing
    ' Assume we will cancel the close.
    e.Cancel = True

    ' Check for errors.
    If IsInvalidField(txtNumber1) Then Exit Sub
    If IsInvalidField(txtNumber3) Then Exit Sub

    ' If we got this far, the data's okay.
    e.Cancel = False
End Sub

' If this control has an error message assigned to it,
' display the message, set focus to the control,
' and return True.
```

```
    Private Function IsInvalidField(ByVal ctl As Control) As Boolean
        ' See if the control has an associated error message.
        If errBadDigits.GetError(ctl).Length = 0 Then
            ' No error message.
            Return False
        Else
            ' There is an error message.
            ' Display the message.
            MessageBox.Show(errBadDigits.GetError(ctl))

            ' Set focus to the control.
            ctl.Focus()
            Return True
        End If
    End Function
```

The `Validating` event handler calls the `ValidateFiveDigits` subroutine much as before, but this time `ValidateFiveDigits` does not take the `cancel_event` parameter. If the `TextBox` object's value has an error, the routine uses the `ErrorProvider` to assign an error message to it and exits.

When the user tries to close the form, the `FormClosing` event handler executes. This routine assumes that some field contains invalid data, so it sets `e.Cancel` to `True`. It then calls the function `IsInvalidField` for each of the controls that it wants to validate. If any call to `IsInvalidField` returns `True`, the event handler exits, `e.Cancel` remains `True`, and the form refuses to close. If all of the fields pass validation, the event handler sets `e.Cancel` to `False`, and the form closes.

The function `IsInvalidField` uses the `ErrorProvider`'s `GetError` method to get a control's assigned error message. If the message is blank, the function returns `False` to indicate that the control's data is valid. If the message is not blank, the function displays it in a message box, sets focus to the control, and returns `True` to indicate that the form's data is invalid.

If the focus is in a `TextBox` when the form tries to close, its `Validating` event fires before the form's `FormClosing` event so the `TextBox` control has a chance to validate its contents before the `FormClosing` event fires.

Example program FiveDigitsDeferred, available for download on the book's web site, demonstrates this approach.

> *If the form is a dialog, you could validate the form's data in an OK button's* `Click` *event handler instead of in the form's* `FormClosing` *event.*

Summary

This chapter described controls, components, and objects in general terms. It told how to create controls and how to use their properties, methods, and events. It spent some extra time explaining how to add and remove event handlers, and data-validation events and strategies.

Appendix A, "Useful Control Properties, Methods, and Events," describes the most useful properties, methods, and events provided by the `Control` class. All controls that inherit from this class also inherit these properties, methods, and events, unless they take action to override the `Control` class's behavior.

Appendix G, "Windows Forms Controls and Components," describes the standard Windows controls and components in greater detail. This appendix can help you understand the controls to get the most out of them.

The `Form` class inherits from the `Control` class all of that class's properties, methods, and events. In some sense a `Form` is just another control, but it does have special needs and provides special features that are not shared with other controls. To help you use these objects effectively, Chapter 10, "Windows Forms," describes the `Form` class in greater detail.

10

Windows Forms

The Visual Basic Windows `Form` class is a descendant of the `Control` class. The inheritance trail is `Control` ⇨ `ScrollableControl` ⇨ `ContainerControl` ⇨ `Form`. That means a form *is* a type of control. Except where overridden, it inherits the properties, methods, and events defined by the `Control` class. In many ways, a form is just another kind of control (like a `TextBox` or `ComboBox`).

At the same time, `Forms` have their own special features that set them apart from other kinds of controls. You usually place controls inside a form, but you rarely place a form inside another form. `Forms` also play a very central role in most Visual Basic applications. They are the largest graphical unit with which the user interacts directly. The user can minimize, restore, maximize, and close forms. They package the content provided by the other controls so that the user can manage them in a meaningful way.

This chapter describes some of the special features of Windows Forms not provided by other objects. It focuses on different ways that typical applications use forms. For example, it explains how to build multiple-document interface (MDI) applications, custom dialogs, and splash screens.

> *An MDI application displays more than one document at a time in separate windows within a larger MDI parent form. MDI applications usually provide tools for managing the child forms they contain. These let the user minimize child forms, arrange the icons for the minimized forms, tile the parent form's area with the child forms, and so on. Visual Studio can display many windows (form designers, code editors, bitmap editors, and so forth) all within its main form, so it is an MDI application.*

> *A single-document interface (SDI) application displays only one document in each form. For example, Microsoft Paint can manage only one picture at a time, so it is an SDI application. Some SDI applications can display more than one document at a time, but each has its own separate form.*

The chapter covers the `Form` object's properties, methods, and events only in passing. For a detailed description of specific `Form` properties, methods, and events, see Appendix J.

Transparency

The `Form` object provides a couple of properties that you can use to make a form partially transparent. `Opacity` determines the form's opaqueness. At design time, the Properties window shows `Opacity` as a percentage where 100% means the form is completely opaque, and 0% means that the form is completely transparent. At runtime, your program must treat `Opacity` as a floating-point value between 0.0 (completely transparent) and 1.0 (completely opaque).

A program can use an `Opacity` value less than 100% to let the user see what lies below the form. For example, you might build a partially transparent Search dialog box so the user could see the underlying document as a search progresses.

Figure 10-1 shows example program SemiTransparent, which is available for download at the book's web page. The program contains a form with `Opacity` set to 66%. You can still see the form's borders, title bar, system menus, menu bar, and button, but you can also see the Visual Basic IDE showing through from behind.
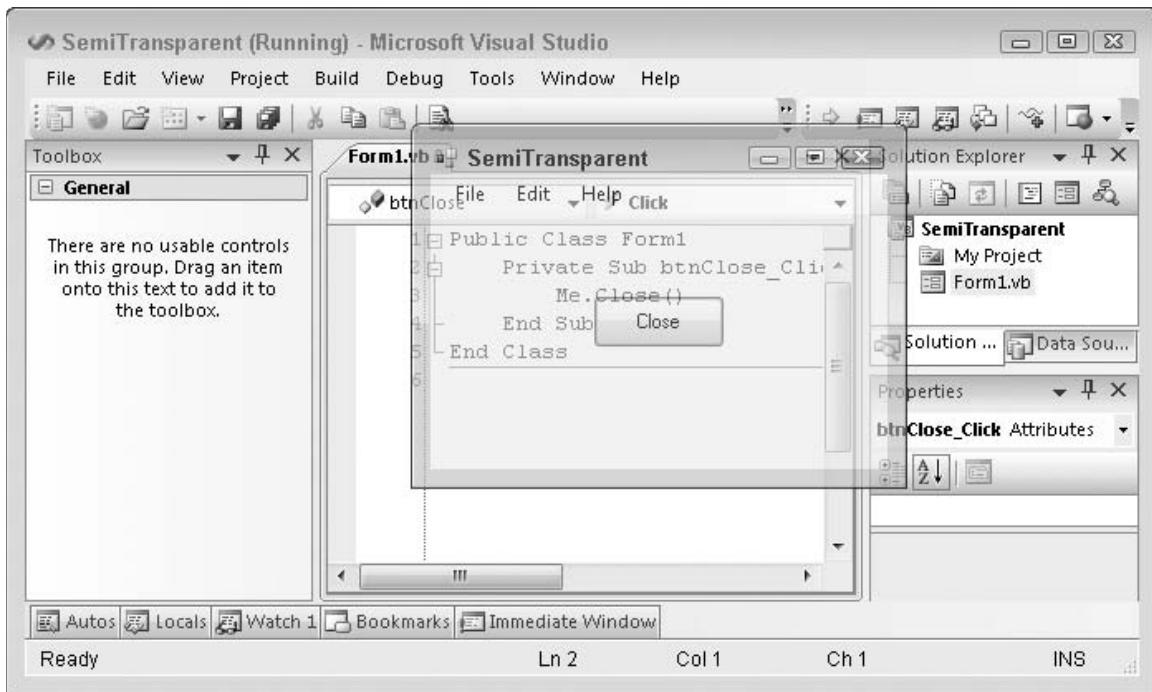
Figure 10-1: A form with Opacity set to 66% allows the Visual Basic IDE to show through.

If `Opacity` is greater than 0%, the form behaves normally aside from its ghostlike appearance. The user can click it, interact with its controls, minimize and maximize it, and grab its borders to resize it.

If `Opacity` is 0%, the form is completely transparent and the user can only interact with the form through the keyboard. For example, the user can press the Tab key to move between the form's controls, type text, press the Spacebar to invoke a button that has the focus, and press Escape or Cancel to fire the form's Accept and Cancel buttons, however the form and its controls will not detect mouse clicks. The user also cannot see the form (obviously), so figuring out which control has the focus can be next to impossible.

> *Many developers don't see a great need for translucent forms. A well-designed application allows the user to move windows around so they don't obscure each other. Translucent forms can be confusing, may create extra confusion for users with special needs, and incur a performance penalty. They're an interesting special effect but not everyone thinks they are necessary.*

Example program TransparentForm, available for download on the book's web site, has a form with `Opacity` = 0 so you cannot see it while it is running. You can still use the Tab key to move between its controls, and you can use the Space key to make its buttons execute.

If `Opacity` is 2%, the form is still invisible, but it recognizes mouse clicks, so it can obscure the windows below. Example program CoverAll, also available for download, displays a maximized form with `Opacity` set to 2%.

> *Normally, you should set a form's `Opacity` big enough that the user can see the form. It can be useful to have toolbars, property grids, and other secondary windows float translucently above the main form to provide information without completely obscuring the main form. In cases such as those, `Opacity` less than 50% makes it hard to read the secondary form, while `Opacity` greater than 75% makes it hard to see the main form. A value around 66% seems to provide a reasonable balance.*

A second property that helps determine the form's transparency is `TransparencyKey`. This property is a color that tells Visual Basic which parts of the form should be completely transparent. When the form is rendered, any areas with this color as their background colors are not drawn.

Figure 10-2 shows example program Hole, which is available for download at the book's web page. The program's form has `TransparencyKey` set to red. Both the form and the Hole label have red backgrounds so they are transparent. The label's `ForeColor` property is black so its text is visible. The form's `Paint` event handler draws a black ellipse around the inside of the form.

Example program GhostForm, also available for download, also uses a transparent background so only its borders and controls are visible when it runs.
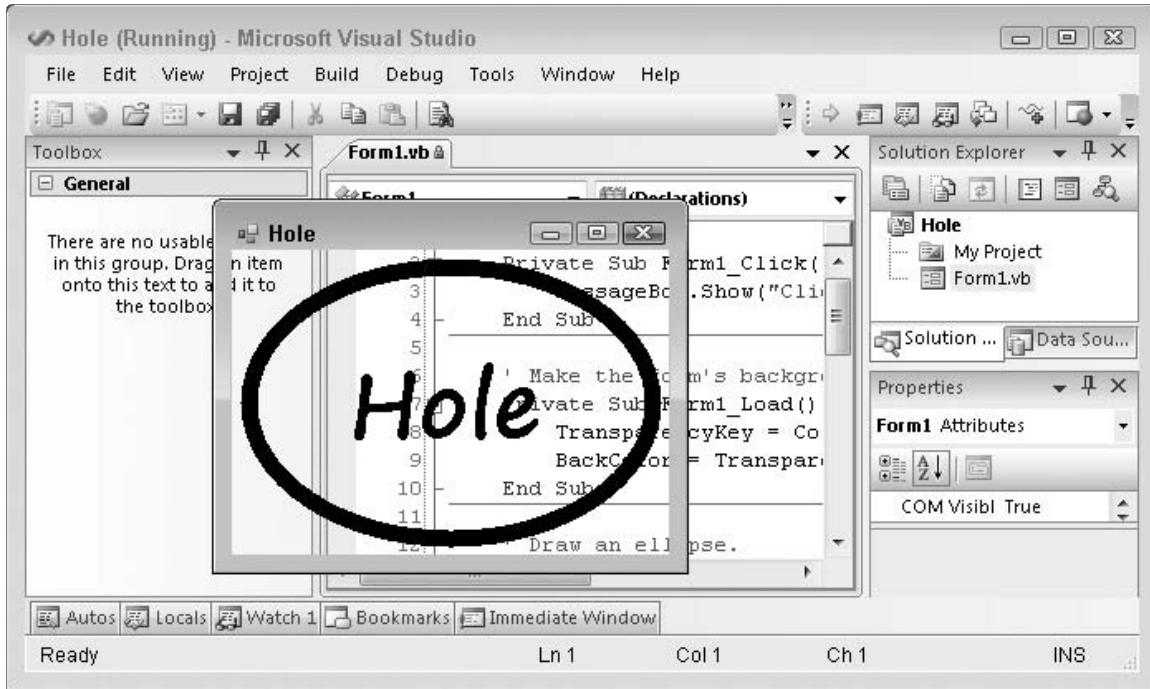
Figure 10-2: A form's TransparencyKey property lets you make shaped forms such as this one with a hole in it.

The most common use for `TransparencyKey` is to create shaped forms or skins. Set the form's `FormBorderStyle` property to `None` to remove the borders, title bar, and system buttons. Set the form's `BackColor` and `TransparencyKey` properties to a color that you don't want to appear on the form. Then draw the shape you want the form to have in some other color.

Figure 10-3 shows the Smiley example program, which has a form shaped like a smiley face. The form's `Paint` event handler draws the image from a bitmap file. These sorts of forms make interesting splash screens and About dialog boxes, although they are often too distracting for use in a program's main user interface.

> *Note that this form has no title bar, borders, or system buttons, so the user cannot move, resize, mini-mize, maximize, or close it. To use this form as a splash screen, add a* `Timer` *control to make the form disappear after a few seconds. To use it as an About dialog or some other kind of dialog, add a button that closes it.*

If you use `Opacity` and `TransparencyKey` together, pixels that match `TransparencyKey` are completely removed and any remaining pixels are shown according to the `Opacity` value.
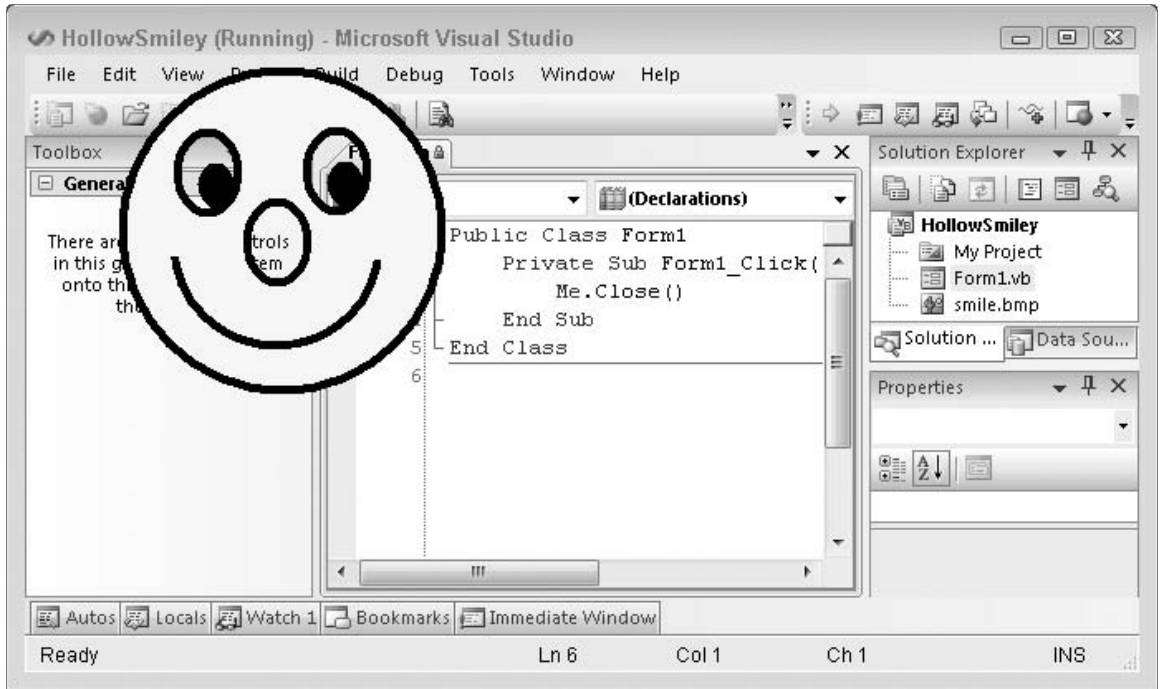
Figure 10-3: The TransparencyKey property lets you make shaped forms such as this one.

About, Splash, and Login Forms

The `TransparencyKey` and `Opacity` properties enable you to build forms with unusual and interesting shapes. Although these would be distracting if used for the bulk of a business application, they can add a little interest to About dialog boxes, splash screens, and login forms.

These three kinds of forms have quite a bit in common. Usually, they all display the application's name, version number, copyright information, trademarks, and so forth. They may also display a serial number, the name of the registered user, and a web site or phone number where the user can get customer support.

The main difference between these forms is in how the user dismisses them. A splash screen automatically disappears after a few seconds. The user closes an About dialog box by clicking an OK button. A login form closes when the user enters a valid user name and password and then clicks OK. It also closes if the user clicks Cancel, although then it doesn't display the main application.

Sometimes a splash screen is displayed while the application initializes, loads needed data, and otherwise prepares itself for work. In that case, the application removes the splash screen after initialization is complete or a few seconds have passed, whichever comes second.

The forms also differ slightly in the controls they contain. A splash screen needs a `Timer` control to determine when it's time to close the form. An About dialog box needs a single OK button. A login form

needs `TextBoxes` to hold the user name and password, two `Labels` to identify them, and OK and Cancel buttons.

Splash screens and login forms greet the user, so there's no need to provide both. However, that still leaves you with the task of building two nearly identical forms: splash and About, or login and About. With a little planning, you can use a single form as a splash screen, About dialog box, and login form. At runtime, you can add whichever set of controls is appropriate to the form's use. Alternatively, you can build the form with all three sets of controls at design time and then hide the ones you don't need for a particular purpose.

The following code shows how example program SplashScreen, available for download on the book's web site, displays a form either as a splash screen or as an About dialog:

```
' Display as a splash screen.
Public Sub ShowSplash()
    Me.tmrUnload.Enabled = True ' The Timer close the dialog.
    Me.TopMost = True           ' Keep on top of main form.
    Me.Show()                   ' Show non-modally.
End Sub

' Unload the splash screen.
Private Sub tmrUnload_Tick() Handles tmrUnload.Tick
    Me.Close()
End Sub

' Display as an About dialog.
Public Sub ShowAbout()
    btnOK.Visible = True        ' The OK button closes the dialog.
    Me.ShowDialog()             ' Show modally.
End Sub

' Close the About dialog.
Private Sub btnOK_Click() Handles btnOK.Click
    Me.Close()
End Sub
```

The form contains both a `Timer` named `tmrUnload` and an OK button named `btnAboutOk`. The form's `ShowSplash` method enables the `tmrUnload Timer` control and calls `Show` to display the form. The `Timer` control's `Interval` property was set to 3,000 milliseconds at design time, so its `Timer` event fires after three seconds and closes the form.

The `ShowAbout` method makes the `btnOk` button visible and calls `ShowDialog` to display the form modally. A *modal* form holds the application's focus so the user cannot interact with other parts of the application until the modal form is dismissed. When the user clicks the button, the button's `Click` event handler closes the form.

Mouse Cursors

A form's `Cursor` property determines the kind of mouse cursor the form displays. The `Form` class inherits the `Cursor` property from the `Control` class, so other controls have a `Cursor` property, too. If you want to give a particular control a special cursor, you can set its `Cursor` property. For example, if

you use a Label control as a hyperlink, you could make it display a pointing hand similar to those displayed by web browsers to let the user know that the control is a hyperlink.

The Cursors class provides several standard cursors as shared values. For example, the following statement sets a form's cursor to the system default cursor (normally an arrow pointing up and to the left):

```
Me.Cursor = Cursors.Default
```

Figure 10-4 shows example program ShowCursors, which is available for download on the book's web site, displaying the names and images of the standard cursors defined by the Cursors class in Windows Vista. In previous versions of Windows, the AppStarting and WaitCursor values display hourglasses instead of animated circles.

Unless a control explicitly sets its own cursor, it inherits the cursor of its container. If the control is placed directly on the form, it displays whatever cursor the form is currently displaying. That means you can set the cursor for a form and all of its controls in a single step by setting the form's cursor.

Similarly, if a control is contained within a GroupBox, Panel, or other container control, it inherits the container's cursor. You can set the cursor for all the controls within a container by setting the cursor for the container.

One common use for cursors is to give the user a hint when the application is busy. The program sets its cursor to Cursors.WaitCursor when it begins a long task and then sets it back to Cursors.Default when it finishes. The following code shows an example:

```
Me.Cursor = Cursors.WaitCursor
' Perform the long task.
...
Me.Cursor = Cursors.Default
```
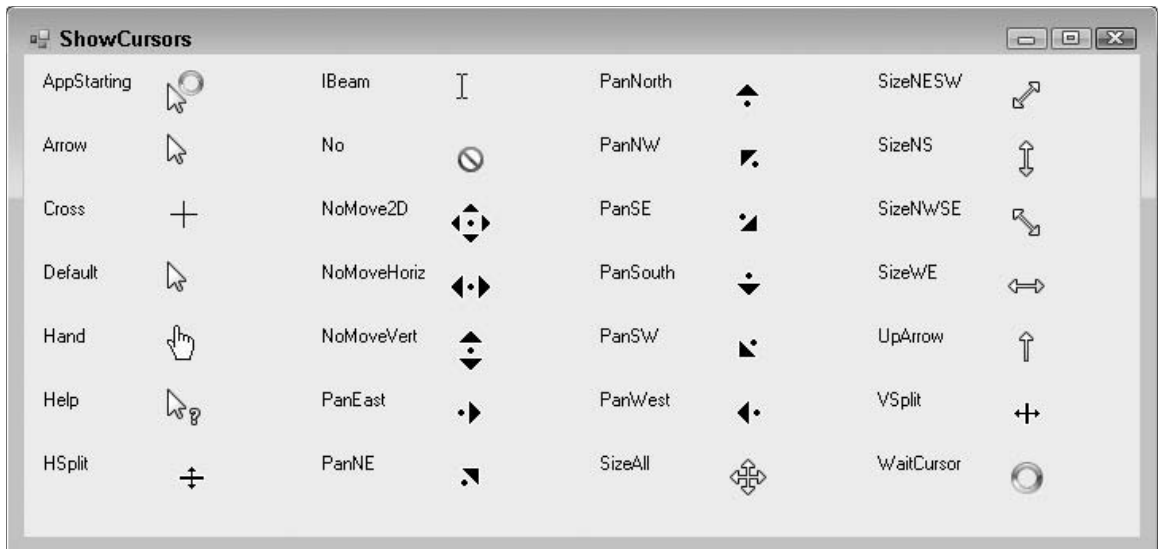

Figure 10-4: The Cursors class defines standard cursors.

Example program UseWaitCursor, also available for download, displays a wait cursor when you click its button.

If the program displays more than one form, it must set the cursors for each form individually. It can set the cursors manually, or it can loop through the `My.Application.OpenForms` collection. The `SetAllCursors` subroutine shown in the following code makes setting the cursor for all forms a bit easier:

```
Private Sub SetAllCursors(ByVal the_cursor As Cursor)
    For Each frm As Form In My.Application.OpenForms
        frm.Cursor = the_cursor
    Next frm
End Sub
```

The following code uses the `SetAllCursors` subroutine while performing a long task:

```
SetAllCursors(Cursors.WaitCursor)
' Perform the long task.
...
SetAllCursors(Cursors.Default)
```

Example program UseMultipleWaitCursors, also available for download, uses the `SetAllCursors` subroutine to display a wait cursor on each of its forms when you click its button.

To use a custom cursor, create a new `Cursor` object using a file or resource containing cursor or icon data. Then assign the new object to the form's `Cursor` property. The following code sets a form's cursor to the program resource named `SmileIcon.ico`:

```
Me.Cursor = New Cursor(My.Resources.SmileIcon.Handle)
```

Example program SmileCursor, also available for download, uses this code to display a custom cursor.

Icons

Each form in a Visual Basic application has its own icon. A form's icon is displayed on the left side of its title bar, in the system's taskbar, and by applications such as the Task Manager and Windows Explorer.

Some of these applications display icons at different sizes. For example, Windows Explorer uses 32×32 pixel icons for its Large Icons view and 16×16 pixel icons for its other views. Toolbar icons come in 16×16, 24×24, and 32×32 pixel sizes. Windows uses still other sizes for different purposes. For more information on various pixel sizes used by Windows Vista, see `msdn2.microsoft.com/en-us/library/aa511280.aspx`, particularly section 5.0.

If an icon file doesn't provide whatever size Windows needs, the system shrinks or enlarges an existing image to fit. That may produce an ugly result. To get the best appearance, you should ensure that icon files include at least 16×16 and 32×32 pixel sizes. Depending on the characteristics of your system, you may also want to include other sizes.

The integrated Visual Studio icon editor enables you to define images for various color models ranging from monochrome to 24-bit color, and sizes ranging from 16 × 16 to 256 × 256 pixels. It even lets you build icon images with custom sizes such as 32 × 48 pixels, although it is unlikely that Windows will need to use those.

To use this editor, open Solution Explorer and double-click the My Project entry to open the Project Properties window. Select the Resources tab, open the Add dropdown, and select New Icon. Use the drawing tools to build the icons. Right-click the icon and use the Current Icon Image Types submenu to work with icons of different sizes.

To assign an icon to a form at design time, open the Form Designer and select the `Icon` property in the Properties window. Click the ellipsis button on the right and select the icon file that you want to use.

To assign an icon to a form at runtime, set the form's `Icon` property to an `Icon` object. The following code sets the form's `Icon` property to an icon resource named `MainFormIcon`:

```
Me.Icon = My.Resources.MainFormIcon
```

Some applications change their icons to provide an indication of their status. For example, a process-monitoring program might turn its icon red when it detects an error. It could even switch back and forth between two icons to make the icon blink in the taskbar.

Application Icons

Windows displays a form's icon in the form's title bar, in the taskbar, and in the Task Manager. Applications (such as Windows Explorer) that look at the application as a whole rather than at its individual forms display an icon assigned to the application, not to a particular form. To set the application's icon, open Solution Explorer and double-click the My Project entry to open the Project Properties window. On the Application tab, open the Icon drop-down list, and select the icon file that you want to use or select <Browse...> to look for the file you want to use.

To set the icon for a form, open the form in the Form Designer. In the Properties window, select the Icon property, click the ellipsis to the right, and select the icon file you want to use.

Note that these different purposes display icons at different sizes. For example, the icon in the form's title bar is very small, whereas the one displayed by Task Manager is relatively large. As the previous section mentions, the integrated Visual Studio icon editor enables you to define images for various color models and sizes in the same icon file.

Notification Icons

Visual Basic applications can display one other kind of icon by using the `NotifyIcon` control. This control can display an icon in the system tray. The *system tray* (also called the *status area*) is the little area holding small icons that is usually placed in the lower-left part of the taskbar.

Figure 10-5 shows example program UseNotifyIcon, which is available for download on the book's web page, and its notification icon. The little stop light near the mouse pointer is an icon displayed by a `NotifyIcon` control. Hovering the mouse over the icon makes it display a tooltip showing its text, in this case Stopped. The program also sets its form icon to match the icon shown in the `NotifyIcon` control.
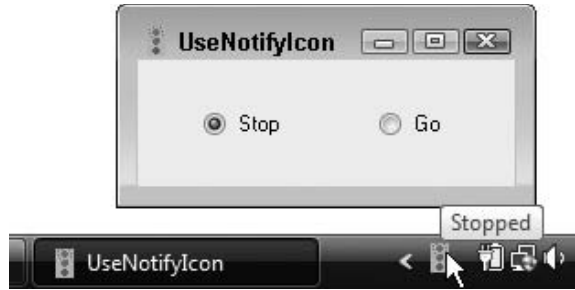
Figure 10-5: An application can use a NotifyIcon control to display status icons in the system tray.

The control's `Icon` property determines the icon that it displays. A typical application will change this icon to give information about the program's status. For example, a program that monitors the system's load could use its system tray icon to give the user an idea of the current load. Notification icons are particularly useful for programs that have no user interface or that run in the background so that the user isn't usually looking at the program's forms.

Notification icons also often include a context menu that appears when the user right-clicks the icon. The items in the menu enable the user to control the application. If the program has no other visible interface, this may be the only way the user can control it.

Appendix G describes the `NotifyIcon` control in greater detail.

Properties Adopted by Child Controls

Some properties are adopted by many of the controls contained on a form. For example, by default, a `Label` control uses the same background color as the form. If you change the form's `BackColor` property, its `Label` controls change to display the same color.

Some properties adopted by a form's controls include `BackColor`, `ContextMenu`, `Cursor`, `Enabled`, `Font`, and `ForeColor`. Not all controls use all of these properties, however. For example, a `TextBox` only matches its form's `Enabled` and `Font` properties.

If you explicitly set one of these properties for a control, its value takes precedence over the form's settings. For example, if you set a `Label` control's `BackColor` property to red, the control keeps its red background even if you change the `Form`'s `BackColor` property.

Some of these properties are also not tremendously useful to the `Form` object itself, but they give guidance to the form's controls. For example, a form doesn't automatically display text on its surface, so it never really uses its `Font` property. Its `Label`, `TextBox`, `ComboBox`, `List`, `RadioButton`, `CheckBox`, and many other controls adopt the value of this property, however, so the form's `Font` property serves as a central location to define the font for all of these controls. If you change the form's `Font` property, even at runtime, all of the form's controls change to match. The change applies to all of the form's controls, even those contained within `GroupBoxes`, `Panels`, and other container controls, so that they do not sit directly on the form.

These properties can also help your application remain consistent both with the controls on the form and with other parts of the application. For example, the following code draws the string "Hello

World!" on the form whenever the form needs to be repainted. This code explicitly creates the Comic Sans MS font.

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles Me.Paint
    Dim new_font As New Font("Comic Sans MS", 20)
    e.Graphics.DrawString("Hello World!", _
        new_font, Brushes.Black, 10, 10)
    new_font.Dispose()
End Sub
```

Rather than making different parts of the program build their own fonts, you can use the forms' `Font` properties as shown in the following code. This makes the code simpler and ensures that different pieces of code use the same font.

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles Me.Paint
    e.Graphics.DrawString("Hello World!", Me.Font, Brushes.Black, 10, 100)
End Sub
```

As a nice bonus, changing the form's `Font` property raises a `Paint` event, so, if the form's font changes, this code automatically runs again and redraws the text using the new font.

Example program ChangeFormFont, available for download on the book's web page, contains three radio buttons and a label. When you click a radio button, the form's font changes and the label's font automatically changes to match.

Property Reset Methods

The `Form` class provides several methods that reset certain property values to their defaults. The most useful of those methods are `ResetBackColor`, `ResetCursor`, `ResetFont`, `ResetForeColor`, and `ResetText`.

If you change one of the corresponding form properties, either at design time or at runtime, these methods restore them to their default values. The default values may vary from system to system, but currently on my computer `BackColor` is reset to `Control`, `Cursor` is reset to `Default`, `Font` is reset to 8-point regular (not bold or italic) Microsoft Sans Serif, `ForeColor` is reset to `ControlText`, and `Text` is reset to an empty string.

Because the controls on a form adopt many of these properties (all except `Text`), these methods also reset the controls on the form.

Overriding WndProc

The Windows operating system sends all sorts of messages to applications that tell them about changes in the Windows environment. Messages tell forms to draw, move, resize, hide, minimize, close, respond to changes in the Windows environment, and do just about everything else related to Windows.

All Windows applications have a subroutine tucked away somewhere that responds to those messages. That routine is traditionally called a `WindowProc`. A Visual Basic .NET form processes these messages in a routine named `WndProc`. You can override that routine to take special actions when the form receives certain messages.

Example program FixedAspectRatio, available on the book's web page, looks for WM_SIZING messages. When it finds those messages, it adjusts the form's new width and height so they always have the same aspect ratio (ratio of height to width).

When you override the WndProc method, it is very important that the new method calls the base class's version of WndProc as shown in the following statement:

```
MyBase.WndProc(m)
```

If the program doesn't do this, then the program will not respond properly to events. For example, the form won't be able to draw itself correctly, resize or move itself, or even create itself properly.

When you override the WndProc method, you must also figure out what messages to intercept, what parameters those messages take, and what you can do to affect them safely. One way to learn about messages is to insert the following WndProc and then perform the action that you want to study (resizing the form, in this example):

```
Protected Overrides Sub WndProc(ByRef m As System.Windows.Forms.Message)
    Debug.WriteLine(m.ToString)
    MyBase.WndProc(m)
End Sub
```

Example program ViewWindowsMessages, which is available for download on the book's web page, uses this code to display information about the messages it receives.

The following statement shows the result for the WM_SIZING message sent to the form while the user resizes it. It at least shows the message name (WM_SIZING) and its numeric value (hexadecimal 0x214).

```
msg=0x214 (WM_SIZING) hwnd=0x30b8c wparam=0x2 lparam=0x590e29c result=0x0
```

Searching for the message name on the Microsoft web site and on other programming sites usually gives you the other information you need to know (such as what m.WParam and m.LParam mean).

Note also that the Form class inherits the WndProc subroutine from the Control class, so all other Windows forms controls inherit it as well. That means you can override their WndProc routines to change their behaviors.

For example, the following code shows how the NoCtxMnuTextBox class works. This control is derived from the TextBox control. Its WndProc subroutine checks for WM_CONTEXTMENU messages and calls the base class's WndProc for all other messages. By failing to process the WM_CONTEXTMENU message, the control prevents itself from displaying the TextBox control's normal Copy/Cut/Paste context menu when you right-click it.

```
Public Class NoCtxMnuTextBox
    Inherits System.Windows.Forms.TextBox

    Protected Overrides Sub WndProc(ByRef m As System.Windows.Forms.Message)
        Const WM_CONTEXTMENU As Integer = &H7B

        If m.Msg <> WM_CONTEXTMENU Then
            MyBase.WndProc(m)
        End If
    End Sub
End Class
```

Example program NoContextMenu, which is available for download on the book's web page, uses similar code to display a text box that does not display a context menu when you right-click it.

SDI and MDI

A *single-document interface* (SDI) application displays a single document in each form. Here, a *document* can be an actual disk file, or it can be a group of related items such as those on an order, employee record, or architectural drawing. For example, Microsoft Paint and Notepad are both SDI applications. Figure 10-6 shows an SDI application showing three files in separate forms. Example program SDIEdit, which is available for download on the book's web page, is a simple SDI application.

In contrast, a *multiple-document interface* (MDI) application displays its documents in their own forms, but then places the forms inside a container form. For example, Visual Studio can act either as an MDI application or it can display its child forms (form designers, code editors, and so forth) using tabs. The individual document windows are called *MDI child forms* and the container form is called the *MDI container* or *MDI parent* form. Figure 10-7 shows an MDI application with three MDI child forms. Example program MDIEdit, which is also available for download, is a simple MDI application.

The following sections describe some of the features provided by MDI forms and discuss reasons you might want to use an MDI or SDI application style.
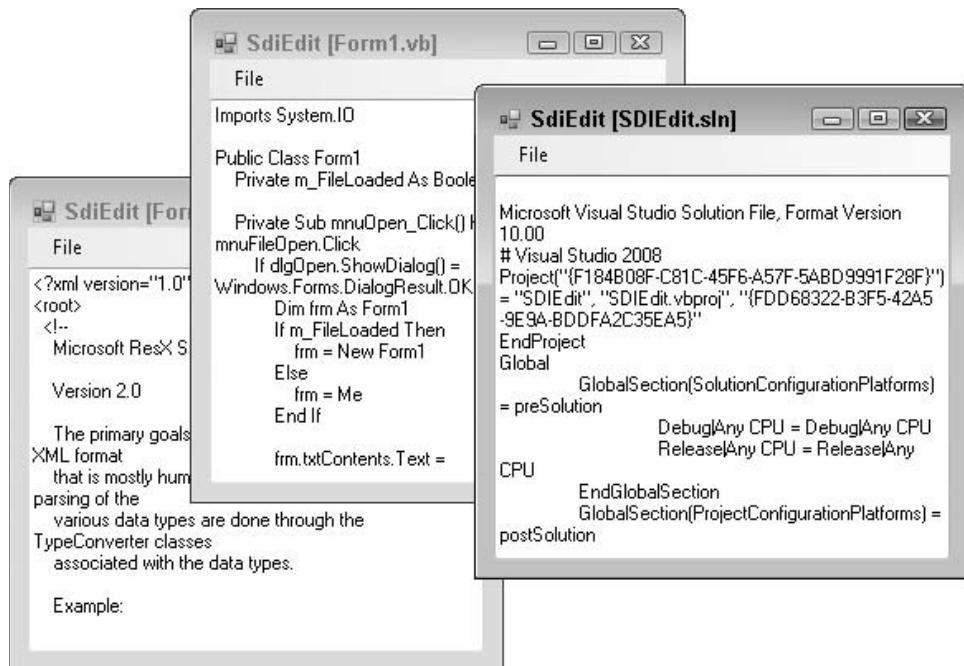
Figure 10-6: An SDI application displays separate documents in separate forms.
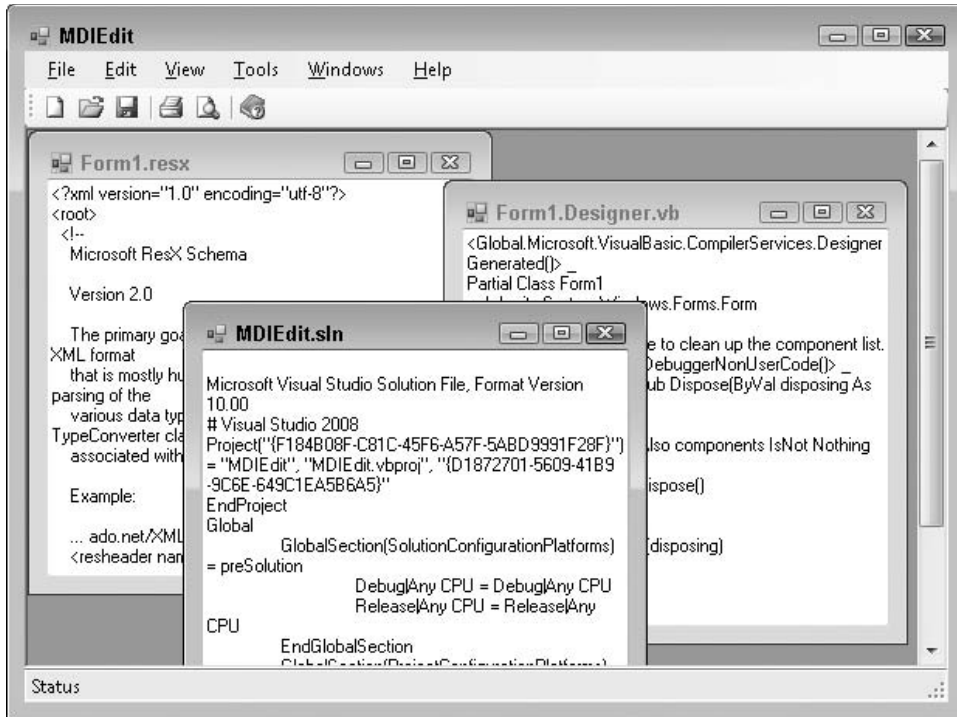
Figure 10-7: An MDI application displays documents in forms contained within an MDI container form.

MDI Features

The MDI container form provides several services for its child forms. It contains the forms and keeps them all together so that they are easy to find. If you move a form so that it won't fit within the container, the container automatically displays scroll bars so you can view it.

The program displays an icon in the taskbar and Task Manager for the MDI container, but not for the child forms. If you minimize the MDI container, all of the forms it contains are hidden with it. If you minimize a child form, its icon is displayed within the container, not separately in the taskbar. If you maximize an MDI child, it fills the parent form and its caption becomes part of the parent's. For example, if the MDI parent form's caption is Parent and the child's caption is Child, then when you maximize the child, the parent's caption becomes Parent - [Child].

The MDI container also provides some methods for arranging its child forms. The following code shows how an MDI container's code can cascade the children so that they overlap nicely, tile the children vertically or horizontally, and arrange the icons of any minimized child forms:

```
Private Sub mnuWinCascade_Click() Handles mnuWinCascade.Click
    Me.LayoutMdi(MdiLayout.Cascade)
End Sub
```

```
Private Sub mnuWinTileVertical_Click() Handles mnuWinTileVertical.Click
    Me.LayoutMdi(MdiLayout.TileVertical)
End Sub

Private Sub mnuWinTileHorizontal_Click() Handles mnuWinTileHorizontal.Click
    Me.LayoutMdi(MdiLayout.TileHorizontal)
End Sub

Private Sub mnuWinArrangeIcons_Click() Handles mnuWinArrangeIcons.Click
    Me.LayoutMdi(MdiLayout.ArrangeIcons)
End Sub
```

Some other useful commands that you can add to an MDI application include Minimize All, Restore All, Maximize All, and Close All. You can implement these commands by looping through the MDI container's `MdiChildren` collection, as shown in the following code:

```
Private Sub mnuWinMinimizeAll_Click() Handles mnuWinMinimizeAll.Click
    For Each frm As Form In Me.MdiChildren
        frm.WindowState = FormWindowState.Minimized
    Next frm
End Sub

Private Sub mnuWinRestoreAll_Click() Handles mnuWinRestoreAll.Click
    For Each frm As Form In Me.MdiChildren
        frm.WindowState = FormWindowState.Normal
    Next frm
End Sub

Private Sub mnuWinMaximizeAll_Click() Handles mnuWinMaximizeAll.Click
    For Each frm As Form In Me.MdiChildren
        frm.WindowState = FormWindowState.Maximized
    Next frm
End Sub

Private Sub mnuWinCloseAll_Click() Handles mnuWinCloseAll.Click
    For Each frm As Form In Me.MdiChildren
        frm.Close()
    Next
End Sub
```

Depending on your application, you might also provide commands that operate on subsets of the child forms. Suppose that a program displays a main order record and its many related order items in MDI child forms. You might want to let the user close all the order items, while keeping the main order form open.

Many MDI programs include a Window menu that displays a list of the MDI child forms that are open. You can select one of these menu items to move that form to the top of the others.

Building an MDI child list is easy in Visual Basic. Select the main `MenuStrip` control. Then in the Properties window, set the control's `MdiWindowListItem` property to the menu that you want to hold the child list. When you open and close child windows, Visual Basic automatically updates the list.

Figure 10-8 shows a menu displaying an MDI child list. The form with the caption `MDIEdit.sln` (behind the menu) currently has the focus, so the list displays a check mark next to that form's entry.

Most regular Visual Basic applications use SDI and when you create a new application, you get SDI by default. To build an MDI application, start a new application as usual. Then set the startup form's `IsMdiContainer` property to `True`. In the Form Designer, this form will change appearance, so it's obvious that it is an MDI parent form.

Alternatively you can select the Project menu's Add Windows Form command. In the new form dialog, select MDI Parent Form, give the form a reasonable name, and click Add. Visual Basic adds a new MDI parent form and gives it an assortment of standard controls that you might like it to have including a menu strip containing standard menus (File, Edit, View, and so forth) and a toolbar with standard tools (new, open, save, and so forth).

At design time, an MDI child form looks just like any other form. To make the child form sit inside the MDI container, you must set its `MdiParent` property to the MDI container form at runtime.
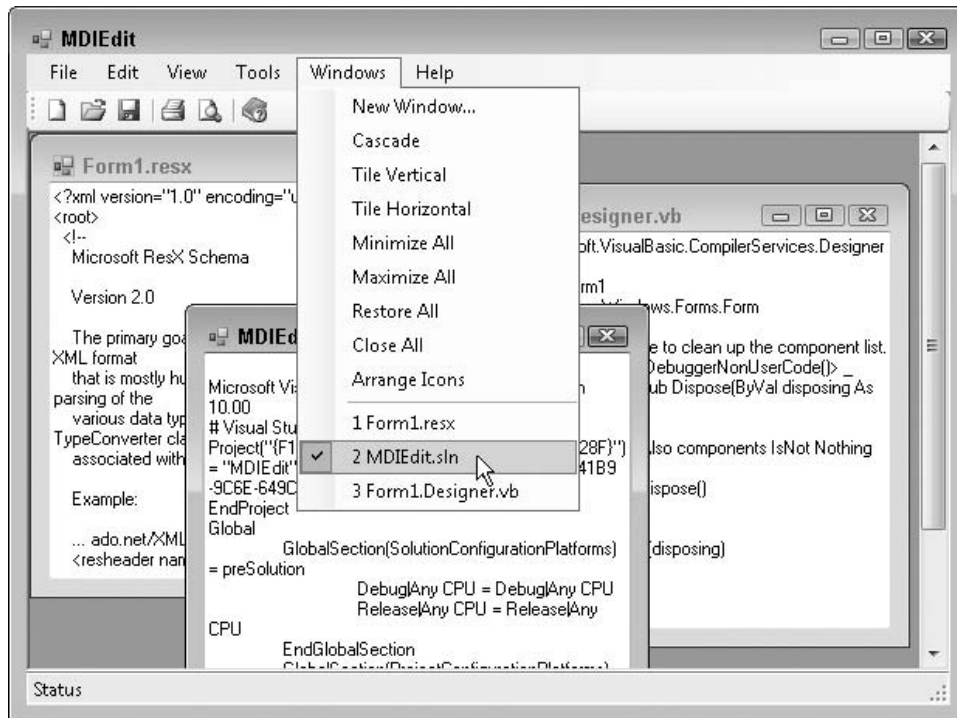
Figure 10-8: The MenuStrip's MdiWindowListItem property determines which menu item displays an MDI child list.

The following code shows how the MDI parent form in Figure 10-7 creates new MDI children. When the user selects the File menu's Open command or the toolbar's Open tool, this event handler executes and displays a file open dialog. If the user selects a file and clicks OK, the code creates a new `Form1` object. It loads the selected file into the form's `txtContents TextBox`, sets the form's caption to the file's name (without the path), sets the form's `MdiParent` property to `Me` (the MDI parent form), and displays the form. The form is automatically shown in the MDI container and added to the MDI child list.

```
Private Sub OpenFile() Handles mnuFileOpen.Click, toolOpen.Click
    If dlgOpen.ShowDialog(Me) = Windows.Forms.DialogResult.OK Then
        Dim frm As New Form1
        frm.FileName = dlgOpen.FileName
        frm.txtContents.Text = _
            My.Computer.FileSystem.ReadAllText(dlgOpen.FileName)
        frm.txtContents.Select(0, 0)
        frm.Text = New FileInfo(dlgOpen.FileName).Name
        frm.MdiParent = Me
        frm.Show()
    End If
End Sub
```

Normally, the system menu in the left of a form's title area includes a Close command with the shortcut Alt+F4. This command closes the form. An MDI child's system menu also contains a Close command, but this one's shortcut is Ctrl+F4. If you select this command or invoke its shortcut, the application closes the MDI child form but not the MDI container.

The MDI child's system menu also includes a Next command that moves the focus to the MDI container's next MDI child. The menu shows this command's shortcut as Ctrl+F6. However, Ctrl+Tab works as well. Ctrl+Tab may be a bit easier to remember because it is more similar to the Alt+Tab shortcut that moves to the next application on the desktop. This is also more consistent with the shortcuts for closing forms: Alt+F4 closes a top-level form, whereas Ctrl+F4 closes an MDI child; Alt+Tab moves to the next desktop application, whereas Ctrl+Tab moves to the next MDI child form.

MDI Events

Events for an MDI child form generally occur before the corresponding MDI parent's events. For example, if you try to close an MDI form, the child forms all receive `FormClosing` events before the MDI parent receives its `FormClosing` event. Next, the MDI child forms receive `FormClosed` events, and finally the MDI parent receives its `FormClosed` event.

Note that MDI child forms also receive these events if only the child form is closing. If the user closes an MDI child form, it receives a `FormClosing` event followed by its `FormClosed` event.

If a form's `FormClosing` event handler sets its `e.Cancel` parameter to `True`, the close is canceled and the form remains open. The form can use this to guarantee that its data is consistent and has been saved.

For example, the following code checks the `txtContents` control's `Modified` property to see if the form's data has been modified since it was loaded. The program sets this property to `False` when the file is opened or created from scratch, and sets it to `True` when the user changes the form's text. If this property is `True`, the program displays a message box asking if it should save the changes.

```
    ' See if it's safe to close the form.
    Private Sub mdiChild_FormClosing(ByVal sender As Object, _
     ByVal e As System.Windows.Forms.FormClosingEventArgs) Handles Me.FormClosing
        If txtContents.Modified Then
            ' There are unsaved changes.
            ' Ask the user if we should save them.
            Select Case MessageBox.Show( _
                    "The data has changed. Save the changes?", _
                    "Save Changes?", _
                    MessageBoxButtons.YesNoCancel, _
                    MessageBoxIcon.Question)
                Case Windows.Forms.DialogResult.Yes
                    ' Save the changes.
                    SaveFile()

                    ' See if we succeeded.
                    e.Cancel = txtContents.Modified
                Case Windows.Forms.DialogResult.No
                    ' Discard the changes.
                    ' Leave e.Cancel = False.
                Case Windows.Forms.DialogResult.Cancel
                    ' Cancel the close.
                    e.Cancel = True
            End Select
        End If
    End Sub
```

If the user clicks the Yes button, the code calls subroutine `SaveFile` to save the changes. This routine saves the data and sets the `txtContents` control's `Modified` property to `False` if it is successful. If `SaveFile` fails (for example, if the data file is locked), it leaves the `Modified` property set to `True`.

If the user clicks No to indicate that the program should discard the changes, the `FormClosing` event handler leaves `e.Cancel` equal to `False` so the form closes normally.

If the user clicks the Cancel button to indicate that the form should not be closed after all, the event handler sets `e.Cancel` to `True` to keep the form open.

If the user tries to close the MDI container and *any* of the MDI child forms' `FormClosing` event handlers sets `e.Cancel` to *all*, the close is canceled for *all* the child forms. Any child forms that have not yet received a `FormClosing` event do not get one. All of the children remain open, even those that set `e.Cancel = False`.

After the children process their `FormClosing` events, the MDI parent form still gets the final word. It receives a `FormClosing` event with its `e.Cancel` value set to `True` if *any* of the child forms set it to `True`. The value `e.Cancel` value is `False` if all of the child forms left it `False`.

The MDI parent can leave the `e.Cancel` alone to accept whatever value the child forms selected, or it can override the value and force the program to exit or not as it desires.

The child forms still have one chance to save their data in their `FormClosed` events. At this point, they will close, however, so they had better take action if they need to save their data.

MDI versus SDI

MDI and SDI applications both have their advantages. In an SDI application, building and understanding the menus is simpler. A menu applies to exactly one form, and there is no merging and swapping of menus as the user changes MDI child forms.

SDI applications work particularly well when the program works with only one document at a time. Notepad, Microsoft Paint, and similar applications that only let the user work with one file at a time are SDI applications. These programs are light enough in weight that the user can easily run more than one instance of the program to view more than one file at a time if necessary.

MDI applications help the user display many related files at once without cluttering up the desktop. For example, Visual Studio can use an MDI interface to let you examine all of the files in a project side by side. Displaying all of a project's form designers, code editors, resource editors, and other files in separate windows might bury the desktop under forms and fill the taskbar with icons. Putting all of these forms inside an MDI container makes using the application easier. It lets the system represent the Visual Studio program with a single container form and a single icon. The Window menu provides an MDI child list that makes it easier to find a particular form.

You can also build a hybrid application that displays several MDI containers, each holding any number of MDI child forms. For example, each MDI container might hold all the forms related to a particular order: customer data, order items, and so forth. This would keep these related items together. It would also enable the user to display information about more than one order at a time in separate MDI containers.

In practice, examples of this kind of hybrid application are often cumbersome and poorly designed. It would generally be simpler to build this application as a standard MDI application and let the user launch multiple instances to display more than one order's data at once, but there may be times when it is easier to build a single multiple-MDI application. For example, if the program must work with a password-protected database, the program would need only to prompt the user for a user name and password once, and all the MDI containers could share the same database connection. Often, you can avoid the need for multiple forms (and hence an MDI format) by using other controls to fit more information on a single form. For example, `ComboBox`, `ListBox`, `TreeView`, `SplitterContainer`, and many other controls can display large amounts of data in a limited space, providing scroll bars as necessary.

The `TabControl` lets an application display many pages of data on a single form. For example, you might use different tabs to display the different pages that are relevant to an order: customer data, the order itself, order items, shipping and billing addresses, and so forth. This type of tabbed form placed inside an MDI container can make a very powerful application that enables the user to easily manage and understand huge amounts of information.

One drawback to many of these controls is that they make it more difficult to perform side-by-side comparisons of values. For example, suppose that a single form displays different addresses (billing, shipping, contact, and so forth) on different tabs. Then it would be difficult for the user to compare two addresses to see if they are identical. If you know that the user may want to compare two pieces of data, try to arrange them so they can both be visible at the same time.

MRU Lists

MDI and SDI interfaces provide different ways to manage documents. Another tool that helps users manage documents is a *Most Recently Used* (MRU) list. The MRU list is a series of menu items (usually at the bottom of an application's File menu) that displays the files most recently accessed by the user. If the user clicks one of these menu items, the program reopens the corresponding file. Figure 10-9 shows an MRU list in a simple editing application.

By convention, these menu items begin with the accelerator characters 1, 2, 3, and so forth. If you opened the File menu shown in Figure 10-9 and pressed 2, for example, the program would reopen the file SDIEdit.sln.
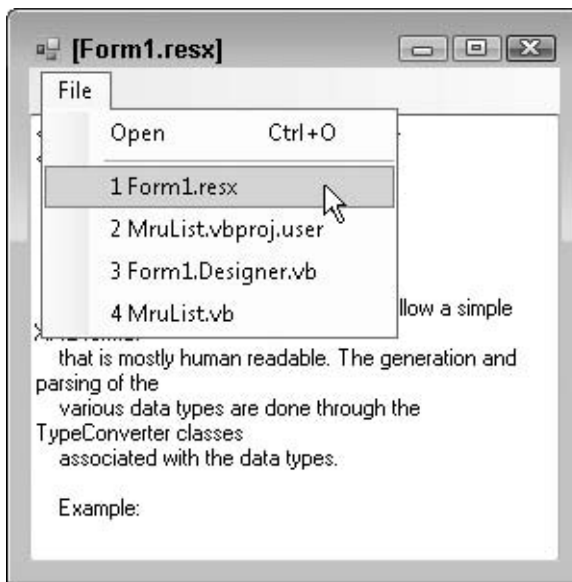
Figure 10-9: An MRU list makes it easier for users to reopen the files they have used most recently.

When the user opens a new file or saves a file with a new name, that file is placed at the top of the list. Most applications display up to four items in the MRU list and, if the list ever contains more items, the oldest are removed.

Most applications remove a file from the MRU list if the applications try to open it and fail. For example, if the user selects an MRU menu item but the corresponding file has been removed from the system, the program removes the file's menu item.

Building an MRU list isn't too difficult in Visual Basic. The MruList example program shown in Figure 10-9 and available for download on the book's web site uses the MruList class to manage its MRU list. This class manages a menu that you want to use as an MRU list and updates the menu as the

user opens and closes files. For example, if you configure the class to allow four MRU list entries and the user opens a fifth file, the class removes the oldest entry and adds the new one.

The class saves and restores the MRU list in the system's Registry. When the user selects a file from the MRU list, the class raises an event so the main program's code can open the corresponding file. The class also provides an Add method that the main program can use to add new files to the MRU list when the user opens a new file. Download the example and look at its code for more details.

The following code shows how the main MruList program uses the `MruList` class. This program is a simple text viewer that lets the user open and view files.

This program declares an `MruList` variable named `m_MruList`. It uses the `WithEvents` keyword so that it is easy to catch the object's `OpenFile` event.

The form's `New` event handler initializes the `MruList` object, passing it the application's name, the File menu, and the number of items the MRU list should hold.

When the user selects the File menu's Open command, the program displays an open file dialog box. If the user selects a file and clicks OK, the program calls subroutine `OpenFile`, passing it the name of the selected file.

If the user selects a file from the MRU list, the `m_MruList_OpenFile` event handler executes and calls subroutine `OpenFile`, passing it the name of the selected file.

Subroutine `OpenFile` loads the file's contents into the `txtContents TextBox` control. It then calls the `MruList` object's `Add` method, passing it the file's name. It finishes by setting the form's caption to the file's name without its directory path.

```
Imports System.IO

Public Class Form1

    Private WithEvents m_MruList As MruList

    ' Initialize the MRU list.
    Private Sub Form1_Load() Handles Me.Load
        m_MruList = New MruList("SdiMruList", mnuFile, 4)
    End Sub

    ' Let the user open a file.
    Private Sub mnuFileOpen_Click() Handles mnuFileOpen.Click
        If dlgOpen.ShowDialog() = Windows.Forms.DialogResult.OK Then
            OpenFile(dlgOpen.FileName)
        End If
    End Sub

    ' Open a file selected from the MRU list.
    Private Sub m_MruList_OpenFile(ByVal file_name As String) _
     Handles m_MruList.OpenFile
```

```
            OpenFile(file_name)
        End Sub

        ' Open a file and add it to the MRU list.
        Private Sub OpenFile(ByVal file_name As String)
            txtContents.Text = File.ReadAll(file_name)
            txtContents.Select(0, 0)
            m_MruList.Add(file_name)
            Me.Text = "[" & New FileInfo(file_name).Name & "]"
        End Sub
    End Class
```

You could easily convert the `MruList` class into a component. If you give the component `ApplicationName`, `FileMenu`, and `MaxEntries` properties, you can set those values at design time. For more information about building components, see Chapter 22, "Custom Controls."

Dialog Boxes

Using a form as a dialog box is easy. Create the form and give it whatever controls it needs to do its job. Add one or more buttons to let the user dismiss the dialog. Many dialog boxes use OK and Cancel buttons, but you can also use Yes, No, Retry, and others. You may also want to set the form's `FormBorderStyle` property to `FixedDialog`, although that's not mandatory.

Set the form's `AcceptButton` property to the button you want to invoke if the user presses the Enter key. Set its `CancelButton` property to the button you want to invoke when the user presses the Escape key.

The form's `DialogResult` property indicates the dialog box's return value. If the main program displays the dialog box by using its `ShowDialog` method, `ShowDialog` returns the `DialogResult` value.

The following code shows how the main program can display a dialog box and react to its result. It creates a new instance of the `dlgEmployee` form and displays it by calling its `ShowDialog` method. If the user clicks OK, then `ShowDialog` returns `DialogResult.OK` and the program displays the employee's name entered on the dialog. If the user clicks the Cancel button, `ShowDialog` returns `DialogResult.Cancel` and the program displays the message "Canceled."

```
    Private Sub btnShowDialog_Click() Handles btnShowDialog.Click
        Dim dlg As New dlgEmployee
        If dlg.ShowDialog() = Windows.Forms.DialogResult.OK Then
            MessageBox.Show( _
                dlg.txtFirstName.Text & " " & _
                dlg.txtLastName.Text)
        Else
            MessageBox.Show("Canceled")
        End If
    End Sub
```

If the user clicks the Cancel button or closes the form by using the system menu, the form automatically sets its `DialogResult` property to `Cancel` and closes the form.

If the user clicks some other button, your event handler should set `DialogResult` to an appropriate value. Setting this value automatically closes the form.

> *You can also set a button's* `DialogResult` *property to indicate the value that the dialog box should return when the user presses that button. When the user presses the button, Visual Basic sets the form's* `DialogResult` *property automatically.*

The following code shows how the employee form reacts when the user clicks the OK button. It sees if the first and last name `TextBox` controls contain nonblank values. If either value is blank, the event handler displays an error message and returns without setting the form's `DialogResult` property. If both values are nonblank, the code sets `DialogResult` to `OK`, and setting `DialogResult` closes the form. Note that the dialog box doesn't need an event handler for the Cancel button. If the user clicks Cancel, Visual Basic automatically sets the form's `DialogResult` to `Cancel` and closes the form.

```
Private Sub btnOk_Click() Handles btnOk.Click
    ' Verify that the first name is present.
    If txtFirstName.Text.Length = 0 Then
        MessageBox.Show( _
            "Please enter a First Name", _
            "First Name Required", _
            MessageBoxButtons.OK, _
            MessageBoxIcon.Exclamation)
        txtFirstName.Select()
        Exit Sub
    End If

    ' Verify that the last name is present.
    If txtLastName.Text.Length = 0 Then
        MessageBox.Show( _
            "Please enter a Last Name", _
            "Last Name Required", _
            MessageBoxButtons.OK, _
            MessageBoxIcon.Exclamation)
        txtLastName.Select()
        Exit Sub
    End If

    ' Accept the dialog.
    Me.DialogResult = Windows.Forms.DialogResult.OK
End Sub
```

Example program CustomDialog, available for download on the book's web page, demonstrates this kind of dialog.

Many dialog boxes provide OK and Cancel buttons, so they usually set `DialogResult` to `OK` or `Cancel`. However, you can also set `DialogResult` to `Abort`, `Ignore`, `No`, `None`, `Retry`, and `Yes` if that makes sense for your program. The main program can use an `If Then` or `Select Case` statement to see which value was set.

Wizards

One common type of dialog box is called a *wizard*. A wizard is a form that guides the user through a series of steps to do something. For example, building a database connection is complicated, so Visual Basic provides a data connection configuration wizard that helps the user enter the correct information for different kinds of databases. When it finishes, the wizard adds a connection object to the current form.

Figure 10-10 shows a typical wizard. The user enters data on each tab and then moves on to the next one. This wizard asks the user to enter an employee's name, identification (Social Security number and Employee ID), address and phone number, office location and extension, and privileges. Many tabbed wizards also include Next and Previous buttons to help you move from one tab to another.

When the user has filled in all the fields, the wizard enables the OK button. When the user clicks the OK or Cancel button, control returns to the main program, which handles the result just as it handles any other dialog box.

Figure 10-11 shows a different style of wizard. Instead of tabs, it uses buttons to let the user move through its pages of fields. The wizard only enables a button when the user has filled in the necessary information on the previous page. In Figure 10-11, the Office button is disabled because the user has not filled in all the fields on the Address page.

The button style is sometimes better at helping the user fill in all of the required fields because the user must finish filling in one page before moving on to the next. In a tabbed wizard, the user might leave a required field blank or use an incorrect format (for example, an invalid phone number) on the first tab and not realize it until pressing the OK button.

Figure 10-10: A wizard guides the user through the steps of some complicated task.

Figure 10-11: This wizard uses buttons instead of tabs to move through its pages of data.

Summary

Although forms are just one kind of control, they have some very special characteristics. They form the basic pieces of an application that sit on the desktop, and they have many properties, methods, and events that set them apart from other controls. Appendix J provides more information about form properties, methods, and events.

This chapter described some of the more typical uses of forms. It explained how to build About, Splash, and Login Forms; manage a form's mouse cursor and icon; override `WndProc` to intercept a form's Windows messages; build MDI applications and tools that help the user manage MDI child forms; and make dialog boxes and wizards. After you master these tasks, you can build the forms that implement the large-scale pieces of an application.

Chapters 8, 9, and 10 described Windows Forms controls and the `Form` class. The next three chapters provide corresponding information for Windows Presentation Foundation (WPF) controls and forms. Chapter 11, "Selecting WPF Controls," starts by providing an overview of WPF controls and giving tips on which you might like to use for given purposes, much as Chapter 8 does for Windows Forms controls.

Selecting WPF Controls

One of the largest new additions in Visual Basic 2008 is Windows Presentation Foundation (WPF). WPF provides a whole new method for building user interfaces. It provides tools for separating the user interface from the code behind the interface so that the two pieces can potentially be built by separate user interface designers and Visual Basic developers. It includes a new Extensible Application Markup Language (XAML, pronounced "zammel") that lets you build a user interface by using declarative statements rather than executable code. XAML lets you determine the size, position, and other properties of the WPF controls on a form. It lets you define styles that can be shared among many controls, and it lets you define transformations and animations that affect the controls.

> *Actually, WPF was introduced in the .NET Framework version 3.0. You can use WPF and several of the other new technologies with Visual Basic 2005, however this is the first version of Visual Basic that includes WPF, and it has better support integrated for WPF than Visual Basic 2005 has.*

As is the case in Windows Forms applications, controls play a central role in WPF (Windows Presentation Foundation) applications. They give information to the user (`Label`, `StatusBar` `TreeView`, `ListView`, `Image`) and organize the information so that it's easy to understand (`Border`, `StackPanel`, `DockPanel`, `TabControl`). They enable the user to enter data (`TextBox`, `TextBlock`, `ComboBox`, `PasswordBox`), select options (`RadioButton`, `CheckBox`, `ListBox`), and control the application (`Button`, `Menu`, `Slider`).

To make an application as effective as possible, you should match controls with your application's needs. Though it is often possible to use many controls to perform a particular task, some controls usually work better than others. For example, you could display status information by changing a button's caption, but that's not really what buttons do best. A label in a status bar is usually a better way to give the user status information because the user will expect and understand it. Users generally don't expect to see status information in a button with changing text.

This chapter briefly describes the most common WPF controls so you can understand which controls work best for different purposes. To help you find the controls you need, the sections later in this chapter group controls by their general function. For example, if you need to display status to the user, look in the section "Providing Feedback."

I provide only brief descriptions of the WPF controls in this chapter, and some tips that can help you decide which control to use for different purposes. The following chapter, "Using WPF Controls," covers the controls in much greater detail, describing each control's most useful properties, methods, and events.

Note that the initial build of Visual Basic 2008 introduces a bug in new WPF projects. For more information, see the section "Visual Basic 2008 Version 1 Warning" in the Introduction on page xxxix.

Controls Overview

You can group WPF controls into several categories. Some of these correspond naturally to the purposes of Windows Forms controls. Other categories play a more important role in WPF than they do in Windows Forms applications.

In particular, WPF controls rely heavily on layout controls that arrange and organize the controls that they contain. Windows Forms developers often simply arrange controls on a form with their desired sizes and positions. A WPF application is more likely to arrange the controls in a hierarchy of `StackPanel` and `Grid` controls and let those controls arrange their contents.

The following sections describe the main categories of WPF controls. The example programs for this chapter, which are available on the book's web site, demonstrate many of the controls' basic uses.

Not all of the controls described here are available by default when you create a new WPF application. You need to add some of these controls to the Toolbox before you can use them. To add a control that is missing, right-click a Toolbox section and select Choose Items. On the Choose Toolbox Items dialog, select the WPF Components tab, check the boxes next to the controls that you want, and click OK.

Note, also, that some additional controls may be available in the Choose Toolbox Items dialog that are not described here. The following sections describe the most commonly used controls.

Containing and Arranging Controls

Layout controls determine the arrangement of the controls that they contain. For example, they may arrange controls vertically, horizontally, or in rows and columns.

The preferred style for WPF control arrangement is to make container controls determine the positions of their children and let the children take advantage of the space allowed. This can be particularly useful for localized applications where you cannot easily predict how much space a control will need in a particular language.

For example, suppose a form contains a `StackPanel` control. The `StackPanel` contains several buttons that launch application dialogs. If you remove the buttons' `Width` properties, the buttons automatically size themselves to fit the `StackPanel` horizontally. Now if you need to make the buttons wider to hold text for a new language, you can simply widen the form. The `StackPanel` widens to fill the form and the buttons widen to fit the `StackPanel`.

Example program ResizingButtons, which is available for download on the book's web site, demonstrates buttons with fixed heights but widths that resize when their container resizes.

In a Windows Forms application, you can achieve a similar effect by using Anchor *and* Dock *properties.*

Layout controls are also important because they can hold other controls. Some of the WPF controls can hold only a single content item. For example, an Expander can hold only a single item. If you place another layout control such as a StackPanel inside the Expander, you can then place other controls inside the StackPanel.

The following table briefly describes the WPF controls that are intended mainly to contain and arrange other controls.

Control	Purpose
Border[1]	Provides a visible border or background to the contents
BulletDecorator[2]	Contains two children. The first is used as a bullet and the second is aligned with the first. For example, you can use this to align bullet images next to labels. (See example program UseBulletDecorator, available for download on the book's web site.)
Canvas	Creates an area in which you can explicitly position children by specifying their Width, Height, Canvas.Left, and Canvas.Top properties. (See example program UseCanvas, available for download on the book's web site.)
DockPanel	Docks its children to its left, right, top, or bottom much as the Dock property does in a Windows Forms application. If the control's LastChildFill property is True, the control makes its last child control fill the remaining space. (See example program UseDockPanel, available for download on the book's web site.)
Expander[1]	Displays a header with an expanded/collapsed indicator. The user can click the header or indicator to expand or collapse the control's single content item. (See example program UseExpander, available for download on the book's web site.)
Grid	Displays children in rows and columns. This is similar to the Windows Forms TableLayoutPanel control.
GridSplitter	Allows the user to resize two rows or columns in a Grid control.
GridView	Displays data in columns within a ListView control.

177

Control	Purpose
GroupBox[1]	Displays a border and caption much as a Windows Forms GroupBox control does.
Panel	Panel is the parent class for Canvas, DockPanel, Grid, TabPanel, ToolbarOverflowPanel, UniformGrid, StackPanel, VirtualizingPanel, and WrapPanel. Usually you should use one of those classes instead of Panel, but you can use Panel to implement your own custom panel controls.
ScrollViewer[1]	Provides vertical and horizontal scroll bars for a single content element. (See example program UseScrollViewer, available for download on the book's web site.)
Separator	Separates two controls inside a layout control. (See example program UseSeparator, available for download on the book's web site.)
StackPanel	Arranges children in a single row or column. If there are too many controls, those that don't fit are clipped.
TabControl	Arranges children in tabs. TabItem controls contain the items that should be displayed in the tabs. (See example program UseTabControl, available for download on the book's web site.)
TabItem[1]	Holds the content for one TabControl tab.
Viewbox[1]	Stretches its single child to fill the Viewbox. The Stretch property determines whether the control stretches its child uniformly (without changing the width-to-height ratio). (See example program UseViewbox, available for download on the book's web site.)
VirtualizingStackPanel	Generates child items to hold items that can fit in the available area. For example, when working with a ListBox bound to a data source, the VirtualizingStackPanel generates only the items that will fit within the ListBox. If the control is not bound to a data source, this control behaves like a StackPanel.
WrapPanel	Arranges children in rows/columns depending on its Orientation property. When a row/column is full, the next child moves to a new row/column. This is similar to the Windows Forms FlowLayoutPanel control. (See example program UseWrapPanel, available for download on the book's web site.)

[1]This control can hold only a single child.
[2]This control should hold two childern.

Many of the layout controls have the ability to resize their children if you let them. For example, if you place a `Button` inside a `Grid` control's first row and column, then by default the `Button` resizes when its row and column resize. The control's `Margin` property determines how far from the cell's edges the `Button`'s edges lie.

If a child control explicitly defines its `Width` and `Height` properties, those properties override the parent's arrangement policy. For example, if you set `Width` and `Height` for a `Button` inside a `Grid`, the `Button` does not resize when its `Grid` cell does.

To get the effect that you want, consider how the control's `Margin`, `Width`, and `Height` properties interact with the parent layout control.

Making Selections

Selection controls enable the user to choose values. If you use them carefully, you can reduce the chances of the user making an invalid selection, so you can reduce the amount of error-handling code you need to write.

The following table briefly describes the WPF controls that allow the user to select choices.

Control	Purpose
CheckBox	Lets the user select an item or not. Each `CheckBox` choice is independent of all others.
ComboBox	Displays items in a drop-down list. `ComboBoxItem` controls contain the items displayed in the list. (See example program UseComboBox, available for download on the book's web site.)
ComboBoxItem[1]	Holds the content for one `ComboBox` item.
ListBox	Displays items in a list. `ListBoxItem` controls contain the items displayed in the list. The control automatically displays scroll bars when needed. (See example program UseListBox, available for download on the book's web site.)
ListBoxItem[1]	Holds the content for one `ListBox` item.
RadioButton	Lets the user pick from among a set of options. If the user checks one `RadioButton`, all others with the same parent become unchecked. (See example program UseRadioButtons, available for download on the book's web site.)

(*continued*)

Control	Purpose
ScrollBar	Allows the user to drag a "thumb" to select a numeric value. Usually scroll bars are used internally by other controls such as the ScrollViewer and your applications should use a Slider instead. (See example program UseScrollBar, available for download on the book's web site.)
Slider	Allows the user to drag a "thumb" to select a numeric value. Similar to the Windows Forms TrackBar control. (See example program UseSlider, available for download on the book's web site.)

[1] This control can hold only a single child.

Entering Data

Sometimes, it is impractical to use the selection controls described in the previous section. For example, the user cannot reasonably enter biographical data or comments using a ComboBox or RadioButton. In those cases, you can provide a text control where the user can type information.

The following table briefly describes the WPF controls that allow the user to enter text.

Control	Purpose
PasswordBox	Similar to a TextBox but displays a mask character instead of the characters that the user types. (See example program UsePasswordBox, available for download on the book's web site.)
RichTextBox	Similar to a TextBox but contains text in the form of a document object. See the section "Managing Documents" later in this chapter for more information on documents.
TextBox	Allows the user to enter simple text. Optionally can allow carriage returns and tabs, and can wrap text.

Displaying Data

These controls are used primarily to display data to the user. The following table briefly describes these WPF controls.

Control	Purpose
Label	Displays non-editable text.
TextBlock	Displays more complex non-editable text. This control's contents can include inline tags to indicate special formatting. Tags can include `AnchoredBlock`, `Bold`, `Hyperlink`, `InlineUIContainer`, `Italic`, `LineBreak`, `Run`, `Span`, and `Underline`.
TreeView	Displays hierarchical data in a tree-like format similar to the directory display provided by Windows Explorer.

Providing Feedback

The following controls provide feedback to the user. Like the controls that display data in the previous section, these controls are intended to give information to the user and not interact with the user. The following table briefly describes these WPF controls.

Control	Purpose
Popup	Displays content in a window above another control. Usually you can use the `Tooltip` and `ContextMenu` controls instead of a `Popup`. (See example program UsePopup, available for download on the book's web site.)
ProgressBar	Indicates the fraction of a long task that has been completed. Usually, the task is performed synchronously, so the user is left staring at the form while it completes. The `ProgressBar` lets the user know that the operation is not stuck. (See example program UseProgressBar, available for download on the book's web site.)
StatusBar	Displays a container at the bottom of the form where you can place controls holding status information. Though you can place anything inside a `StatusBar`, this control is intended to hold summary status information, not tools. Generally, menus, combo boxes, buttons, toolbars, and other controls that let the user manipulate the application do not belong in a `SatusBar`. (See example program UseStatusBar, available for download on the book's web site.)
StatusBarItem[1]	Holds the content for one `StatusBar` item.
ToolTip	Displays a tooltip. To give a control a simple textual tooltip, set its `Tooltip` property. Use the `Tooltip` control to build more complex tooltips. For example, a `Tooltip` control might contain a `StackPanel` that holds other controls. (See example program UseToolTip, available for download on the book's web site.)

[1]This control can hold only a single child.

Initiating Action

Every kind of control responds to events, so every control can initiate an action. In practice, however, users only expect certain kinds of controls to perform actions. The following table describes controls that normally initiate action.

Control	Purpose
Button[1]	Raises a `Click` event that the program can catch to perform an action. (See example program UseButtonRepeatButton, available for download on the book's web site.)
ContextMenu	Displays a context menu for other controls. Normally the `ContextMenu` contains `MenuItem` controls. (See example program UseMenuContextMenu, available for download on the book's web site.)
Menu	Displays a menu for the form. Normally, the `Menu` contains `MenuItem` controls representing the top-level menus. Those items contain other `MenuItem` controls representing commands. (See example program UseMenuContextMenu, available for download on the book's web site.)
MenuItem	Contains an item in a `ContextMenu` or `Menu`.
PrintDialog	Displays a standard Windows print dialog. You shouldn't place a `PrintDialog` on a window. Instead use code to build and display the `PrintDialog`. (See example program UsePrintDialog, available for download on the book's web site.)
RepeatButton[1]	Acts as a `Button` that raises its `Click` event repeatedly when it is pressed and held down. (See example program UseButtonRepeatButton, available for download on the book's web site.)
ToolBar	Contains items. Normally, the control sits across the top of the form and contains command items such as buttons and combo boxes. (See example program UseToolBar, available for download on the book's web site.)
ToolBarTray	Contains `ToolBars` and allows the user to drag them into new positions. (See example program UseToolBar, available for download on the book's web site.)

[1]This control can hold only a single child.

Presenting Graphics and Media

Any control can display an image. The following XAML code makes an `ImageBrush` and then uses it to fill a `Grid` control's background:

```
<Window x:Class="Window1"
    xmlns="http://schemas.microsoft.com/winfx/2006/xaml/presentation"
    xmlns:x="http://schemas.microsoft.com/winfx/2006/xaml"
    Title="Window1" Height="300" Width="300">
    <Window.Resources>
        <ImageBrush ImageSource="smile.bmp" x:Key="brSmile" />
    </Window.Resources>
    <Grid Background="{StaticResource brSmile}">

    </Grid>
</Window>
```

Example program FormImage, which is available for download on the book's web site, displays an image in a `Grid` control's background.

While a `Grid` control can display an image or other graphic, its real purpose is to arrange other controls. The following table describes controls whose main purpose is to present graphics and media.

Control	Purpose
Ellipse	Displays an ellipse.
Image	Displays an image. Can optionally stretch the image with or without distortion.
Line	Draws a line segment.
MediaElement	Presents audio and video. To let you control the media, it provides `Play`, `Pause`, and `Stop` methods, and `Volume` and `SpeedRatio` properties. (See example program UseMediaElement, available for download on the book's web site.)
Path	Draws a series of drawing instructions.
Polygon	Draws a closed polygon.
Polyline	Draws a series of connected line segments.
Rectangle	Draws a rectangle, optionally with rounded corners.

The shape drawing objects (`Ellipse`, `Line`, `Path`, `Polygon`, `Polyline`, and `Rectangle`) all provide `Stroke`, `StrokeThickness`, and `Fill` properties to let you control their appearance. Although these controls are primarily intended to draw simple (or not so simple) shapes, like any other control they provide a full assortment of events. For example, they provide an `IsMouseOver` property and a `MouseUp` event that you can use to make these objects behave like simple buttons.

Example program DrawingShapes, which is available for download on the book's web site, demonstrates several of these shape controls. Program EllipseClick, which is also available for download, uses triggers to change the color of an `Ellipse` when the mouse is over it, and displays a message when you click the `Ellipse`.

Providing Navigation

The `Frame` control provides support for navigation through external web sites or the application's pages. Use the control's `Navigate` method to display a web page or XAML page. The `Frame` provides back and forward arrows to let the user navigate through the pages visited.

Example program UseFrame, which is available for download on the book's web site, uses a `Frame` control to provide navigation between two `Page` objects.

Managing Documents

WPF includes three different kinds of documents: flow documents, fixed documents, and XPS documents. These different kinds of documents provide support for high-end text viewing and printing.

The following table summaries the controls that WPF provides for viewing these kinds of documents.

Control	Purpose
`DocumentViewer`	Displays fixed documents page-by-page.
`FlowDocumentPageViewer`	Displays a flow document one page at a time. If the control is wide enough, it may display multiple columns although it still only displays one page at a time.
`FlowDocumentReader`	Displays flow documents in one of three modes. When in *single page* mode, it acts as a `FlowDocumentReader`. When in *scrolling* mode, it acts as a `FlowDocumentScrollViewer`. In book *reading mode*, it displays two pages side-by-side much as a real book does.
`FlowDocumentScollViewer`	Displays an entire flow document in a single long scrolling page and provides scroll bars to let the user move through the document.

Digital Ink

Digital ink controls provide support for stylus input from tablet PCs. Normally you would only use digital ink in a tablet PC application where the user is expected to enter data by drawing on the screen with a stylus. These applications usually provide text recognition to understand what the user is writing. They also use the stylus to perform the same operations they would perform with the mouse on a desktop system. For example, they let you tap to click buttons, and tap and drag to move items. For more information on tablet PCs, see `msdn.microsoft.com/mobility/tabletpc/default.aspx`.

Though ink controls are most useful for tablet PCs, WPF includes two ink controls that you can use in any Visual Basic application.

Control	Purpose
InkCanvas	Displays or captures ink strokes.
InkPresenter	Displays ink strokes.

Summary

Controls are the link between the user and the application. They allow the application to give information to the user and they allow the user to control the application.

This chapter briefly described the WPF controls grouped by category. You can use the categories to help you decide which control to use. If the user must select an item, consider the controls in the "Making Selections" section. If the application needs to display status information, look at the controls in the "Providing Feedback" section.

This chapter gave only a brief introduction to the WPF controls and provides some hints about each control's purpose. Chapter 12, "Using WPF Controls," describes the controls in greater detail. It explains the most important properties, methods, and events provided by the most useful WPF controls.

12

Using WPF Controls

The code behind WPF controls is the same as the code behind Windows Forms controls. That means that everything the earlier chapters have explained about applications, forms, controls, Visual Basic code, error handling, drawing, printing, reports, and so forth, still work almost exactly as before.

Chapter 11, "Selecting WPF Controls," briefly describes the most common WPF controls, grouped by category to help you pick the control that best suits a particular task. This chapter provides more detail about WPF. It explains some of the more important concepts that underlie WPF. It also gives more detail about how particular controls work and tells how you can use them in your applications.

WPF is a huge topic. It basically reproduces all of the functionality of Windows Forms programming, and then some. This chapter cannot hope to cover all of the concepts, tools, and techniques used by WPF. Instead, it introduces some of the more important concepts and explains how to build basic WPF forms.

> *The example programs for this chapter, which are available on the book's web site, demonstrate many of the topics described in this chapter.*

> *Note that the initial build of Visual Basic 2008 introduces a bug in new WPF projects. For more information, see the section "Visual Basic 2008 Version 1 Warning" in the Introduction on page xxxix.*

WPF Concepts

WPF applications are similar in concept to Windows Forms applications in many respects. Both display a form or window that contains controls. Controls in both systems provide properties, methods, and events that determine the control's appearance and behavior.

Windows Forms applications use a set of controls provided by the System. Windows .Forms namespace. WPF applications use a different set of controls in the System.Windows.Controls namespace. Many of these controls serve similar functions to those used by Windows Forms applications, but they provide a different set of capabilities. For example, both namespaces have buttons, labels, combo boxes, and check boxes, but their appearances and abilities are different.

WPF uses these similar, but different, controls for two main reasons. First, the new controls take better advantage of the graphics capabilities of modern computer hardware and software. They can more easily provide graphical effects such as transparent or translucent backgrounds, gradient shading, rotation, two- and three-dimensional appearance, multimedia, and other effects.

The second main goal of WPF is to provide a greater separation between the user interface and the code behind it. The following sections describe this idea and some of the other key WPF concepts in greater detail.

Separation of User Interface and Code

The idea of separating the user interface from the code isn't new. Visual Basic developers have been building *thin user interface* applications for years. Here, the user interface contains as little code as possible, and calls routines written in libraries to do most of the work.

Unfortunately, the code that calls those libraries sits inside the same file that defines the user interface, at least in Visual Studio 2008 Windows Forms applications. That means you cannot completely separate the code from the user interface. For example, if one developer wants to modify the user interface, another developer cannot simultaneously modify the code behind it.

WPF separates the user interface from the code more completely. The program stores the user interface definition in a text file that uses a language called XAML (pronounced *zammel*). XAML is a special form of Extensible Markup Language (XML) that defines user interface elements such as buttons, labels, container controls, backgrounds, colors, fonts, styles, and other control attributes.

Associated with a XAML file is a code file containing Visual Basic code. It contains any code you write to respond to events and manipulate the controls much as Windows Forms code can.

By keeping the user interface and the code as separate as possible, WPF allows more than one developer to work on the same form at the same time. For example, a graphics designer can use a tool called Expression Design to build the user interface, defining the forms' labels, menus, buttons, and other controls. Then a Visual Basic developer can attach code to handle the controls' events.

> *You can learn more about Expression Design and download a trial version at* `www.microsoft.com/expression/products/overview.aspx`.

Because the user interface definition is separate from the code behind it, the graphic designer can later edit the XAML to rearrange controls, change their appearance, and otherwise modify the user interface while the code behind it should still work.

> *It's not yet clear whether this scenario will actually play out as envisioned by Microsoft. At a Visual Studio users group meeting, a Microsoft representative said that Expression Design will not be included with MSDN subscriptions. The group greeted this statement with a rousing chorus of boos. Of the 100 or so people in the room, none thought that their companies would have the desire or budget to provide separate graphics designers and developers. They felt that the developers would be building user interfaces much as they do today.*

I suspect there's still some room for adjustment in Microsoft's plan, however. It is possible that the Integrated Development Environment (IDE) and the Properties window will not give developers access to every feature supported by Expression Design, but if customers don't want a separate designer product, it is possible that Microsoft will respond to customer demand and pull some of these features into the IDE.

You can also implement these features by using XAML code or Visual Basic code, although that will be more difficult than using built-in design tools. If using the new features is too difficult, developers simply won't bother.

WPF Control Hierarchies

In a WPF application, the `Window` class plays a role similar to the one played by a `Form` in a Windows Forms application. Whereas a `Form` can contain any number of controls, a `Window` can contain only one. If you want a WPF form to display more than one control, you must first give it some kind of container control, and then place other controls inside that one.

For example, when you create a WPF application, its `Window` initially contains a `Grid` control that can hold any number of other controls, optionally arranged in rows and columns. Other container controls include `Canvas`, `DockPanel`, `DocumentViewer`, `Frame`, `StackPanel`, and `TabControl`.

The result is a tree-like control hierarchy with a single `Window` object serving as the root element. This matches the hierarchical nature of XAML. Because XAML is a form of XML, and XML files must have a single root element, XAML files must also have a single root element. When you look at XAML files later in this chapter, you will find that they begin with a `Window` element that contains all other elements.

Many non-container controls can hold only a single element, and that element is determined by the control's `Content` property. For example, you can set a `Button` control's `Content` property to the text that you want to display.

A control's `Content` property can only have a single value, but that value does not need to be something simple such as text. For example, Figure 12-1 shows a `Button` containing a `Grid` control that holds three labels.

Figure 12-1 This Button contains a Grid that holds three labels.

189

WPF in the IDE

The Visual Studio IDE includes editors for manipulating WPF `Window` classes and controls. Although many of the details are different, the basic operation of the IDE is the same whether you are building a Windows Forms application or a WPF application. For example, you can use the WPF Window Designer to edit a WPF window. You can select controls from the Toolbox and place them on the window much as you place controls on a Windows Form.

Despite their broad similarities, the Windows Form Designer and the WPF Window Designer differ in detail. Although the Properties window displays properties for WPF controls much as it does for Windows Forms controls, many of the property values are not displayed in similar ways.

The window represents some Boolean properties with check boxes. It represents other properties that take enumerated values by text boxes where you can type values (if you know the allowed values). The window represents some object properties with the objects' type names and doesn't allow you to select objects as the Properties window does in the Windows Form Designer.

Some of these features may be addressed in later versions of Visual Studio. Others may be places where Microsoft has reserved more advanced features for Expression Design users, and still others may simply represent a change in Visual Studio's design philosophy.

Though some of these property editors are inconvenient or missing, it is important to note that the editors merely build the XAML code that defines the user interface. You can always edit the XAML manually to achieve effects that the Properties window does not support directly.

The following sections explain how to write XAML code and the Visual Basic code behind it.

Editing XAML

Figure 12-2 shows the IDE displaying a new WPF project. Most of the areas should look familiar from Windows Forms development. The Toolbox on the left contains tools that you can place on the window in the middle area. Solution Explorer on the right shows the files used by the application. The Properties window shows property values for the currently selected control in the middle. The selected object in Figure 12-2 is the main `Window`, so the top of the Properties window shows its type: System.Windows .Window.

One large difference between the IDE's appearance when building a WPF application versus a Windows Forms application is the central editor. In a Windows Forms application, you edit a form with the Windows Form Designer. In a WPF application, you use the graphical XAML editor shown in Figure 12-2 to edit a `Window` object's XAML code. The upper half of this area shows a graphical editor where you can drag controls from the Toolbox much as you design a Windows Form. The lower part of the editor shows the resulting XAML code.

If you look closely at Figure 12-2, you can see the `Window` element that includes the rest of the file. When you first build an application, the `Window` object's element contains a single `Grid` control.

Usually, it is easiest to build WPF `Window` objects by using the graphical editor and the Toolbox. When you select a control in the graphical editor, you can view and modify many of its properties in the Properties window. Unfortunately, the Properties window does not give you access to all of the

controls' features. Some properties are read-only in the Properties window. Others are editable, but do not provide custom editors.
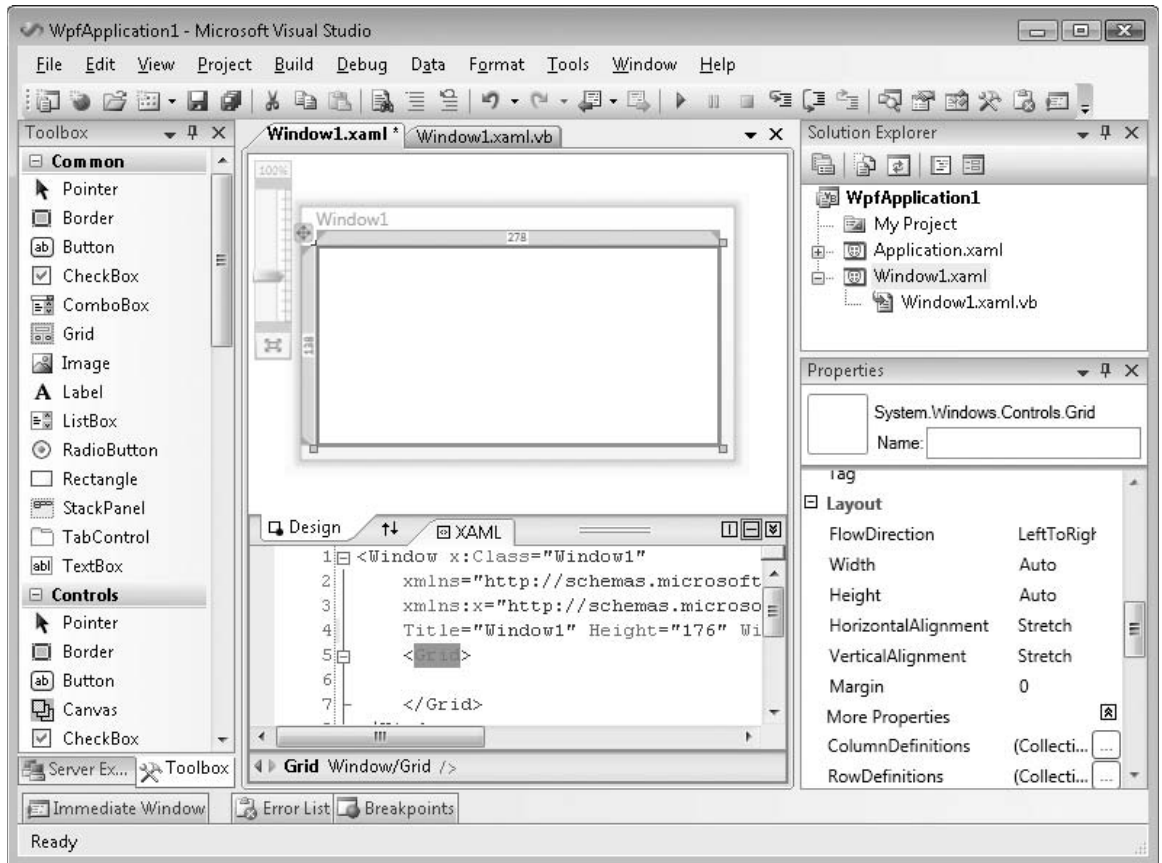
Figure 12-2: The IDE looks almost the same for Windows Forms and WPF applications.

For example, a control's `Background` property determines how the control draws its background. In the Properties window, you can set this to a single color's name, such as `Red` or a numeric color value such as `#FF0000FF` (blue). However, this property can also be set to a brush that the control should use to draw its background. For example, the brush can be a `LinearGradientBrush`, `RadialGradientBrush`, or `PathGradientBrush` object. You can set these kinds of values in the XAML code, or by using Visual Basic code, but the Properties window does not provide an editor that can do this, at least in the current release.

Figure 12-3 shows a `Window` containing a `Grid` that has a linear gradient background. Notice that the `Background` property in the Properties window displays the brush's class name System.Windows .Media.LinearGradientBrush. The XAML code in the bottom left defines the `Grid` control's background.

191
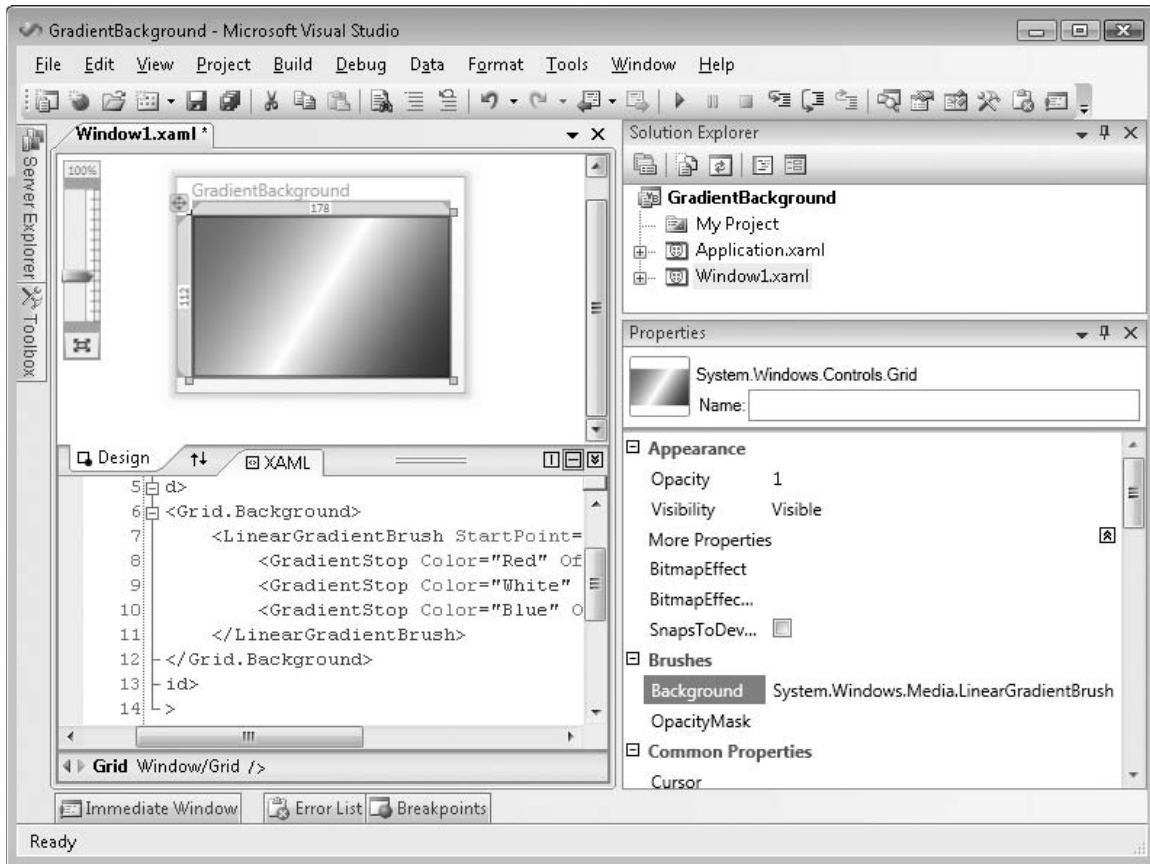
Figure 12-3: XAML code can make a gradient background but the Properties window cannot.

The following code shows the XAML that gives the grid its background:

```
<Window x:Class="Window1"
    xmlns="http://schemas.microsoft.com/winfx/2006/xaml/presentation"
    xmlns:x="http://schemas.microsoft.com/winfx/2006/xaml"
    Title="GradientBackground" Height="150" Width="200"
    >
    <Grid >
      <Grid.Background>
        <LinearGradientBrush StartPoint="0,0" EndPoint="1,1">
          <GradientStop Color="Red" Offset="0" />
          <GradientStop Color="White" Offset="0.5" />
          <GradientStop Color="Blue" Offset="1" />
        </LinearGradientBrush>
      </Grid.Background>
    </Grid>
</Window>
```

Example program GradientBackground, which is available for download on the book's web site, uses this code to fill a `Grid` with a gradient background.

The `Window` element contains the single `Grid` element. That element contains a `Grid.Background` element that in turn contains a `LinearGradientBrush` element. The `StartPoint` and `EndPoint` attributes give the points across which the gradient should vary its colors. The scale for these points ranges from (0, 0) in the control's upper-left corner to (1, 1) in its lower-right corner.

The `GradientStop` elements inside the `LinearGradientBrush` element indicate desired colors at points between the starting point and the ending point. The values shown here indicate that the background should start red at the `StartPoint`, shade to white halfway to the `EndPoint`, and shade from white to blue at the `EndPoint`.

> *Changes to the XAML code are not always immediately reflected in the graphical designer. Click the Design tab to make the designer reload the XAML code.*

Expression Design provides additional tools for editing XAML. For example, it includes editors that let you define gradient backgrounds and Bezier curves interactively. Although the Visual Studio IDE doesn't provide similar tools, you can build these non-interactively with XAML code.

Similarly, the Properties window doesn't give you an easy way to set a non-container control's `Content` property to another control, but you can do this easily with XAML code. For example, to place a `Grid` inside a `Button` control, simply type the `Grid` control's definition between the `Button` control's start and end tags.

Example program GridButton, which is available for download on the book's web site, uses the following XAML code to build a `Button` containing a `Grid` similar to the one shown in Figure 12-1:

```xml
<Window x:Class="Window1"
    xmlns="http://schemas.microsoft.com/winfx/2006/xaml/presentation"
    xmlns:x="http://schemas.microsoft.com/winfx/2006/xaml"
    Title="XamlGridButton" Height="193" Width="219"
    >
<Grid>
  <Button Name="btnGrid" Height="100" Width="150">
    <Grid Height="90" Width="140">
      <Grid.RowDefinitions>
        <RowDefinition Height="33*" />
        <RowDefinition Height="33*" />
        <RowDefinition Height="33*" />
      </Grid.RowDefinitions>
      <Grid.ColumnDefinitions>
        <ColumnDefinition Width="33*" />
        <ColumnDefinition Width="33*" />
        <ColumnDefinition Width="33*" />
      </Grid.ColumnDefinitions>
      <Label Content="UL" Grid.Row="0" Grid.Column="0" />
      <Label Content="In The Middle" Grid.Row="1" Grid.Column="0"
        Grid.ColumnSpan="3" VerticalAlignment="Center"
        HorizontalAlignment="Center" />
```

193

```
            <Label Content="LR" Grid.Row="2" Grid.Column="2"
               VerticalAlignment="Bottom" HorizontalAlignment="Right" />
          </Grid>
        </Button>
      </Grid>
  </Window>
```

The top-level `Window` element contains a `Grid` control that holds a single `Button`. The `Button` contains a second `Grid` control. `Grid.Row` and `Grid.Column` elements define the grid's row and column sizes.

The inner `Grid` contains three `Label` controls. The first displays the text UL, is aligned to the upper left (by default), and is contained in the grid's upper-left cell (row 0, column 0).

The second `Label` displays the text In the Middle, is aligned in the center, and is contained in grid's second row (row 1), first column (column 0). Its `ColumnSpan` property is 3, so it spans all three cells in the second row.

The final `Label` displays the text LR, is aligned to the lower right, and is in the grid's lower-right cell (row 2, column 2).

The graphical editor and the Properties window don't give you access to all of XAML's features, but they do let you build a basic user interface for WPF applications. Once you have defined the window's basic structure, you can use XAML to fine-tune the result (for example, by adding gradient backgrounds).

Editing Visual Basic Code

Each XAML file is associated with a Visual Basic code file. When you first create a WPF project, that file is opened by default. If you look closely at the central designer in Figure 12-3, you'll see that the XAML file `Window1.xaml` is open and visible in the designer. Another tab contains the corresponding Visual Basic file `Window1.xaml.vb`. Click that tab to view the Visual Basic source code.

The following text shows the Visual Basic source code initially created for a XAML file:

```
Class Window1

End Class
```

You can add event handlers to this file just as you can add event handlers to Windows Forms code. Use the left dropdown to select a control or Window1 Events. Then, use the right drop-down list to select an event for that object.

You can also double-click a WPF control on the WPF Window Designer to create an event handler for that control's default event. This doesn't work with every control (such as `Grid`, `Label`, and `StackPanel`) but it works for those that are most likely to need event handlers (such as `Button`, `CheckBox`, `ComboBox`, `RadioButton`, and `TextBox`).

You can also add non-event handler subroutines and functions as you can in any other Visual Basic code file.

Inside the Visual Basic code file, you can get and set control properties, and call control methods, just as you can in a Windows Forms project. The only differences are in the features the WPF controls provide. Those differences generally correspond to the XAML commands that define controls.

For example, the following Visual Basic code builds the same `Button` containing a `Grid` holding three `Labels` shown in Figure 12-1. The previous section, "Editing XAML," shows XAML code that builds this button.

```
Class Window1
    Private Sub Window1_Loaded() Handles Me.Loaded
        ' Make a grid.
        Dim grd As New Grid()
        grd.Width = btnGrid.Width - 10
        grd.Height = btnGrid.Height - 10

        ' Add rows and columns.
        AddRow(grd, New GridLength(33, GridUnitType.Star))
        AddRow(grd, New GridLength(33, GridUnitType.Star))
        AddRow(grd, New GridLength(33, GridUnitType.Star))
        AddCol(grd, New GridLength(33, GridUnitType.Star))
        AddCol(grd, New GridLength(33, GridUnitType.Star))
        AddCol(grd, New GridLength(33, GridUnitType.Star))

        ' Put things inside the grid.
        Dim lbl1 As New Label()
        lbl1.Content = "UL"
        lbl1.HorizontalAlignment = Windows.HorizontalAlignment.Left
        lbl1.VerticalAlignment = Windows.VerticalAlignment.Top
        lbl1.SetValue(Grid.RowProperty, 0)
        lbl1.SetValue(Grid.ColumnProperty, 0)
        grd.Children.Add(lbl1)

        Dim lbl2 As New Label()
        lbl2.Content = "In the Middle"
        lbl2.HorizontalAlignment = Windows.HorizontalAlignment.Center
        lbl2.VerticalAlignment = Windows.VerticalAlignment.Center
        lbl2.SetValue(Grid.RowProperty, 1)
        lbl2.SetValue(Grid.ColumnProperty, 0)
        lbl2.SetValue(Grid.ColumnSpanProperty, 3)
        grd.Children.Add(lbl2)

        Dim lbl3 As New Label()
        lbl3.Content = "LR"
        lbl3.HorizontalAlignment = Windows.HorizontalAlignment.Right
        lbl3.VerticalAlignment = Windows.VerticalAlignment.Bottom
        lbl3.SetValue(Grid.RowProperty, 2)
        lbl3.SetValue(Grid.ColumnProperty, 2)
        grd.Children.Add(lbl3)

        ' Put the grid inside the button.
        btnGrid.Content = grd
    End Sub

    ' Add a row of the indicated height to the grid.
```

```
        Private Sub AddRow(ByVal my_grid As System.Windows.Controls.Grid, _
         ByVal height As GridLength)
            Dim row_def As New RowDefinition()
            row_def.Height = height
            my_grid.RowDefinitions.Add(row_def)
        End Sub

        ' Add a column of the indicated width to the grid.
        Private Sub AddCol(ByVal my_grid As System.Windows.Controls.Grid, _
         ByVal width As GridLength)
            Dim col_def As New ColumnDefinition()
            col_def.Width = width

            my_grid.ColumnDefinitions.Add(col_def)
        End Sub

        Private Sub btnGrid_Click() Handles btnGrid.Click
            MessageBox.Show("Clicked!", "Clicked", _
                MessageBoxButton.OK, _
                MessageBoxImage.Information)
        End Sub
    End Class
```

The main `Window` class's `Loaded` event handler fires when the form is loaded. The code starts by creating a `Grid` control and setting its width and height.

Next, the code calls subroutines `AddRow` and `AddCol` to make three rows and columns. These routines make building rows and columns easier, and are described shortly.

The code then creates three `Label` controls and sets their properties. Some properties, such as `HorizontalAlignment` and `Content`, are fairly straightforward. Other properties, such as `Grid .RowProperty`, `Grid.ColumnProperty`, and `Grid.ColumnSpan` are a little trickier. Those properties only make sense when the `Label` controls are contained in a `Grid`, so they are not really properties of the `Label` controls. Instead they are properties added by the `Grid` control's `SetValue` method, much as an `ExtenderProvider` adds properties to a control. If you place a `Button` inside a `StackPanel`, the Properties window doesn't show these properties.

After it initializes each `Label`, the code uses the `Grid` control's `Children.Add` method to put the `Label` inside the `Grid`.

After it finishes creating all of the controls, the code sets the `Button` control's `Content` property to the new grid.

Subroutine `AddRow` creates a new `RowDefinition` object to represent a `Grid`'s row. It sets the object's `Height` and adds the object to the `Grid` control's `RowDefinitions` collection. Subroutine `AddCol` uses similar methods to make a new `Grid` row.

The last piece of code in this example is a `Click` event handler for the `btnGrid` button. When you click the button, this code displays a message box.

Anything you can do declaratively with XAML you can also do procedurally with Visual Basic. The following section, "XAML Features," describes some of the things that you can do with XAML and shows examples. The section "Procedural WPF" later in this chapter explains how you can implement some of the same features with Visual Basic code instead of XAML.

XAML Features

XAML is a form of XML that defines certain allowed combinations of XML elements. For example, a XAML file should have a single root element that represents a `Window`. That object can have a single child element that is normally a container. The container can hold several children with specifically defined properties such as `Width` and `Height`.

XAML is a very complicated language, and many of its features are available only in certain places within the file. For example, inside a `Button` element you can place attributes such as `Background`, `BorderThickness`, `Margin`, `Width`, `Height`, and `Content`. The XAML text editor provides IntelliSense that makes figuring out what is allowed in different places easier, but building a XAML file can still be quite challenging.

> *One good way to learn XAML is to go online and search for examples. The Microsoft web site has lots of examples, as do several other web sites. Although the documentation isn't always easy to use, the examples can help you learn specific techniques. Some good places to start include the XAML overview at* `msdn2.microsoft.com/library/ms752059.aspx` *and the Windows Presentation Foundation development page at* `msdn2.microsoft.com/library/ms754130.aspx`. *If you discover other sources of good examples, email me at* `RodStephens@vb-helper.com` *and I'll post them on the book's web site.*

The following sections describe some of the basic building blocks of a XAML application. They explain how to build objects; how to use resources, styles, and templates to make objects consistent and easier to modify; and how to use transformations and animations to make objects interactive. The section "Procedural WPF" later in this chapter explains how to do these things in Visual Basic code instead of XAML.

Objects

WPF objects are represented by XML elements in the XAML file. Their properties are represented either by attributes within the base elements or as separate elements within the main element.

For example, the following XAML code shows a `Window` containing a `Grid` object. The `Grid` element contains a `Background` attribute that makes the object's background red.

```
<Window x:Class="Window1"
    xmlns="http://schemas.microsoft.com/winfx/2006/xaml/presentation"
    xmlns:x="http://schemas.microsoft.com/winfx/2006/xaml"
    Title="WindowsApplication1" Height="235" Width="300"
    >
    <Grid Background="Red">

    </Grid>
</Window>
```

More complicated properties must be set in their own sub-elements. The following code shows a similar `Grid` that has a linear gradient background:

```
<Window x:Class="Window1"
    xmlns="http://schemas.microsoft.com/winfx/2006/xaml/presentation"
    xmlns:x="http://schemas.microsoft.com/winfx/2006/xaml"
    Title="WindowsApplication1" Height="235" Width="300"
    >
    <Grid>
      <Grid.Background>
        <LinearGradientBrush StartPoint="0,0" EndPoint="1,1">
          <GradientStop Color="Red" Offset="0.0" />
          <GradientStop Color="White" Offset="0.5" />
          <GradientStop Color="Blue" Offset="1.0" />
        </LinearGradientBrush>
      </Grid.Background>
    </Grid>
</Window>
```

Instead of using a `Background` attribute, the `Grid` element contains a `Grid.Background` element. That, in turn, contains a `LinearGradientBrush` element that defines the background. The `StartPoint` and `EndPoint` attributes indicate that the gradient should start at the upper-left corner of the grid (0, 0) and end at the lower right (1, 1). The `GradientStop` elements inside the brush's definition set the colors that the brush should display at different fractions of the way through the gradient. In this example, the gradient starts red, changes to white halfway through, and changes to blue at the end.

> *You cannot define an object's* `Background` *property more than once. If you include a* `Background` *attribute and a* `Grid.Background` *element for the same grid, the XAML editor complains.*

Object elements often contain other elements that further define the object. The following code defines a grid that has two rows and three columns. (From now on I'm leaving out the `Window` element to save space.) The rows each occupy 50 percent of the grid's height. The first column is 50 pixels wide and the other two columns each take up 50 percent of the remaining width.

```
<Grid >
  <Grid.RowDefinitions>
    <RowDefinition Width="50*" />
    <RowDefinition Width="50*" />
  </Grid.RowDefinitions>
  <Grid.ColumnDefinitions>
    <ColumnDefinition Width="50" />
    <ColumnDefinition Width="50*" />
    <ColumnDefinition Width="50*" />
  </Grid.ColumnDefinitions>
</Grid>
```

When you use a * in measurements, the control divides its height or width proportionally among items that contain a *. For example, if a grid has two rows with height 50*, they each get half of the control's height. If the two rows had heights 10* and 20*, then the first would be half as tall as the second.

If the control also contains items without that *, their space is taken out first. For example, suppose a grid defines rows with heights 10, 20*, and 30*. Then the first row has height 10, the second row gets 20/30 of the remaining height, and the third row gets the rest.

Most of the examples in this chapter use values that are at least close to percentages because they're easier to understand.

An object element's body can also contain content for the object. In some cases, the content is simple text. The following example defines a `Button` object that has the caption Click Me:

```
<Button Margin="2,2,2,2" Name="btnClickMe">Click Me</Button>
```

An object's content may also contain other objects. The following code defines a grid with three rows and three columns holding nine buttons:

```
<Grid>
  <Grid.RowDefinitions>
    <RowDefinition Height="33*" />
    <RowDefinition Height="33*" />
    <RowDefinition Height="33*" />
  </Grid.RowDefinitions>
  <Grid.ColumnDefinitions>
    <ColumnDefinition Width="33*" />
    <ColumnDefinition Width="33*" />
    <ColumnDefinition Width="33*" />
  </Grid.ColumnDefinitions>
  <Button Grid.Row="0" Grid.Column="0" Margin="5">0,0</Button>
  <Button Grid.Row="0" Grid.Column="1" Margin="5">0,1</Button>
  <Button Grid.Row="0" Grid.Column="2" Margin="5">0,2</Button>
  <Button Grid.Row="1" Grid.Column="0" Margin="5">1,0</Button>
  <Button Grid.Row="1" Grid.Column="1" Margin="5">1,1</Button>
  <Button Grid.Row="1" Grid.Column="2" Margin="5">1,2</Button>
  <Button Grid.Row="2" Grid.Column="0" Margin="5">2,0</Button>
  <Button Grid.Row="2" Grid.Column="1" Margin="5">2,1</Button>
  <Button Grid.Row="2" Grid.Column="2" Margin="5">2,2</Button>
</Grid>
```

Usually, it is easiest to start building a `Window` by using the graphical XAML editor, but you may eventually want to look at the XAML code to see what the editor has done. It often produces almost but not quite what you want. For example, if you size and position a control by using click and drag, the editor may set its `Margin` property to 10,10,11,9 when you really want 10,10,10,10 (or just 10).

It can also sometimes be hard to place controls exactly where you want them. You can fix some of these values in the Properties window, but sometimes it's just easier to edit the XAML code directly.

Resources

Example program Calculator, which is available for download on the book's web site, is shown in Figure 12-4. This program contains three groups of buttons that use radial gradient backgrounds with similar colors. The number buttons, +/-, and the decimal point have yellow backgrounds drawn

with `RadialGradientBrush` objects. The CE, C, and = buttons have blue backgrounds, and the operator buttons have green backgrounds.

You could build each button separately, including the appropriate `RadialGradientBrush` objects to give each button the correct background. Suppose, however, you decide to change the color of all of the number buttons from yellow to red. You would have to edit each of their 12 `RadialGradientBrush` objects to give them their new colors. In addition to being a lot of work, those changes would give you plenty of chances to make mistakes. The changes would be even harder if you decide to change the numbers of colors used by the brushes (perhaps having the brush shade from yellow to red to orange), or if you want to use a completely different brush for the buttons such as a `LinearGradientBrush`.

One of the ways XAML makes maintaining projects easier is by letting you define resources. You can then use the resources when defining objects. In this example, you can define resources to represent button backgrounds, and then use those resources to set each button's `Background` property. If you later need to change the background, you only need to update the resources.

Figure 12-4: This program uses resources
to simplify maintenance.

The following code shows how the calculator application shown in Figure 12-4 creates a `LinearGradientBrush` resource called `brResult`, which the program uses to draw the result text box at the top. Ellipses show where code has been omitted to make it easier to read.

```
<Window x:Class="Window1"
    xmlns="http://schemas.microsoft.com/winfx/2006/xaml/presentation"
    xmlns:x="http://schemas.microsoft.com/winfx/2006/xaml"
    Title="XamlCalculator" Height="292" Width="227" Focusable="True">
  <Window.Resources>
    ...
```

```
    <LinearGradientBrush x:Key="brResult"
      StartPoint="0,0"
      EndPoint="1,1">
      <GradientStop Color="LightBlue" Offset="0.0" />
      <GradientStop Color="AliceBlue" Offset="1.0" />
    </LinearGradientBrush>
    ...
  </Window.Resources>
  ...
</Window>
```

The `Window` element contains a `Window.Resources` tag that contains the resource definitions. The `LinearGradientBrush` element defines the brush. One of the more important pieces of this element is the `x:Key` attribute, which identifies the brush for later use.

The following code shows how the calculator program defines the `Label` that displays calculation results. The `Background` attribute refers to the resource `brNumber`.

```
<Label Name="lblResult"
  Background="{StaticResource brResult}"
  Grid.ColumnSpan="4"
  Margin="2,2,2,2"
  HorizontalContentAlignment="Right"
  VerticalContentAlignment="Center">0</Label>
```

Later if you decide to change the background color for the result label, you only need to change the definition of the `brResult` resource. This example only uses that resource for one label so you don't save a huge amount of work by defining a resource. The program's buttons, however, reuse the same resources many times. Instead of reusing the background resources directly, however, the buttons use styles as described in the next section.

Styles

Resources make it easy to create many controls that share an attribute such as a background. Styles take attributes a step further by allowing you to bundle multiple attributes into one package. For example, you could define a style that includes background, width, height, and font properties. Then you could use the style to help define controls.

You can also use styles to define other styles. For example, you can make a base style to be applied to every button in an application. Then you can derive other styles for different kinds of buttons from the base style.

The following example defines a style named `styAllButtons`. It contains `Setter` elements that set controls' properties. This style sets a control's `Focusable` property to `false` and its `Margin` property to 2,2,2,2.

```
<Style x:Key="styAllButtons">
  <Setter Property="Control.Focusable" Value="false" />
  <Setter Property="Control.Margin" Value="2,2,2,2" />
</Style>
```

201

The following code defines a style named `styClear` for the calculator's C, CE, and = buttons:

```
<Style x:Key="styClear" BasedOn="{StaticResource styAllButtons}">
  <Setter Property="Control.Background" Value="{StaticResource brClear}" />
  <Setter Property="Grid.Row" Value="1" />
  <Setter Property="Control.Margin" Value="2,20,2,2" />
</Style>
```

The `BasedOn` attribute makes the new style start with the properties defined by `styAllButtons`. The new style then uses two `Setter` elements to add new values for the `Background` (set to the brush resource `brClear`) and `Grid.Row` properties (these buttons are all in row 1 in the calculator). It then overrides the `styAllButtons` style's value for the `Margin` property to increase the margin above these buttons.

The following code shows how the program defines its C button. By setting the button's style to `styClear`, the code sets most of the button's properties with a single statement. It then sets the button's `Grid.Column` property (those values are different for the C, CE, and = buttons) and its content.

```
<Button Name="btnC"
  Style="{StaticResource styClear}"
  Grid.Column="1">C</Button>
```

Styles let the program keep all of the common properties for a set of controls in a single location. Now if you decided to change the color of the C, CE, and = buttons, you would only need to change the definition of the `brClear` brush. If you wanted to change the brushes' margins, you would only need to change the `styClear` style.

As the previous code shows, it also keeps the controls' definitions very simple.

Styles also let you easily change the controls' properties later. For example, if you later decide to specify the font family and font size for the calculator's C, CE, and = buttons, you only need to add the appropriate `Setter` elements to `styClear` instead of adding a new property to every button. If you want to set the font for every button in the program, you simply add the appropriate `Setter` elements to `styAllButtons` and the other styles automatically pick up the changes.

Templates

Templates determine how controls are drawn and how they behave by default. For example, the default button template makes buttons turn light blue when the mouse hovers over them. When you press the button, it grows slightly darker and shows a thin shadow along its upper and left edges. By using `Template` elements, you can override these default behaviors.

The following code contained in the `Window.Resources` section defines a button template:

```
<Style TargetType="Button">
  <Setter Property="Margin" Value="2,2,2,2" />
  <Setter Property="Template">
    <Setter.Value>
      <ControlTemplate TargetType="{x:Type Button}">
```

```
          <Grid>
            <Polygon x:Name="pgnBorder"
              Stroke="Purple"
              StrokeThickness="5"
              Points="0.2,0 0.8,0 1,0.2 1,0.8 0.8,1 0.2,1 0,0.8 0,0.2"
              Stretch="Fill"
              Fill="{StaticResource brOctagonUp}">
            </Polygon>
            <ContentPresenter
              HorizontalAlignment="Center"
              VerticalAlignment="Center" />
          </Grid>

          <!-- Triggers -->
          <ControlTemplate.Triggers>
            <Trigger Property="IsMouseOver" Value="true">
              <Setter TargetName="pgnBorder" Property="Stroke" Value="Black" />
              <Setter TargetName="pgnBorder" Property="Fill"
                Value="{StaticResource brOctagonOver}" />
            </Trigger>
          </ControlTemplate.Triggers>
        </ControlTemplate>
      </Setter.Value>
    </Setter>
  </Style>
```

The code begins with a `Style` element that contains two `Setter` elements. The first `Setter` sets a button's `Margin` property to 2,2,2,2. The second `Setter` sets a `Template` property. The `Setter`'s value is a `ControlTemplate` element targeted at `Buttons`.

The `ControlTemplate` contains a `Grid` that it uses to hold other elements. In this example, the `Grid` holds a `Polygon` element named `pgnBorder`. The `Points` attribute lists the points used to draw the polygon. Because the polygon's `Fill` attribute is set to `Stretch`, the polygon is stretched to fill its parent area, and `Points` coordinates are on a 0.0 to 1.0 scale within this area. The polygon's `Fill` attribute is set to the `brOctagonUp` brush defined elsewhere in the `Window.Resources` section and not shown here. This is a `RadialGradientBrush` that shades from white in the center to red at the edges.

The `ControlTemplate` element also contains a `Triggers` section. The single `Trigger` element in this section executes when the button's `IsMouseOver` condition is `true`. When that happens, a `Setter` changes the `pgnBorder` polygon's `Stroke` property to `Black`. A second `Setter` sets the polygon's `Fill` property to another brush named `brOctagonOver`. This brush (which also isn't shown here) shades from red in the center to white at the edges.

Because this style does not have an `x:Key` attribute, it applies to any button in the `Window` that doesn't have a `Style` set explicitly.

Example program `ButtonTemplate`, which is available for download on the book's web site, uses the following code to create its controls:

```
<Grid>
  <Grid.ColumnDefinitions>
    <ColumnDefinition Width="0.25*" />
    <ColumnDefinition Width="0.25*" />
    <ColumnDefinition Width="0.25*" />
    <ColumnDefinition Width="0.25*" />
  </Grid.ColumnDefinitions>
  <Grid.RowDefinitions>
    <RowDefinition Height="0.50*" />
    <RowDefinition Height="0.50*" />
  </Grid.RowDefinitions>
  <Button Name="btnOne" Content="One" Grid.Row="1" Grid.Column="0" />
  <Button Name="btnTwo" Content="Two" Grid.Row="1" Grid.Column="1" />
  <Button Name="btnThree" Content="Three" Grid.Row="1" Grid.Column="2" />
  <Button Name="btnFour" Content="Four" Grid.Row="1" Grid.Column="3" />

  <Button Name="btnClickMe" Content="Click Me"
    Style="{StaticResource styYellowButton}" />
  <Button Name="btnYellow" Content="I'm Yellow"
    Style="{StaticResource styYellowButton}"
    Grid.Column="2" Grid.Row="0" />
</Grid>
```

The `Window` contains a `Grid` that holds six buttons. The first four buttons do not explicitly set their `Style`, so they use the previously defined octagonal style.

The final buttons set their `Style` attributes to `styYellowButton` (also defined in the `Windows .Resources` section, but not shown here) so they display a yellow background. That style also positions the button's text in the upper center. When you hover the mouse over these buttons, they switch to an orange background. If you press the mouse down on these buttons, they change to a red background with white text that says "Pushed!"

Example program ButtonTemplate, which is available for download on the book's web site, demonstrates this code. Download the example to see how the triggers work.

Figure 12-5 shows the result. The mouse is hovering over the second button, so it displays the black border and its background shades from red in the center to white at the edges.
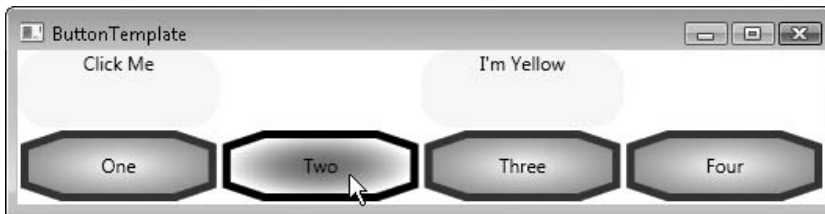
Figure 12-5: Templates let you change the appearance and behavior of objects such as buttons.

In the version of Visual Studio I'm currently using, the octagonal buttons don't draw in the graphical XAML editor. At runtime, they look and work as intended, but the XAML editor doesn't seem to understand the code that sets the yellow button's text to white when you push the button. The previous version of the designer only displayed their text.

You can use templates to change the appearance and behavior of XAML objects to give your applications distinctive appearances, but you probably shouldn't get too carried away. Although you can make buttons radically change their colors, shapes, captions, and other characteristics when the user interacts with them, doing so may be very distracting. Use templates to make your applications distinctive, but not overwhelming.

Transformations

Properties determine a control's basic appearance, but you can further modify that appearance by using a `RenderTransform` element. The following code creates a button that has been rotated 270 degrees. The `Button.RenderTransform` element contains a `RotateTransform` element that represents the rotation.

```
<Button Name="btnSideways"
  Content="Sideways"
  Background="{StaticResource brButton}"
  Margin="-6,-6.5,0,0"
  Height="43"
  HorizontalAlignment="Left"
  VerticalAlignment="Top"
  Width="94">
  <Button.RenderTransform>
    <RotateTransform Angle="270" CenterX="75" CenterY="50" />
  </Button.RenderTransform>
</Button>
```

XAML also provides `TranslateTransform` and `ScaleTransform` elements that let you translate and scale an object. Example program RotatedButton, which is available for download on the book's web site and shown in Figure 12-6, uses transformations to draw several buttons that have been rotated and scaled vertically and horizontally.

XAML also defines a `TransformGroup` element that you can use to perform a series of transformations on an object. For example, a `TransformGroup` would let you translate, scale, rotate, and then translate an object again.

Figure 12-6: Buttons can be rotated and scaled vertically and horizontally by using RotateTransform and ScaleTransform.

Animations

The section "Templates" earlier in this chapter shows how to use `Triggers` to make an object change its appearance in response to events. For example, it shows how to make a button change its background and border color when the mouse moves over it.

XAML also provides methods for scripting more complicated actions that take place over a defined period of time. For example, you can make a button spin slowly for two seconds when the user clicks it.

You use a trigger to start the animation and a `Storyboard` object to control it. The `SpinButton` example program, which is available for download on the book's web site, uses the following code to make a button rotate around its center when it is clicked:

```
<Button Name="btnSpinMe" Content="Spin Me"
  Width="150" Height="100">
  <Button.Background>
    <RadialGradientBrush
      Center="0.5,0.5"
      RadiusX="1.0" RadiusY="1.0">
      <GradientStop Color="Yellow" Offset="0.0" />
      <GradientStop Color="Orange" Offset="1.0" />
    </RadialGradientBrush>
  </Button.Background>
  <Button.RenderTransform>
    <RotateTransform x:Name="rotButton"
      Angle="0"
      CenterX="75" CenterY="50" />
  </Button.RenderTransform>
  <Button.Triggers>
    <EventTrigger RoutedEvent="Button.Click">
      <EventTrigger.Actions>
        <BeginStoryboard>
          <Storyboard
            Storyboard.TargetName="rotButton"
            Storyboard.TargetProperty="(RotateTransform.Angle)">
            <DoubleAnimationUsingKeyFrames>
              <SplineDoubleKeyFrame KeyTime="0:0:00.0" Value="0.0" />
              <SplineDoubleKeyFrame KeyTime="0:0:00.2" Value="30.0" />
              <SplineDoubleKeyFrame KeyTime="0:0:00.8" Value="330.0" />
              <SplineDoubleKeyFrame KeyTime="0:0:01.0" Value="360.0" />
            </DoubleAnimationUsingKeyFrames>
          </Storyboard>
        </BeginStoryboard>
      </EventTrigger.Actions>
    </EventTrigger>
  </Button.Triggers>
</Button>
```

Much of this code should seem familiar by now. The `Button` element's attributes set its name, contents, and size. A `Background` element fills the button with a `RadialGradientBrush`.

The `Button` element contains a `RenderTransform` element similar to the ones described in the previous section. In this case, the transform is a `RotateTransform` with angle of rotation initially set to 0 so that

the button appears in its normal orientation. Its center is set to the middle of the button. The transform is named `rotButton` so that other code can refer to it later.

After the transform element, the code contains a `Triggers` section. This section holds an `EventTrigger` element that responds to the `Button.Click` routed event. A *routed event* is simply an event that is processed so that you can catch it with a normal Visual Basic event handler. When the user clicks the button, the `Button.Click` event fires and this trigger springs into action.

The trigger's `Actions` element contains the tasks that the trigger should perform when it runs. In this example, the trigger performs the `BeginStoryboard` action. Inside the `BeginStoryboard` element is a `Storyboard` element that represents the things that the storyboard should do.

The `Storyboard` element's `TargetName` attribute gives the target object on which the storyboard should act, in this case the `RotateTransform` object named `rotButton`. The `TargetProperty` attribute tells what property of the target button the storyboard should manipulate, in this example the object's `Angle` property.

The `Storyboard` element contains a `DoubleAnimationUsingKeyFrames` element. A *key frame* is specific point in an animation sequence with known values. The program calculates values between the key frame values to make the animation smooth.

This `DoubleAnimationUsingKeyFrames` element holds a collection of `SplineDoubleKeyFrame` elements that define the animation's key values. Each key frame gives its time in the animation in hours, minutes, and seconds, and the value that the controlled property should have at that point in the animation. In this example, the rotation transformation's angle should have value 0 when the storyboard starts, a value of 30 when the animation is 20 percent complete, a value of 330 when the storyboard is 80 percent complete, and a value of 360 when the storyboard finishes. The result is that the button rotates slowly for the first 0.2 seconds, spins relatively quickly for the next 0.6 seconds, and then finishes rotating at a more leisurely pace.

Example program `SpinButton` animates a single property, the button's angle of rotation, but you can animate more than one property at the same time if you must. Program `SpinAndGrowButton`, which is also available for download on the book's web site, simultaneously animates a button's angle of rotation and size. This example has two key differences from program `SpinButton`.

First, the new button's `RenderTransform` element contains a `TransformGroup` that contains two transformations, one that determines the button's angle of rotation and one that determines its scaling:

```
<Button.RenderTransform>
  <TransformGroup>
    <RotateTransform x:Name="rotButton"
      Angle="0"
      CenterX="50" CenterY="25" />
    <ScaleTransform x:Name="scaButton"
      ScaleX="1" ScaleY="1"
      CenterX="50" CenterY="25" />
  </TransformGroup>
</Button.RenderTransform>
```

The second difference is in the new button's `Storyboard`. The following code omits the animation's `TargetName` and `TargetProperty` from the `Storyboard` element's attributes. It includes three `DoubleAnimationUsingKeyFrame` elements inside the `Storyboard`, and it is there that it sets the `TargetName` and `TargetProperty`. The three animations update the button's angle of rotation, horizontal scale, and vertical scale.

```xml
<Storyboard>
  <!-- Rotate -->
  <DoubleAnimationUsingKeyFrames
    Storyboard.TargetName="rotButton"
    Storyboard.TargetProperty="(RotateTransform.Angle)">
    <SplineDoubleKeyFrame KeyTime="0:0:00.0" Value="0.0" />
    <SplineDoubleKeyFrame KeyTime="0:0:01.0" Value="360.0" />
  </DoubleAnimationUsingKeyFrames>

  <!-- ScaleX -->
  <DoubleAnimationUsingKeyFrames
    Storyboard.TargetName="scaButton"
    Storyboard.TargetProperty="(ScaleTransform.ScaleX)">
    <SplineDoubleKeyFrame KeyTime="0:0:00.0" Value="1.0" />
    <SplineDoubleKeyFrame KeyTime="0:0:00.5" Value="2.0" />
    <SplineDoubleKeyFrame KeyTime="0:0:01.0" Value="1.0" />
  </DoubleAnimationUsingKeyFrames>

  <!-- ScaleY -->
  <DoubleAnimationUsingKeyFrames
    Storyboard.TargetName="scaButton"
    Storyboard.TargetProperty="(ScaleTransform.ScaleY)">
    <SplineDoubleKeyFrame KeyTime="0:0:00.0" Value="1.0" />
    <SplineDoubleKeyFrame KeyTime="0:0:00.5" Value="2.0" />
    <SplineDoubleKeyFrame KeyTime="0:0:01.0" Value="1.0" />
  </DoubleAnimationUsingKeyFrames>
</Storyboard>
```

By using XAML `Storyboard`s, you can build complex animations that run when certain events occur. As with templates, however, you should use some restraint when building storyboard animations. A few small animations can make an application more interesting, but too many large animations can distract and annoy the user.

Drawing Objects

WPF provides several objects for drawing two-dimensional shapes. The following sections summarize the most useful of these objects: `Line`, `Ellipse`, `Rectangle`, `Polygon`, `Polyline`, and `Path`.

Line

The `Line` object draws a straight line between two points. The `X1`, `Y1`, `X2`, and `Y2` attributes determine the line's endpoints. The following code draws a line from (10, 10) to (90, 90) and another from (90, 10) to (10, 90):

```xml
<Line X1="10" Y1="10" X2="90" Y2="90"
  Grid.Column="0" Grid.Row="1"
  Stroke="Blue" StrokeThickness="10"
  StrokeStartLineCap="Round" StrokeEndLineCap="Round" />
```

```
<Line X1="90" Y1="10" X2="10" Y2="90"
  Grid.Column="0" Grid.Row="1"
  Stroke="Blue" StrokeThickness="10"
  StrokeStartLineCap="Round" StrokeEndLineCap="Round" />
```

The `Stroke` and `StrokeThickness` attributes determine the lines' color and thickness.

The `StrokeStartLineCap` and `StrokeEndLineCap` attributes determine the appearance of the lines' start and end points. This example draws rounded end caps.

Ellipse

The `Ellipse` object draws an ellipse. The following code draws an ellipse filled with a `LinearGradientBrush`:

```
<Ellipse Margin="2,20,2,20"
  Grid.Column="2" Grid.Row="0"
  Stroke="Orange" StrokeThickness="5">
  <Ellipse.Fill>
    <LinearGradientBrush
      StartPoint="0,0"
      EndPoint="1,0">
      <GradientStop Color="Green" Offset="0.0" />
      <GradientStop Color="White" Offset="0.5" />
      <GradientStop Color="Green" Offset="1.0" />
    </LinearGradientBrush>
  </Ellipse.Fill>
</Ellipse>
```

Rectangle

The `Rectangle` object draws a rectangle. The syntax is similar to that used to draw ellipses.

Polygon

The `Polygon` object draws a closed polygon. Its `Points` attribute lists the points that should be connected. The `Polygon` object automatically closes its figure by connecting the final point to the first point.

The following code draws the four-pointed star:

```
<Polygon Margin="0,0,0,0"
  Grid.Column="0" Grid.Row="0"
  Points="10,10 50,40 90,10 60,50 90,90 50,60 10,90 40,50"
  Fill="LightBlue"
  Stroke="Red" StrokeThickness="3" />
```

Polyline

The `Polyline` object is similar to the `Polygon` object, except that it does not automatically close the drawing by connecting the final point to the first point.

The following code draws a series of four dashed lines:

```
<Polyline Margin="0,0,0,0"
  Grid.Column="1" Grid.Row="0"
  Points="20,20 40,40 60,30 90,90 30,70"
  Stroke="Black" StrokeLineJoin="Round"
  StrokeThickness="3"
  StrokeDashArray="2,1,2,3" />
<Ellipse Margin="2,20,2,20"
   Grid.Column="2" Grid.Row="0"
   Stroke="Orange" StrokeThickness="5">
   <Ellipse.Fill>
     <LinearGradientBrush
       StartPoint="0,0"
       EndPoint="1,0">
       <GradientStop Color="Green" Offset="0.0" />
       <GradientStop Color="White" Offset="0.5" />
       <GradientStop Color="Green" Offset="1.0" />
     </LinearGradientBrush>
   </Ellipse.Fill>
</Ellipse>
```

This code demonstrates a few additional features of line drawing in general. The `StrokeLineJoin` attribute determines how lines are connected. In this example, the lines are joined with rounded corners.

The `StrokeDashArray` attribute determines the lines' dash pattern. The numbers indicate the number of units the line draws and skips. In this example, the value 2,1,2,3 means the line draws 2 units, skips 1 unit, draws 2 units, and skips 3 units. Each unit represents the line's width.

Path

The `Path` object draws a series of shapes such as lines, arcs, and curves. A `Path` object can be incredibly complex, and can include any of the other drawing objects plus a few others that draw smooth curves.

You can define a `Path` object in two ways. First, you can make the `Path` element contain other elements (`Line`, `Ellipse`, and so forth) that define objects drawn by the path.

The second (and more concise) method is to use the `Path` element's `Data` attribute. This is a text attribute that contains a series of coded commands for drawing shapes. For example, the following code makes the `Path` move to the point (20, 20), and then draw to connect the following points (80, 20), (50, 60), (90, 100), and (50, 120):

```
<Path Stroke="Gray" StrokeThickness="5" Grid.Column="1" Grid.Row="1"
  Data="M 20,20 L 80,20 50,60 90,100 50,120" />
```

You can use spaces or commas to separate point coordinates. To make it easier to read the code, you may want to use commas between a point's X and Y coordinates and spaces between points, as in the previous example.

Some commands allow both uppercase and lowercase command letters. For those commands, the lowercase version means that the following points' coordinates are relative to the previous points'

coordinates. For example, the following data makes the object move to the point (10, 20) and then draws to the absolute coordinates (30, 40):

```
Data="M 10,20 L 30,40"
```

In contrast, the following data moves to the point (10, 20) as before, but then moves distance (30, 40) relative to the current position. The result is that the line ends at point (10 + 30, 20 + 40) = (40, 60).

```
Data="M 10,20 l 30,40"
```

There isn't enough room for a complete discussion of the `Path` object, but the following table summarizes the commands that you can include in the `Data` attribute.

Command	Result	Example
F0	Sets the fill rule to the odd/even rule.	F0
F1	Sets the fill rule to the non-zero rule.	F1
M or m	Moves to the following point without drawing.	M 10,10
L or l	Draws a line to the following point(s).	L 10,10 20,20 30,10
H or h	Draws a horizontal line from the current point to the given X coordinate.	h 50
V or v	Draws a vertical line from the current point to the given Y coordinate.	v 30
C or c	Draws a cubic Bezier curve. This command takes three points as parameters: two control points and an endpoint. The curve starts at the current point moving toward the first control point. It ends at the endpoint, coming from the direction of the second control point.	C 20,20 60,0 50,50
S or s.	Draws a smooth cubic Bezier curve. This command takes two points as parameters: a control point and an endpoint. The curve defines an initial control point by reflecting the second control point used by the previous S command, and then uses it plus its two points to draw a cubic Bezier curve. This makes a series of Bezier curves join smoothly.	S 60,0 50,50 S 80,60 50,70

Command	Result	Example
Q or q	Draws a quadratic Bezier curve. This command takes two points as parameters: a control point and an endpoint. The curve starts at the current point moving toward the control point. It ends at the endpoint, coming from the direction of the control point.	Q 80,20 50,60
T or t	Draws a smooth cubic Bezier curve. This command takes one point as a parameter: an endpoint. The curve defines a control point by reflecting the control point used by the previous T command, and then uses it to draw a quadratic Bezier curve. The result is a smooth curve that passes through each of the points given as parameters to successive T commands.	T 80,20 T 50,60 T 90,100
A or a	Draws an elliptical arc. This command takes five parameters: size — The X and Y radii of the arc rotation_angle — The ellipse's angle of rotation large_angle — 0 if the arc should span less than 180; 1 if the arc should span 180 degrees or more sweep_direction — 0 if the arc should sweep counterclockwise; 1 if it should sweep clockwise end_point — The point where the arc should end	A 50,20 0 1 0 60,80
Z or z	Closes the figure by drawing a line from the current point to the Path's starting point.	Z

Example program Shapes, which is available for download on the book's web site, demonstrates several different Path objects.

Example program BezierCurves, shown in Figure 12-7 and also available for download, shows examples of the four different kinds of Bezier curves. This program also draws a gray polyline to show the curves' parameters.

The cubic Bezier curve on the left connects the two endpoints using the two middle points to determine the curve's direction at the endpoints.
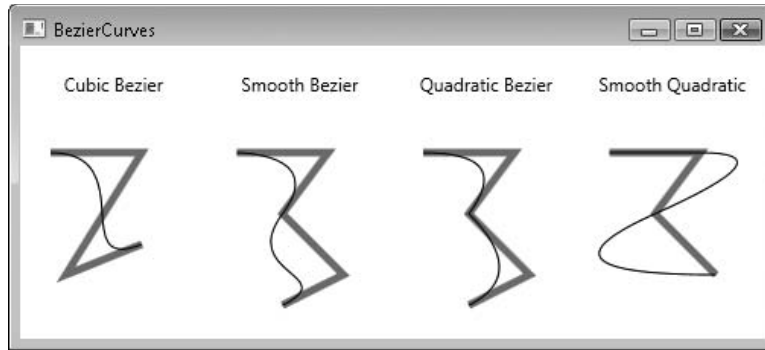
Figure 12-7: The Path object can draw Bezier curves.

The smooth cubic Bezier curve shown next passes through the first, third, and fifth points. The second point determines the curve's direction as it leaves the first point and as it enters the third point. The curve automatically defines a control point to determine the direction leaving the third point, so the curve passes through the point smoothly. Finally, the fourth point determines the curve's direction as it ends at the fifth point.

The next curve shows two quadratic Bezier curves. The first curve connects the first and third points with the second point determining the curve's direction at both points. The second curve connects the third and fifth points, using the fourth to determine its direction.

The final curve in Figure 12-7 uses an M command to move to the point (20, 20). It then uses three smooth quadratic Bezier curves to connect the following three points. The curve automatically defines the control points it needs to connect the points smoothly.

With all of these drawing objects at your disposal, particularly the powerful Path object, you can draw just about anything you need. The graphical XAML editor does not provide interactive tools for drawing shapes, but you can draw them by using the XAML text editor. It may help to sketch out what you want to draw on graph paper first.

Procedural WPF

The previous sections explain how to use XAML to build WPF windows. By using XAML, you can define controls, resources, styles, templates, transformations, and even animations.

Behind the scenes, an application reads the XAML code, and then builds corresponding controls and other objects to make the user interface. Often, it's easiest to build forms by using the XAML editor, but if necessary, your Visual Basic code can build exactly the same objects.

Usually you should build the interface with XAML to increase the separation between the user interface and the code. However, it may sometimes be easier to build dynamic elements in code (for example, in response to data loaded at runtime, inputs from the user, or in response to errors).

For example, the following Visual Basic code adds a button to a WPF form:

```
' The button we will build.
Private WithEvents btnClickMe As Button

' Build the user interface.
Private Sub Window1_Loaded() Handles Me.Loaded
    ' Get the window's default Grid.
    Dim grd As Grid = DirectCast(Me.Content, Grid)

    ' Add a Button.
    btnClickMe = New Button()
    btnClickMe.Content = "Click Me"
    btnClickMe.Margin = New Thickness(5)
    grd.Children.Add(btnClickMe)
End Sub

' The user clicked the button.
Private Sub btnClickMe_Click() Handles btnClickMe.Click
    MessageBox.Show("Clicked!")
End Sub
```

The code starts by converting the window's `Content` property into a `Grid` object. It then creates a `Button`, sets a couple of properties for it, and adds it to the `Grid` control's `Children` collection.

The `Button` control's variable is declared at the module level and includes the `WithEvents` keyword so that it is easy to catch the button's `Click` event.

Example program `ProceduralAnimatedButton`, which is available for download on the book's web site, uses Visual Basic code to implement several of the techniques described earlier using XAML code. It creates a brush object and uses it to define a `Style` for buttons. It then creates three `Buttons` using that `Style`.

When the mouse moves over a button, the program's code builds and plays an animation to enlarge the button. When the mouse moves off of the button, the code restores the button to its original size.

The following code builds the user interface objects when the program's window loads:

```
Private WithEvents btnCenter As Button
Private Const BIG_SCALE As Double = 1.5

Private Sub Window1_Loaded() Handles Me.Loaded
    ' Make a style for the buttons.
    Dim br_button As New RadialGradientBrush( _
        Colors.HotPink, Colors.Red)
    br_button.Center = New Point(0.5, 0.5)
    br_button.RadiusX = 1
    br_button.RadiusY = 1

    Dim style_button As New Style(GetType(Button))
    style_button.Setters.Add(New Setter(Control.BackgroundProperty, _
        br_button))
    style_button.Setters.Add(New Setter(Control.WidthProperty, CDbl(70)))
```

```
        style_button.Setters.Add(New Setter(Control.HeightProperty, CDbl(40)))
        style_button.Setters.Add(New Setter(Control.MarginProperty, _
            New Thickness(5)))

        ' Set the transform origin to (0.5, 0.5).
        style_button.Setters.Add(New Setter( _
            Control.RenderTransformOriginProperty, New Point(0.5, 0.5)))

        ' Make a StackPanel to hold the buttons.
        Dim stack_panel As New StackPanel()
        stack_panel.Margin = New Thickness(20)

        ' Add the Left button.
        Dim btn_left As Button
        btn_left = New Button()
        btn_left.Style = style_button
        btn_left.Content = "Left"
        btn_left.RenderTransform = New ScaleTransform(1, 1)
        btn_left.SetValue( _
            StackPanel.HorizontalAlignmentProperty, _
            Windows.HorizontalAlignment.Left)
        AddHandler btn_left.MouseEnter, AddressOf btn_MouseEnter
        AddHandler btn_left.MouseLeave, AddressOf btn_MouseLeave
        stack_panel.Children.Add(btn_left)

        ' Make the Center button.
        btnCenter = New Button()
        btnCenter.Style = style_button
        btnCenter.Content = "Center"
        btnCenter.RenderTransform = New ScaleTransform(1, 1)
        btnCenter.SetValue( _
            StackPanel.HorizontalAlignmentProperty, _
            Windows.HorizontalAlignment.Center)
        AddHandler btnCenter.MouseEnter, AddressOf btn_MouseEnter
        AddHandler btnCenter.MouseLeave, AddressOf btn_MouseLeave
        stack_panel.Children.Add(btnCenter)

        ' Make the Right button.
        Dim btn_right As New Button
        btn_right.Style = style_button
        btn_right.Content = "Right"
        btn_right.RenderTransform = New ScaleTransform(1, 1)
        btn_right.SetValue( _
            StackPanel.HorizontalAlignmentProperty, _
            Windows.HorizontalAlignment.Right)
        AddHandler btn_right.MouseEnter, AddressOf btn_MouseEnter
        AddHandler btn_right.MouseLeave, AddressOf btn_MouseLeave
        stack_panel.Children.Add(btn_right)

        Me.Content = stack_panel
    End Sub
```

This code starts by declaring a `Button` control using the `WithEvents` keyword. The program makes three buttons, but only catches the `Click` event for this one. The code also defines a constant that determines how large the button will grow when it enlarges.

When the window loads, the code creates a `RadialGradientBrush` and defines its properties. It then creates a `Style` object that can apply to `Button` objects. It adds several `Setter` objects to the `Style` to set a `Button` control's `Background`, `Width`, `Height`, `Margin`, and `RenderTransformOrigin` properties.

Next, the code creates a `StackPanel` object. This will be the window's main control and will replace the `Grid` control that Visual Studio creates by default.

The program then makes three `Button` objects. It sets various `Button` properties, including setting the `Style` property to the `Style` object created earlier. It also sets each `Button` control's `RenderTransform` property to a `ScaleTransform` object that initially scales the `Button` by a factor of 1 vertically and horizontally. It will later use this transformation to make the `Button` grow and shrink.

The code uses each `Button` control's `SetValue` method to set its `HorizontalAlignment` property for the `StackPanel`. The code uses `AddHandler` to give each `Button` an event handler for its `MouseEnter` and `MouseLeave` events. Finally, the code adds the `Button` controls to the `StackPanel`'s `Children` collection.

The window's `Loaded` event handler finishes by setting the window's `Content` property to the new `StackPanel` containing the `Button` controls.

The following code shows how the program responds when the mouse moves over a `Button`:

```
' The mouse moved over the button.
' Make it larger.
Private Sub btn_MouseEnter(ByVal btn As Button, _
 ByVal e As System.Windows.Input.MouseEventArgs)
    ' Get the button's transformation.
    Dim scale_transform As ScaleTransform = _
        DirectCast(btn.RenderTransform, ScaleTransform)

    ' Create a DoubleAnimation.
    Dim ani As New DoubleAnimation(1, BIG_SCALE, _
        New Duration(TimeSpan.FromSeconds(0.15)))

    ' Create a clock for the animation.
    Dim ani_clock As AnimationClock = ani.CreateClock()

    ' Associate the clock with the transform's
    ' ScaleX and ScaleY properties.
    scale_transform.ApplyAnimationClock( _
        ScaleTransform.ScaleXProperty, ani_clock)
    scale_transform.ApplyAnimationClock( _
        ScaleTransform.ScaleYProperty, ani_clock)
End Sub
```

This code first gets the button's `ScaleTransform` object. It then creates a `DoubleAnimation` object to change a value from 1 to the `BIG_SCALE` value (defined as 1.5 in the earlier `Const` statement) over a period of 0.15 seconds. It uses the object's `CreateClock` statement to make an

AnimationClock to control the animation. Finally, the code calls the ScaleTransformation object's ApplyAnimationClock method twice, once for its horizontal and vertical scales. The result is that the Button control's ScaleTransform object increases the Button control's scale vertically and horizontally.

The btn_MouseLeave event handler is very similar, except that it animates the Button controls' scale values shrinking from BIG_SCALE to 1.

Example program GrowingButtons uses a similar technique to enlarge and shrink Button controls. Instead of using a simple DoubleAnimation to enlarge the Button controls, however, it uses DoubleAnimationUsingKeyFrames. This object lets you define a series of values that the animation should visit.

The following code shows how this program's MouseEnter event handler works:

```
Private Const BIG_SCALE As Double = 1.75
Private Const END_SCALE As Double = 1.5

Private Sub btn_MouseEnter(ByVal btn As Button, _
 ByVal e As System.Windows.Input.MouseEventArgs)
    ' Get the button's transformation.
    Dim scale_transform As ScaleTransform = _
        DirectCast(btn.RenderTransform, ScaleTransform)

    ' Create a DoubleAnimation that first
    ' makes the button extra big and then
    ' shrinks it to the "normal" big size.
    Dim ani As New DoubleAnimationUsingKeyFrames()
    Dim fr1 As New SplineDoubleKeyFrame(1.0, KeyTime.FromPercent(0.0))
    Dim fr2 As New SplineDoubleKeyFrame(BIG_SCALE, KeyTime.FromPercent(0.5))
    Dim fr3 As New SplineDoubleKeyFrame(END_SCALE, KeyTime.FromPercent(1.0))
    ani.KeyFrames.Add(fr1)
    ani.KeyFrames.Add(fr2)
    ani.KeyFrames.Add(fr3)
    ani.Duration = New Duration(TimeSpan.FromSeconds(0.33))

    ' Create a clock for the animation.
    Dim ani_clock As AnimationClock = ani.CreateClock()
    'Dim ani_clock As AnimationClock = ani.CreateClock()

    ' Associate the clock with the transform's
    ' ScaleX and ScaleY properties.
    scale_transform.ApplyAnimationClock( _
        ScaleTransform.ScaleXProperty, ani_clock)
    scale_transform.ApplyAnimationClock( _
        ScaleTransform.ScaleYProperty, ani_clock)

    ' Pop the button to the top of the stacking order.
    grdMain.Children.Remove(btn)
    grdMain.Children.Add(btn)
End Sub
```

Instead of simply growing the `Button`'s scale factors from 1 to 1.5, the animation first makes the `Button` grow by a factor of 1.75, and then shrink to a growth factor of 1.5. This overshoot gives the `Button` a cartoon-like style that is popular in user interfaces lately.

After it finishes animating the `Button`, the code removes the `Button` from the main `Grid` control's `Children` collection, and then re-adds it to the collection to make the `Button` appear above the other `Buttons` so it covers parts of its neighbors.

Figure 12-8 shows example program `GrowingButtons`, which is available for download on the book's web site, in action with the mouse resting over the Tuesday button.

Figure 12-8: Program GrowingButtons uses Visual Basic code to animate buttons.

Other examples available for download on the book's web site demonstrate other procedural WPF techniques. For example, program `ProceduralCalculator` builds a calculator similar to the one shown in Figure 12-4, but it builds its user interface in Visual Basic code. Example program GridButtonCode uses Visual Basic code to build a button that holds a grid similar to the one shown in Figure 12-1.

Documents

WPF includes three different kinds of documents: flow documents, fixed documents, and XPS documents. These different kinds of documents provide support for high-end text and printing capabilities.

For example, fixed documents allow you to generate a document that keeps the same layout whether it is viewed on a monitor, printed at low-resolution, or printed at a very high-resolution. On each device, the document uses the features available on that device to give the best result possible.

Each of these three kinds of documents is quite complex so there isn't room to do them justice here. However, the following three sections provide an overview and give brief examples.

Flow Documents

Flow documents are designed to display as much data as possible in the best way possible, depending on runtime constraints such as the size of the control displaying the document. If the control grows, the document rearranges its contents to take advantage of the new available space. If the control shrinks, the

document again rearranges its contents to fit the available space. The effect sort of mimics the way a web browser behaves, rearranging the objects it displays as it is resized.

The WPF `FlowDocument` control represents a flow document. The `FlowDocument` can contain four basic content elements: `List`, `Section`, `Paragraph`, and `Table`. These have rather obvious purposes: to display data in a list, group data in a section, group data in a paragraph, or display data in a table.

Although the main emphasis of these elements is on text, they can contain other objects. For example, a `Paragraph` can contain controls such as `Button`, `Label`, `TextBox`, and `Grid` controls. It can also contain shapes such as `Polygon`, `Ellipse`, and `Path`.

A fifth content element, `BlockUIElement`, can hold user interface controls such a `Button`, `Label`, and `TextBox`. A `BlockUIElement` can hold only one child, but if that child is a container such as a `Grid` or `StackPanel` it may contain other controls.

WMF provides three types of objects for displaying `FlowDocuments`: `FlowDocumentReader`, `FlowDocumentPageViewer`, and `FlowDocumentScrollViewer`.

The `FlowDocumentReader` lets the user pick from three different viewing modes: single page, book reading, and scrolling. In *single page mode*, the reader displays the document one page at a time. The object determines how big to make a page based on its size. If the reader is wide enough, it will display the `FlowDocument` in two or more columns, although it still considers its surface to hold a single page at a time, even if that page uses several columns.

In *book reading mode*, the reader displays two pages at a time. The object divides its surface into left and right halves, and fills each with a "page" of data. The reader always displays two pages, no matter how big or small it is.

In *scrolling mode*, the reader displays all of the document's contents in a single long page, and it provides a scroll bar to allow the user to scroll down through the document. This is similar to the way web browsers handle a very tall web page.

Example program UseFlowDocumentReader, shown in Figure 12-9 and available for download on the book's web site, shows a `FlowDocumentReader` object displaying a document in book reading mode. The program's View menu lets you change the viewing mode.

This program demonstrates several useful features of `FlowDocument` objects. The section headers are contained in `Paragraph` objects that use a `Style` that defines their font. If you wanted to change the appearance of all of the headers, you would only need to change the `Style`.

The `FlowDocument` uses a `LinearGradientBrush` that shades from black to gray as the text moves left to right. (The effect is more striking on a monitor if you use a colored gradient.)

The document contains a table in its first section, `Button` and `TextBox` controls, an `Ellipse`, and a `Grid` that holds a `Polygon`. It uses the `Floater` element to allow another `Grid` containing a `Polygon` and a text caption to float to a position where it will fit nicely in the display. The document also holds a list, one item of which contains a `Polygon` drawing a triangle.
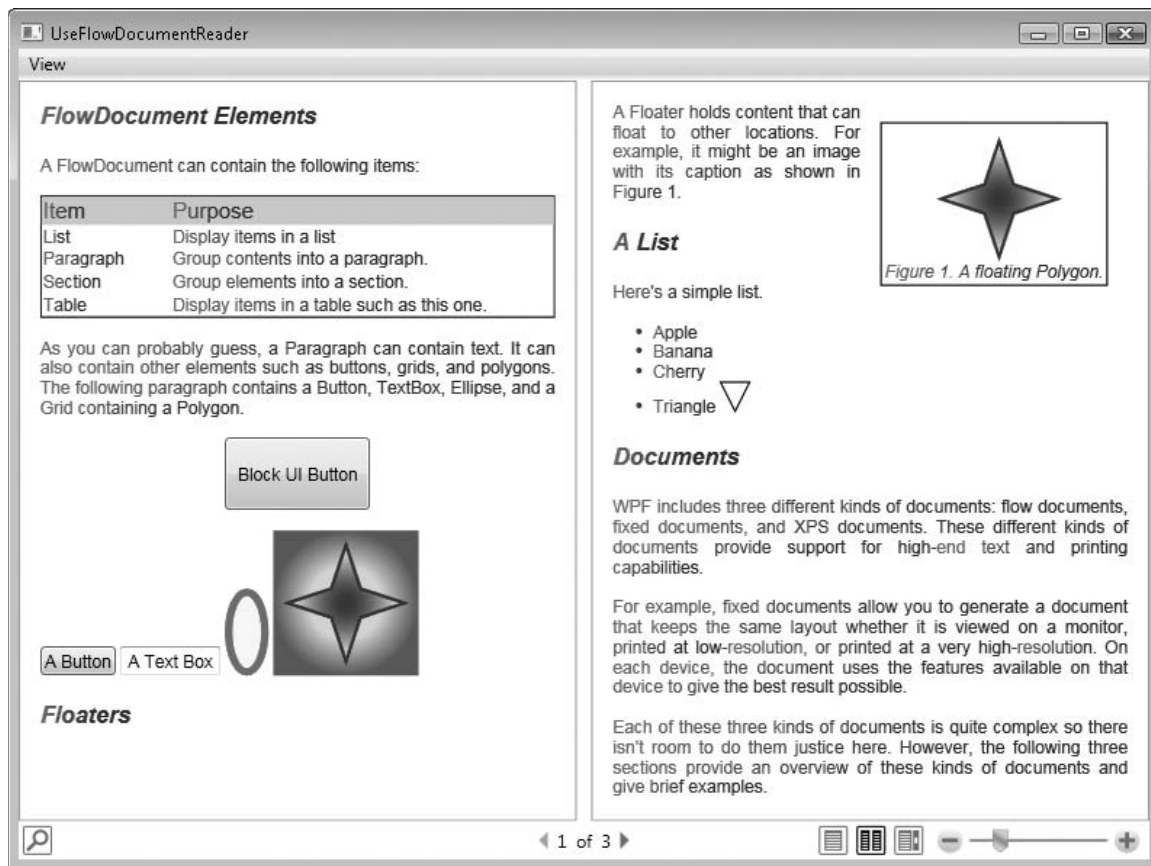
Figure 12-9: This FlowDocumentReader is using book reading mode.

The bottom of the `FlowDocumentReader` displays a toolbar. If you click the magnifying glass button on the left, a search text box appears next to it. You can enter text to search for, and the reader will let you scroll back and forth through any matches.

In the middle of the toolbar, the reader displays the current page number and the total number of pages. The three buttons to the right let the user select the single page, book reading, and scrolling views. Finally the slider on the lower right lets the user adjust the document's scale to zoom in or out.

The `FlowDocumentPageViewer` and `FlowDocumentScrollViewer` objects behave as the `FlowDocumentReader` does in its single page and scrolling modes, respectively. Example programs UseFlow DocumentPageViewer and UseFlowDocumentScrollViewer, which are available for download on the book's web site, demonstrate these controls.

If you display a `FlowDocument` element itself, it acts as a `FlowDocumentReader`. See example program UseFlowDocument, which is available for download on the book's web site.

Fixed Documents

A `FixedDocument` represents a document that should always be displayed exactly as it was originally composed. Whereas a `FlowDocument` rearranges its content to take advantage of its current size, all of the content in a `FixedDocument` remains where it was originally placed. If a `FlowDocument` is similar to a web browser, then a `FixedDocument` is similar to an Adobe Acrobat PDF document.

The `FixedDocument` object contains one or more `PageContent` objects, each containing a `FixedPage` object. It is in the `FixedPage` object that you place your content. You can use the usual assortment of containers to arrange controls and other objects inside the `FixedPage` object.

A program can use a `DocumentViewer` to display a `FixedDocument`. The `DocumentViewer` provides tools to let the user print, zoom in and out, size the document to fit the viewer, display the document in one- or two-page modes, and search for text within the document.

Example program UseFixedDocument, which is available for download on the book's web site, displays a `FixedDocument` inside a `DocumentViewer`.

XPS Documents

In addition to flow documents and fixed documents, WPF also defines a third kind of document called *XML Paper Specification* (XPS) documents. XPS is an XML-based open standard used to represent fixed documents.

An XPS document is stored in a file called a *package*. The package is made up of pieces called *parts*. Physically, the parts are arranged as files and folders. When you save the document to disk, it is stored as a ZIP-compressed collection of these physical files and folders. If you change the file's extension from `.xps` to `.zip`, you can read the files using any ZIP-enabled viewer. For example, Windows Explorer will let you browse through the ZIP file.

Logically, the document's parts form a hierarchical representation of the document. (Remember that the document uses an XML format, and XML is hierarchical, so the document is also hierarchical.) The document itself may contain a `FixedDocumentSequence` object that contains one or more `FixedDocument` objects. The `FixedDocument` objects are similar to the ones described in the previous section, so they can hold container controls that contain any number of objects arranged in a hierarchical way.

In addition to the features provided by `FixedDocuments`, XPS documents also allow you to digitally sign the package. That tells others that you signed it, gives them the time and date that you signed it, and ensures that the document has not been modified since then. A document can contain more than one signature and you can provide different levels of security on different parts of the document. For example, you could prevent others from changing the document's body, but allow them to add annotations.

Like the other new WPF document objects, XPS documents are quite complex, and there isn't room to do them justice here. See Microsoft's online help (`msdn2.microsoft.com/en-us/library/system.windows.xps` is a good place to start) and search the Web for more detailed information and examples.

Note that many of the WPF examples on the Web were written in early betas and no longer work exactly as they were originally posted. You may need to perform some conversions to make them work properly.

Summary

One of the main goals of WPF is to separate the user interface more completely from the code behind it. XAML lets you declaratively build a user interface, and then later add code to handle the events that any Windows application needs to perform. Because the user interface is separate from the code, you can assign different developers to work on each of them. You can have a graphics designer use a graphical XAML editor to build the user interface, and have a Visual Basic developer write the underlying code. Later, the graphical designer can modify the user interface without forcing you to rewrite the code.

WPF also includes hundreds of new objects for defining user interfaces. These objects let you build windows that take advantage of modern computer graphics hardware, and can provide such advanced features as translucency and rotated controls. New drawing objects produce complex graphics in two and three dimensions.

Resources and styles let you customize objects so that they are easy to change in a central location. Triggers, animations, and storyboards let the interface interact with the user at a very high level, so the bulk of your code doesn't need to handle these more cosmetic chores.

New document objects let you display information that can flow to take best advantage of the available space, or that remain in fixed positions on any display device. Powerful document viewers let users scroll through documents, zoom in and out, print, and copy data to the clipboard.

WPF provides a huge number of powerful new features, and this chapter barely scratches the surface.

In Windows Forms applications, `Form` objects play a special role. They represent the top-level user interface components in which all other controls reside.

In a WPF application, the situation is a little less obvious. A top-level object in a WPF application can be a `Window`, which roughly corresponds to a `Form`, but it can also be a `Page`, `PageFunction`, or `FlowDocument`. Chapter 13, "WPF Windows," describes the `Windows` class and these other top-level classes, and explains their special roles in WPF applications.

WPF Windows

In Windows Forms applications, `Form` objects play a special role. They represent the top-level user interface components in which all other controls reside. A typical Windows Forms application starts by displaying a `Form` object. That `Form` may provide buttons, menus, and other controls that open other `Form` objects, but all of the controls are contained in `Form` objects.

In WPF applications, you can display controls on a `Window`, an object that is basically the WPF version of a `Form`. Alternatively you can display controls in a `Page`. A `Page` is a lot like a `Window` without decorations such as borders, title bar, and system menus (maximize, minimize, restore, close, and so forth). A `Page` must be hosted inside another object that provides these decorations. Usually, a `Page` is displayed in a web browser, but the WPF `Frame` control can act as a browser and display `Page` objects.

This chapter explains how you can use these top-level objects, `Window` and `Page`, in your WPF applications. It explains how a program can display and manage multiple `Window` and `Page` objects, and provides some examples showing simple navigation schemes.

> *Note that the initial build of Visual Basic 2008 introduces a bug in new WPF projects. For more information, see the section "Visual Basic 2008 Version 1 Warning" in the Introduction on page xxxix.*

Window Applications

A typical desktop WPF application displays its control in `Window` objects. To create this type of application, select the File menu's New Project command to display the New Project dialog. On the Windows tab, select WPF Application, enter a project name, and click OK.

The new application begins with a single `Window` class named Window1. Open the Solution Explorer and double-click the Window1.xaml entry to edit the `Window`'s controls. Double-click the Window1.xaml.vb entry to edit the Visual Basic code behind the `Window`.

To add other `Window` classes, open the Project menu and select Add Window. Enter a name for the class and click OK.

To display a window in code, create a variable that refers to a new instance of the window. Call its `Show` method to display the window non-modally, or call its `ShowDialog` method to display the window modally. The following code creates a new window of type Window2 and displays it modally:

```
Dim win2 As New Window2
win2.ShowDialog()
```

Although there are several similarities between the way a program uses a `Window` and the way it uses a `Form`, there are many significant differences.

For example, both classes have a `DialogResult` property that indicates how the user closed the form. Both classes' `ShowDialog` methods return this result, so the code can easily determine the form's `DialogResult` value. In a `Form`, the `DialogResult` is a value of type `DialogResult`, an enumerated type that provides values such as OK, Cancel, Yes, and No to indicate which button the user clicked to close the form. If the code sets this value, the form automatically hides, so the calling `ShowDialog` method returns.

In contrast, a `Window`'s `DialogResult` value is a Boolean intended to indicate whether the user accepted or canceled the dialog. If you need more detail (did the user click Yes, No, or Cancel?), then you'll need to provide code in the dialog to remember which button the user clicked. If the code sets this value, the window automatically closes so the calling `ShowDialog` method returns. Unfortunately, the window closes rather than hides so you cannot display the dialog again (you cannot display a window after it has closed). If you want to remember which button the user clicked and then hide the window without closing it, you'll need to implement your own property rather than `DialogResult`, and you'll need to hide the window explicitly.

The Windows Forms and WPF `Button` classes also both have properties that you can use to define a dialog's default and cancel buttons, but they work in different ways.

You can set a Windows Forms `Button` object's `DialogResult` property to the value you want the button to give to the form's `DialogResult` property. If the user clicks the button, it assigns the form's `DialogResult` value and hides the form so the calling `ShowDialog` method returns that value.

In a WPF application, you can set a button's `IsCancel` property to `True` to indicate that the button is the form's cancel button. If the user presses the Escape key or clicks the button, the button sets the form's `DialogResult` property and closes the form so the calling `ShowDialog` method returns. Unfortunately, the button closes the form rather than merely hiding it so you cannot display the dialog again (you cannot display a window after it has closed).

You can set a WPF button's `IsDefault` property to indicate that it should fire if the user presses the Enter key. Unfortunately, this does not automatically set the form's `DialogResult` property and does not close the dialog.

Example program UseDialog, which is available for download on the book's web page, shows one approach to solving this problem. The dialog class `Window2` contains three buttons labeled Yes, No, and Cancel.

The following code shows how the dialog handles button clicks. The single `btn_Click` event handler fires for all three of the buttons. It saves the button's text in the public variable `UserClicked` and then closes the form.

```
Partial Public Class Window2
    Public UserClicked As String = "Cancel"

    Private Sub btn_Click(ByVal btn As Button, _
     ByVal e As System.Windows.RoutedEventArgs) _
     Handles btnYes.Click, btnNo.Click, btnCancel.Click
        UserClicked = btn.Content
        Me.Close()
    End Sub
End Class
```

The following code shows how the program's main window displays the dialog and checks the result. When you click the Show Dialog button, the program creates a new dialog window and displays it modally. It then checks the dialog's `UserClicked` property to see which button the user clicked.

```
Private Sub btnShowDialog_Click() Handles btnShowDialog.Click
    Dim win2 As New Window2
    win2.ShowDialog()
    Select Case win2.UserClicked
        Case "Yes"
            MessageBox.Show("You clicked Yes", "Yes", MessageBoxButton.OK)
        Case "No"
            MessageBox.Show("You clicked No", "No", MessageBoxButton.OK)
        Case "Cancel"
            MessageBox.Show("You clicked Cancel", "Cancel", _
                MessageBoxButton.OK)
    End Select
End Sub
```

Most of the things that you can do with a `Form` you can do with a `Window`. You can create new instances of `Window` classes, display them modally or non-modally, close or hide them, and view and manipulate the properties of one `Window` from another.

Nevertheless, the details between `Form` and `Window` operations may be different. You may need to use slightly different properties, and you may need to take a slightly different approach, but `Window` is a fairly powerful class and with some perseverance you should be able to build usable interfaces with it.

In many ways, the `Window` class seems like a primitive version of the `Form` class, somewhat like those used in previous versions of Visual Basic. Hopefully future versions of WPF will give us a more powerful and consistent control that provides the features we've grown used to in the `Form` class.

Page Applications

A `Page` is similar to a borderless `Window`. It doesn't provide its own decorations (border, title bar, and so forth), but instead relies on its container to provide those elements.

Often a `Page` is hosted by a web browser, although the WPF `Frame` control can also display `Page` objects.

The following sections explain how you can use `Page` objects to build WPF applications.

Browser Applications

To make an XAML Browser Application (XBAP), select the File menu's New Project command to display the New Project dialog. On the Windows tab, select WPF Browser Application, enter a project name, and click OK.

The new application begins with a single `Page` class named Page1. You can view and edit this `Page` exactly as you would view and edit a `Window`. Open the Solution Explorer and double-click the Page1 .xaml entry to edit the `Window`'s controls. Double-click the Window1.xaml.vb entry to edit the Visual Basic code behind the `Window`.

To run the application, open the Debug window and select Start Debugging. Internet Explorer should open and display the initial `Page`. Visual Studio is nicely integrated with this instance of Internet Explorer so you can set breakpoints in the code to stop execution and debug the code just as you can debug a Windows Forms application or a WPF Window application.

To add other `Page` classes to the application, open the Project menu and select Add Page. Enter a name for the class and click OK.

To display a page in code, create a variable that refers to a new instance of the page. Then use the current page's `NavigationService` object's `Navigate` method to display the new page.

The following code creates a new page of type `Page2`, and then uses the `NavigationService` object to display it:

```
Dim p2 As New Page2
NavigationService.Navigate(p2)
```

Because the application is hosted inside a browser, there are several differences in the ways in which the user will interact with the application. Rather than displaying new forms and dialogs, the application will generally display new material within the same browser.

This design has several consequences. For example, the previous code creates a new instance of the `Page2` class and displays it. If the user were to execute this same code later, it would create a second instance of the class and display it. Because these are two instances of the class, they do not have the same controls, so any changes the user makes (entering text, checking radio buttons, and so forth) are not shared between the two pages. When the second instance appears, the user may wonder where all of the previous selections have gone.

The program can prevent this confusion by using a single application-global variable to hold references to the Page2 instance. Every time the program needs to show this page, it can display the same instance. That instance will display the same control values so the user's selections are preserved.

That approach solves one problem but leads to another. Because the application runs inside a browser, the browser's navigation and history tools work with it. If you press the browser's Back button, it will display the previous page. That part works relatively transparently, but every time the application uses `NavigationService.Navigate` to display a page, that page is added to the browser's history.

To see why this is an issue, suppose the application has a main start page that contains a button leading to a second page. That page has a button that navigates back to the first page. If the user moves back and forth several times, the browser's history will be cluttered with entries such as: Page 1, Page 2, Page 1, Page 2, Page 2, and so forth. While this represents the user's actual path through the pages, it isn't very useful.

You can reduce clutter in the browser's history by using the `NavigationService` object's `GoForward` and `GoBack` methods whenever it makes sense. In this example, it would probably make sense for the second page to use the `GoBack` method to return to the main page. Instead of creating a new entry in the history as the `Navigate` method does, `GoBack` moves back one position in the existing history. After several trips between the two pages, the history will contain only those two pages, one possibly available via the browser's Back button and one possibly available via the browser's Next button.

Example program BrowserApp, which is available for download on the book's web page, demonstrates this technique. The program uses two pages that provide buttons to navigate to each other. Both pages also contain a text box where you can enter some text, just to verify that the values are preserved when you navigate between the pages.

The following code shows how the main page navigates to the second page. If the `NavigationService` can go forward, the code calls its `GoForward` method. If the `NavigationService` cannot go forward, the code uses its `Navigate` method to visit a new `Page2` object.

```
Private Sub btnPage2_Click() Handles btnPage2.Click
    If NavigationService.CanGoForward Then
        NavigationService.GoForward()
    Else
        NavigationService.Navigate(New Page2)
    End If
End Sub
```

The following code shows how the second page returns to the first. This code simply calls the `NavigationService` object's `GoBack` method.

```
Private Sub btnBack_Click() Handles btnBack.Click
    Me.NavigationService.GoBack()
End Sub
```

Once you've built an XBAP, you can run it by pointing a web browser at the compiled xbap file. When I built the previous example program, the file `BrowserApp.xbap` was created in the project's bin/Debug directory and the file successfully loaded in Internet Explorer 7.0 and Firefox 2.0.

Building a `Page` class is almost exactly the same as building a `Window` class. You use the same XAML editor and Visual Basic code behind the scenes. The main difference is in how you navigate between the application's forms. In a WPF application, you create `Window` objects and use their `Show` or `ShowDialog` methods. In an XBAP, you create `Page` objects and use the `NavigationService` object's navigation methods.

Frame Applications

Though `Page` objects normally sit inside a browser, the WPF `Frame` control can also host them. The program simply navigates the `Frame` control to a `Page` and the rest works exactly as it does for an XBAP.

Example program FrameApp, which is available for download on the book's web page and shown in Figure 13-1, uses the following code to load a `Page1` object into its `Frame` control:

```
fraPages.Navigate(New Page1)
```

This example contains the same `Page1` and `Page2` classes used by the BrowserApp example program described in the previous section.

Figure 13-1: The `Frame` control provides navigation between `Page` objects.

If an XBAP runs so easily in a browser, why would you want to host pages in a `Frame` control?

You can place one or more frames within a normal WPF Window application to let the user view different pieces of information or perform different tasks at the same time. For example, you can display help in a separate frame, possibly in a separate window.

If you build each frame's contents in a separate XBAP, then you can load the frames at runtime. That makes replacing XBAPs to upgrade or change their capabilities easy.

The `Frame` control also provides simple browser-style navigation that uses Next and Back buttons and that may be easier for users to navigate in some situations. Microsoft's web page "Top Rules for the Windows Vista User Experience" at `http://msdn2.microsoft.com/en-us/library/Aa511327 .aspx` lists as Rule 7 "Use Windows Explorer-hosted, navigation-based user interfaces, provide a Back button." That page argues that this style of interaction simplifies navigation even in traditional applications.

Personally I think this is claiming a weakness as a strength. Web browsers use this type of navigation because they have no context to provide more organized navigation other than the hyperlinks provided by web pages. There are certainly cases where this style of navigation is reasonable (for example, in wizards that lead the user through a series of steps) but many desktop applications are more natural if the user can open separate windows for different tasks. Let me know what you think at `RodStephens@vb-helper.com`*.*

The `Frame` control gives you more control than a browser does. For example, it provides easier access to page history. You can also determine a `Frame` control's size whereas you have no control over a browser's size and position.

Displaying `Page` objects within a `Frame` control won't make sense for every application, but for some it can be a useful technique.

PageFunction Applications

Microsoft's documentation says that a `PageFunction` is, "A special type of page that allows you to treat navigation to a page in a similar fashion to calling a method." This is a fairly misleading statement. Navigating to a `PageFunction` is actually similar to navigating to any other `Page` object. What is different is that a `PageFunction` is intended to take parameters when it is displayed and to return a result when it finishes.

The `PageFunction` does not perform these tasks in the same way that a method call performs them. The program "passes parameters" to the object by including them in the `PageFunction`'s constructor. It receives a "return value" by catching the `PageFunction`'s `Return` event and examining a parameter passed to that event.

Example program UsePageFunction, which is available for download on the book's web page and shown in Figure 13-2, demonstrates the `PageFunction` class. This program is an XBAP that contains a startup `Page` and a `PageFunction`. The startup `Page` contains two text boxes: one for an initial value and one for a return value. Type some text into the Initial Value text box and click the Go to Page 2 button.
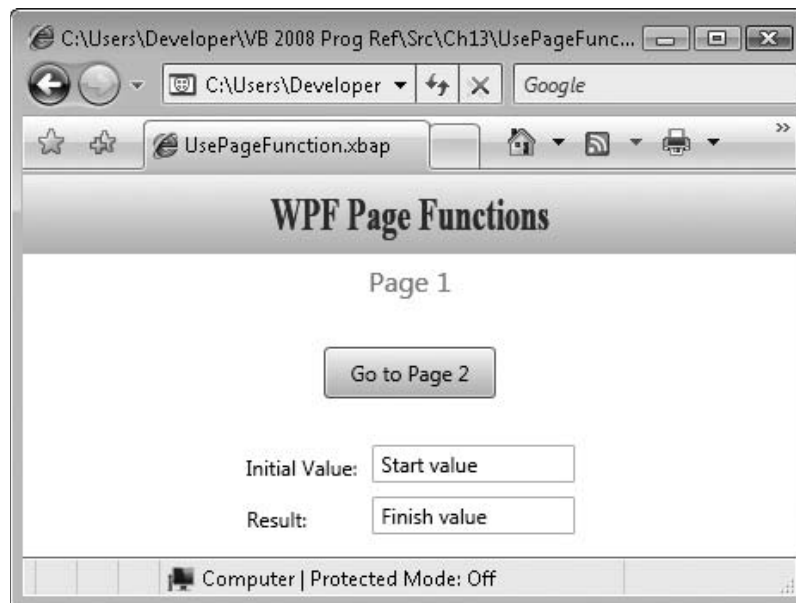

Figure 13-2: The **PageFunction** class simplifies passing parameters and return values to pages.

The second page displays the text you typed on the first page in a text box to show that the code successfully passed your text into the `PageFunction`. If you modify the text and click the Return button, the first page displays the modified text to show that it successfully received the `PageFunction` object's return value.

The following code shows how the `PageFunction` works. Notice that the class inherits from `PageFunction(Of String)`. That indicates that this is a `PageFunction` class and that its "parameter" and "return value" are strings. The wizard example described in the following section shows how a `PageFunction` can use a different data type.

```
Partial Public Class PageFunction1
    Inherits PageFunction(Of String)

    ' Start with the input value.
    Public Sub New(ByVal initial_value As String)
        Me.InitializeComponent()

        txtValue.Text = initial_value
    End Sub

    ' Return the current text.
    Private Sub btnReturn_Click() Handles btnReturn.Click
        OnReturn(New ReturnEventArgs(Of String)(txtValue.Text))
    End Sub
End Class
```

The `PageFunction`'s constructor takes a string as a parameter. It calls its `InitializeComponent` method to prepare its controls for use and saves the string value in the page's text box.

When you click the Return button, the `btnReturn_Click` event handler calls the `PageFunction`'s `OnReturn` method, passing it a new `ReturnEventArgs(Of String)` object. That object becomes the return result that the first page receives. The code passes this object's constructor the string that it wants to return. In this example, the result is the text you modified in the text box.

The following code shows how the startup `Page` works:

```
Class Page1
    Private WithEvents page2 As PageFunction1

    Private Sub btnPage2_Click() Handles btnPage2.Click
        page2 = New PageFunction1(txtInitialValue.Text)
        NavigationService.Navigate(page2)
    End Sub

    ' Catch the Return event and process the result.
    Private Sub page2_Return(ByVal sender As Object, _
     ByVal e As System.Windows.Navigation.ReturnEventArgs(Of String)) _
     Handles page2.Return
        txtReturnedValue.Text = e.Result
    End Sub
End Class
```

This code starts by declaring a variable named `page2` of type `PageFunction1`. The code uses the `WithEvents` keyword, so it is easy to catch the object's events.

When you click the page's Go to Page 2 button, the `btnPage2_Click` event handler creates a new `PageFunction1` and saves it in the variable `page2` so it can catch that object's events. It then navigates to the new object.

When the `PageFunction` calls its `OnReturn` method, this page catches the object's `Return` event. The event handler receives a parameter `e` that contains the return value in its `Result` property. The code displays the result in the `txtReturnedValue` text box.

This isn't exactly the way a method call works, but it does allow the application to pass a value to the `PageFunction` and receive a result. The next section describes a more complicated `PageFunction` example.

Wizard Applications

Although `PageFunction` objects, or XBAPs in general for that matter, are not appropriate for all situations, they work well for building wizards. A typical wizard walks the user through a series of steps one at a time until the user finishes the final step.

The BrowserWizard example program, which is available for download on the book's web page, is an XBAP that uses `PageFunction` objects to build a simplistic dinner selection wizard.

The start page is a `Page` object that displays a Start Wizard button and a list of final selections made by the wizard (initially these are blank). When the user clicks the button, the program displays the wizard's first page.

The first page is a `PageFunction` that contains a combo box where the user can select an appetizer and a check box that lets the user select salad (or not). After making selections, the user can click the Next button to move to the wizard's second page. The user can also click the Cancel button to close the wizard.

The second page is another `PageFunction`. This page contains two combo boxes where the user can select an entrée and a drink. This page only enables its Next button after the user selects an entrée. The page also contains a Prev button that lets the user move back to the first page and a Cancel button that lets the user cancel the wizard.

The final page is also implemented with a `PageFunction` object. It contains a combo box that lets the user select a dessert. It provides Prev and Cancel buttons similar to those on the second page. Instead of a Next button, it displays a Finish button that ends the wizard. Control returns to the start page and that page displays the user's choices.

This application passes an object of type `WizardData` to each of its pages. This class, shown in the following code, keeps track of the user's selections as the wizard walks through its steps:

```
Public Enum DessertType
    None
    IceCream
    Cake
    Pie
    Cookie
End Enum

' This is the data that the user will fill in.
' We set default values here.
Public Class WizardData
    Public Canceled As Boolean = True
    Public Appetizer As String = ""
    Public Entree As String = ""
    Public Salad As Boolean = False
    Public Drink As String = ""
    Public Dessert As DessertType = DessertType.None
End Class
```

In addition to fields to store the user's appetizer, entrée, salad, drink, and dessert selections, the `WizardData` class also defines a `Canceled` field to keep track of whether the user clicked the Cancel button at any stage.

The following code shows how the start page works:

```
Class WizardStart
    Private WithEvents m_Page1 As WizardPage1

    ' Display page 1.
    Private Sub btnPage1_Click() Handles btnPage1.Click
        m_Page1 = New WizardPage1(New WizardData)
        NavigationService.Navigate(m_Page1)
    End Sub

    ' Page 1 returned.
    Private Sub m_Page1_Return(ByVal sender As Object, _
     ByVal e As System.Windows.Navigation.ReturnEventArgs(Of WizardData)) _
     Handles m_Page1.Return
        Dim wiz_data As WizardData = e.Result

        ' See if the user canceled.
        If wiz_data.Canceled Then
            lblAppetizer.Content = ""
            lblEntree.Content = ""
            lblSalad.Content = ""
            lblDrink.Content = ""
            lblDessert.Content = ""
        Else
            lblAppetizer.Content = wiz_data.Appetizer
            lblEntree.Content = wiz_data.Entree
            lblSalad.Content = wiz_data.Salad.ToString
```

```
                lblDrink.Content = wiz_data.Drink
                lblDessert.Content = wiz_data.Dessert.ToString
            End If
        End Sub
    End Class
```

This page declares a variable of type `WizardPage1`, using the `WithEvents` keyword so it is easy to catch the object's `Return` event. When the user clicks the Start Wizard button, the `btnPage1_Click` event handler creates a new `WizardPage1` object passing its constructor a new `WizardData` object and navigates to the new page.

When the `WizardPage1` object returns, the start page catches its `Return` event. If the returned `WizardData` object's `Canceled` value is True, the code clears all of the start page's menu choice controls. If `Canceled` is False, the program displays the menu selections in the start page's controls.

> *Notice that the `Return` event handler's e parameter has a type that includes the `Of WizardData` generic specifier. That makes the `e.Return` property have type `WizardData` so it's easy for the code to use.*

The following code shows how the wizard's first page begins. Notice that this class inherits from `PageFunction(Of WizardData)` so its constructor and `OnReturn` method take `WizardData` objects as parameters.

```
Inherits PageFunction(Of WizardData)

Private m_WizardData As WizardData
Private WithEvents m_Page2 As WizardPage2

' Save the WizardData object.
Public Sub New(ByVal wizard_data As WizardData)
    InitializeComponent()

    m_WizardData = wizard_data
End Sub
```

The code declares a private `WizardData` variable to hold information about the user's current menu selections. The class's constructor initializes its controls and then saves the `WizardData` object it is passed in this variable.

The code also creates a variable of type `WizardPage2`. It displays this object when the user clicks this page's Next button.

When that page returns, the following code catches its `Return` event and calls this page's `OnReturn` method passing it the same event parameter that it received. This forwards the results of the following page back to the start page.

```
' The next page returned. Return its result.
Private Sub m_Page2_Return(ByVal sender As Object, _
 ByVal e As System.Windows.Navigation.ReturnEventArgs(Of WizardData)) _
 Handles m_Page2.Return
    OnReturn(e)
End Sub
```

The following code shows the first page's navigation code:

```
' Open the next page.
Public Sub btnNext_Click() Handles btnNext.Click
    If NavigationService.CanGoForward Then
        NavigationService.GoForward()
    Else
        m_Page2 = New WizardPage2(m_WizardData)
        NavigationService.Navigate(m_Page2)
    End If
End Sub

' Return a result indicating that we canceled.
Private Sub btnCancel_Click() Handles btnCancel.Click
    m_WizardData.Canceled = True
    OnReturn(New ReturnEventArgs(Of WizardData)(m_WizardData))
End Sub
```

When the user clicks the Next button, the btnNext_Click event handler checks whether the NavigationService can go forward. This object's CanGoForward property will be True if the user went to the next page and then came back to this one. In that case, the program shouldn't create a new page 2 object. Instead it calls NavigationService object's GoForward method to display the same object again.

If NavigationService.CanGoForward is False, then the code has not displayed the second page yet. The code creates a new WizardPage2 object, passing its constructor the WizardData object that holds the information about the user's current menu selections. It then navigates to the new page.

If the user presses the Cancel button, the btnCancel_Click event handler sets the WizardData object's Canceled property to True and then calls the page's OnReturn method, passing it the WizardData. Control returns to the start page where that page catches the Return event and sees that the WizardData object's Canceled property is True.

The following code records the user's appetizer and salad selections:

```
' Save the selection.
Private Sub cboAppetizer_SelectionChanged() _
 Handles cboAppetizer.SelectionChanged
    ' The ComboBox's Text property isn't updated yet.
    If cboAppetizer.SelectedIndex < 0 Then
        m_WizardData.Appetizer = ""
    Else
        m_WizardData.Appetizer = _
            cboAppetizer.Items(cboAppetizer.SelectedIndex).Content
    End If
End Sub
```

```
' Save the selection.
Private Sub chkSalad_Checked() _
 Handles chkSalad.Checked, chkSalad.Unchecked
    m_WizardData.Salad = chkSalad.IsChecked
End Sub
```

When the user selects an appetizer, the cboAppetizer_SelectionChanged event handler saves the user's new choice in the WizardData object's Appetizer field. Similarly if the user checks or unchecks the Salad check box, the chkSalad_Checked event handler saves the user's new selection.

The second and third wizard pages are similar to the first except for two issues.

First, the user can navigate back to wizard pages that come before these pages. The following code shows how these pages move to the previous page when the user clicks the Prev button:

```
' Go back to the previous page.
Private Sub btnPrev_Click() Handles btnPrev.Click
    NavigationService.GoBack()
End Sub
```

Second, the final page does not navigate to a next page when the user clicked a Next button. Instead when the user clicks the Finish button, the following code executes:

```
' Finish.
Public Sub btnFinish_Click() Handles btnFinish.Click
    m_WizardData.Canceled = False
    OnReturn(New ReturnEventArgs(Of WizardData)(m_WizardData))
End Sub
```

This code sets the WizardData object's Canceled field to False to indicate that the user did not cancel. The code then calls the PageFunction's OnReturn method, passing it a new ReturnEventArgs object that contains the WizardData.

At this point, control cascades back through the page navigations. The second page catches this page's Return event and calls its own OnReturn method. Next, the first page catches the second page's Return event and calls its own OnReturn method. Finally the start page catches the first wizard page's Return event and displays the results contained in the returned WizardData object.

PageFunction classes are not necessary in every application, but they can simplify wizards such as this one that pass information back and forth through a series of pages.

Summary

In a Windows Forms application, everything is contained in Form objects. Some of those Form classes may be dialogs or derived from the Form class, but ultimately everything is contained in a form.

In a WPF application, controls may be contained in Window objects or in Page objects. Window objects sit on the desktop much as Windows Forms do. Page objects must be hosted inside something else, usually

a browser or a `Frame` control in a `Window`. The `PageFunction` class provides a modified version of a `Page` that makes it easier to pass values back and forth between coordinated pages.

Chapters 8 through 13 gave useful background on working with controls. They explained how to select and use both Windows Forms and WPF controls. They also explained the top-level user interface classes: `Form` for Windows Forms applications, and `Window`, `Page`, and `PageFunction` for WPF applications.

Although these are huge topics, there's more to building a Visual Basic application than just controls. You also need to understand the code behind the controls that lets the program take values from the controls, manipulate those values, and display a result in other controls. The next several chapters cover these topics in detail. Chapter 14, "Program and Module Structure," starts the process by explaining the files that make up a Visual Basic project and the structure contained within code files.

14

Program and Module Structure

A Visual Basic solution contains one or more related *projects*. A project contains files related to some topic. Usually, a project produces some kind compiled output (such as an executable program, class library, control library, and so forth). The project includes all the files related to the output, including source code files, resource files, documentation files, and whatever other kinds of files you decide to add to it.

This chapter describes the basic structure of a Visual Basic project. It explains the functions of some of the most common files and tells how you can use them to manage your applications.
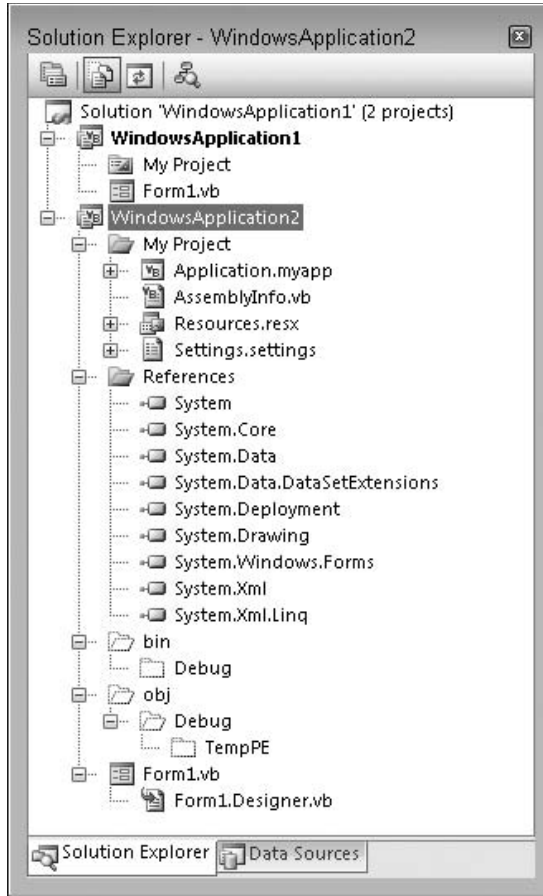
This chapter also explains the basic structure of source code files. It explains regions, namespaces, and modules. It also describes some simple typographic features provided by Visual Basic such as comments, line continuation, and line labels. These features do not execute programming commands themselves, but they are an important part of how you can structure your code.

Hidden Files

Figure 14-1 shows the Solution Explorer window for a solution that contains two projects. The solution named MySolution contains two projects named `WindowsApplication1` and `WindowsApplication2`. Each project contains a My Project item that represents the project's properties, various files containing project configuration settings, and a form named `Form1`.

In `WindowsApplication2`, the Show Hidden Files button has been clicked (the second button from the left with the box around it) so that you can see all the project's files. `WindowsApplication1` has similar files, but they are hidden by default.

These files are generated by Visual Basic for various purposes. For example, `Resources.resx` contains resources used by the project and `Settings.settings` contains project settings.

Figure 14-1: A solution contains one or more projects that contain files.

Resources are chunks of data that are distributed with the application but that are not intended to be modified by the program. These might include prompt strings, error message strings, icons, and sound files. For example, resources are commonly used for customizing applications for different languages. You build different resource files for different languages, and the program loads its prompts and error messages from the appropriate resource file. Chapter 36, "Configuration and Resources," has more to say about resources. (Technically, you can change resource values, but then they are acting more as settings than resources, so I won't cover that here. In fact, changing resources in a strongly named resource file raises an alarm indicating that someone may have tampered with the file.)

Settings are values that control the execution of the application. These might include flags telling the program what options to display or how to perform certain tasks. For example, you could build different profiles to provide settings that make the program run in a restricted demo mode or in a fully licensed mode. Normally, settings for .NET applications are stored in `.config` *files, although an application can also store settings in the Registry or* `.ini` *files.*

The following list describes the files contained in `WindowsApplication2` and shown in Figure 14-1. The exact files you see may be different from those shown here, but this list should give you an idea of what's involved in building a project.

❑ `WindowsApplication2` — This folder represents the entire project. You can expand or collapse it to show and hide the project's details.

❑ `My Project` — This folder represents the project's assembly information, application-level events, resources, and configuration settings. Double-click the My Project entry to view and edit these values.

❑ `Application.myapp` — This XML file defines application properties (such as whether it's a single instance program and whether its shutdown mode is `AfterMainFormCloses` or `AfterAllFormsClose`).

❑ `Application.Designer.vb` — This file contains code that works with the values defined in `Application.myapp`.

❑ `AssemblyInfo.vb` — This file contains information about the application's assembly such as copyright information, company name, trademark information, and assembly version.

❑ `Resources.resx` — This resource file contains project's resources.

❑ `Resources.Designer.vb` — This file contains Visual Basic code for manipulating resources defined in `Resources.resx`. For example, if you define a string resource named `Greeting` in `Resources.resx`, Visual Basic adds a read-only property to this module so you can read the value of `Greeting` as shown in the following code:

```
MessageBox.Show(My.Resources.Greeting)
```

❑ `Settings.settings` — This file contains settings that you can define to control the application.

❑ `Settings.Designer.vb` — This file contains Visual Basic code for manipulating settings defined in `Settings.settings`, much as `Resources.Designer.vb` contains code for working with `Resources.resx`. For example, the following code uses the `UserMode` setting:

```
If My.Settings.UserMode = "Clerk" Then ...
```

❑ `References` — This folder lists references to external components such as DLLs and COM components.

❑ `bin` —This folder is used to build the application before it is executed. It contains the compiled `.exe` file.

❑ `obj` — This folder is used to build the application before it is executed.

❑ `ApplicationEvents.vb` — This code file contains application-level event handlers for the `MyApplication` object. For example, it contains the application's `Startup`, `Shutdown`, and `NetworkAvailabilityChanged` event handlers.

❑ `Form1.vb` — This is a form file. It contains the code you write for the form, its controls, their event handlers, and so forth.

❑ `Form1.Designer.vb` — This file contains designer-generated Visual Basic code that builds the form. It initializes the form when it is created, adds the controls you placed on the form, and defines variables with the `WithEvents` keyword for the controls so that you can easily catch their events.

Some projects may have other hidden files. For example, when you add controls to a form, the designer adds a resource file to the form to hold any resources needed by the controls.

Normally, you do not need to work directly with the hidden files. You can use other tools to modify them indirectly instead. For example, the files `Resources.Designer.vb`, `Settings.Designer.vb`, and `Form1.Designer.vb` are automatically generated when you modify their corresponding source files `Resources.resx`, `Settings.settings`, and `Form1.vb`.

You don't even need to work with all of these source files directly. For example, if you double-click the My Project item in Solution Explorer, the property pages shown in Figure 14-2 appear. The Application tab shown in this figure lets you set high-level application settings. The View Application Events button at the bottom of the figure lets you edit the application-level events stored in `ApplicationEvents.vb`.

The Resources tab shown in Figure 14-2 lets you view, add, and remove project references. As you can probably guess, the Resources and Settings tabs let you edit the project's resources and settings.

A particularly important section hidden away in these tabs is the assembly information. When you click the Assembly Information button shown in Figure 14-2, the dialog box shown in Figure 14-3 appears.

Many of the items in this dialog box, such as the application's title and description, are self-explanatory. They are simply strings that the assembly carries around for identification. The assembly and file versions are used by the Visual Studio runtime to verify compatibility between an application's components. The GUID (which stands for "globally unique identifier" and is pronounced to rhyme with "squid") uniquely identifies the assembly and is generated by Visual Studio. The Make assembly COM-Visible check box lets you determine whether the assembly should make types defined in the assembly visible to COM applications. For more information on this dialog box, see `msdn2.microsoft.com/en-gb/library/1h52t681(VS.80).aspx`.
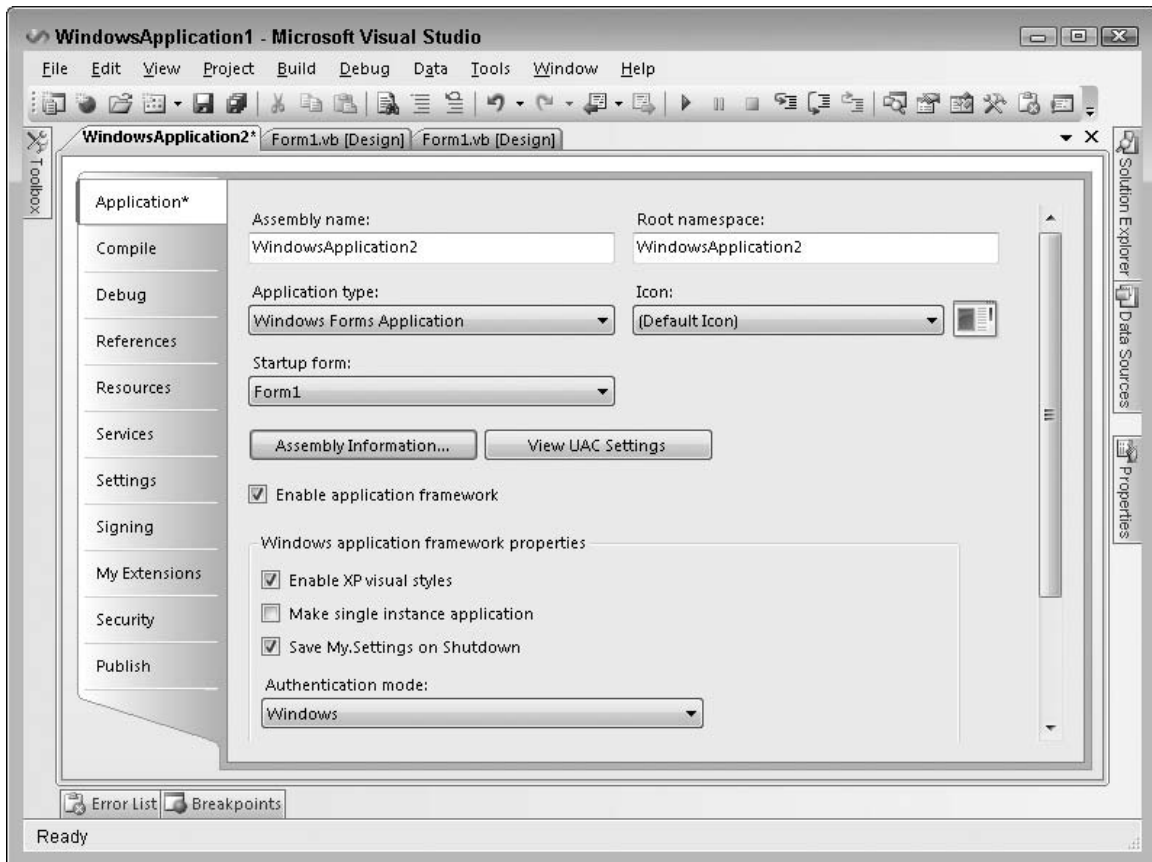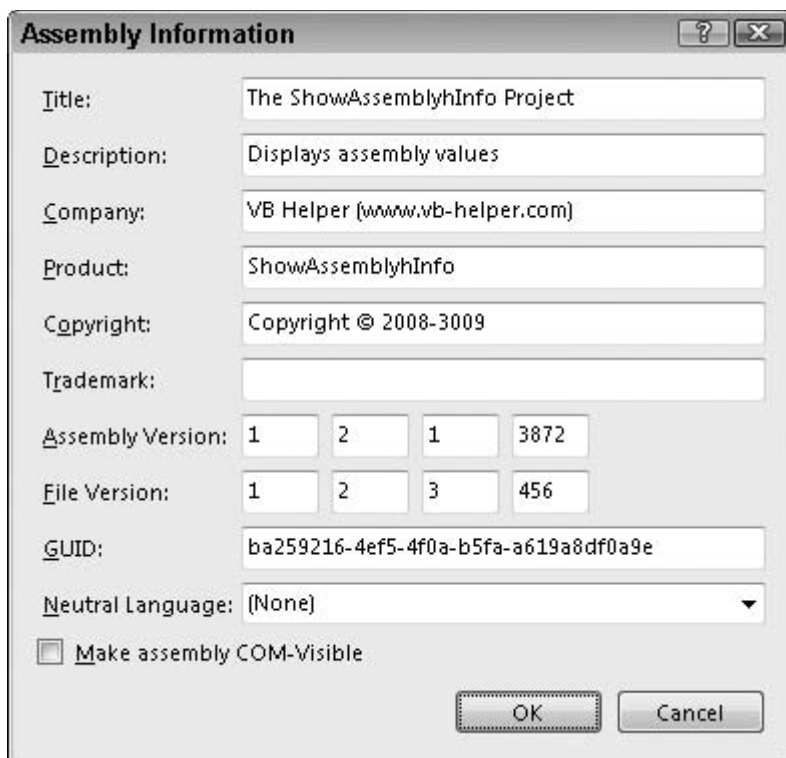

Figure 14-2: These property pages let you define the project's resources, settings, and general configuration.

Figure 14-3: The Assembly Information dialog box lets you define basic
project information such as title, copyright, and version number.

An assembly is the fundamental unit of deployment and version control in Visual Studio .NET. An
assembly can contain an executable application, a DLL, or a control library. Usually a project is contained
in a single assembly.

The Assembly Information dialog box lets you define information that should be associated with the
assembly, including the assembly's company name, description, copyright, trademark, name, product
name, title, and version (which includes major, minor, revision, and build values).

The `My.Application.AssemblyInfo` namespace provides easy access to these values at runtime.
Example program ShowAssemblyInfo, which is available for download on the book's web site, uses the
following code to display this information in a series of labels when it starts:

```
Private Sub Form1_Load() Handles MyBase.Load
    lblCompanyName.Text = My.Application.Info.CompanyName
    lblDescription.Text = My.Application.Info.Description
    lblCopyright.Text = My.Application.Info.Copyright
    lblTrademark.Text = My.Application.Info.Trademark
    lblDirectoryPath.Text = My.Application.Info.DirectoryPath
    lblProductName.Text = My.Application.Info.ProductName
    lblTitle.Text = My.Application.Info.Title
    lblVersion.Text = My.Application.Info.Version.ToString
End Sub
```

241

Code File Structure

A form, class, or code module should contain the following sections in this order (if they are present):

- ❑ `Option` *statements* — `Option Explicit`, `Option Strict`, `Option Compare`, or `Option Infer`. By default, `Option Explicit` is on, `Option Strict` is off, `Option Compare` is binary, and `Option Infer` is on.

- ❑ `Imports` *statements* — These declare namespaces that the module will use.

- ❑ *A* `Main` *subroutine* — The routine that starts execution when the program runs.

- ❑ `Class`, `Module`, *and* `Namespace` *statements* — As needed.

   To uncover potentially annoying and sometimes elusive bugs, turn `Option Explicit` *on,* `Option Strict` *on, and* `Option Infer` *off. Also see the section "Project" in Chapter 2.*

Some of these items may be missing. For example, `Option` and `Imports` statements are optional. Note that an executable Windows program can start from a `Main` subroutine or it can start by displaying a form, in which case it doesn't need a `Main` subroutine. Classes and code modules don't need `Main` subroutines.

The following code shows a simple code module. It sets `Option Explicit` on (variables must be declared before used), `Option Strict` on (implicit type conversions cause an error), and `Option Infer` off (you must give variables explicit data types). It imports the `System.IO` namespace so the program can easily use classes defined there. It then defines the `Employee` class.

```
Option Explicit On
Option Strict On
Option Infer Off

Imports System.IO

Public Class Employee
    ...
End Class
```

Usually, you put each class or module in a separate file, but you can add more `Class` or `Module` statements to a file if you like.

`Class` and `Module` statements define top-level nodes in the code hierarchy. Click the minus sign to the left of one of these statements in the code editor to collapse the code it contains. When the code is collapsed, click the plus sign to the left of it to expand the code.

The project can freely refer to any public class, or to any public variable or routine in a module. If two modules contain a variable or routine with the same name, the program can select the version it wants by prefixing the name with the module's name. For example, if the `AccountingTools` and `BillingTools` modules both have a subroutine named `ConnectToDatabase`, the following statement executes the version in the `BillingTools` module:

```
BillingTools.ConnectToDatabase
```

Code Regions

`Class` and `Module` statements define regions of code that you can expand or collapse to make the code easier to understand. Subroutines and functions also define collapsible code sections. In addition to these, you can use the `Region` statement to create your own collapsible sections of code. You can place subroutines that have a common purpose in a region so you can collapse and expand the code as needed. The following code shows a simple region:

```
#Region "Drawing Routines"
    ...
#End Region
```

Note that the IDE's search-and-replace features normally work only on expanded regions. If you collapse a region and make a global search-and-replace in the current document or the current selection, the collapsed code remains unchanged. If you make a global replace throughout the whole project, the replacement occurs within collapsed regions as well.

By itself, the `End Region` statement does not tell you which region it is ending. You can make your code easier to understand, particularly if you have many regions in the same module, by adding a comment after the `End Region` statement giving the name of the region, as shown in the following code:

```
#Region "Drawing Routines"
    ...
#End Region ' Drawing Routines
```

I use regions extensively in my code. They make it easy to collapse code that you're not working on and they group related code into meaningful sections. Just building the regions helps put related material together and makes reading the code easier.

Sometimes it may be easier to move related pieces of code into separate files. The `Partial` keyword allows you to place parts of a class in different files. For example, you could move a form's code for loading and saving data in a separate file and use the `Partial` keyword to indicate that the code was part of the form. Chapter 26, "Classes and Structures," describes the `Partial` keyword in detail.

However, you cannot use the `Partial` keyword with modules so a module's code must all go in one file. In that case, you can use regions to similarly separate a group of related routines and make the code easier to read.

Conditional Compilation

Conditional compilation statements allow you to include or exclude code from the program's compilation. The basic conditional compilation statement is similar to a multiline `If Then Else` statement. The following code shows a typical statement. If the value `condition1` is `True`, the code in `code_block_1` is included in the compiled program. If that value is `False` but the value `condition2` is `True`, the code in `code_block_2` becomes part of the compiled program. If neither condition is `True`, the code in `code_block_3` is included in the program.

```
#If condition1 Then
    code_block_1...
#ElseIf condition2 Then
    code_block_2...
#Else
    code_block_3...
#End If
```

It is important to understand that the code not included by the conditional compilation statements is completely omitted from the executable program. At compile time, Visual Studio decides whether a block of code should be included or not. That means any code that is omitted does not take up space in the executable program. It also means that you cannot set the execution statement to omitted lines in the debugger because those lines are not present.

In contrast, a normal `If Then Else` statement includes all the code in every code block in the executable, and then decides which code to execute at runtime.

Because the conditional compilation statement evaluates its conditions at compile time, those conditions must be expressions that can be evaluated at compile time. For example, they can be expressions containing values that you have defined using compiler directives (described shortly). They cannot include values generated at runtime (such as the value of variables).

In fact, a conditional compilation statement evaluates its conditions at design time, so it can give feedback while you are writing the code. For example, if `Option Explicit` is set to `On`, Visual Basic flags the following assignment statement as an error. Because the first condition is `True`, the variable `X` is declared as a string. `Option Explicit On` disallows implicit conversion from an integer to a string, so the IDE flags the statement as an error.

```
#If True Then
    Dim X As String
#Else
    Dim X As Integer
#End If

    X = 10
```

That much makes sense, but it's also important to realize that the code not included in the compilation is not evaluated by the IDE. If the first condition in the previous code were `False`, the code would work properly because variable `X` would be declared as an integer. The IDE doesn't evaluate the other code, so it doesn't notice that there is an error if the condition is `False`. You probably won't notice the error until you try to actually use the other code.

You can set conditional compilation constants in two main ways: in code and in the project's compilation settings.

Setting Constants in Code

To set conditional compilation constants explicitly in your program, use a #Const statement, as shown in the following code:

```
#Const UserType = "Clerk"

#If UserType = "Clerk" Then
    ' Do stuff appropriate for clerks...
    ...
#ElseIf UserType = "Supervisor" Then
    ' Do stuff appropriate for supervisors...
    ...
#Else
    ' Do stuff appropriate for others...
    ...
#End If
```

Note that these constants are defined only after the point at which they appear in the code. If you use a constant before it is defined, its value is False (unfortunately Option Explicit doesn't apply to these constants). That means the following code displays the value Slow followed by the value Fast:

```
#If UseFastAlgorithm Then
    MessageBox.Show("Fast")
#Else
    MessageBox.Show("Slow")
#End If

#Const UseFastAlgorithm = True

#If UseFastAlgorithm Then
    MessageBox.Show("Fast")
#Else
    MessageBox.Show("Slow")
#End If
```

To avoid possible confusion, many programmers define these constants at the beginning of the file.

Also note that your code can redefine a constant using a new #Const statement later. That means these are not really constants in the sense that their values are unchangeable.

Setting Constants with the Project's Compilation Settings

To set constants with the project's compilation settings, open Solution Explorer and double-click My Project. Select the Compile tab and click its Advanced Compile Options button to open the Advanced Compiler Settings dialog box shown in Figure 14-4. Enter the names and values of the constants in the Custom constants text box. Enter each value in the form ConstantName=Value. Separate multiple constants with commas.
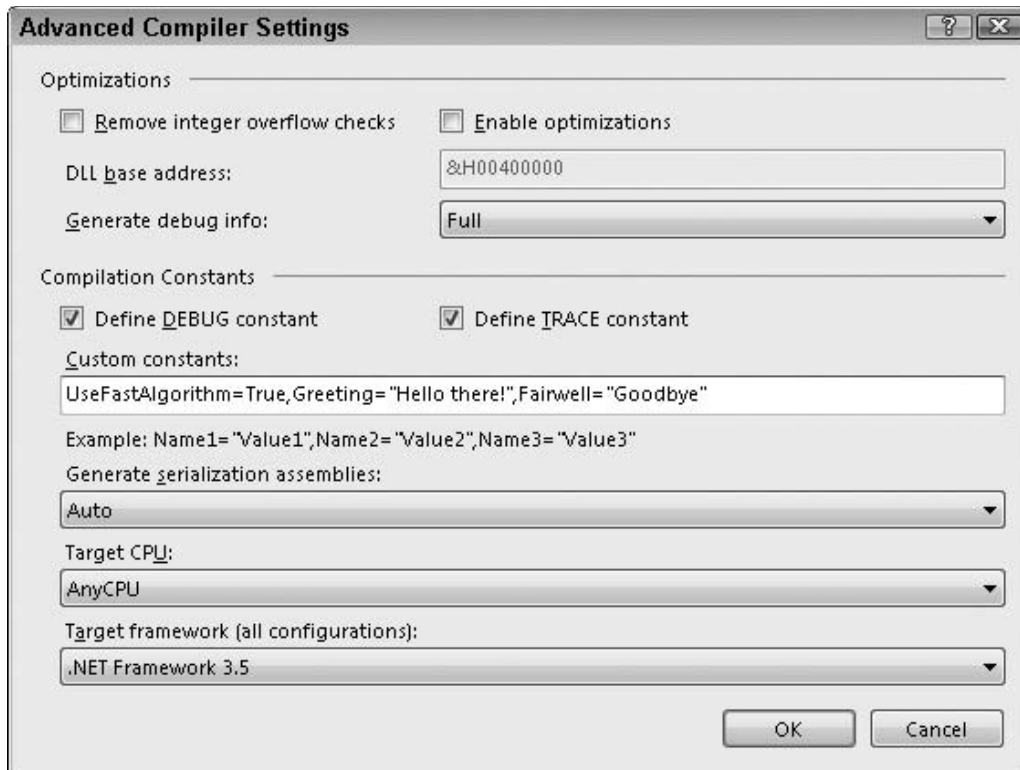
Figure 14-4: Use the Advanced Compiler Settings dialog box to define compilation constants.

Constants that you specify on the Advanced Compiler Settings dialog box are available everywhere in the project. However, your code can redefine the constant using a `#Const` directive. The constant has the new value until the end of the file or until you redefine it again.

Example program CompilerConstantsSettings, which is available for download on the book's web site, includes constants set on this dialog and code to check their values.

Predefined Constants

Visual Basic automatically defines several conditional compilation constants that you can use to determine the code that your application compiles. The following table describes these constants.

Compilation constant values are case-sensitive. For example, you should compare `CONFIG` *to "Debug" not "debug" or "DEBUG."*

Constant	Meaning
CONFIG	A string that gives the name of the current build. Typically, this will be `"Debug"` or `"Release"`.
DEBUG	A Boolean that indicates whether this is a debug build. By default, this value is `True` when you build a project's Debug configuration.
PLATFORM	A string that tells you the target platform for the application's current configuration. Unless you change this, the value is `"AnyCPU"`.
TARGET	A string that tells the kind of application the project builds. This can be `winexe` (Windows Form or WPF application), `exe` (console application), `library` (class library), or `module` (code module).
TRACE	A Boolean that indicates whether the `Trace` object should generate output in the Output window.
VBC_VER	A number giving Visual Basic's major and minor version numbers. The value for Visual Basic 2008 is 9.0.
_MyType	A string that tells what kind of application this is. Typical values are `"Console"` for a console application, `"Windows"` for a class or Windows control library, and `"WindowsForms"` for a Windows Forms application.

For more information on _MyType *and how it relates to other special compilation constants, see* `msdn2.microsoft.com/en-us/library/ms233781(VS.80).aspx`.

Example program CompilerConstantsInCode, which is available for download on the book's web site, shows how a program can check these compiler constants. Example program WpfCompilerConstantsInCode, which is also available for download, is a WPF version of the same program.

The following sections describe the DEBUG, TRACE, and CONFIG constants and their normal uses in more detail.

DEBUG

Normally when you make a debug build, Visual Basic sets the DEBUG constant to `True`. When you compile a release build, Visual Basic sets DEBUG to `False`. The Configuration Manager lets you select the Debug build, the Release build, or other builds that you defined yourself.

After you have activated the Configuration Manager, you can open it by clicking the project in the Solution Explorer and then selecting the Build menu's Configuration Manager command. Figure 14-5 shows the Configuration Manager. Select Debug or Release from the drop-down list, and click Close.

If the Configuration Manager is not available in the Build menu, open the Tools menu and select the Options command. Open the Projects and Solutions node's General entry, and select the "Show advanced build configurations" check box.

When the `DEBUG` constant is `True`, the `Debug` object's methods send output to the Output window. When the `DEBUG` constant is not `True`, the `Debug` object's methods do not generate any code, so the object doesn't produce any output. This makes the `Debug` object useful for displaying diagnostic messages during development and then hiding the messages in release builds sent to customers.
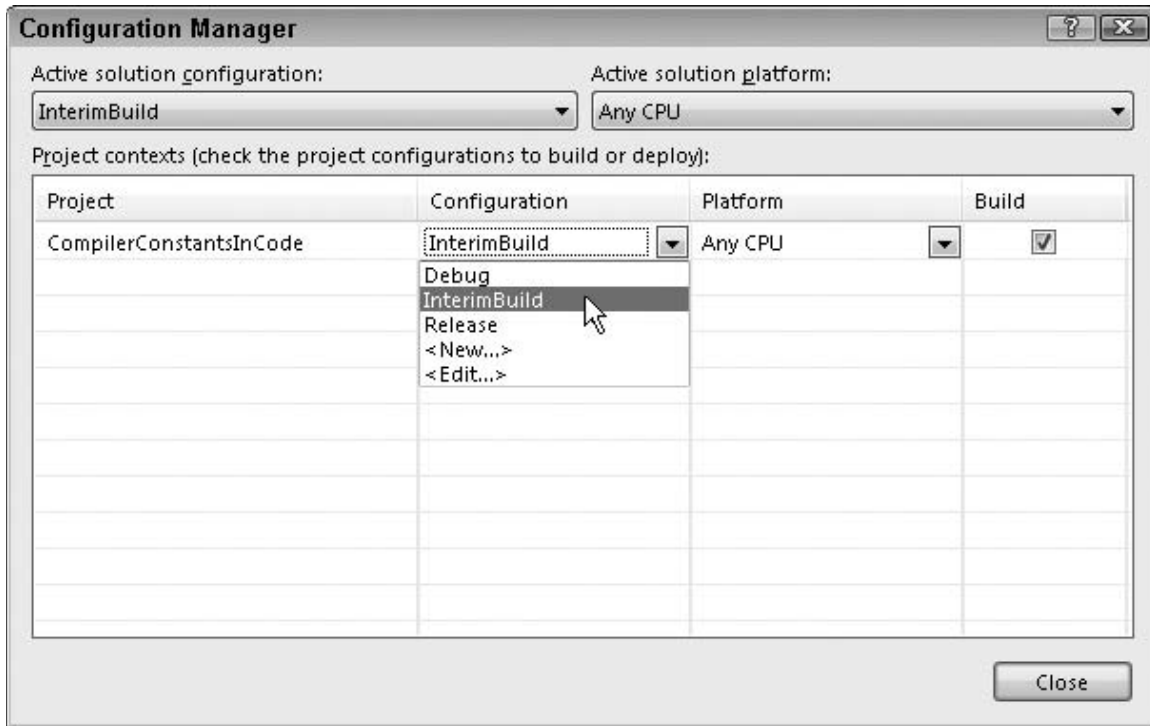

Figure 14-5: Use the Configuration Manager to select a Debug or Release build.

The following sections describe some of the `Debug` object's most useful properties and methods.

Assert

The `Debug.Assert` method evaluates a Boolean expression and, if the expression is `False`, displays an error message. This method can optionally take as parameters an error message and a detailed message to display. The following code shows how a program might use `Debug.Assert` to verify that the variable `NumEmployees` is greater than zero:

```
Debug.Assert(NumEmployees > 0, _
    "The number of employees must be greater than zero.", _
    "The program cannot generate timesheets if no employees are defined")
```

Example program EmployeeAssert, which is available for download on the book's web site, demonstrates this `Debug.Assert` statement.

If `NumEmployees` is zero, this statement displays an error dialog that shows the error message and the detailed message. It also displays a long stack dump that shows exactly what code called what other code to reach this point of execution. Only the first few entries will make sense to practically anyone because the stack dump quickly moves out of the application's code and into the supporting Visual Basic libraries that execute the program.

The dialog also displays three buttons labeled Abort, Retry, and Ignore. If you click the Abort button, the program immediately halts. If you click Retry, the program breaks into the debugger, so you can examine the code. If you click Ignore, the program continues as if the `Assert` statement's condition was `True`.

A good use for the `Assert` method is to verify that a routine's parameters or other variable values are reasonable before starting calculations. For example, suppose that the `AssignJob` subroutine assigns a repairperson to a job. The routine could begin with a series of `Assert` statements that verify that the person exists, the job exists, the person has the skills necessary to perform the job, and so forth. It is usually easier to fix code if you catch these sorts of errors before starting a long calculation or database modification that may later fail because, for example, the repairperson doesn't have the right kind of truck to perform the job.

If the `DEBUG` constant is not `True`, the `Assert` method does nothing. This lets you automatically remove these rather obscure error messages from the compiled executable that you send to customers. The dialog with its messages and stack dump is so technical that it would terrify many users anyway, so there's no point inflicting it on them.

You should take some care when deciding what tests should be placed in `Assert` statements so that they are removed from the compiled executable. For example, suppose you use `Assert` to verify that a string entered by the user contains a valid value. When you run the compile executable, this test is removed, so the program does not protect itself from bad data. When you use `Assert` to verify a condition, you must be certain that the program can run safely if the `Assert` statement is removed and the condition fails.

Fail

The `Debug.Fail` method displays an error message just as `Debug.Assert` does when its Boolean condition parameter is `False`.

IndentSize, Indent, Unindent, and IndentLevel

These properties and methods determine the amount of indentation used when the `Debug` object writes into the Output window. You can use them to indent the output in subroutines to show the program's structure more clearly.

The `IndentSize` property indicates the number of spaces that should be used for each level of indentation. The `IndentLevel` property determines the current indentation level. For example, if `IndentSize` is 4 and `IndentLevel` is 2, output is indented by eight spaces.

The `Indent` and `Unindent` methods increase and decrease the indentation level by one.

Write, WriteLine, WriteIf, and WriteLineIf

These routines send output to the Output window. The `Write` method prints text and stops without starting a new line. `WriteLine` prints text and follows it with a new line.

The `WriteIf` and `WriteLineIf` methods take a Boolean parameter and act the same as `Write` and `WriteLine` if the parameter's value is `True`.

TRACE

The `Trace` object is very similar to the `Debug` object and provides the same set of properties and methods. The difference is that it generates output when the `TRACE` constant is defined rather than when the `DEBUG` constant is defined.

Normally, the `TRACE` constant is defined for both debug and release builds so `Trace.Assert` and other `Trace` object methods work in both builds. By default, `DEBUG` is defined only for debug builds, so you get `Debug` messages for debug builds. You can add *listener* objects to the `Trace` object (or the `Debug` object) to perform different actions on any `Trace` output. For example, a *listener* could write the `Trace` output into a log file.

CONFIG

The `CONFIG` constant's value is the name of the type of build. Normally, this is either `Debug` or `Release`, but you can also create your own build configurations. You can use these for interim builds, point releases, alpha and beta releases, or any other release category you can think of.

To select the debug or release build, click the project in the Solution Explorer and then select the Build menu's Configuration Manager command to display the dialog box shown in Figure 14-5. Select <New . . . > from the drop-down list to display the New Project Configuration dialog box. Enter a name for the new configuration, select the existing configuration from which the new one should initially copy its settings, and click OK.

The following code shows how to use the `CONFIG` compiler constant to determine which build is being made and take different actions accordingly:

```
#If CONFIG = "Debug" Then
    ' Do stuff for a Debug build...
#ElseIf CONFIG = "Release" Then
    ' Do stuff for a Release build...
#ElseIf CONFIG = "InterimBuild" Then
    ' Do stuff for a custom InterimBuild...
#Else
    MsgBox("Unknown build type")
#End If
```

One reason you might want to make different configurations is to handle variations among operating systems. Your code can decide which configuration is in effect, and then execute the appropriate code to handle the target operating system. For example, it might need to work around the reduced privileges that are granted by default on Vista.

Debugging Level Constants

Sometimes it is helpful to be able to easily adjust the level of diagnostic output a program generates. You could define the constant DEBUG_LEVEL and then send data to the Output window, depending on its value. For example, you might place level 1 Debug statements in major subroutines, level 2 statements in secondary routines, and level 3 statements throughout important routines to provide step-by-step information. Then you can define the DEBUG_LEVEL constant to quickly give you the amount of information you want.

The following code shows a small example. The IsPhoneNumberValid function determines whether its parameter looks like a valid 7- or 10-digit U.S. phone number. If DEBUG_LEVEL is at least 1, the function displays messages when it starts and when it exits. It also indents the output when it starts and unindents the output before it exits. If DEBUG_LEVEL is at least 2, the function also displays statements telling when it is about to check for 7- and 10-digit phone numbers.

```
#Const DEBUG_LEVEL = 2

    Private Function IsPhoneNumberValid(ByVal phone_number As String) As Boolean
#If DEBUG_LEVEL >= 1 Then
        Debug.WriteLine("Entering IsPhoneNumberValid(" & phone_number & ")")
        Debug.Indent()
#End If

        ' Check for a 7-digit phone number.
#If DEBUG_LEVEL >= 2 Then
        Debug.WriteLine("Checking for 7-digit phone number")
#End If
        Dim is_valid As Boolean = _
            phone_number Like "###-####"

        If Not is_valid Then
#If DEBUG_LEVEL >= 2 Then
            Debug.WriteLine("Checking for 10-digit phone number")
#End If
            is_valid = phone_number Like "###-###-####"
        End If

#If DEBUG_LEVEL >= 1 Then
        Debug.Unindent()
        Debug.WriteLine("Leaving IsPhoneNumberValid, returning " & is_valid)
#End If
        Return is_valid
    End Function
```

The following sample shows the results in the Output window when DEBUG_LEVEL is set to 2:

```
Entering IsPhoneNumberValid(123-4567)
    Checking for 7-digit phone number
Leaving IsPhoneNumberValid, returning True
```

From this output, you can tell that the function examined the string 123-4567, did not need to check for a 10-digit phone number, and returned True.

Example program DebugLevel, which is available for download on the book's web site, uses this strategy to provide different levels of debugging output.

For more information on debugging Visual Basic applications, see Chapter 19, "Error Handling."

Namespaces

Visual Studio uses *namespaces* to categorize code. A namespace can contain other namespaces, which can contain others, forming a hierarchy of namespaces.

You can define your own namespaces to help categorize your code. By placing different routines in separate namespaces, you can allow pieces of code to include only the namespaces they are actually using. That makes it easier to ignore the routines that the program isn't using. It also allows more than one namespace to define items that have the same names.

For example, you could define an `Accounting` namespace that contains the `AccountsReceivable` and `AccountsPayable` namespaces. Each of those might contain a subroutine named `ListOutstandingInvoices`. The program could select one version or the other by calling either `Accounting.AccountsReceivable.ListOutstandingInvoices` or `Accounting.AccountsPayable.ListOutstandingInvoices`.

You can only use the `Namespace` statement at the file level or inside another namespace, not within a class or module. Within a namespace, you can define nested namespaces, classes, or modules. The following example defines the `AccountingModules` namespace. That namespace contains the two classes `PayableItem` and `ReceivableItem`, the module `AccountingRoutines`, and the nested namespace `OrderEntryModules`. The `AccountingRoutines` module defines the `PayInvoice` subroutine. All the classes, modules, and namespaces may define other items.

```
Namespace AccountingModules
    Public Class PayableItem
        ...
    End Class

    Public Class ReceivableItem
        ...
    End Class

    Module AccountingRoutines
        Public Sub PayInvoice(ByVal invoice_number As Long)
            ...
        End Sub
        ...
    End Module

    Namespace OrderEntryModules
        Public Class OrderEntryClerk
            ...
        End Class
        ...
    End Namespace
End Namespace
```

Code using a module's namespace does not need to explicitly identify the module. If a module defines a variable or routine that has a unique name, you do not need to specify the module's name to use that item. In this example, there is only one subroutine named `PayInvoice`, so the code can invoke it as `AccountingModules.PayInvoice`. If the `AccountingModules` namespace contained another module that defined a `PayInvoice` subroutine, the code would need to indicate which version to use as in `AccountingModules.AccountingRoutines.PayInvoice`.

Although modules are transparent within their namespaces, nested namespaces are not. Because the nested `OrderEntryModules` namespace defines the `OrderEntryClerk` class, the code must specify the full namespace path to the class, as in the following code:

```
Dim oe_clerk As New AccountingModules.OrderEntryModules.OrderEntryClerk
```

Note that a Visual Basic project defines its own namespace that contains everything else in the project. Normally, the namespace has the same name as the project. To view or modify this root namespace, double-click the Solution Explorer's My Project entry to open the project's property pages, and select the Application tab. Enter the new root namespace name in the text box labeled "Root namespace" in the upper right.

You can use an `Imports` statement to simplify access to a namespace inside a file. For example, suppose that you are working on the `GeneralAccounting` project that has the root namespace `GeneralAccounting`. The first statement in the following code allows the program to use items defined in the `AccountingModules` namespace without prefixing them with `AccountingModules`. The second statement lets the program use items defined in the `AccountingModules` nested namespace `OrderEntryModules`. The last two lines of code declare variables using classes defined in those namespaces.

```
Imports GeneralAccounting.AccountingModules
Imports GeneralAccounting.AccountingModules.OrderEntryModules
...
Private m_OverdueItem As PayableItem      ' In the AccountingModules namespace.
Private m_ThisClerk As OrderEntryClerk    ' In the namespace
                                          ' AccountingModules.OrderEntryModules.
```

Typographic Code Elements

A few typographic code elements can make a program's structure a bit easier to understand. They do not execute programming commands themselves, but they are an important part of how you can structure your code. These elements include comments, line continuation and joining characters, and line labels.

Comments

Comments can help other developers (or you at a later date) understand the program's purpose, structure, and method. You start a comment by typing a single quotation mark (') that is not inside a quoted string. All of the characters starting at the quote and continuing until the end of the line are part of the comment and are ignored by Visual Basic.

If a line with a comment ends with a line continuation character (described shortly), Visual Basic ignores that character. That means the line is not continued onto the next line, so the comment ends with the current line. In other words, you cannot use line continuation characters to make a multi-line comment.

In the following code, the first declaration is followed by a comment. The comment ends with a line continuation character so you might expect the second declaration to be part of the comment. That is not the case. Because this can be misleading, you should not end comments with a line continuation character. The second statement declares and initializes a string using a value that contains a single quote. Because the quote is inside a quoted string, it becomes part of the string and does not start a comment. The next single quotation mark outside of the string begins a new comment.

```
Dim num_customers As Integer      ' The number of customers.
Dim product_name As String = "Miracle Code Fixer"  ' The program's name.
```

If you want to continue a comment on the following line, you must use another comment character, as in the following example:

```
' Return True if the address is valid. This function checks the address
' format to see that it makes sense. It also looks up the ZIP code and
' verifies that the city is valid for that ZIP code. It does not verify
' that the street and street number exist.
Private Function IsAddressValid(ByVal address_text As String) As Boolean
...
```

To quickly comment or uncomment a large block of code, select it using the mouse and then open the Edit menu's Advanced submenu. Select the Comment Selection command to comment out the selection or select Uncomment Selection to remove the comment characters from the front of the selection. Those commands are also available more conveniently as buttons in the Text Editor toolbar. Use the View menu's Toolbars submenu's Text Editor command to show or hide this toolbar.

Another way to quickly remove a chunk of code from the program is to surround it with compiler directives, as in the following code:

```
#If False Then
    Dim A As Integer
    Dim B As Integer
    Dim C As Integer
#End If
```

Use comments to make your code clear. Comments do not slow the executable program down, so there's no good reason to exclude them.

XML Comments

A normal comment is just a piece of text that gives information to a developer trying to read your code. XML comments let you add some context to a comment. For example, you can mark a comment as a summary describing a subroutine.

Visual Studio automatically extracts XML comments to build an XML file describing the project. This file displays the hierarchical shape of the project, showing comments for the project's modules, namespaces, classes, and other elements.

The result is not particularly easy to read, but you can use it to automatically generate more useful documentation.

You can place a block of XML comments before code elements that are not contained in methods. Generally, you use them to describe a module, class, variable, property, method, or event.

To begin a comment block, place the cursor on the line before the element you want to describe and type three single quotes (`'''`). Visual Studio automatically inserts a template for an XML comment block. If the element that follows takes parameters, it includes sections describing the parameters, so it is in your best interest to completely define the parameters before you create the XML comment block.

The following code shows the XML comment block created for a simple subroutine. It includes a summary area to describe the subroutine, two `param` sections to describe the subroutine's parameters, and a `remarks` section to provide additional detail.

```
''' <summary>
'''
''' </summary>
''' <param name="jobs"></param>
''' <param name="employees"></param>
''' <remarks></remarks>
Public Sub AssignJobs(ByVal jobs() As Job, ByVal employees() As Employee)

End Sub
```

Note that XML elements can span multiple lines, as the summary element does in this example.

You can add more XML comment sections to the block simply by typing them, following the convention that they should begin with three single quotes. For example, the following code adds some content for the comments in the previous code and an extra `WrittenBy` element that contains a date attribute:

```
''' <summary>
''' Assigns jobs to employees, maximizing the total value of jobs assigned.
''' </summary>
''' <param name="jobs">The array of Jobs to assign.</param>
''' <param name="employees">The array of Employees to assign.</param>
''' <remarks>The full assignment is not guaranteed to be unique.</remarks>
''' <WrittenBy date="7/24/04">Rod Stephens</WrittenBy>
Public Sub AssignJobs(ByVal jobs() As Job, ByVal employees() As Employee)

End Sub
```

These XML comments are somewhat bulky and hard to read. In the previous example, it isn't easy to pick out the subroutine's most important summary information with a quick glance at the code. To make reading XML comments easier, Visual Basic defines an outlining section for each XML comment block. If you click the minus sign to the left of the first line in the block, the whole block collapses and shows only the summary information. If you then click the plus sign to the left of the summary, Visual Studio expands the comments to show them all.

The following code shows the beginning of an application that assigns jobs to employees. The project contains two files, a form named `Form1.vb` and a code module named `Module1.vb`. The form contains

very little code. The code module defines the `Job` and `Employee` classes and the `AssignJobs` subroutine. Each of these has an XML comment block.

```
Public Class Form1

    Private m_Jobs() As Job
    Private m_Employees() As Employee

End Class

Module Module1
    Public Class Job
        Public JobNumber As Integer

        ''' <summary>
        ''' A list of skills required to perform this job.
        ''' </summary>
        ''' <remarks>Represent required equipment as skills.</remarks>
        Public SkillsRequired As New Collection

        ''' <summary>
        ''' The value of this job.
        ''' </summary>
        ''' <remarks>Higher numbers indicate more priority.</remarks>
        Public Priority As Integer
    End Class

    Public Class Employee
        Public FirstName As String
        Public LastName As String
        ''' <summary>
        ''' A list of skills this employee has.
        ''' </summary>
        ''' <remarks>Represent special equipment as skills.</remarks>
        Public Skills As New Collection
    End Class

    ''' <summary>
    ''' Assigns jobs to employees.
    ''' </summary>
    ''' <param name="jobs">Array of Jobs to assign.</param>
    ''' <param name="employees">Array of Employees to assign jobs.</param>
    ''' <remarks>Maximizes total value of jobs assigned.</remarks>
    ''' <WrittenBy date="7/26/04">Rod Stephens</WrittenBy>
    Public Sub AssignJobs(ByVal jobs() As Job, ByVal employees() As Employee)

    End Sub
End Module
```

Figure 14-6 shows the Object Browser describing the `Job` class's `SkillsRequired` property. The area on the lower right shows the property's XML summary and remarks sections. This project's name is AssignJobsProject and its root namespace is AssignJobsRoot, so the complete path to the `Job` class

shown in the tree view on the left is AssignJobsProject (project), AssignJobsRoot (root namespace), Module1 (module), Job (class).
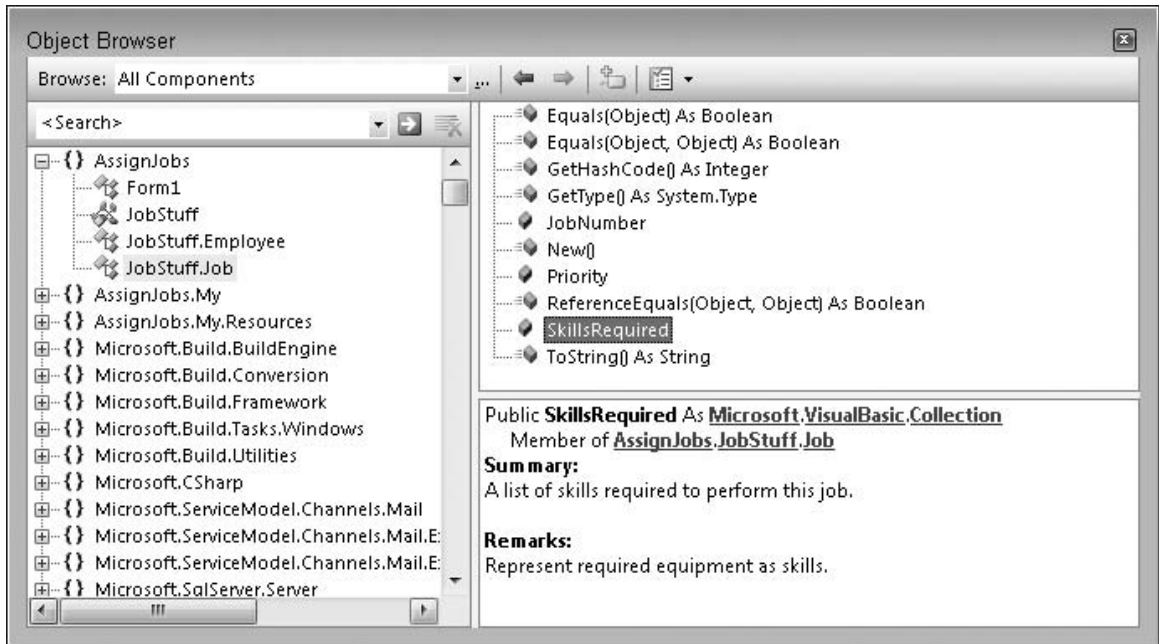
Figure 14-6: The Object Browser displays an item's XML summary and remarks sections.

When you compile the application, Visual Studio extracts the XML comments and places them in an XML file with the same name as the executable file in the project's bin\Debug directory. The following text shows the result. If you look through the document carefully, you can pick out the XML comments.

```xml
<?xml version="1.0"?>
<doc>
<assembly>
<name>
AssignJobs
</name>
</assembly>
<members>
<member name="F:AssignJobs.JobStuff.Job.SkillsRequired">
    <summary>
 A list of skills required to perform this job.
 </summary>
    <remarks>Represent required equipment as skills.</remarks>
</member><member name="F:AssignJobs.JobStuff.Job.Priority">
    <summary>
 The value of this job.
 </summary>
```

```
      <remarks>Higher numbers indicate more priority.</remarks>
  </member><member name="F:AssignJobs.JobStuff.Employee.Skills">
      <summary>
 A list of skills this employee has.
  </summary>
      <remarks>Represent special equipment as skills.</remarks>
  </member><member name="M:AssignJobs.JobStuff.AssignJobs(
          AssignJobs.JobStuff.Job[],AssignJobs.JobStuff.Employee[])">
      <summary>
 Assigns jobs to employees.
  </summary>
      <param name="jobs">Array of Jobs to assign.</param>
      <param name="employees">Array of Employees to assign jobs.</param>
      <remarks>The assignment maximizes total value of jobs assigned.</remarks>
      <WrittenBy date="1/13/07">Rod Stephens</WrittenBy>
  </member>
  </members>
  </doc>
```

Example program AssignJobs, which is available for download on the book's web site, defines job assignment classes that you can view with the Object Browser. If you compile the program (which actually doesn't do any job assignment, it just defines the classes), you can examine its the XML documentation.

Line Continuation

Line continuation characters let you break long lines across multiple shorter lines so that they are easier to read. To continue a line, end it with a space followed by an underscore (_). Visual Basic treats the following line as if it were tacked on to the end of the first line:

```
Dim background_color As Color = _
    Color.FromName( _
        My.Resources.ResourceManager.GetString( _
            "MainFormBackgroundColor"))
```

As the previous section explains, you cannot continue comments. A comment includes any space and underscore at the end of its line so the comment does not apply to the following line.

You can break a line just about anywhere that a space is allowed and between program elements. For example, you can break a line after the opening parenthesis in a parameter list, as shown in the following code:

```
AReallyReallyLongSubroutineNameThatTakesFiveParameters( _
    parameter1, parameter2, parameter3, parameter4, parameter5)
```

You cannot break a line inside a quoted string. If you want to break a string, end the string and restart it on the next line, as in the following example:

```
Dim txt As String = "To break a long string across multiple lines, " & _
    "end the string, add the line continuation character " & _
    "(space + underscore) " & _
    "and restart the string on the next line."
```

Visual Basic does not enforce its usual indentation rules on continued lines, so you can indent the lines in any way you like to make the code's structure more clear. For example, many programmers align parameters in long subroutine calls:

```
DoSomething( _
    parameter1, _
    parameter2, _
    parameter3)
```

Line Joining

Not only can you break a long statement across multiple lines, but you can also join short statements on a single line. To use two statements on a single line, separate them with a colon (:). The following line of code contains three statements that store the red, green, and blue components of a form's background color in the variables r, g, and b:

```
r = BackColor.R : g = BackColor.G : b = BackColor.B
```

Line continuation is most useful when you have many lines in a row that all have a very similar structure. By scanning down the lines, you can tell if there are differences that may indicate a bug.

Use line joining with some caution. If the statements are long, or if you have a series of joined lines with dissimilar structure, combining lots of statements on a single line can make the code harder to read. If the code is easier to read with each statement on a separate line, write the code that way. Using more lines doesn't make the code run any slower.

Line Labels

You can place a label to the left of any line of code. The label can be either a name or a number, followed by a colon. The following code defines three labels. The first is named DeclareX and marks the declaration of the variable X. The second has value 10 and is located on a line containing a comment. The third label, named Done, labels a blank line.

```
DeclareX:  Dim X As Single
10:        ' Do something here.
Done:
```

You label a line if you will later want to jump to that line. For example, the GoTo, On Error GoTo, and Resume statements can make code jump to a labeled line. These are less useful in Visual Basic .NET than they were in Visual Basic 6 and previous versions that didn't have structured error handling (the Try Catch block), but they are still available.

Summary

A Visual Studio solution contains a hierarchical arrangement of items. At the top level, it contains one or more projects. Each project contains several standard items such as My Project (that represents the project as a whole), References (that records information about references to external objects), the `bin` and `obj` items (that are used by Visual Studio when building the application), and `app.config` (which holds configuration information). Projects also contain form, class, and other code modules.

Normally, many of these files are hidden and you do not need to edit them directly. Instead, you can double-click Solution Explorer's My Project entry and use the project's Properties pages to view and modify application values. Other hidden files store code and resources that determine a form's appearance, and you can modify them by altering the form with the Form Designer.

Within a code module, you can use modules, classes, regions, and namespaces to group related code into blocks. You can use conditional compilation statements and conditional compilation constants to easily add or remove code to or from the compiled application. The `Debug` and `Trace` objects let you generate messages and alerts, depending on whether certain predefined constants are defined.

Finally, typographic elements such as comments, line continuation, and line joining let you format the code so that it is easier to read and understand. XML comments provide additional information that is useful to the Object Browser and that you can use to automatically generate more complete documentation.

Although all of these components are not required by Visual Basic, they can make the difference between understanding the code quickly and completely, and not understanding it at all. Over an application's lifetime of development, debugging, upgrading, and maintenance, this can determine a project's success.

This chapter described structural elements that make up code files. Within those elements, you can place the code that gathers, manipulates, stores, and displays data. Chapter 15, "Data Types, Variables, and Constants," describes the variables that a program uses to hold data values. It explains how to declare variables, what types of data they can hold, and how Visual Basic converts from one data type to another.

15

Data Types, Variables, and Constants

Variables are among the most fundamental building blocks of a program. A *variable* is a program object that stores a value. The value can be a number, letter, string, date, structure containing other values, or an object representing both data and related actions.

When a variable contains a value, the program can manipulate it. It can perform arithmetic operations on numbers, string operations on strings (concatenation, calculating substrings, finding a target within a string), date operations (find the difference between two dates, add a time period to a date), and so forth.

Four factors determine a variable's exact behavior:

❑ **Data type** determines the kind of the data (integer, character, string, and so forth).

❑ **Scope** defines the code that can access the variable. For example, if you declare a variable inside a `For` loop, only other code inside the `For` loop can use the variable. If you declare a variable at the top of a subroutine, all the code in the subroutine can use the variable.

❑ **Accessibility** determines what code in other modules can access the variable. If you declare a variable at the module level (outside of any subroutine in the module) and you use the `Private` keyword, only the code in the module can use the variable. If you use the `Public` keyword, code in other modules can use the variable as well.

❑ **Lifetime** determines how long the variable's value is valid. A variable inside a subroutine that is declared with a normal `Dim` statement is created when the subroutine begins and is destroyed when it exits. If the subroutine runs again, it creates a new copy of the variable and its value is reset. If the variable is declared with the `Static` keyword, however, the same instance of the variable is used whenever the subroutine runs. That means the variable's value is preserved between calls to the subroutine.

For example, a variable declared within a subroutine has scope equal to the subroutine. Code outside of the subroutine cannot access the variable. If a variable is declared on a module level outside any subroutine, it has module scope. If it is declared with the `Private` keyword, it is accessible only to code within the module. If it is declared with the `Public` keyword, then it is also accessible to code outside of the module.

Visibility is a concept that combines scope, accessibility, and lifetime. It determines whether a certain piece of code can use a variable. If the variable is accessible to the code, the code is within the variable's scope, and the variable is within its lifetime (has been created and not yet destroyed), the variable is visible to the code.

This chapter explains the syntax for declaring variables in Visual Basic. It explains how you can use different declarations to determine a variable's data type, scope, accessibility, and lifetime. It discusses some of the issues you should consider when selecting a type of declaration. This chapter also describes some newer variable concepts such as anonymous and nullable types, which can complicate variable declarations.

Constants, parameters, and property procedures all have concepts of scope and data type that are similar to those of variables, so they are also describe here.

The chapter finishes with a brief explanation of naming conventions. Which naming rules you adopt isn't as important as the fact that you adopt some. This chapter discusses where you can find the conventions used by Microsoft Consulting Services. From those, you can build your own coding conventions.

Data Types

The following table summarizes the elementary data types of Visual Basic.

Type	Size	Values
Boolean	2 bytes	`True` or `False`
Byte	1 byte	0 to 255 (unsigned byte)
SByte	1 byte	−128 to 127 (signed byte)
Char	2 bytes	0 to 65,535 (unsigned character)
Short	2 bytes	−32,768 to 32,767
UShort	2 bytes	0 through 65,535 (unsigned short)
Integer	4 bytes	−2,147,483,648 to 2,147,483,647
UInteger	4 bytes	0 through 4,294,967,295 (unsigned integer)
Long	8 bytes	−9,223,372,036,854,775,808 to 9,223,372,036,854,775,807
ULong	8 bytes	0 through 18,446,744,073,709,551,615 (unsigned long)
Decimal	16 bytes	0 to +/−79,228,162,514,264,337,593,543,950,335 with no decimal point. 0 to +/−7.9228162514264337593543950335 with 28 places
Single	4 bytes	−3.4028235E+38 to −1.401298E−45 (negative values) 1.401298E−45 to 3.4028235E+38 (positive values)

Type	Size	Values
Double	8 bytes	−1.79769313486231570E+308 to −4.94065645841246544E-324 (negative values) 4.94065645841246544E-324 to 1.79769313486231570E+308 (positive values)
String	variable	Depending on the platform, a string can hold approximately 0 to 2 billion Unicode characters
Date	8 bytes	January 1, 0001 0:0:00 to December 31, 9999 11:59:59 pm
Object	4 bytes	Points to any type of data
Structure	variable	Structure members have their own ranges

The System namespace also provides integer data types that specify their number of bits explicitly. For example, Int32 represents a 32-bit integer. Using these values instead of Integer emphasizes the fact that the variable uses 32 bits. That can sometimes make code clearer. For example, suppose that you need to call an application programming interface (API) function that takes a 32-bit integer as a parameter. In Visual Basic 6, a Long uses 32 bits but in Visual Basic .NET, an Integer uses 32 bits. You can make it obvious that you are using a 32-bit integer by giving the parameter the Int32 type.

The data types that explicitly give their sizes are Int16, Int32, Int64, UInt16, UInt32, and UInt64.

The Integer data type is usually the fastest of the integral types. You will generally get better performance using Integers than you will with the Char, Byte, Short, Long, or Decimal data types. You should stick with the Integer data type unless you need the extra range provided by Long and Decimal, or you need to save space with the smaller Char and Byte data types. In many cases, the space savings you will get using the Char and Byte data types isn't worth the extra time and effort, unless you are working with a very large array of values.

Note that you cannot safely assume that a variable's storage requirements are exactly the same as its size. In some cases, the program may move a variable so that it begins on a boundary that is natural for the hardware platform. For example, if you make a structure containing several Short (2-byte) variables, the program may insert 2 extra bytes between them so they can all start on 4-byte boundaries, because that may be more efficient for the hardware. For more information on structures, see Chapter 26, "Classes and Structures."

Actually you can use attributes to change the way Visual Basic allocates the memory for a structure. In that case you may be able to determine exactly how the structure is laid out. This is a fairly advanced topic and it's not covered in this book.

Some data types also come with some additional overhead. For example, an array stores some extra information about each of its dimensions.

Type Characters

Data type characters identify a value's data type. The following table lists the data type characters of Visual Basic.

Character	Data Type
%	Integer
&	Long
@	Decimal
!	Single
#	Double
$	String

You can specify a variable's data type by adding a data type character after a variable's name when you declare it. When you use the variable later, you can omit the data type character if you like. For example, the following code declares variable `num_desserts` as a Long and `satisfaction_quotient` as a Double. It then assigns values to these variables.

```
Dim num_desserts&
Dim satisfaction_quotient#

num_desserts = 100
satisfaction_quotient# = 1.23
```

If you have `Option Explicit` turned off, you can include a data type character the first time you use the variable to determine its data type. If you omit the character, Visual Basic picks a default data type based on the value you assign to the variable.

If the value you assign is an integral value that will fit in an Integer, Visual Basic makes the variable an Integer. If the value is too big for an Integer, Visual Basic makes the variable a Long. If the value contains a decimal point, Visual Basic makes the variable a Double.

The following code shows the first use of three variables (`Option Explicit` is off). The first statement sets the variable `an_integer` equal to the value 100. This value fits in an Integer, so Visual Basic makes the variable an Integer. The second statement sets `a_long` equal to 10000000000. That value is too big to fit in an Integer, so Visual Basic makes it a Long. The third statement sets `a_double` to 1.0. That value contains a decimal point, so Visual Basic makes the variable a Double.

```
an_integer = 100
a_long = 10000000000
a_double = 1.0
```

If you set a variable equal to a `True` or `False`, Visual Basic makes it a Boolean.

Dates in Visual Basic are delimited with # characters. If you assign a variable to a date value, Visual Basic gives the variable the Date data type. The following code assigns Boolean and Date variables:

```
a_boolean = True
a_date = #12/31/2007#
```

In addition to data type characters, Visual Basic provides a set of *literal type characters* that determine the data type of literal values. These are values that you explicitly type into your code in statements such as assignment and initialization statements. The following table lists the literal type characters of Visual Basic.

Character	Data Type
S	Short
US	UShort
I	Integer
UI	UInteger
L	Long
UL	ULong
D	Decimal
F	Single (F for *floating point*)
R	Double (R for *real*)
c	Char (note lowercase c)

A literal type character determines the data type of a literal value in your code and may indirectly determine the data type of a variable assigned to it. For example, suppose that the following code is the first use of the variables i and ch (with `Option Explicit` turned off). Normally, Visual Basic would make i an Integer, because the value `123` fits in an Integer. Because the literal value `123` ends with the `L` character, however, the value is a Long, so the variable i is also a Long.

Similarly, Visual Basic would normally make variable ch a String because the value `"X"` looks like a string. The `c` following the value tells Visual Basic to make this a Char variable instead, as shown here:

```
i = 123L
ch = "X"c
```

Visual Basic also lets you precede a literal integer value with &H to indicate that it is hexadecimal (base 16) or &O to indicate that it is octal (base 8). For example, the following three statements set the variable `flags` to the same value. The first statement uses the decimal value `100`, the second uses the hexadecimal value `&H64`, and the third uses the octal value `&O144`.

```
flags = 100    ' Decimal 100.
flags = &H64   ' Hexadecimal &H64 = 6 * 16 + 4 = 96 + 4 = 100.
flags = &O144  ' Octal &O144 = 1 * 8 * 8 + 4 * 8 + 4 = 64 + 32 + 4 = 100.
```

As an aside, note that the `Hex` and `Oct` functions let you convert numeric values into hexadecimal and octal strings, respectively. In some sense, this is the opposite of what the `&H` and `&O` codes do: make Visual Basic interpret a string literal as hexadecimal or octal. The following example displays the value of the variable `flags` in decimal, hexadecimal, and octal:

```
Debug.WriteLine(flags)      ' Decimal.
Debug.WriteLine(Hex(flags)) ' Hexadecimal.
Debug.WriteLine(Oct(flags)) ' Octal.
```

Sometimes you must use literal type characters to make a value match a variable's data type. For example, the first assignment in the following code tries to assign the value `"X"` to a Char variable. This throws an error because `"X"` is a String value. Although it is obvious to a programmer that this code is trying to assign the character `X` to the variable, Visual Basic thinks the types don't match. The second assignment statement works because it assigns the Char value `"X"c` to the variable. The next assignment fails when it tries to assign the Double value `12.34` to a Decimal variable. The final assignment works because the value `12.34D` is a Decimal literal.

```
Dim ch As Char
ch = "X"        ' Error because "X" is a String.
ch = "X"c       ' Okay because "X"c is a Char.

Dim amount As Decimal
amount = 12.34   ' Error because 12.34 is a Double.
amount = 12.34D  ' Okay because 12.34D is a Decimal.
```

The following code shows another way to accomplish these assignments. This version uses the data type conversion functions `CChar` and `CDec` to convert the values into the proper data types. The following section, "Data Type Conversion," has more to say about data type conversion functions.

```
ch = CChar("X")
amount = CDec(12.34)
```

Using data type characters, literal type characters, and the Visual Basic default data type assignments can lead to very confusing code. You cannot expect every programmer to notice that a particular variable is a Single because it is followed by `!` in its first use, but not in others. You can make your code less confusing by using variable declarations that include explicit data types.

Data Type Conversion

Normally, you assign a value to a variable that has the same data type as the value. For example, you assign a string value to a String variable, you assign an integer value to an Integer variable, and so forth. Whether you can assign a value of one type to a variable of another type depends on whether the conversion is a narrowing or widening conversion.

Narrowing Conversions

A *narrowing conversion* is one where data is converted from one type to another type that cannot hold all of the possible values allowed by the original data type. For example, the following code copies the value from a Long variable into an Integer variable. A Long value can hold values that are too big to fit in an Integer, so this is a narrowing conversion. The value contained in the Long variable may or may not fit in the Integer.

```
Dim an_integer As Integer
Dim a_long As Long
...
an_integer = a_long
```

The following code shows a less obvious example. Here the code assigns the value in a String variable to an Integer variable. If the string happens to contain a number (for example "10" or "1.23"), the assignment works. If the string contains a non-numeric value (such as "Hello"), however, the assignment fails with an error.

```
Dim an_integer As Integer
Dim a_string As String
...
an_integer = a_string
```

Another non-obvious narrowing conversion is from a class to a derived class. Suppose that the Employee class inherits from the Person class. Then setting an Employee variable equal to a Person object, as shown in the following code, is a narrowing conversion because you cannot know without additional information whether the Person is a valid Employee. All Employees are Persons, but not all Persons are Employees.

```
Dim an_employee As Employee
Dim a_person As Person
...
an_employee = a_person
```

If you have Option Strict turned on, Visual Basic will not allow implicit narrowing conversions. If Option Strict is off, Visual Basic will attempt an implicit narrowing conversion and throw an error if the conversion fails (for example, if you try to copy the Integer value 900 into a Byte variable).

To make a narrowing conversion with Option Strict turned on, you must explicitly use a data type conversion function. Visual Basic will attempt the conversion and throw an error if it fails. The CByte function converts a numeric value into a Byte value, so you could use the following code to copy an Integer value into a Byte variable:

```
Dim an_integer As Integer
Dim a_byte As Byte
...
a_byte = CByte(an_integer)
```

If the Integer variable contains a value less than 0 or greater than 255, the value will not fit in a Byte variable so CByte throws an error.

The following table lists the data type conversion functions of Visual Basic.

Function	Converts To
CBool	Boolean
CByte	Byte
CChar	Char
CDate	Date
CDbl	Double
CDec	Decimal
CInt	Integer
CLng	Long
CObj	Object
CSByte	SByte
CShort	Short
CSng	Single
CStr	String
CUInt	UInteger
CULng	ULong
CUShort	UShort

The `CInt` and `CLng` functions round fractional values off to the nearest whole number. If the fractional part of a number is exactly .5, the functions round to the nearest even whole number. For example, 0.5 rounds to 0, 0.6 rounds to 1, and 1.5 rounds to 2.

In contrast, the `Fix` and `Int` functions truncate fractional values. `Fix` truncates toward zero, so `Fix(-0.9)` is 0 and `Fix(0.9)` is 0. `Int` truncates downward, so `Int(-0.9)` is –1 and `Int(0.9)` is 0.

`Fix` and `Int` also differ from `CInt` and `CLng` because they return the same data type they are passed. `CInt` always returns an Integer no matter what type of value you pass it. If you pass a Long into `Fix`, `Fix` returns a Long. In fact, if you pass a Double into `Fix`, `Fix` returns a Double.

The `CType` function takes as parameters a value and a data type, and it converts the value into that type if possible. For example, the following code uses `CType` to perform a narrowing conversion from a Long to an Integer. Because the value of `a_long` can fit within an integer, the conversion succeeds.

```
Dim an_integer As Integer
Dim a_long As Long = 100
an_integer = Ctype(a_long, Integer)
```

The `DirectCast` statement changes value types much as `CType` does, except that it only works when the variable it is converting implements or inherits from the new type. For example, suppose that the variable `dessert_obj` has the generic type `Object` and you know that it points to an object of type `Dessert`. Then the following code converts the generic `Object` into the specific `Dessert` type:

```
Dim dessert_obj As Object = New Dessert("Ice Cream")
Dim my_dessert As Dessert
my_dessert = DirectCast(dessert_obj, Dessert)
```

`DirectCast` throws an error if you try to use it to change the object's data type. For example, the following code doesn't work, even though converting an Integer into a Long is a narrowing conversion:

```
Dim an_integer As Integer = 100
Dim a_long As Long
a_long = DirectCast(an_integer, Long)
```

The `TryCast` statement converts data types much as `DirectCast` does, except that it returns `Nothing` if there is an error, rather than throwing an error.

Data Type Parsing Methods

Each of the fundamental data types except for String has a `Parse` method that attempts to convert a string into the variable type. For example, the following two statements both try to convert the string value `txt_entered` into an Integer:

```
Dim txt_entered As String = "112358"
Dim num_entered As Integer
...
num_entered = CInt(txt_entered)          ' Use CInt.
num_entered = Integer.Parse(txt_entered) ' Use Integer.Parse.
```

Some of these parsing methods can take additional parameters to control the conversion. For example, the numeric methods can take a parameter that gives the international number style the string should have.

The class parsing methods have a more object-oriented feel than the conversion functions. They are also a bit faster. They only parse strings, however, so if you want to convert from a Long to an Integer, you need to use `CInt` rather than `Integer.Parse`.

Widening Conversions

In contrast to a narrowing conversion, a *widening conversion* is one where the new data type is always big enough to hold the old data type's values. For example, a Long is big enough to hold any Integer value, so copying an Integer value into a Long variable is a widening conversion.

Visual Basic allows widening conversions. Note that some widening conversions can still result in a loss of data. For example, a Decimal variable can store more significant digits than a Single variable can. A Single can hold any value that a Decimal can but not with the same precision. If you assign a Decimal value to a Single variable, you may lose some precision.

Variable Declarations

The complete syntax for a variable declaration is as follows:

```
[attribute_list] [accessibility] [Shared] [Shadows] [ReadOnly] _
Dim [WithEvents] name [(bounds_list)] [As [New] type] _
[= initialization_expression]
```

All declarations have only one thing in common: They contain a variable's name. Other than the name, different declarations may have nothing in common. Variable declarations with different forms can use or omit any other piece of the general declaration syntax. For example, the following two declarations don't share a single keyword:

```
Dim i = 1            ' Declare private Integer named i. (Option Explicit Off)
Public j As Integer ' Declare public Integer named j.
```

The many variations supported by a variable declaration make the general syntax rather intimidating. In most cases, however, declarations are straightforward. The previous two declarations are fairly easy to understand.

The following sections describe the pieces of the general declaration in detail.

Attribute_List

The optional attribute list is a comma-separated list of attributes that apply to the variable. An attribute further refines the definition of a variable to give more information to the compiler and the runtime system.

Attributes are rather specialized and address issues that arise when you perform very specific programming tasks. For example, when you write code to serialize and de-serialize data, you can use serialization attributes to gain more control over the process.

The following code defines the OrderItem class. This class declares three public variables: ItemName, Quantity, and Price. It uses attributes on its three variables to indicate that ItemName should be stored as text, Price should be stored as an attribute named Cost, and Quantity should be stored as an attribute with its default name, Quantity.

```
Public Class OrderItem
    <XmlText()> _
        Public ItemName As String
    <XmlAttributeAttribute(AttributeName:="Cost")> _
        Public Price As Decimal
    <XmlAttributeAttribute()> _
        Public Quantity As Integer
End Class
```

The following code shows the XML serialization of an OrderItem object:

```
<OrderItem Cost="1.25" Quantity="12">Cookie</OrderItem>
```

Because attributes are so specialized, they are not described in more detail here. For more information, see the sections in the online help related to the tasks you need to perform. For more information on XML serialization attributes, for example, search for "System.Xml.Serialization Namespace," or go to `http://msdn.microsoft.com/library/en-us/cpref/html/frlrfSystemXmlSerialization.asp`.

For more information on attributes, see the "Attributes" section of the Visual Basic Language Reference or go to `http://msdn.microsoft.com/library/en-us/vbls7/html/vblrfVBSpec4_10.asp`. For a list of attributes you can use to modify variable declarations, search the online help for "Attribute Hierarchy," or go to `http://msdn.microsoft.com/library/en-us/cpref/html/frlrfsystemattributeclasshierarchy.asp`.

Accessibility

A variable declaration's *accessibility* clause can take one of the following values:

❑   `Public` — You can use the `Public` keyword only for variables declared at the module, class, structure, namespace, or file level but not inside a subroutine. `Public` indicates that the variable should be available to all code inside or outside of the variable's module. This allows the most access to the variable.

❑   `Protected` — You can use the `Protected` keyword only at the class level, not inside a module or inside a routine within a class. `Protected` indicates that the variable should be accessible only to code within the same class or a derived class. The variable is available to code in the same or a derived class, even if the instance of the class is different from the one containing the variable. For example, one `Employee` object can access a `Protected` variable inside another `Employee` object.

❑   `Friend` — You can use the `Friend` keyword only for variables declared at the module, class, namespace, or file level, not inside a subroutine. `Friend` indicates that the variable should be available to all code inside or outside of the variable's module within the same project. The difference between this and `Public` is that `Public` allows code outside of the project to access the variable. This is generally only an issue for code and control libraries. For example, suppose that you build a code library containing dozens of routines and then you write a program that uses the library. If the library declares a variable with the `Public` keyword, the code in the library and the code in the main program can use the variable. In contrast, if the library declares a variable with the `Friend` keyword, only the code in the library can access the variable, not the code in the main program.

❑   `Protected Friend` — You can use `Protected Friend` only at the class level, not inside a module or inside a routine within a class. `Protected Friend` is the union of the `Protected` and `Friend` keywords. A variable declared `Protected Friend` is accessible only to code within the same class or a derived class and only within the same project.

❑   `Private` — You can use the `Private` keyword only for variables declared at the module, class, or structure, not inside a subroutine. A variable declared `Private` is accessible only to code in the same module, class, or structure. If the variable is in a class or structure, it is available to other instances of the class or structure. For example, one `Customer` object can access a `Private` variable inside another `Customer` object.

❑   `Static` — You can use the `Static` keyword only for variables declared within a subroutine or a block within a subroutine (for example, a `For` loop or `Try Catch` block). You cannot use `Static` with `Shared` or `Shadows`. A variable declared `Static` keeps its value between lifetimes.

271

For example, if a subroutine sets a `Static` variable to 27 before it exits, the variable begins with the value 27 the next time the subroutine executes. The value is stored in memory, so it is not retained if you exit and restart the whole program. Use a database, the System Registry, or some other means of permanent storage if you need to save values between program runs.

Shared

You can use the `Shared` keyword at the module, class, structure, namespace, or file level, not within a subroutine. This keyword means that all instances of the class or structure containing the variable share the same variable.

For example, suppose that the `Order` class declares the `Shared` variable `NumOrders` to represent the total number of orders in the application. Then all instances of the `Order` class share the same `NumOrders` variable. If one instance of an `Order` sets `NumOrders` to 10, all instances of `Order` see `NumOrders` equal 10.

You can access a `Shared` variable either by using a specific class instance or by using the class itself. For example, the following code uses the `order1` object's `NumOrders` variable to set the value of `NumOrders` to 100. It then displays this value by using `order1` and another `Order` object named `order2`. Next, it uses the class itself to set the value of `NumOrders` and uses the class to display the result.

```
order1.NumOrders = 100            ' Use order1 to set NumOrders = 100.
MessageBox.Show(order1.NumOrders)  ' Use order1 to display 100.
MessageBox.Show(order2.NumOrders)  ' Use a different Order to Display 100.
Order.NumOrders = 101             ' Use the class to set NumOrders = 101.
MessageBox.Show(Order.NumOrders)   ' Use the class to display 101.
```

You cannot use the `Shared` keyword with the `Static` keyword. This makes sense because a `Shared` variable is in some fashion static to the class or structure that contains it. If one instance of the class modifies the variable, the value is available to all other instances. In fact, even if you destroy every instance of the class or never create any instances at all, the class itself still keeps the variable's value safe. That provides a persistence similar to that given by the `Static` keyword.

Shadows

You can use the `Shadows` keyword only for variables declared at the module, class, structure, namespace, or file level, not inside a subroutine. `Shadows` indicates that the variable hides a variable with the same name in a base class. In a typical example, a subclass provides a variable with the same name as a variable declared in one of its ancestor classes.

Example program ShadowTest, which is available for download on the book's web site, uses the following code to demonstrate the `Shadows` keyword:

```
Public Class Person
    Public LastName As String
    Public EmployeeId As String
End Class

Public Class Employee
    Inherits Person
    Public Shadows EmployeeId As Long
```

```
    End Class

    Public Class Manager
        Inherits Employee
        Public Shadows LastName As String
    End Class

    Private Sub TestShadows()
        Dim txt As String = ""

        Dim mgr As New Manager
        mgr.LastName = "Manager Last Name"
        mgr.EmployeeId = 1

        Dim emp As Employee = CType(mgr, Employee)
        emp.LastName = "Employee Last Name"
        emp.EmployeeId = 2

        Dim per As Person = CType(mgr, Person)
        per.LastName = "Person Last Name"
        per.EmployeeId = "A"

        txt &= "Manager:  " & mgr.EmployeeId & ": " & mgr.LastName & vbCrLf
        txt &= "Employee: " & emp.EmployeeId & ": " & emp.LastName & vbCrLf
        txt &= "Person:   " & per.EmployeeId & ": " & per.LastName & vbCrLf

        txtResults.Text = txt
        txtResults.Select(0, 0)
    End Sub
```

The code defines a `Person` class that contains public String variables `LastName` and `EmployeeId`. The `Employee` class inherits from `Person` and declares its own version of the `EmployeeId` variable. It uses the `Shadows` keyword so this version covers the version defined by the `Person` class. Note that `Shadows` works here even though the two versions of `EmployeeId` have different data types: Long versus String. An `Employee` object gets the Long version, and a `Person` object gets the String version.

The `Manager` class inherits from the `Employee` class and defines its own version of the `LastName` variable. A `Manager` object uses this version, and an `Employee` or `Person` object uses the version defined by the `Person` class.

Having defined these three classes, the program works with them to demonstrate shadowing. First it creates a `Manager` object, and sets its `LastName` variable to `Manager Last Name` and its `EmployeeId` variable to `1`. The `LastName` value is stored in the `Manager` class's version of the variable declared with the `Shadows` keyword. The `EmployeeId` value is stored in the `EmployeeId` variable declared with the `Shadows` keyword in the `Employee` class.

The program then creates an `Employee` variable and makes it point to the `Manager` object. This makes sense because `Manager` inherits from `Employee`. A `Manager` is a type of `Employee` so an `Employee` variable can point to a `Manager` object. The program sets the `Employee` object's `LastName` variable to `Employee Last Name` and its `EmployeeId` variable to `2`. The `LastName` value is stored in the `Person` class's version of the variable. The `EmployeeId` value is stored in the `EmployeeId` variable declared with the `Shadows` keyword in the `Employee` class. Because the `Manager` class does not override this

273

declaration with its own shadowing declaration of `EmployeeId`, this value overwrites the value stored by the `Manager` object.

Next, the program creates a `Person` variable and makes it point to the same `Manager` object. Again this makes sense because a `Manager` is a type of `Person` so a `Person` variable can point to a `Manager` object. The program sets the `Person` object's `LastName` variable to "Person Last Name" and its `EmployeeId` variable to "A." The `Person` class does not inherit, so the program stores the values in the versions of the variables defined by the `Person` class. Because the `Employee` class does not override the `Person` class's declaration of `LastName` with its own shadowing declaration, this value overwrites the value stored by the `Employee` object.

Finally, the program prints the values of the `EmployeeId` and `LastName` variables for each of the objects.

The following output shows the program's results. Notice that the `Employee` object's value for `EmployeeId` (2) overwrote the value saved by the `Manager` object (1) and that the `Person` object's value for `LastName` (`Person Last Name`) overwrote the value saved by the `Employee` object (`Employee Last Name`).

```
Manager:  2: Manager Last Name
Employee: 2: Person Last Name
Person:   A: Person Last Name
```

Normally, you don't need to access shadowed versions of a variable. If you declare a version of `LastName` in the `Employee` class that shadows a declaration in the `Person` class, you presumably did it for a good reason (unlike in the previous example which does it just to show how it's done), and you don't need to access the shadowed version directly.

However, if you really do need to access the shadowed version, you can use variables from ancestor classes to do so. For example, the previous example creates `Employee` and `Person` objects pointing to a `Manager` object to access that object's shadowed variables.

Within a class, you can similarly cast the `Me` object to an ancestor class. For example, the following code in the `Manager` class makes a `Person` variable pointing to the same object and sets its `LastName` value:

```
Public Sub SetPersonEmployeeId(ByVal employee_id As String)
    Dim per As Person = CType(Me, Person)
    per.EmployeeId = employee_id
End Sub
```

Code in a class can also use the `MyBase` keyword to access the variables defined by the parent class. The following code in the `Manager` class sets the object's `LastName` variable declared by the `Employee` parent class:

```
Public Sub SetManagerLastName(ByVal last_name As String)
    MyBase.LastName = last_name
End Sub
```

ReadOnly

You can use the `ReadOnly` keyword only for variables declared at the module, class, structure, namespace, or file level, not inside a subroutine. `ReadOnly` indicates that the program can read, but not modify, the variable's value.

You can initialize the variable in one of two ways. First, you can include an initialization statement in the variable's declaration, as shown in the following code:

```
Public Class EmployeeCollection
    Public ReadOnly MaxEmployees As Integer = 100
    ...
End Class
```

Second, you can initialize the variable in the object's constructors. The following code declares the `ReadOnly` variable `MaxEmployees`. The empty constructor sets this variable to `100`. A second constructor takes an integer parameter and sets the `MaxEmployees` to its value.

```
Public Class EmployeeCollection
    Public ReadOnly MaxEmployees As Integer

    Public Sub New()
        MaxEmployees = 100
    End Sub

    Public Sub New(ByVal max_employees As Integer)
        MaxEmployees = max_employees
    End Sub
    ...
End Class
```

After the object is initialized, the program cannot modify the `ReadOnly` variable. This restriction applies to code inside the module that declared the variable, as well as code in other modules. If you want to allow code inside the same module to modify the value but want to prevent code in other modules from modifying the value, you should use a property procedure instead. See the section, "Property Procedures," later in this chapter for more information.

Dim

The `Dim` keyword officially tells Visual Basic that you want to create a variable.

You can omit the `Dim` keyword if you specify `Public`, `Protected`, `Friend`, `Protected Friend`, `Private`, `Static`, or `ReadOnly`. In fact, if you include one of these keywords, the Visual Basic editor automatically removes the `Dim` keyword if you include it.

If you do not specify otherwise, variables you declare using a `Dim` statement are `Private`. The following two statements are equivalent:

```
Dim num_people As Integer
Private num_people As Integer
```

For certainty's sake, many programmers explicitly specify `Private` to declare private variables. Using `Private` means that programmers don't need to remember that the `Dim` keyword gives a private variable by default.

One place where the `Dim` keyword is common is when declaring variables inside subroutines. You cannot use the `Private` keyword inside a subroutine (or `Public`, `Protected`, `Friend`, `Protected Friend`, or `ReadOnly`, for that matter), so you must use either `Static` or `Dim`.

275

WithEvents

The `WithEvents` keyword tells Visual Basic that the variable is of a specific object type that may raise events that you will want to catch. For example, the following code declares the variable `Face` as a `PictureBox` object that may raise events you want to catch:

```
Private WithEvents Face As PictureBox
```

When you declare a variable with the `WithEvents` keyword, Visual Basic creates an entry for it in the left drop-down list in the module's code window, as shown in Figure 15-1.

If you select the object in the left drop-down list, Visual Basic fills the right drop-down list with the object's events that you might want to catch, as shown in Figure 15-2.
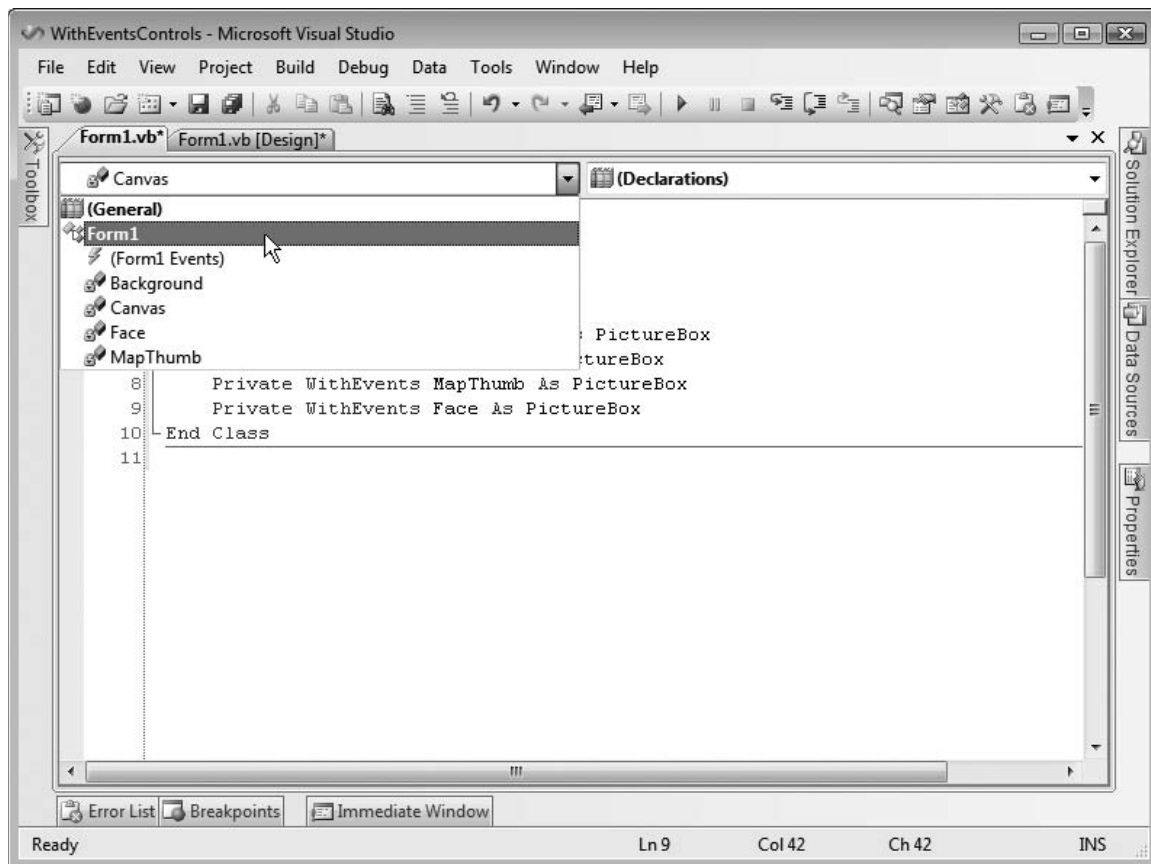
Figure 15-1: Visual Basic creates a drop-down entry for variables declared WithEvents.

If you select an event, Visual Basic creates a corresponding empty event handler. Letting Visual Basic automatically generate the event handler in this way is easier and safer than trying to type the event handler yourself, creating all of the required parameters by hand.

Declaring variables using the WithEvents keyword is a powerful technique. You can make the variable point to an object to catch its events. Later, if you want to process events from some other object using the same event handlers, you can set the variable to point to the new object. If you no longer want to receive any events, you can set the variable to Nothing.

Unfortunately, you cannot declare an array using the WithEvents keyword. That means you cannot use a simple declaration to allow the same event handlers to process events from more than one object. However, you can achieve this by using the AddHandler method to explicitly set the event handler routines for a series of objects. For more information on this technique, see the section "Catching Events" in Chapter 26, "Classes and Structures."
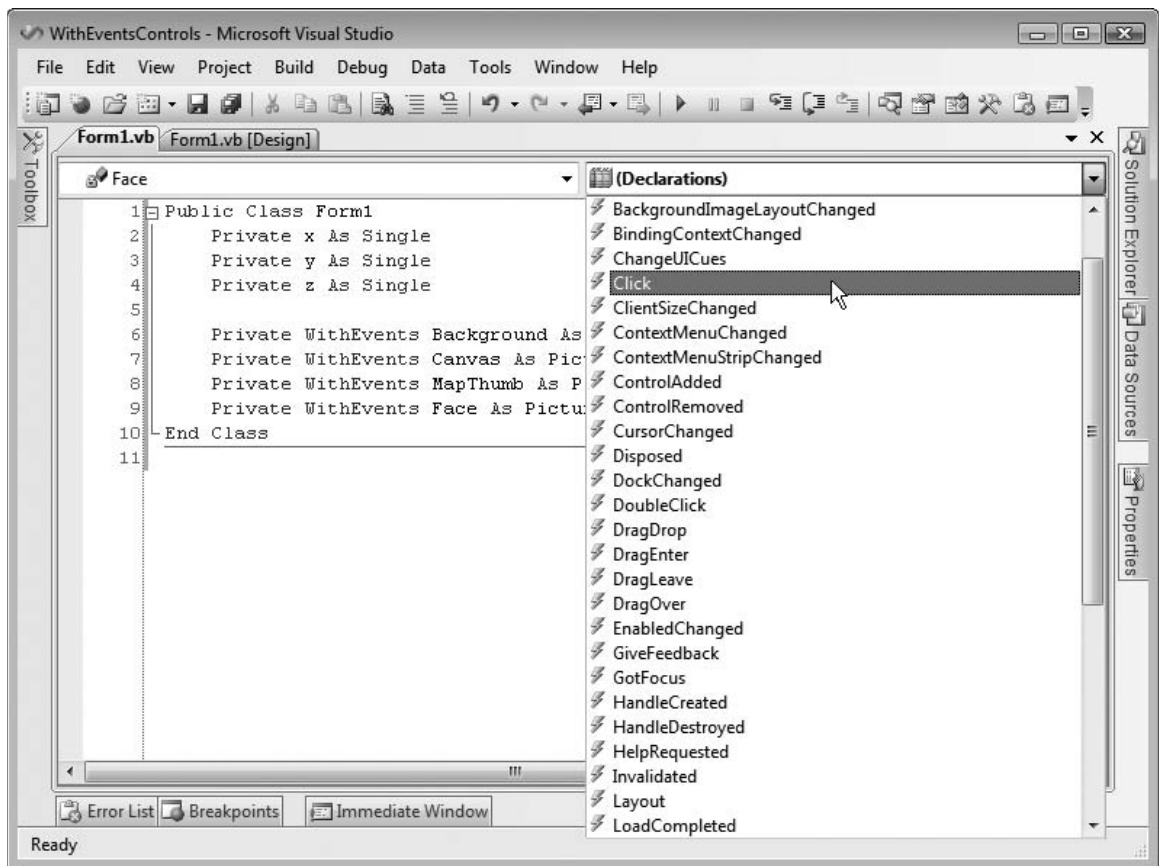
Figure 15-2: When you select an object declared WithEvents in the left drop-down list, Visual Basic fills the right drop-down list with events you might want to catch.

Name

A declaration's *name* clause gives the name of the variable. This must be a valid Visual Basic identifier. The rules for valid identifiers are a bit confusing, but generally an identifier should begin with a letter or underscore, followed by any number of letters, digits, or underscores. If the identifier begins with an underscore (which is unusual), it must contain at least one other valid character (letter, digit, or underscore) so that Visual Basic doesn't confuse it with a line continuation character. Here are some examples:

`num_employees`	Valid
`NumEmployees`	Valid
`_manager`	Valid (but unusual)
`_`	Invalid (contains only a single underscore)
`__`	Valid (two underscores is valid but could be very confusing)
`1st_employee`	Invalid (doesn't begin with a letter or underscore)

Normal identifiers cannot be the same as a Visual Basic keyword. However, you can *escape* an identifier by enclosing it in square brackets. If you escape an identifier, you can give it the same name as a Visual Basic keyword. For example, in the following code, the `ParseString` subroutine takes a single parameter named `String` of type String:

```
Public Sub ParseString(ByVal [String] As String)
    Dim values() As String = Split([String])
    ...
End Sub
```

If you begin writing a call to this subroutine in the code editor, the IntelliSense pop-up describes this routine as `ParseString(String As String)`.

These rules let you come up with some strange and potentially confusing identifier names. For example, you can make escaped variables named `String`, `Boolean`, `ElseIf`, and `Case`. Depending on your system's settings, underscores may be hard to read either on the screen or in printouts. That may make variables such as `__` (two underscores) seem to vanish and may make it hard to tell the difference between `_Name` and `Name`.

Although these identifiers are all legal, they can be extremely confusing and may lead to long, frustrating debugging sessions. To avoid confusion, use escaped identifiers and identifiers beginning with an underscore sparingly.

Bounds_List

A variable declaration's *bounds_list* clause specifies bounds for an array. This should be a comma-separated list of non-negative integers that give the upper bounds for the array's dimensions. All dimensions have a lower bound of zero. You can optionally specify the lower bound, but it must always be zero.

> *Henry Ford once said, "Any customer can have a car painted any colour that he wants so long as it is black." A similar rule applies here: you can specify any lower bound for an array as long as it's zero.*

The following code declares two arrays in two different ways. The first statement declares a one-dimensional array of 101 `Customer` objects with indexes ranging from 0 to 100. The second statement defines a two-dimensional array of `Order` objects. The first dimension has bounds ranging from 0 to 100 and the second dimension has bounds ranging from 0 to 10. The array's entries are those between `orders(0, 0)` and `orders(100, 10)` giving a total of 101 * 11 = 1111 entries. The last two statements define similar arrays, while explicitly declaring the arrays' lower bounds.

```
Private customers(100) As Customer
Private orders(100, 10) As Order
Private customers2(0 To 100) As Customer
Private orders2(0 To 100, 0 To 10) As Order
```

You may find that specifying the lower bound makes the code easier to read because it gives the lower bound explicitly rather than requiring you to remember that lower bounds are always 0. It can be particularly helpful for those who have used Visual Basic 6 and earlier versions because those versions of Visual Basic allowed arrays to have lower bounds other than 0.

Note that declarations of this sort that use an object data type do not instantiate the objects. For example, the first declaration in the previous example defines 101 array entries that all point to `Nothing`. They do not initially point to instances of the `Customer` class. After this declaration, the program would need to create each object reference individually, as shown in the following code:

```
Private customers(100) As Customer
For i As Integer = 0 To 100
    customers(i) = New Customer
Next i
```

Alternatively, the program can use an initialization statement to declare and initialize the objects in a single step. See the section "Initialization_Expression" shortly for more information on initializing arrays in their declarations.

If you provide parentheses but no *bounds_list*, Visual Basic defines the array, but doesn't create it with specific bounds. Later, you can use the `ReDim` statement to give it bounds. Note that you can also use `ReDim` to change the bounds of an array that you initially give bounds. The following example declares two arrays named `a1` and `a2`. Initially, the program allocates 11 items for array `a1` but no items for array `a2`. The program then uses `ReDim` to allocate 21 entries for both arrays.

```
Dim a1(10) As Integer
Dim a2() As Integer

ReDim a1(20)
ReDim a2(0 To 20)
```

The `ReDim` statement cannot change the number of bounds in an array. If you want to declare but not initialize a multidimensional array, include commas as if you were defining the bounds. The following code declares a three-dimensional array and initializes its separate steps:

```
Dim a1(,,) As Integer

ReDim a1(10, 20, 30)
```

New

If you are declaring an object variable, the `New` keyword tells Visual Basic to create a new instance of the object. Without this keyword, Visual Basic makes an object variable that doesn't yet hold a reference to any object. It initially holds `Nothing`.

For example, the first line in the following code declares an `Employee` object variable named `emp1`. After that line, the variable is defined, but it doesn't point to anything. If you examine the variable, you will find that it has the value `Nothing`. The second line sets `emp1` equal to a new `Employee` object. The last line creates an `Employee` object variable named `emp2` and assigns it to a new `Employee` object. This does the same thing as the first and second line but in a single statement.

```
Dim emp1 As Employee
emp1 = New Employee

Dim emp2 As New Manager
```

If the object's class has constructors that take parameters, you can include the parameters after the class name. For example, suppose that the `Employee` class has two constructors: an empty constructor (one that takes no parameters) and a constructor that takes first and last name strings as parameters. Then the following code creates two `Employee` objects using the different constructors:

```
Dim emp1 As New Employee
Dim emp2 As New Employee("Rod", "Stephens")
```

Note that you must provide parameters that match some constructor. If the class does not have a constructor that takes no arguments, you cannot use the `New` keyword without specifying parameters. If the `Employee` class didn't have an empty constructor, the first line in the previous example would be illegal.

As Type and Inferred Types

The `As` clause tells Visual Basic what kind of variable you are declaring. For example, the following `As` statement indicates that the variable `cx` has type Single:

```
Dim cx As Single
```

If `Option Infer` is on, then you do not need to declare a local variable's data type. If you omit the `As` clause, Visual Basic infers the variable's data type from the value that you assign to it. For example, the following code declares a variable named `message`. Because the code assigns a string value to the variable, Visual Basic infers that the variable should be a String.

```
Dim message = "Hello!"
```

Unfortunately, inferred data types make the code harder to understand later. You can figure out that the previous declaration makes a variable that is a String, but it is much more obvious if you explicitly include the `As String` clause. In this example, type inference only saves you a few keystrokes and makes the code slightly harder to understand. Now, consider the following statement:

```
Dim x = 1.234
```

Does this statement make variable `x` a Single, Double, Decimal, or some other data type? In this case, it's much less obvious what data type Visual Basic will decide to use. (It makes `x` a Double.)

To avoid confusion and make the code as easy to read as possible, I recommend that you turn `Option Infer` off. Then you can use an `Option Infer` statement at the top of any module where type inference would be helpful. Even in those modules, I recommend that you explicitly give variables data types whenever possible.

The only times when type inference is helpful is when you cannot easily figure out the type needed by a variable. For example, LINQ lets a program generate results that have confusing data types, so type inference can be very handy when working with LINQ. For more information on LINQ, see Chapter 21.

When you create a new project, `Option Infer` *is on by default. Turn it off for the project as a whole and then turn it on only in the files that need it.*

Initialization_Expression

The *initialization_expression* clause gives data that Visual Basic should use to initialize the variable. The most straightforward form of initialization assigns a simple value to a variable. The following code declares the variable `num_employees` and assigns it the initial value zero:

```
Dim num_employees As Integer = 0
```

More complicated data types may require more complex initialization clauses. If the declaration declares an object variable, you can use the `New` keyword to initialize the variable. For example, the first line in the following code declares an `Employee` variable named `emp1` and sets it equal to a new `Employee` object. The second statement uses the `As New` form of declaration to do the same thing without a separate initialization clause. This version is slightly more compact, but you can use whichever version seems most natural to you.

```
Dim emp1 As Employee = New Employee("Rod", "Stephens")
Dim emp2 As New Employee("Rod", "Stephens")
```

The `With` keyword allows you to initialize an object without using a special constructor. This statement lets you assign values to an object's public properties and variables right after the object is created. The following code creates a new `Employee` object and sets its `FirstName` and `LastName` values much as the previous statements do:

```
Dim emp3 As New Employee With {.FirstName = "Rod", .LastName = "Stephens"}
```

Initializing Arrays

Arrays have their own special initialization syntax. To declare and initialize an array in one statement, you must omit the array's bounds. Visual Basic uses the initialization data to discover the bounds.

Place the array's values inside curly braces separated by commas. The following code initializes a one-dimensional array of integers:

```
Dim fibonacci() As Integer = {1, 1, 2, 3, 5, 8, 13, 21, 33, 54, 87}
```

For a multidimensional array, put commas in the variable's parentheses to indicate the number of dimensions. Use curly braces to surround the array data. Nest each dimension of data inside the previous one, enclosing each dimension's data with braces and separating entries with commas.

This probably makes the most sense if you think of a multidimensional array as an array of arrays. For example, a three-dimensional array is an array of two-dimensional arrays. Each of the two-dimensional arrays is an array of one-dimensional arrays. You can use line continuation characters and indentation to make the array's structure more obvious.

The following code declares and initializes a two-dimensional array of integers and then prints the values:

```
Dim int_values(,) As Integer = _
{ _
    {1, 2, 3}, _
    {4, 5, 6} _
}
For i As Integer = 0 To 1
    For j As Integer = 0 To 2
        txt &= int_values(i, j)
    Next j
    txt &= vbCrLf
Next i
```

The following shows this code's output:

```
123
456
```

The following code declares and initializes a three-dimensional array of strings. The text for each value gives its position in the array. For example, the value `str_values(0, 1, 1)` is "011." Notice how the code uses indentation to make the data a bit easier to understand. Items in the first dimension are

indented one level and items in the second dimension are indented two levels. The final level is basically a one-dimensional array, which is fairly easy to understand with just commas separating its values. After initializing the array, the code loops through its entries and prints them.

```
Dim str_values(,,) As String = _
{ _
    { _
        {"000", "001", "002"}, _
        {"010", "011", "012"} _
    }, _
    { _
        {"100", "101", "102"}, _
        {"110", "111", "112"} _
    } _
}
For i As Integer = 0 To 1
    For j As Integer = 0 To 1
        txt &= "[ "
        For k As Integer = 0 To 2
            txt &= str_values(i, j, k) & " "
        Next k
        txt &= "] "
    Next j
    txt &= vbCrLf
Next i
```

The following text shows this code's output:

```
[ 000 001 002 ] [ 010 011 012 ]
[ 100 101 102 ] [ 110 111 112 ]
```

Example program InitializeArrays, which is available for download on the book's web site, uses similar code to demonstrate array initialization.

Note that you must provide the correct number of items for each of the array's dimensions. For example, the following declaration is invalid because the array's second row contains fewer elements than its first row:

```
Dim int_values(,) As Integer = _
{ _
    {1, 2, 3}, _
    {4, 5} _
}
```

Initializing Object Arrays

The basic syntax for initializing an array of objects is similar to the syntax you use to initialize any other array. You still omit the array bounds from the declaration and then include values inside curly braces. The values you use to initialize the array, however, are different because object variables do not take simple values such as 12 and "Test" that you would use to initialize integer or string arrays.

If you create an array of objects without an initialization clause, Visual Basic creates the object variables but does not create objects for them. Initially, all of the array's entries are `Nothing`.

The following code creates an array containing 11 references to `Employee` objects. Initially, all of the references are set to `Nothing`.

```
Dim employees(0 To 10) As Employee
```

If you want to initialize the objects, you must initialize each object in the array separately using `Nothing` or the class's constructors. Optionally, you can add a `With` statement to set public properties and variables after creating the object. The following code declares an array of `Employee` objects. It initializes two entries using an `Employee` object constructor that takes as parameters the employees' first and last names, two entries with an empty constructor and a `With` statement, two with an empty constructor only, and two final entries with the value `Nothing`.

```
Dim employees() As Employee = _
{ _
    New Employee("Alice", "Andrews"), _
    New Employee("Bart", "Brin"), _
    New Employee With {.FirstName = "Cindy", .LastName="Cant"}, _
    New Employee With {.FirstName = "Dan", .LastName="Diver"}, _
    New Employee, _
    New Employee, _
    Nothing, _
    Nothing _
}
```

To initialize higher-dimensional arrays of objects, use the syntax described in the previous section. Use `Nothing` or the `New` keyword and object constructors to initialize each array entry individually.

Initializing XML Variables

One of the new features in Visual Basic 2008 is the ability to store XML data in `XElement` objects. To do that, declare the `XElement` variable and set it equal to properly formatted XML code. The XML code must begin on the same logical line as the variable assignment, although as usual you can use line continuation characters to start the actual XML code on the following line. Visual Basic reads the data's opening tag and then reads XML data until it reaches a corresponding closing tag so the XML data can include whitespace just as an XML document can. In particular, it can span multiple lines without line continuation characters.

> *In fact, if you use line continuation characters within the XML, the underscore characters become part of the XML data.*

For example, the following code declares a variable named `book_node` that contains XML data representing a book:

```
Dim book_node As XElement = _
    <Book>
        <Title>The Bug That Was</Title>
        <Year>2008</Year>
        <Pages>376</Year>
    </Book>
```

This type of declaration and initialization makes it easy to build XML data directly into your Visual Basic applications.

You can initialize XML literal values with much more complicated expressions. For example, you can use LINQ to select values from relational data sources and build results in the form of an XML document. For more information on LINQ, see Chapter 21.

Multiple Variable Declarations

Visual Basic .NET allows you to declare more than one variable in a single declaration statement. For example, the following statement declares two Integer variables named `num_employees` and `num_customers`:

```
Private num_employees, num_customers As Integer
```

You can place accessibility keywords (`Private`, `Public`, and so on), `Shared`, `Shadows`, and `ReadOnly` only at the beginning of the declaration and they apply to all of the variables in the declaration. In the previous statement, both `num_employees` and `num_customers` are `Private`.

You can declare variables with different data types by including more than one `As` clause separated by commas. The following statement declares two Integer variables and one String variable:

```
Private emps, custs As Integer, cust As String
```

You cannot use an initialization statement if more than one variable share the same `As` clause, but you can include an initialization statement for variables that have their own `As` clause. In the previous example, you cannot initialize the two Integer variables, but you can initialize the String variable as shown in the following statement:

```
Private emps, custs As Integer, cust As String = "Cozmo"
```

To initialize all three variables, you would need to give them each their own `As` clauses, as shown in the following example:

```
Private emps As Integer = 5, custs As Integer = 10, cust As String = "Cozmo"
```

You can also declare and initialize multiple objects, arrays, and arrays of objects all in the same statement.

Although all of these combinations are legal, they quickly become too confusing to be of much practical use. Even the relatively simple statement that follows can lead to later misunderstandings. Quickly glancing at this statement, the programmer may think that all three variables are declared as Long.

```
Private num_employees, num_customers As Integer, num_orders As Long
```

You can reduce the possibility of confusion by using one `As` clause per declaration. Then a programmer can easily understand how the variables are defined by looking at the beginning and ending of the declaration. The beginning tells the programmer the variables' accessibility and whether they are shared, shadowing other variables, or read-only. The end gives the variables' data type.

You can also keep the code simple by giving variables with initialization statements their own declarations. Then a programmer reading the code won't need to decide whether an initialization statement applies to one or all of the variables.

There's nothing particularly wrong with declaring a series of relatively short variables in a single statement, as long as you don't find the code confusing. The following statements declare five Integer variables and three Single variables. Breaking this into eight separate `Dim` statements would not make it much clearer.

```
Dim i, j, k, R, C As Integer
Dim X, Y, Z As Single
```

Option Explicit and Option Strict

The `Option Explicit` and `Option Strict` compiler options play an important role in variable declarations.

When `Option Explicit` is set to `On`, you must declare all variables before you use them. If `Option Explicit` is `Off`, Visual Basic automatically creates a new variable whenever it sees a variable that it has not yet encountered. For example, the following code doesn't explicitly declare any variables. As it executes the code, Visual Basic sees the first statement, `num_managers = 0`. It doesn't recognize the variable `num_managers`, so it creates it. Similarly, it creates the variable `i` when it sees it in the `For` loop.

```
Option Explicit Off
Option Strict Off

Public Class Form1
    ...
    Public Sub CountManagers()
        num_managers = 0
        For i = 0 To m_Employees.GetUpperBound(0)
            If m_Employees(i).IsManager Then num_managrs += 1
        Next i

        MsgBox(num_managers)
    End Sub
    ...
End Class
```

Keeping `Option Explicit` turned off can lead to two very bad problems. First, it silently hides typographical errors. If you look closely at the previous code, you'll see that the statement inside the `For` loop increments the misspelled variable `num_managrs` instead of the correctly spelled variable `num_managers`. Because `Option Explicit` is off, Visual Basic assumes that you want to use a new variable, so it creates `num_managrs`. After the loop finishes, the program displays the value of `num_managers`, which is zero because it was never incremented.

The second problem that occurs when `Option Explicit` is off is that Visual Basic doesn't really know what you will want to do with the variables it creates for you. It doesn't know whether you will use a variable as an Integer, Double, String, or PictureBox. Even after you assign a value to the variable (say, an

Integer), Visual Basic doesn't know whether you will always use the variable as an Integer or whether you might later want to save a String in it.

To keep its options open, Visual Basic creates undeclared variables as generic objects. Then it can fill the variable with just about anything. Unfortunately, this can make the code much less efficient than it needs to be. For example, programs are much better at manipulating integers than they are at manipulating objects. If you are going to use a variable as an integer, creating it as an object makes the program run much slower.

> *If* `Option Infer` *is on, Visual Basic may be able to deduce an explicit data type for a variable declared with a type. In that case, the program may not incur a performance penalty. It won't be clear from the code whether that's the case, however, so it could lead to some confusion.*
>
> *In more advanced terms, integers are value types, whereas objects are reference types. A reference type is really a fancy pointer that represents the location of the actual object in memory. When you treat a value type as a reference type, Visual Basic performs an operation called boxing, where it wraps the value in an object so it can use references to the boxed value. If you then perform an operation involving two boxed values, Visual Basic must unbox them, perform the operation, and then possibly box the result to store it in another reference variable. All of this boxing and unboxing has a significant overhead.*

Example program TimeGenericObjects, which is available for download on the book's web site, uses the following code to demonstrate the difference in speed between using variables with explicit types and variables of the generic `Object` type:

```
Dim num_trials As Integer = Integer.Parse(txtNumTrials.Text)

Dim start_time As DateTime
Dim stop_time As DateTime
Dim elapsed_time As TimeSpan

start_time = Now
For i As Integer = 1 To num_trials

Next i
stop_time = Now
elapsed_time = stop_time.Subtract(start_time)
lblIntegers.Text = elapsed_time.TotalSeconds.ToString("0.000000")
Refresh()

start_time = Now
For j = 1 To num_trials

Next j
stop_time = Now
elapsed_time = stop_time.Subtract(start_time)
lblObjects.Text = elapsed_time.TotalSeconds.ToString("0.000000")
```

The code executes two `For` loops. In the first loop, it explicitly declares its looping variable to be of type `Integer`. In the second loop, the code doesn't declare its looping variable, so Visual Basic automatically makes it an `Object` when it is needed. In one test, the second loop took more than 60 times as long as the first loop.

The second compiler directive that influences variable declaration is `Option Strict`. When `Option Strict` is turned off, Visual Basic silently converts values from one data type to another, even if the types are not very compatible. For example, Visual Basic will allow the following code to try to copy the string `s` into the integer `i`. If the value in the string happens to be a number (as in the first case), this works. If the string is not a number (as in the second case), this throws an error at runtime.

```
Dim i As Integer
Dim s As String
s = "10"
i = s          ' This works.
s = "Hello"
i = s          ' This Fails.
```

If you turn `Option Strict` on, Visual Basic warns you of possibly illegal conversions at compile time. You can still use conversion functions such as `CInt`, `Int`, and `Integer.Parse` to convert a string into an Integer, but you must take explicit action to do so.

To avoid confusion and ensure total control of your variable declarations, you should always turn on `Option Explicit` and `Option Strict`. (Frankly, it's strange that Visual Basic doesn't have these options on by default. Or, it could simply remove them completely and behave as if they were on. Possibly this is done for historical reasons, or perhaps it's so because the related language VBScript doesn't allow variable declarations.)

For more information on `Option Explicit` and `Option Strict` (including instructions for turning these options on), see the "Project" section in Chapter 2, "Menus, Toolbars, and Windows."

Scope

A variable's *scope* tells which other pieces of code can access it. For example, if you declare a variable inside a subroutine, only code within that subroutine can access the variable. The four possible levels of scope are (in increasing size of scope) block, procedure, module, and namespace.

Block Scope

A *block* is a series of statements enclosed in a construct that ends with some sort of `End`, `Else`, `Loop`, or `Next` statement. If you declare a variable within a block of code, the variable has block scope, and only other code within that block can access the variable. Furthermore, only code that appears after the variable's declaration can see the variable.

Variables declared in the block's opening statement are also part of the block. Note that a variable is visible within any sub-block contained within the variable's scope.

The following example uses a `For` loop with the looping variable `i` declared in the `For` statement. The scope of variable `i` is block-defined by the `For` loop. Code inside the loop can see variable `i`, but code outside of the loop cannot.

Inside the loop, the code declares variable `j`. This variable's scope is also the `For` loop's block.

If i equals j, the program declares variable M and uses it. This variable's scope includes only the two lines between the If and Else statements.

If i doesn't equal j, the code declares variable N. This variable's scope includes only the two lines between the Else and End If statements.

The program then declares variable k. This variable also has block scope, but it is available only after it is declared, so the code could not have accessed it earlier in the For loop.

```
For i As Integer = 1 To 5
    Dim j As Integer = 3
    If i = j Then
        Dim M As Integer = i + j
        Debug.WriteLine("M: " & M)
    Else
        Dim N As Integer = i * j
        Debug.WriteLine("N: " & N)
    End If

    Dim k As Integer = 123
    Debug.WriteLine("k: " & k)
Next i
```

Other code constructs that define blocks include the following:

❑   `Select Case` **statements** — Each `Case` has its own block.

❑   `Try Catch` **statements** — The `Try` section and each `Exception` statement defines a block. Note also that the exception variable defined in each `Exception` statement is in its own block; for example, they can all have the same name.

```
Try
    Dim i As Integer = CInt("bad value")
Catch ex As InvalidCastException
    Dim txt As String = "InvalidCastException"
    MsgBox(txt)
Catch ex As Exception
    Dim txt As String = "Exception"
    MsgBox(txt)
End Try
```

❑   **Single-Line** `If Then` **statements** — These are strange and confusing enough that you should avoid them, but the following code *is* legal:

```
If manager Then Dim txt As String = "M" : MsgBox(txt) Else _
    Dim txt As String = "E" : MsgBox(txt)
```

❑   `While` **loops** — Variables declared inside the loop are local to the loop.

❑   `Using` **statements** — Resources acquired by the block and variables declared inside the block are local to the block. The `Using` statement in the following code defines two `Employee` objects and variable i within its block. Those variables are visible only within the block.

```
Using _
  emp1 As New Employee("Ann", "Archer"), _
  emp2 As New Employee("Bob", "Beagle"), _
    Dim i As Integer
    ...
End Using
```

Because block scope is the most restrictive, you should use it whenever possible to reduce the chances for confusion. The section "Restricting Scope" later in this chapter discusses more about restricting variable scope.

Procedure Scope

If you declare a variable inside a subroutine, function, or other procedure, but not within a block, the variable is visible in any code inside the procedure that follows the declaration. The variable is not visible outside of the procedure. In a sense, the variable has block scope where the block is the procedure.

A procedure's parameters also have procedure scope. For example, in the following code, the scope of the `order_object` and `order_item` parameters is the `AddOrderItem` subroutine:

```
Public Sub AddOrderItem(ByVal order_object As Order, ByVal order_item As OrderItem)
    order_object.OrderItems.Add(order_item)
End Sub
```

Module Scope

A variable with module scope is available to all code in its code module, class, or structure, even if the code appears before the variable's declaration. For example, the following code works even though the `DisplayLoanAmount` subroutine is declared before the `m_LoanAmount` variable that it displays:

```
Private Class Lender
    Public Sub DisplayLoanAmount()
        MsgBox(m_LoadAmount)
    End Sub

    Private m_LoanAmount As Decimal
    ...
End Class
```

To give a variable module scope, you should declare it with the `Private`, `Protected`, or `Protected Friend` keyword. If you declare the variable `Private`, it is visible only to code within the same module.

If you declare the variable `Protected`, it is accessible only to code in its class or a derived class. Remember that you can only use the `Protected` keyword in a class.

A `Protected Friend` variable is both `Protected` and `Friend`. That means it is available only to code that is inside the variable's class or a derived class (`Protected`), and that is within the same project (`Friend`).

These keywords apply to both variable and procedure declarations. For example, you can declare a subroutine, function, or property procedure `Private`, `Protected`, or `Protected Friend`.

For more information on accessibility keywords, see the section "Accessibility" earlier in this chapter.

Example program ScopeTest, which is available for download on the book's web site, demonstrates module and procedure scope.

Namespace Scope

By default, a project defines a namespace that includes all the project's variables and code. However, you can use `Namespace` statements to create other namespaces if you like. This may be useful to help categorize the code in your application.

If you declare a variable with the `Public` keyword, it has namespace scope and is available to all code in its namespace, whether inside the project or in another project. It is also available to code in any namespaces nested inside the variable's namespace. If you do not create any namespaces of your own, the whole project lies in a single namespace, so you can think of `Public` variables as having global scope.

If you declare a variable with the `Friend` keyword, it has namespace scope and is available to all code in its namespace within the same project. It is also available to code in any namespaces nested inside the variable's namespace within the project. If you do not create any namespaces of your own, the whole project lies in a single namespace so you can think of `Friend` variables as having project scope.

For more information on the `Public` and `Friend` keywords, see the section "Accessibility" earlier in this chapter.

Restricting Scope

There are several reasons why you should give variables the most restrictive scope possible that still lets them do their jobs.

Limited scope keeps the variable localized so that programmers cannot use the variable incorrectly in far off code that is unrelated to the variable's main purpose.

Having fewer variables with global scope means programmers have less to remember when they are working on the code. They can concentrate on their current work, rather than worrying about whether variables `r` and `c` are declared globally and whether the current code will interfere with them.

Limiting scope keeps variables closer to their declarations, so it's easier for programmers to check the declaration. One of the best examples of this situation is when a `For` loop declares its looping variable right in the `For` statement. A programmer can easily see that the looping variable is an integer without scrolling to the top of the subroutine hunting for its declaration. It is also easy to see that the variable has block scope, so other variables with the same names can be used outside of the loop.

Limited scope means a programmer doesn't need to worry about whether a variable's old value will interfere with the current code, or whether the final value after the current code will later interfere with some other code. This is particularly true for looping variables. If a program declares variable `i` at the top of a subroutine, and then uses it many times in various loops, you might need to do a little thinking to be sure the variable's past values won't interfere with new loops. If you declare `i` separately in each `For` statement, each loop has its own version of `i`, so there's no way they can interfere with each other.

Finally, variables with larger scope tend to be allocated more often, so they take up memory more often. For example, block variables and non-static variables declared with procedure scope are allocated when they are needed and are destroyed when their scope ends, freeing their memory. A variable declared `Static` or with module or namespace scope is not freed until your application exits. If those variables are large arrays, they may take up a lot of memory the entire time your application is running.

Parameter Declarations

Parameter declarations for subroutines, functions, and property procedures always have nonstatic procedure scope. Visual Basic creates parameter variables when a procedure begins and destroys them when the procedure ends. The subroutine's code can access the parameters, but code outside of the routine cannot.

For example, the following subroutine takes an integer as a parameter. The subroutine calls this value `employee_id`. Code within the subroutine can access `employee_id`, whereas code outside of the subroutine cannot.

```
Public Sub DisplayEmployee(ByVal employee_id As Integer)
    ...
End Sub
```

Whereas a parameter's basic scope is straightforward (nonstatic procedure scope), parameters have some special features that complicate the situation. Although this isn't exactly a scoping issue, it's related closely enough to scope that it's worth covering here.

You can declare a parameter `ByRef` or `ByVal` (`ByVal` is the default if you use neither keyword). If you declare the variable `ByVal`, the routine makes its own local parameter variable with procedure scope just as you would expect.

If you declare a parameter with the `ByRef` keyword, the routine does not create a separate copy of the parameter variable. Instead, it uses a reference to the parameter you pass in, and any changes the routine makes to the value are reflected in the calling subroutine.

For example, the following code includes two routines that double their parameters. Subroutine `DoubleItByVal` declares its parameter with the `ByVal` keyword. This routine makes a new variable named `X` and copies the value of its parameter into that variable. The parameter `X` is available within the subroutine, the routine multiplies it by 2, and then exits. At that point, the parameter variable goes out of scope and is destroyed.

Subroutine `DoubleItByRef` declares its parameter with the `ByRef` keyword. This routine's variable `X` is a reference to the variable passed into the routine. The subroutine doubles `X` and that doubles the variable in the calling code.

Subroutine `TestParameters` calls each of these routines. It declares a variable named `value`, passes it to subroutine `DoubleItByVal`, and displays the result after `DoubleItByVal` returns. Because `DoubleItByVal` declares its parameter `ByVal`, the variable value is not changed so the result is 10.

Subroutine `TestParameters` then calls subroutine `DoubleItByRef` and displays the result after the call returns. Subroutine `DoubleItByRef` declares its parameter `ByRef` so the variable `value` is changed to 20.

```
Sub DoubleItByVal(ByVal X As Single)
    X*= 2
End Sub
Sub DoubleItByRef(ByRef X As Single)
    X*= 2
End Sub
Sub TestParameters()
    Dim value As Single

    value = 10
    DoubleItByVal(value)
    Debug.WriteLine(value)

    value = 10
    DoubleItByRef(value)
    Debug.WriteLine(value)
End Sub
```

Even this more complex view of how procedures handle parameters has exceptions. If you pass a literal value or the result of an expression into a procedure, there is no variable to pass by reference, so Visual Basic must create its own temporary variable. In that case, any changes made to a `ByRef` parameter are not returned to the calling routine, because that code did not pass a variable into the procedure. The following code shows statements that pass a literal expression and the result of an expression into the `DoubleItByRef` subroutine:

```
DoubleItByRef(12)     ' Literal expression.
DoubleItByRef(X + Y) ' Result of an expression.
```

Another case where a `ByRef` parameter does not modify a variable in the calling code is when you omit an optional variable. For example, the following subroutine takes an optional `ByRef` parameter. If you call this routine and omit the parameter, Visual Basic creates the `employee_id` parameter from scratch so the subroutine can use it in its calculations. Because you called the routine without passing it a variable, the subroutine does not update a variable.

```
Sub UpdateEmployee(Optional ByRef employee_id As Integer = 0)
    ...
End Sub
```

Probably the sneakiest way a `ByRef` variable can fail to update a variable in the calling routine is if you enclose the variable in parentheses. The parentheses tell Visual Basic to evaluate their contents as an expression, so Visual Basic creates a temporary variable to hold the result of the expression. It then passes the temporary variable into the procedure. If the procedure's parameter is declared `ByRef`, it updates the temporary variable, but not the original variable, so the calling routine doesn't see any change to its value.

The following code calls subroutine `DoubleItByRef`, passing the variable `value` into the routine surrounded with parentheses. The `DoubleItByRef` subroutine doubles the temporary variable Visual Basic creates, leaving `value` unchanged.

```
DoubleItByRef((value))
```

Keep these issues in mind when you work with parameters. Parameters have nonstatic procedure scope but the `ByRef` keyword can sometimes carry their values outside of the routine.

For more information on routines and their parameters, see Chapter 17, "Subroutines and Functions."

Property Procedures

Property procedures are routines that can represent a variable-like value. To other pieces of the program, property procedures look just like variables, so they deserve mention in this chapter.

The following code shows property procedures that implement a `Name` property. The `Property Get` procedure simply returns the value in the private variable `m_Name`. The `Property Set` procedure saves a new value in the `m_Name` variable.

```
Private m_Name As String

Property Name() As String
    Get
        Return m_Name
    End Get
    Set(ByVal Value As String)
        m_Name = Value
    End Set
End Property
```

A program could use these procedures exactly as if there were a single public `Name` variable. For example, if this code is in the `Employee` class, the following code shows how a program could set and then get the `Name` value for the `Employee` object named `emp`:

```
emp.Name = "Rod Stephens"
MessageBox.Show(emp.Name)
```

There are several reasons why you might want to use property procedures rather than a public variable. First, the routines give you extra control over the getting and setting of the value. For example, you could use code to validate the value before saving it in the variable. The code could verify that a postal code or phone number has the proper format and throw an error if the value is badly formatted.

You can set breakpoints in property procedures. Suppose that your program is crashing because a piece of code is setting an incorrect value in a variable. If you implement the variable with property procedures, you can set a breakpoint in the `Property Set` procedure and stop whenever the program sets the value. This can help you find the problem relatively quickly.

Property procedures let you set and get values in formats other than those you want to actually use to store the value. For example, the following code defines `Name` property procedures that save a name in `m_FirstName` and `m_LastName` variables. If your code would often need to use the last and first names separately, you could also provide property procedures to give access to those values separately.

```
Private m_LastName As String
Private m_FirstName As String

Property MyName() As String
    Get
        Return m_FirstName & " " & m_LastName
    End Get
    Set(ByVal Value As String)
        m_FirstName = Value.Split(" "c)(0)
        m_LastName = Value.Split(" "c)(1)
    End Set
End Property
```

Finally, you can use property procedures to create read-only and write-only variables. The following code shows how to make a read-only `NumEmployees` property procedure and a write-only `NumCustomers` property procedure. (Write-only property procedures are unusual but legal.)

```
Public ReadOnly Property NumEmployees() As Integer
    Get
        ...
    End Get
End Property

Public WriteOnly Property NumCustomers() As Integer
    Set(ByVal Value As Integer)
        ...
    End Set
End Property
```

You don't need to remember all of the syntax for property procedures. If you type the first line and press Enter, Visual Basic fills in the rest of the empty property procedures. If you use the keyword `ReadOnly` or `WriteOnly`, Visual Basic only includes the appropriate procedure.

Enumerated Data Types

An *enumerated type* is a discrete list of specific values. You define the enumerated type and the values allowed. Later, if you declare a variable of that data type, it can take only those values.

For example, suppose that you are building a large application where users can have one of three access levels: clerk, supervisor, and administrator. You could define an enumerated type named `AccessLevel`

that allows the values `Clerk`, `Supervisor`, and `Administrator`. Now, if you declare a variable to be of type `AccessLevel`, Visual Basic will only allow the variable to take those values.

The following code shows a simple example. It defines the `AccessLevel` type and declares the variable `m_AccessLevel` using the type. Later the `MakeSupervisor` subroutine sets `m_AccessLevel` to the value `AccessLevel.Supervisor`. Note that the value is prefixed with the enumerated type's name.

```
Public Enum AccessLevel
    Clerk
    Supervisor
    Administrator
End Enum

Private m_AccessLevel As AccessLevel ' The user's access level.

' Set supervisor access level.
Public Sub MakeSupervisor()
    m_AccessLevel = AccessLevel.Supervisor
End Sub
```

The syntax for declaring an enumerated type is as follows:

```
[attribute_list] [accessibility] [Shadows] Enum name [As type]
    [attribute_list] value_name [= initialization_expression]
    [attribute_list] value_name [= initialization_expression]
    ...
End Enum
```

Most of these terms, including *attribute_list* and *accessibility*, are similar to those used by variable declarations. See the section "Variable Declarations" earlier in this chapter for more information.

The *type* value must be an integral type and can be Byte, Short, Integer, or Long. If you omit this value, Visual Basic stores the enumerated type values as integers.

The *value_name* pieces are the names you want to allow the enumerated type to have. You can include an *initialization_expression* for each value if you like. This value must be compatible with the underlying data type (Byte, Short, Integer, or Long). If you omit a value's initialization expression, the value is set to one greater than the previous value. The first value is zero by default.

For example, in the previous example, `Clerk` = 0, `Supervisor` = 1, and `Administrator` = 2. The following code changes the default assignments so `Clerk` = 10, `Supervisor` = 11, and `Administrator` = −1:

```
Public Enum AccessLevel
    Clerk = 10
    Supervisor
    Administrator = -1
End Enum
```

Usually, all that's important about an enumerated type is that its values are unique, so you don't need to explicitly initialize the values.

Note that you can give enumerated values the same integer value either explicitly or implicitly. For example, the following code defines several equivalent `AccessLevel` values. The first three values, `Clerk`, `Supervisor`, and `Administrator`, default to 0, 1, and 2, respectively. The code explicitly sets `User` to 0, so it is the same as `Clerk`. The values `Manager` and `SysAdmin` then default to the next two values, 1 and 2 (the same as `Supervisor` and `Administrator`, respectively). Finally, the code explicitly sets `Superuser = SysAdmin`.

```
Public Enum AccessLevel
    Clerk
    Supervisor
    Administrator
    User = 0
    Manager
    SysAdmin
    Superuser = SysAdmin
End Enum
```

This code is somewhat confusing. The following version makes it more obvious that some values are synonyms for others:

```
Public Enum AccessLevel
    Clerk
    Supervisor
    Administrator

    User = Clerk
    Manager = Supervisor
    SysAdmin = Administrator
    Superuser = Administrator
End Enum
```

You can get an effect similar to enumerated types using integer variables and constants, as shown in the following code. This code does roughly the same thing as the previous examples.

```
Public Const Clerk As Integer = 0
Public Const Supervisor As Integer = 1
Public Const Administrator As Integer = 2

Private m_AccessLevel As Integer        ' The user's access level.

' Set supervisor access level.
Public Sub MakeSupervisor()
    m_AccessLevel = Supervisor
End Sub
```

Declaring an enumerated type has a couple of advantages over using integers and constants, however. First, it prevents you from assigning nonsense values to the variable. In the previous code, you could set `m_AccessLevel` to 10, which wouldn't make any sense.

Using an enumerated data type allows Visual Basic to verify that the value you are assigning to the variable makes sense. You can only set the variable equal to one of the values in the enumerated type or to the value stored in another variable of the same enumerated type.

If you really need to set an enumerated variable to a calculated value for some reason, you can use the CType function to convert an integer value into the enumerated type. For example, the following statement uses the value in the variable integer_value to set the value of the variable m_AccessLevel. Making you use CType to perform this type of conversion makes it less likely that you will set an enumerated value accidentally.

```
m_AccessLevel = CType(integer_value, AccessLevel)
```

Another benefit of enumerated types is that they allow Visual Basic to provide IntelliSense help. If you type m_AccessLevel =, Visual Basic provides a list of the allowed AccessLevel values.

A final benefit of enumerated types is that they provide a ToString method that returns the textual name of the value. For example, the following code displays the message "Clerk."

```
Dim access_level As AccessLevel = Clerk
MessageBox.Show(access_level.ToString())
```

Example program AccessLevelEnum, which is available for download on the book's web site, makes an AccessLevel Enum and then displays the results returned by calling ToString for each of its values.

If you have a value that can take only a fixed number of values, you should probably make it an enumerated type. Also, if you discover that you have defined a series of constants to represent related values, you should consider converting them into an enumerated type. Then you can gain the benefits of the improved Visual Basic type checking and IntelliSense.

Anonymous Types

An *anonymous type* is an object data type that is built automatically by Visual Basic and never given a name for the program to use. The type is used implicitly by the code that needs it and is then discarded.

The following code uses LINQ to select data from an array of BookInfo objects named m_BookInfo. It begins by using a LINQ query to fill variable book_query with the selected books. It then iterates through the results stored in book_query, adding information about the selected books to a string. It finishes by displaying the string in a text box.

```
Dim book_query = _
    From book In m_BookInfo _
    Where book.Year > 1999 _
    Select book.Title, book.Pages, book.Year _
    Order By Year

Dim txt As String = ""
For Each book In book_query
    txt &= book.Title & " (" & book.Year & ", " & _
        book.Pages & " pages)" & ControlChars.CrLf
Next book
txtResult.Text = txt
```

The `book_query` variable is an ordered sequence containing objects that hold the data selected by the query: Title, Pages, and Year. This type of object doesn't have an explicit definition; it is an anonymous type created by Visual Basic to hold the selected values Title, Pages, and Year. If you hover the mouse over the `book_query` variable in the code editor, a tooltip appears giving the variable's data type as:

```
System.Linq.IOrderedSequence(Of <anonymous type>)
```

Later, the code uses a `For Each` loop to enumerate the objects in `book_query`. The looping variable `book` must have the same type as the items in the sequence. The code does not explicitly give the variable's data type, so Visual Basic can infer it. If you hover the mouse over the `book` variable in the code editor, a tooltip appears giving the variable's data type as:

```
<anonymous type>
```

You are not really intended to use anonymous types explicitly. For example, you shouldn't need to declare a new object of the anonymous type. They are intended to support LINQ. Although you won't use anonymous types explicitly, it's still helpful to understand what they are.

> *In this example, Visual Basic infers the data types for the* `book_query` *and* `book` *variables. This is important because they must use an anonymous type, so you cannot explicitly give them a type. Because these data types are inferred, the code will only work if* `Option Infer` *is on.*

For more information on LINQ, see Chapter 21, "LINQ."

Nullable Types

Most relational databases have a concept of a null data value. A null value indicates that a field does not contain any data. It lets the database distinguish between valid zero or blank values and non-existing values. For example, a null value in a text field means there is no data in the field and a blank value means the field contains a value that happens to be blank.

You can create a nullable variable in Visual Basic by adding a question mark either to the variable's name or after its data type. You can also declare the variable to be of type `Nullable(Of type)`. For example, the following code declares three nullable integers:

```
Dim i As Integer?
Dim j? As Integer
Dim k As Nullable()Of Integer)
```

To make a nullable variable "null," set it equal to `Nothing`. The following code makes variable `num_choices` null:

```
num_choices = Nothing
```

To see if a nullable variable contains a value, use the `Is` operator to compare it to `Nothing`. The following code determines whether the nullable variable `num_choices` contains a value. If the variable contains a value, the code increments it. Otherwise the code sets the value to 1.

```
If num_choices IsNot Nothing Then
    num_choices += 1
Else
    num_choices = 1
End If
```

Calculations with nullable variables use "null-propagation" rules to ensure that the result makes sense. For example, if a nullable integer contains no value, it probably doesn't make sense to add another number to it. (What is null plus three?)

If one or more operands in an expression contains a null value, then the result is a null value. For example, if num_choices in the previous example contains a null value, then num_choices + 1 is also a null value. (That's why the previous code checks explicitly to see whether num_choices is null before incrementing its value.)

Example program NullableTypes, which is available for download on the book's web site, demonstrates nullable types.

Constants

In many respects, a constant is a lot like a read-only variable. Both variable and constant declarations may have attributes, accessibility keywords, and initialization expressions. Both read-only variables and constants represent a value that the code cannot change after it is assigned.

The syntax for declaring a constant is as follows:

```
[attribute_list] [accessibility] [Shadows] _
Const name [As type] = initialization_expression
```

For the general meanings of the various parts of a constant declaration, see the section "Variable Declarations" earlier in this chapter. The following sections describe differences between read-only variable and constant declarations.

Accessibility

When you declare a variable, you can omit the Dim keyword if you use any of the keywords Public, Protected, Friend, Protected Friend, Private, Static, or ReadOnly. You cannot omit the Const keyword when you declare a constant, because it tells Visual Basic that you are declaring a constant rather than a variable.

You cannot use the Static, ReadOnly, or Shared keywords in a constant declaration. Static implies that the value will change over time, and the value should be retained when the enclosing routine starts and stops. Because the code cannot change a constant's value, that doesn't make sense.

The ReadOnly keyword would be redundant because you already cannot change a constant's value.

You use the Shared keyword in a variable declaration within a class to indicate that the variable's value is shared by all instances of the class. If one object changes the value, all objects see the changed value. Because the program cannot change a constant's value, the value need not be shared. All objects have the same version of the constant at all times. You can think of a constant as always shared.

You can use the other accessibility keywords in a constant declaration: Public, Protected, Friend, Protected Friend, and Private.

As Type

If you have Option Strict turned on, you must include the constant's data type. A constant can only be an intrinsic type (Boolean, Byte, Short, Integer, Long, Decimal, Single, Double, Char, String, Date, or Object) or the name of an enumerated type. You cannot declare a constant that is a class, structure, or array.

If you declare the constant with the Object data type, the *initialization_expression* must set the object equal to Nothing. If you want a constant that represents some other object, or a class, structure, or array, use a read-only variable instead.

Because the generic Object class doesn't raise any events, and because you cannot make a constant of some other class type, it doesn't make sense to use the WithEvents keyword in a constant declaration.

Though Visual Basic has inferred types for local variables, it does not infer types of constants. If you have Option Strict on, you must explicitly give all constants a data type.

Initialization_Expression

The *initialization_expression* assigns the constant its never-changing value. You cannot use variables in the *initialization_expression*, but you can use conversion functions such as CInt. You can also use the values of previously defined constants and enumeration values. The expression can include type characters such as # or &H, and if the declaration doesn't include a type statement (and Option Explicit is off), the type of the value determines the type of the constant.

The following code demonstrates these capabilities. The first statement uses the CInt function to convert the value 123.45 into an integer constant. The second and third statements set the values of two Long constants to hexadecimal values. The next statement combines the values defined in the previous two using a bitwise Or. The final statement sets a constant to a value defined by the enumerated type AccessLevel.

```
Private Const MAX_VALUES As Integer = CInt(123.45)
Private Const MASK_READ As Long = &H1000&
Private Const MASK_WRITE As Long = &H2000&
Private Const MASK_READ_WRITE As Long = MASK_READ Or MASK_WRITE
Private Const MAX_ACCESS_LEVEL As AccessLevel = AccessLevel.SuperUser
```

Delegates

A *delegate* is an object that refers to a subroutine, function, or other method. The method can be an instance method provided by an object, a class's shared method, or a method defined in a code module. A delegate variable acts as a pointer to a subroutine or function. Delegate variables are sometimes called *type-safe function pointers*.

The `Delegate` keyword defines a delegate class and specifies the parameters and return type of the method to which the delegate will refer.

The following code uses a `Delegate` statement to declare the `StringDisplayerType` to be a delegate to a subroutine that takes a string as a parameter. Next, the code declares the variable `m_DisplayStringRoutine` to be of this type. This variable can hold a reference to a subroutine that takes a string parameter. The code then sets the variable equal to the `ShowStringInOutputWindow` subroutine. Finally, the code invokes the delegate's subroutine, passing it a string.

```
' Define a StringDisplayerType delegate to be a pointer to a subroutine
' that has a string parameter.
Private Delegate Sub StringDisplayerType(ByVal str As String)

' Declare a StringDisplayerType variable.
Dim m_DisplayStringRoutine As StringDisplayerType

' Assign the variable to a subroutine.
m_DisplayStringRoutine = AddressOf ShowStringInOutputWindow

' Invoke the delegate's subroutine.
m_DisplayStringRoutine("Hello world")
```

The delegate in the previous example holds a reference to a subroutine defined in a code module. A delegate can also hold the address of a class's shared method or an instance method. For example, suppose the `Employee` class defines the shared function `GetNumEmployees` that returns the number of employees loaded. Suppose that it also defines the instance function `ToString` that returns an `Employee` object's first and last names.

Example program UseDelegates, which is available for download on the book's web site, uses the following code to demonstrate delegates for both of these functions:

```
    Dim emp As New Employee("Rod", "Stephens")

' Use a delegate pointing to a shared class method.
Private Delegate Function NumEmployeesDelegate() As Integer

Private Sub btnShared_Click() Handles btnShared.Click
    Dim show_num As NumEmployeesDelegate
    show_num = AddressOf Employee.GetNumEmployees
    MessageBox.Show(show_num().ToString, "# Employees")
End Sub

' Use a delegate pointing to a class instance method.
Private Delegate Function GetNameDelegate() As String
```

```
Private Sub btnInstance_Click() Handles btnInstance.Click
    Dim show_name As GetNameDelegate
    show_name = AddressOf emp.ToString
    MessageBox.Show(show_name(), "Name")
End Sub
```

First, it declares and initializes an `Employee` object named `emp`. It then defines a delegate named `NumEmployeesDelegate`, which is a pointer to a function that returns an integer. The `btnShared_Click` event handler declares a variable of this type, sets it to the address of the `Employee` class's shared `GetNumEmployees` function, and calls the function. Then the code defines a delegate named `GetNameDelegate`, which is a pointer to a function that returns a string. The `btnInstance_Click` event handler declares a variable of this type, sets it to the address of the `emp` object's `ToString` function, and then calls the function.

These examples are somewhat contrived because the code could easily invoke the subroutines and functions directly without delegates, but they show how a program can save a delegate pointing to a subroutine or function and then call it later. A real application might set the delegate variable's value and only use it much later.

A particular delegate variable could hold references to different methods, depending on the program's situation. For example, different subroutines might generate output on a form, on the printer, or into a bitmap file. The program could set a delegate variable to any of these routines. Later, the program could invoke the variable's routine without needing to know which routine will actually execute.

Another useful technique is to pass a delegate variable into a subroutine or function. For example, suppose that you are writing a subroutine that sorts an array of `Customer` objects. This routine could take as a parameter a delegate variable that references the function to use when comparing the objects in the array. By passing different functions into the routine, you could make it sort customers by company name, contact name, customer ID, total past sales, or anything else you can imagine.

Delegates are particularly confusing to many programmers, but understanding them is worth a little extra effort. They can add an extra dimension to your programming by essentially allowing you to manipulate subroutines and functions as if they were data.

Naming Conventions

Many development teams adopt naming conventions to make their code more consistent and easier to read. Different groups have developed their own conventions, and you cannot really say that one of them is best. It doesn't really matter which convention you adopt. What is important is that you develop some coding style that you use consistently.

One rather simple convention is to use `lowercase_letters_with_underscores` for variables with routine scope, `MixedCaseLetters` for variables with module and global scope, and `ALL_CAPS` for constants of any scope. Use the prefixes `m_` and `g_` to differentiate between module and global scope, and an abbreviation to give an object's data type. For example, the following statement defines a module-scope `PictureBox` variable:

```
Private m_picCanvas As PictureBox
```

Routine names are generally `MixedCase`.

Many developers carry these rules a bit further and add type prefix abbreviations to all variables, not just objects. For example, this statement declares an integer variable:

```
Dim iNumEmployees As Integer
```

If you apply these rules strictly enough, you should never need to assign one variable to another variable's value, unless the two have the same type abbreviation. If you see a statement that mixes variable types, you should examine the code more closely to see if there is a real data type mismatch problem. For example, the following statement should make the developer suspicious because it's assigning an Integer value to a Long variable:

```
mlngNumEmployees = intNumAbsent + intNumPresent
```

Some developers extend the rules to cover all programming objects, including functions and subroutines. For example, a global function that returns a string might be named `gstrGetWebmasterName`.

Generally, this scope and type information is more important the farther you are from a variable's declaration. If you declare a variable inside a subroutine, a developer can usually remember the variable's data type. If there is any doubt, it's easy to scroll up and review the variable's declaration.

In contrast, if a variable is declared globally in an obscure code module that developers rarely need to read, a programmer may have trouble remembering the variable's scope and data type. In that case, using prefixes to help the developers' memory can be important.

No matter which convention you use, the most important piece of a name is the descriptive part. The name `mblnDL` tells you that the value is a module-scope Boolean, but it doesn't tell you what the value means (and variables with such terrible names are all too common). The name `mblnDataIsLoaded` is much more descriptive. I have never seen a project that suffered because it lacked variable prefixes such as `mbln`. On the other hand, I have seen developers waste huge amounts of time because the descriptive parts of variable names were confusing.

Building an all-encompassing naming convention that defines abbreviations for every conceivable type of data, control, object, database component, menu, constant, and routine name takes a lot of time and more space than it's worth in a book such as this. For an article that describes the conventions used by Microsoft Consulting Services, go to `http://support.microsoft.com/default.aspx?scid=kb;en-us;110264`. It explains everything, including data type abbreviations, making the first part of a function name contain a verb (`GetUserName` rather than `UserName`), and commenting conventions.

Naming and coding conventions make it easier for other programmers to read your code. Look over the Microsoft Consulting Services conventions or search the Web for others. Select the features that you think make the most sense and ignore the others. It's more important that you write consistent code than that you follow a particular set of rules.

Summary

Two of the most important things you control with a variable declaration are its data type and its visibility. Visibility combines scope (the piece of code that contains the variable such as a `For` loop, subroutine, or module), accessibility (the code that is allowed to access the variable determined by keywords such as `Private`, `Public`, and `Friend`), and lifetime (when the variable has been created and not yet destroyed).

To avoid confusion, explicitly declare the data type whenever possible and use the most limited scope possible for the variable's purpose. Turn `Option Explicit` and `Option Strict` on to allow the IDE to help you spot potential scope and type errors before they become a problem.

Code that uses LINQ complicates matters somewhat. When you use LINQ, it is generally not possible to declare explicitly every variable's data type. A LINQ query returns a sequence of objects that have an anonymous type. If you enumerate over the sequence, the looping variable will be of the same anonymous type. In those cases, when you cannot explicitly declare a variable's type, use extra caution to make the code easy to understand so you can fix and maintain it later.

Parameters, property procedures, and constants have similar data types and scope issues. Once you become comfortable with variable declarations, they should give you little trouble.

One of the most important steps you can take to make your code easier to debug and maintain is to make your code consistent. A good naming convention can help. Review the guidelines used by Microsoft Consulting Services, and adopt the pieces that make the most sense to you.

When you know how to declare variables, you are ready to learn how to combine them. Chapter 16, "Operators," explains the symbols (such as +, –, and ^) that you can use to combine variables to produce new results.

16

Operators

An *operator* is a basic code element that performs some operation on one or more values to create a result. The values the operator acts upon are called *operands*. For example, in the following statement, the operator is + (addition), the operands are B and C, and the result is assigned to the variable A:

```
A = B + C
```

The Visual Basic operators fall into five categories: arithmetic, concatenation, comparison, logical, and bitwise. This chapter first explains these categories and the operators they contain, and then discusses other operator issues such as precedence, assignment operators, and operator overloading. Also included are discussions of some specialized issues that arise when you work with strings and dates.

Arithmetic Operators

The following table lists the arithmetic operators provided by Visual Basic. Most programmers should be very familiar with most of them. The four operators that may need a little extra explanation are \, Mod, <<, and >>.

Operator	Purpose	Example	Result
^	Exponentiation	2 ^ 3	(2 to the power 3) = 2 * 2 * 2 = 8
–	Negation	–2	–2
*	Multiplication	2 * 3	6
/	Division	3 / 2	1.5
\	Integer division	17 \ 5	3
Mod	Modulus	17 Mod 5	2

(continued)

Operator	Purpose	Example	Result
+	Addition	2 + 3	5
–	Subtraction	3 – 2	1
<<	Bit left shift	10110111 << 1	01101110
>>	Bit right shift	10110111 >> 1	01011011

The \ operator performs integer division. It returns the result of dividing its first operand by the second, dropping any remainder. It's important to understand that the result is truncated toward zero, not rounded. For example, 7 \ 4 = 1 and –7 \ 4 = –1 rather than 2 and –2 as you might expect.

The Mod operator returns the remainder after dividing its first operand by its second. For example, 17 Mod 5 = 2 because 17 = 3 * 5 + 2.

The << operator shifts the bits of an integer value to the left, padding the empty bits on the right with zeros. For example, the byte value with bits 10110111 shifted 1 bit to the left gives 01101110. Shifting 10110111 2 bits to the left gives 11011100.

The >> operator shifts the bits of a value to the right, padding the empty bits on the left with zeros. For example, the byte value with bits 10110111 shifted 1 bit to the right gives 01011011. Shifting 10110111 2 bits to the right gives 00101101.

Unfortunately, Visual Basic doesn't work easily with bit values, so you cannot use a binary value such as 10110111 in your code. Instead, you must write this value as the hexadecimal value &HB7 or the decimal value 183. The last two entries in the table show the values in binary, so it is easier to understand how the shifts work.

> *The Calculator application that comes with Windows lets you easily convert between binary, octal, hexadecimal, and decimal. To start the Calculator, open the Start menu and select Run. Type calc and click OK. Open the View menu and select Scientific. Now you can click the Bin, Oct, Dec, or Hex radio buttons to select a base, enter a value, and select another base to convert the value.*

Concatenation Operators

Visual Basic provides two concatenation operators: + and &. Both join two strings together. Because the + symbol also represents an arithmetic operator, your code will be easier to read if you use the & symbol for concatenation. Using & can also make your code faster and lead to fewer problems because it lets Visual Basic know that the operands are strings.

Comparison Operators

Comparison operators compare one value to another and return a Boolean value (`True` or `False`), depending on the result. The following table lists the comparison operators provided by Visual Basic. The first six (=, <>, <, <=, >, and >=) are relatively straightforward. Note that the `Not` operator is not a comparison operator, so it is not listed here. It is described in the next section, "Logical Operators."

Operator	Purpose	Example	Result
=	Equals	`A = B`	`True` if A equals B
<>	Not equals	`A <> B`	`True` if A does not equal B
<	Less than	`A < B`	`True` if A is less than B
<=	Less than or equal to	`A <= B`	`True` if A is less than or equal to B
>	Greater than	`A > B`	`True` if A is greater than B
>=	Greater than or equal to	`A >= B`	`True` if A is greater than or equal to B
`Is`	Equality of two objects	`emp Is mgr`	`True` if `emp` and `mgr` refer to the same object
`IsNot`	Inequality of two objects	`emp IsNot mgr`	`True` if `emp` and `mgr` refer to different objects
`TypeOf...Is`	Object is of a certain type	`TypeOf(obj) Is Manager`	`True` if `obj` points to a `Manager` object
`Like`	Matches a text pattern	`A Like "###-####"`	`True` if `A` contains three digits, a dash, and four digits

The `Is` operator returns `True` if its two operands refer to the same object. For example, if you create an `Order` object and make two different variables, `A` and `B`, point to it, the expression `A Is B` is `True`. Note that `Is` returns `False` if the two operands point to different `Order` objects that happen to have the same property values.

The `IsNot` operator is simply shorthand for a more awkward `Not...Is` construction. For example, the statement `A IsNot Nothing` is equivalent to `Not (A Is Nothing)`.

The value `Nothing` is a special value that means *not an object*. If you have an object variable, you can use the `Is` or `IsNot` operator to compare it to `Nothing` to see if it represents anything. Note that you cannot use `Is` or `IsNot` to compare an object variable to 0 or some other numeric value. `Is` and `IsNot` only work with objects such as those stored in variables and the special value `Nothing`.

The `TypeOf` operator returns `True` if its operand is of a certain type. This operator is particularly useful when a subroutine takes a parameter that could be of more than one object type. It can use `TypeOf` to see which type of object it has.

The `Like` operator returns `True` if its first operand matches a pattern specified by its second operand. Where the pattern includes normal characters, the string must match those characters exactly. The pattern can also include several special character sequences summarized in the following table.

Character(s)	Meaning
?	Matches any single character
*	Matches any zero or more characters
#	Matches any single digit
[characters]	Matches any of the characters between the brackets
[!characters]	Matches any character not between the brackets
A-Z	When inside brackets, matches any character in the range A to Z

You can combine ranges of characters and individual characters inside brackets. For example, the pattern [a-zA-Z] matches any letter between a and z or between A and Z. The following table lists some useful patterns.

Pattern	Meaning
[2-9]##-####	Seven-digit phone number
[2-9]##-[2-9]##-####	Ten-digit phone number, including area code
1-[2-9]##-[2-9]##-####	Eleven-digit phone number, beginning with 1 and area code
#####	Five-digit ZIP code
#####-####	Nine-digit ZIP + 4 code
?*@?*.?*	E-mail address

These patterns are not completely foolproof. For example, the e-mail address pattern verifies that the string contains at least one character, an @ character, at least one other character, a dot, and at least one more character. For example, it allows `RodStephens@vb-helper.com`. However, it does not verify that the extension makes sense, so it also allows `RodStephens@vb-helper.commercial`, and it allows more than one @ character, as in `RodStephens@vb-helper.com@bad_value`.

Regular expressions provide much more powerful pattern-matching capabilities. The section "Regular Expressions" in Chapter 40, "Useful Namespaces," contains more information about regular expressions.

Logical Operators

Logical operators combine two Boolean values and return `True` or `False`, depending on the result. The following table summarizes Visual Basic's logical operators.

Operator	Purpose	Example	Result
Not	Logical or bitwise negation	Not A	True if A is false
And	Logical or bitwise And	A And B	True if A and B are both true
Or	Logical or bitwise Or	A Or B	True if A or B or both are true
Xor	Logical or bitwise exclusive Or	A Xor B	True if A or B but not both is true
AndAlso	Logical or bitwise And with short-circuit evaluation	A AndAlso B	True if A and B are both true (see notes)
OrElse	Logical or bitwise Or with short-circuit evaluation	A OrElse B	True if A or B or both are true (see the following notes)

The operators `Not`, `And`, and `Or` are relatively straightforward.

"Xor" stands for "exclusive or," and the `Xor` operator returns `True` if one but not both of its operands is true. The expression `A Xor B` is true if A is true or B is true but both are not true.

The `AndAlso` and `OrElse` operators are similar to the `And` and `Or` operators, except that they provide short-circuit evaluation. In *short-circuit evaluation*, Visual Basic is allowed to stop evaluating operands if it can deduce the final result without them. For example, consider the expression `A AndAlso B`. If Visual Basic evaluates the value A and discovers that it is false, the program knows that the expression `A AndAlso B` is also false no matter what value B has, so it doesn't need to evaluate B.

Whether the program evaluates both operands doesn't matter much if `A` and `B` are simple Boolean variables. However, assume that they are time-consuming functions in the following code. For example, the `TimeConsumingFunction` function might need to look up values in a database or download data from a web site. In that case, not evaluating the second operand might save a lot of time.

```
If TimeConsumingFunction("A") AndAlso TimeConsumingFunction("B") Then ...
```

Just as `AndAlso` can stop evaluation if it discovers one of its operands is false, the `OrElse` operand can stop evaluating if it discovers that one of its operands is true. The expression `A OrElse B` is true if either `A` or `B` is true. If the program finds that `A` is true, it doesn't need to evaluate `B`.

Because `AndAlso` and `OrElse` do the same thing as `And` and `Or` but sometimes faster, you might wonder why you would ever use `And` and `Or`. The main reason is that the operands may have side effects. A *side effect* is some action a routine performs that is not obviously part of the routine. For example, suppose that the `NumEmployees` function opens an employee database and returns the number of employee records, leaving the database open. The fact that this function leaves the database open is a side effect.

Now, suppose that the `NumCustomers` function similarly opens the customer database, and then consider the following statement:

```
If (NumEmployees() > 0) AndAlso (NumCustomers() > 0) Then ...
```

After this code executes, you cannot be certain which databases are open. If `NumEmployees` returns `0`, the `AndAlso` operator's first operand is false, so it doesn't evaluate the `NumCustomers` function and that function doesn't open the customer database.

The `AndAlso` and `OrElse` operators can improve application performance under some circumstances. However, to avoid possible confusion and long debugging sessions, do not use `AndAlso` or `OrElse` with operands that have side effects.

Bitwise Operators

Bitwise operators work much like logical operators do, except they compare values one bit at a time. The bitwise negation operator `Not` flips the bits in its operand from 1 to 0 and vice versa. The following shows an example:

```
    10110111
Not 01001000
```

The `And` operator places a 1 in a result bit if both of the operands have a 1 in that position. The following shows the results of combining two binary values by using the bitwise `And` operator:

```
      10101010
  And 00110110
      00100010
```

The bitwise `Or` operator places a 1 bit in the result if either of its operands has a 1 in the corresponding position. The following shows an example:

```
      10101010
   Or 00110110
      10111110
```

The bitwise `Xor` operator places a 1 bit in the result if exactly one of its operands, but not both, has a 1 in the corresponding position. The following shows an example:

```
      10101010
  Xor 00110110
      10011100
```

There are no bitwise equivalents for the `AndAlso` and `OrElse` operators.

Operator Precedence

When Visual Basic evaluates a complex expression, it must decide the order in which to evaluate operators. For example, consider the expression $1 + 2 * 3 / 4 + 2$. The following text shows three orders in which you might evaluate this expression to get three different results:

```
  1 + (2 * 3) / (4 + 2) = 1 + 6 / 6 = 2
  1 + (2 * 3 / 4) + 2 = 1 + 1.5 + 2 = 4.5
  (1 + 2) * 3 / (4 + 2) = 3 * 3 / 6 = 1.5
```

Precedence determines which operator Visual Basic executes first. For example, the Visual Basic precedence rules say the program should evaluate multiplication and division before addition, so the second equation is correct.

The following table lists the operators in order of precedence. When evaluating an expression, the program evaluates an operator before it evaluates those lower than it in the list. When operators are on the same line, or if an expression contains more than one instance of the same operator, the program evaluates them in left-to-right order.

Operator	Description
( )	Grouping (parentheses)
^	Exponentiation
-	Negation
*, /	Multiplication and division
\	Integer division
Mod	Modulus
+, −, +	Addition, subtraction, and concatenation
&	Concatenation
<<, >>	Bit shift
=, <>, <, <=, >, >=, Like, Is, IsNot, TypeOf... Is	All comparisons
Not	Logical and bitwise negation
And, AndAlso	Logical and bitwise And with and without short-circuit evaluation
Xor, Or, OrElse	Logical and bitwise Xor, and Or with and without short-circuit evaluation

Parentheses are not really operators, but they do have a higher precedence than the true operators, so they're listed to make the table complete. You can always use parentheses to explicitly dictate the order in which Visual Basic will perform an evaluation. If there's the slightest doubt about how Visual Basic will handle an expression, add parentheses to make it obvious. There's no extra charge for using parentheses, and they may avoid some unnecessary confusion.

Assignment Operators

Visual Basic has always had the simple assignment operator =. Visual Basic .NET added several new assignment operators to handle some common statements where a value was set equal to itself combined with some other value. For example, the following two statements both add the value 10 to the variable `iterations`:

```
    iterations = iterations + 10    ' Original syntax.
    iterations += 10                ' New syntax.
```

All the other assignment operators work similarly by adding an equals sign to an arithmetic operator. For example, the statement A ^= B is equivalent to A = A ^ B.

You can still use the original syntax if you like. However, the new syntax sometimes gives you better performance. If the left-hand side of the assignment is not a simple variable, Visual Basic may be able to save time by evaluating it only once. For example, the following code adds 0.1 to a customer order's discount value. By using +=, the code allows Visual Basic to find the location of this value only once.

```
    Customers(cust_num).Orders(order_num).Discount += 0.1
```

In most applications, performance is usually adequate whether you use += or the older syntax. Usually, you are best off if you use whichever version seems most natural and easiest to understand, and only worry about performance when you are sure you have a problem.

The complete list of assignment operators is: =, ^=, *=, /=, \=, +=, -=, &=, <<=, and >>=.

If you have Option Strict set to on, the variables must have the appropriate data types. For example, /= returns a Double, so you cannot use that operator with an Integer, as in the following code:

```
    Dim i As Integer = 100
    i /= 2                              ' Not allowed.
```

To perform this operation, you must explicitly convert the result into an Integer, as shown in the following statement:

```
    i = CInt(i / 2)
```

This makes sense because you are trying to assign the value of floating-point division to an integer. It's less obvious why the following code is also illegal. Here the code is trying to assign an Integer result to a Single variable, so you might think it should work. After all, an Integer value will fit in a Single variable.

```
    Dim x As Single
    x \= 10                         ' Not allowed.
```

The problem isn't in the assignment, but in performing the calculation. The following statement is equivalent to the previous one, and it is also illegal:

```
    x = x \ 10                      ' Not allowed.
```

The problem with both of these statements is that the \ operator takes as arguments two integers. If Option Strict is on, the program will not automatically convert a floating-point variable into an integer for the \ operator. To make this statement work, you must manually convert the variable into an Integer data type, as shown in the following example:

```
    x = CLng(x) \ 10                ' Allowed.
```

315

The `+=` and `&=` operators both combine strings but `&=` is less ambiguous, so you should use it whenever possible. It may also give you better performance because it explicitly tells Visual Basic that the operands are strings.

The StringBuilder Class

The `&` and `&=` operators are useful for concatenating a few strings together. However, if you must combine a large number of strings, you may get better performance using the `StringBuilder` class. This class is optimized for performing long sequences of concatenations to build big strings.

For small pieces of code, the difference between using a String and a `StringBuilder` is not noticeable. On the one hand, if you need only to concatenate a dozen or so strings once, using a `StringBuilder` won't make much difference in run time. On the other hand, if you make huge strings built up in pieces, or if you build simpler strings but many times in a loop, `StringBuilder` may make your program run faster.

Example program StringBuilderTest1, which is available for download on the book's web site, uses the following code to compare the speeds of building a long string with and without the `StringBuilder` class:

```
Private Sub btnGo_Click() Handles btnGo.Click
    Const ADD_STRING As String = "1234567890"
    Dim num_trials As Long = Long.Parse(txtNumTrials.Text)
    Dim start_time As DateTime
    Dim stop_time As DateTime
    Dim elapsed_time As TimeSpan
    Dim txt As String
    Dim string_builder As New StringBuilder

    lblString.Text = ""
    lblStringBuilder.Text = ""
    Application.DoEvents()

    txt = ""
    start_time = Now
    For i As Long = 1 To num_trials
        txt = txt & ADD_STRING
    Next i
    stop_time = Now
    elapsed_time = stop_time.Subtract(start_time)
    lblString.Text = elapsed_time.TotalSeconds.ToString("0.000000")

    txt = ""
    start_time = Now
    For i As Long = 1 To num_trials
        string_builder.Append(ADD_STRING)
    Next i
    txt = string_builder.ToString()
    stop_time = Now
    elapsed_time = stop_time.Subtract(start_time)
    lblStringBuilder.Text = elapsed_time.TotalSeconds.ToString("0.000000")
End Sub
```

The code concatenates the string `1234567890` a large number of times, first using a String variable and then using a `StringBuilder`. In one test that performed the concatenation 10,000 times to build strings 100,000 characters long, using a String took roughly 1.6 seconds. Using a `StringBuilder`, the program was able to build the string in roughly 0.001 seconds.

Admittedly, building such enormous strings is not a common programming task. Even when the strings are shorter, you can sometimes see a noticeable difference in performance.

Example program StringBuilderTest2, which is also available for download, uses the following code to concatenate the string `1234567890` to itself 100 times, making a string 1,000 characters long. It builds the string repeatedly for a certain number of trials. In one test building the 1,000-character string 10,000 times, using a String took around 0.95 seconds, whereas using a `StringBuilder` took about 0.06 seconds.

```
Private Sub btnGo_Click() Handles btnGo.Click
    Const ADD_STRING As String = "1234567890"
    Dim num_trials As Long = Long.Parse(txtNumTrials.Text)
    Dim start_time As DateTime
    Dim stop_time As DateTime
    Dim elapsed_time As TimeSpan
    Dim txt As String
    Dim string_builder As New StringBuilder

    lblString.Text = ""
    lblStringBuilder.Text = ""
    Application.DoEvents()

    start_time = Now
    For i As Long = 1 To num_trials
        txt = ""
        For j As Long = 1 To 100
            txt = txt & ADD_STRING
        Next j
    Next i
    stop_time = Now
    elapsed_time = stop_time.Subtract(start_time)
    lblString.Text = elapsed_time.TotalSeconds.ToString("0.000000")

    txt = ""
    start_time = Now
    For i As Long = 1 To num_trials
        string_builder = New StringBuilder
        For j As Long = 1 To 100
            string_builder.Append(ADD_STRING)
        Next j
        txt = string_builder.ToString()
    Next i
    stop_time = Now
    elapsed_time = stop_time.Subtract(start_time)
    lblStringBuilder.Text = elapsed_time.TotalSeconds.ToString("0.000000")
End Sub
```

317

Strings and string operations are a bit more intuitive than the `StringBuilder` class, so your code will usually be easier to read if you use String variables when performance isn't a big issue. If you are building enormous strings, or are building long strings a huge number of times, the performance edge given by the `StringBuilder` class may be worth slightly more complicated-looking code.

Date and TimeSpan Operations

The Date data type is fundamentally different from other data types. When you perform an operation on most data types, you get a result that has the same data type or that is at least of some compatible data type. For example, if you subtract two Integer variables, the result is an Integer. If you divide two Integers using the / operator, the result is a Double. That's not another Integer, but it is a compatible numeric data type used because an Integer cannot always hold the result of a division.

If you subtract two Date variables, however, the result is not a Date. For example, what's August 7 minus July 20? It doesn't make sense to think of the result as a Date. Instead, Visual Basic defines the difference between two Dates as a TimeSpan. A TimeSpan measures the elapsed time between two Dates. In this example, August 7 minus July 20 is 18 days.

The following equations define the arithmetic of Dates and TimeSpans:

- ❑   Date – Date = TimeSpan
- ❑   Date + TimeSpan = Date
- ❑   TimeSpan + TimeSpan = TimeSpan
- ❑   TimeSpan – TimeSpan = TimeSpan

The `TimeSpan` class also defines unary negation (`ts2 = -ts1`), but other operations (such as multiplying a TimeSpan by a number) are not defined. However, in some cases, you can still perform the calculation if you must.

Example program MultiplyTimeSpan, which is available for download on the book's web site, uses the following statement to make the TimeSpan `ts2` equal to 12 times the duration of TimeSpan `ts1`:

```
ts2 = New TimeSpan(ts1.Ticks * 12)
```

In Visual Basic 2005, the +, -, <, >, <=, >=, <>, and = operators are defined for Dates and TimeSpans. Previous versions did not define these operators, but the `Date` class did provide equivalent operator methods. For example, the `Date` class's `op_Subtraction` method subtracts two Dates and returns a TimeSpan.

These operator methods are still available and you may want to use them if you find using the normal operator symbols less clear. The following table lists the Date operator methods. Note that the Common Language Runtime name for the Date data type is DateTime, so you need to look for DateTime in the online help for more information on these methods.

Syntax	Meaning
result_date = Date.op _Addition(date1, timespan1)	Returns date1 plus timespan1
result_boolean = Date.op _Equality(date1, date2)	True if date1>date2
result_boolean = Date.op _GreaterThan(date1, date2)	True if date1>date2
result_boolean = Date.op _GreaterThanOrEqual (date1, date2)	True if date1>= date2
result_boolean = Date.op _Inequality(date1, date2)	True if date1<>date2
result_boolean = Date.op _LessThan(date1, date2)	True if date1<date2
result_boolean = Date.op _LessThanOrEqual(date1, date2)	True if date1<= date2
result_timespan = Date.op _Subtraction(date1, date2)	Returns the TimeSpan between date1 and date2
result = Date.Compare (date1, date2)	Returns a value indicating whether date1 is greater than, less than, or equal to date2

The Compare method is a bit different from the others, returning an Integer rather than a Boolean or Date. Its value is less than zero if date1<date2, greater than zero if date1>date2, and equal to zero if date1 = date2.

These are shared methods, so you do not need to use a specific instance of the Date data type to use them. For example, the following code displays the number of days between July 20 and August 7:

```
Dim date1 As Date = #7/20/04#
Dim date2 As Date = #8/7/04#
Dim elapsed_time As TimeSpan

    elapsed_time = Date.op_Subtraction(date2, date1)
    Debug.WriteLine(elapsed_time.Days)
```

These operators are a bit cumbersome. To make these kinds of calculations easier, the Date data type provides other methods for performing common operations that are a bit easier to read. Whereas the operator methods take both operands as parameters, these methods take a single operand as one parameter and use the current object as the other. For example, a Date object's Add method adds a TimeSpan to the date and returns the resulting date. The following table summarizes these methods.

Syntax	Meaning
result_date = date1.Add(timespan1)	Returns date1 plus timespan1
result_date = date1.AddYears (num_years)	Returns the date plus the indicated number of years
result_date = date1.AddMonths (num_months)	Returns the date plus the indicated number of months
result_date = date1.AddDays (num_days)	Returns the date plus the indicated number of days
result_date = date1.AddHours (num_hours)	Returns the date plus the indicated number of hours
result_date = date1.AddMinutes (num_minutes)	Returns the date plus the indicated number of minutes
result_date = date1.AddSeconds (num_seconds)	Returns the date plus the indicated number of seconds
result_date = date1.AddMilliseconds (num_milliseconds)	Returns the date plus the indicated number of milliseconds
result_date = date1.AddTicks (num_ticks)	Returns the date plus the indicated number of ticks (100-nanosecond units)
result_timespan = date1.Subtract (date2)	Returns the time span between date2 and date1
result_integer = date1.CompareTo (date2)	Returns a value indicating whether date1 is greater than, less than, or equal to date2
result_boolean = date1.Equals(date2)	Returns True if date1 equals date2

The CompareTo method returns a value less than zero if date1<date2, greater than zero if date1>date2, and equal to zero if date1 = date2.

Operator Overloading

Visual Basic defines operators for expressions that use standard data types such as integers and Boolean values. It defines a few operators such as `Is` and `IsNot` for objects, but operators such as `*` and `Mod` don't make sense for objects in general.

Nevertheless, you can also define those operators for your structures and classes, if you like, by using the `Operator` statement. This is a more advanced topic, so if you're new to Visual Basic, you may want to skip this section and come back to it later, perhaps after you have read Chapter 26, "Classes and Structures."

The general syntax for operator overloading is:

```
[ <attributes> ] Public [ Overloads ] Shared [ Shadows ] _
  [ Widening | Narrowing ]  Operator symbol ( operands ) As type
    ...
End Operator
```

The parts of this declaration are:

❑ *attributes* — Attributes for the operator.

❑ `Public` — All operators must be `Public Shared`.

❑ `Overloads` — You can only use this if the operator takes two parameters that are from a base class and a derived class as its two operators. In that case, it means the operator overrides the operator defined in the base class.

❑ `Shared` — All operators must be `Public Shared`.

❑ `Shadows` — The operator replaces a similar operator defined in the base class.

❑ `Widening` — Indicates that the operator defines a widening conversion that always succeeds at runtime. For example, an `Integer` always fits in a `Single`, so storing an `Integer` in a `Single` is a widening operation. This operator must catch and handle all errors. The `CType` operator must include either the `Widening` or `Narrowing` keyword.

❑ `Narrowing` — Indicates that the operator defines a narrowing conversion that may fail at runtime. For example, a Single does not necessarily fit in an Integer, so storing a Single in an Integer is a narrowing operation. The `CType` operator must include either the `Widening` or `Narrowing` keyword.

❑ *symbol* — The operator's symbol. This can be `+`, `−`, `*`, `/`, `\`, `^`, `&`, `<<`, `>>`, `=`, `<>`, `<`, `>`, `<=`, `>=`, `Mod`, `Not`, `And`, `Or`, `Xor`, `Like`, `IsTrue`, `IsFalse`, or `CType`.

❑ *operands* — Declarations of the objects to be manipulated by the operator. The unary operators `+`, `−`, `Not`, `IsTrue`, and `IsFalse` take a single operand. The binary operators `+`, `−`, `*`, `/`, `\`, `^`, `&`, `<<`, `>>`, `=`, `<>`, `<`, `>`, `<=`, `>=`, `Mod`, `And`, `Or`, `Xor`, `Like`, and `CType` take two operands.

❑ *type* — All operators must have a return type and must return a value by using a `Return` statement.

Operator overloading is subject to several constraints:

❑ Some operands come in pairs, and if you define one you must define the other. The pairs are `=` and `<>`, `<` and `>`, `<=` and `>=`, and `IsTrue` and `IsFalse`.

❑ For the standard unary or binary operators, the class or structure that defines the operator must appear in an operand. For the `CType` conversion operator, the class or structure must appear in the operand or return type.

❑ The `IsTrue` and `IsFalse` operators must return Boolean values.

❑ The second operands for the `<<` and `>>` operators must be Integers.

If you define an operator, Visual Basic automatically provides the corresponding assignment operator. For example, if you define the + operator, Visual Basic provides the += assignment operator.

Though you cannot use the `IsTrue` and `IsFalse` operators directly, you can use them indirectly. If you define `IsTrue` for a class, Visual Basic uses it to determine whether an object should be treated as `True` in a Boolean expression. For example, the following statement uses the `IsTrue` operator to decide whether the object `c1` should be considered `True`:

```
If c1 Then ...
```

If you define the `And` and `IsFalse` operators, Visual Basic uses them to handle the `AndAlso` operator as well. For this to work, the `And` operator must return the same type of class or structure where you define it. For example, suppose you have defined `And` and `IsFalse` for the `Composite` class and suppose variables `c1`, `c2`, and `c3` are all instances of this class. Then consider the following statement:

```
c3 = c1 AndAlso c2
```

Visual Basic uses `IsFalse` to evaluate `c1`. If `IsFalse` returns `True`, the program doesn't bother to evaluate `c2`. Instead it assumes the whole statement is false and returns a `False` value. Because `IsFalse` returned `True` for `c1`, Visual Basic knows that `c1` is a false value so it sets `c3` equal to `c1`.

This is pretty confusing. It may make more sense if you think about how Visual Basic evaluates Boolean expressions that use the normal `AndAlso` operator.

Similarly, if you define the `Or` and `IsTrue` operators, Visual Basic automatically provides the `OrElse` operator.

Although you generally cannot make two versions of a function in Visual Basic that differ only in their return types, you can do that for `CType` conversion operators. When the program tries to make a conversion, Visual Basic can tell by the type of the result which conversion operator to use.

Example program ComplexNumbers, which is available for download on the book's web site, uses the following code to define a `Complex` class that represents a complex number. It defines +, −, and * operators to implement normal addition, subtraction, and multiplication on complex numbers. It also defines =, <>, and unary negation operators, and a conversion operator that converts a `Complex` object into a Double by returning its magnitude.

```
Public Class Complex
    Public Re As Double
    Public Im As Double

    ' Constructors.
    Public Sub New()
    End Sub
    Public Sub New(ByVal real_part As Double, ByVal imaginary_part As Double)
        Re = real_part
        Im = imaginary_part
    End Sub

    ' ToString.
    Public Overrides Function ToString() As String
        Dim txt As String = Re.ToString
        If Im < 0 Then
            txt &= " - " & Math.Abs(Im).ToString
        Else
            txt &= " + " & Im.ToString
        End If
        Return txt & "i"
    End Function

    ' Operators.
    Public Shared Operator *(ByVal c1 As Complex, ByVal c2 As Complex) _
     As Complex
        Return New Complex( _
            c1.Re * c2.Re - c1.Im * c2.Im, _
            c1.Re * c2.Im + c1.Im * c2.Re)
    End Operator
    Public Shared Operator +(ByVal c1 As Complex, ByVal c2 As Complex) _
     As Complex
        Return New Complex( _
            c1.Re + c2.Re, _
            c1.Im + c2.Im)
    End Operator
    Public Shared Operator -(ByVal c1 As Complex, ByVal c2 As Complex) _
     As Complex
        Return New Complex( _
            c1.Re - c2.Re, _
            c1.Im - c2.Im)
    End Operator
    Public Shared Operator =(ByVal c1 As Complex, ByVal c2 As Complex) _
     As Boolean
        Return (c1.Re = c2.Re) AndAlso (c1.Im = c2.Im)
    End Operator
    Public Shared Operator <>(ByVal c1 As Complex, ByVal c2 As Complex) _
     As Boolean
        Return (c1.Re <> c2.Re) OrElse (c1.Im <> c2.Im)
    End Operator
```

323

```
      Public Shared Operator -(ByVal c1 As Complex) As Complex
            Return New Complex(-c1.Re, -c1.Im)
      End Operator
      Public Shared Narrowing Operator CType(ByVal c1 As Complex) As Double
            Return System.Math.Sqrt(c1.Re * c1.Re + c1.Im * c1.Im)
      End Operator
  End Class
```

It is easy to get carried away with operator overloading. Just because you can define an operator for a class doesn't mean you should. For example, you might be able to concoct some meaning for addition with the `Employee` class, but it would probably be a counterintuitive operation. You would probably be better off writing a subroutine or function with a meaningful name instead of using an ambiguous operator such as + or >>.

Operators with Nullable Types

Chapter 15, "Data Types, Variables, and Constants," describes nullable types. A variable declared as nullable can distinguish between holding zero, blank, and other "trivial" values and holding no data at all. For example, if you declare the variable x as a nullable integer, then you can set it to the special value `Nothing` to indicate that it doesn't contain any data.

If all of the operands in an expression contain actual values rather than `Nothing`, then arithmetic, comparison, logical, or bitwise operations return the values you would expect. If one or more nullable variables in an expression contains the special value `Nothing`, then Visual Basic uses special "null-propagation" rules for evaluating the expression.

If one or more of the operands in an arithmetic, comparison, logical, or bitwise operation is `Nothing` then the result is also `Nothing`. For example, if x and y are nullable and x contains no value then the following expressions, and just about any other expression containing x, have the value `Nothing`.

```
-x
x + y
x * y
x ^ y
x >> y
```

For more information about nullable types, see Chapter 15, "Data Types, Variables, and Constants."

Summary

A program uses operators to manipulate variables, constants, and literal values to produce new results. The Visual Basic operators fall into five categories: arithmetic, concatenation, comparison, logical, and bitwise. In most cases, using operators is straightforward and intuitive.

Operator precedence determines the order in which Visual Basic applies operators when evaluating an expression. In cases where an expression's operator precedence is unclear, add parentheses to make the

order obvious. Even if you don't change the way that Visual Basic handles the statement, you can make the code more understandable and avoid possibly time-consuming bugs.

The String data type has its own special needs. String manipulation plays a big role in many applications, so Visual Basic provides a `StringBuilder` class for manipulating strings more efficiently. On the one hand, if your program only works with a few short strings, it probably doesn't need to use a `StringBuilder`, and using the String data type will probably make your code easier to understand. On the other hand, if your application builds enormous strings or concatenates a huge number of strings, you may be able to save a noticeable amount of time using the `StringBuilder` class.

The Date data type also behaves differently from other data types. The normal operators such as + and – have different meanings here from other data types. For example, a Date minus a Date gives a TimeSpan, not another Date. These operations generally make sense if you think carefully about what dates and time spans are.

Just as addition, subtraction, and the other operators have special meaning for Dates and TimeSpans, you can use operator overloading to define operators for your classes. Defining division or exponentiation may not make much sense for `Employees`, `Customer`, or `Orders`, but in some cases custom operators can make your code more readable. For example, you might imagine the following statement adding an `OrderItem` to a `CustomerOrder`:

```
the_order += new_item
```

This chapter explains how to use operators to combine variables to calculate new results. A typical program may perform the same set of calculations many times for different variable values. Although you might be able to perform those calculations in a long series, the resulting code would be cumbersome and hard to maintain. Chapter 17, "Subroutines and Functions," explains how you can use subroutines and functions to break a program into manageable pieces that you can then reuse to make performing the calculations easier and more uniform.

17

Subroutines and Functions

Subroutines and functions enable you to break an otherwise unwieldy chunk of code into manageable pieces. They enable you to extract code that you may need to use under more than one circumstance and place it in one location where you can call it as needed. This not only reduces repetition within your code; it also enables you to maintain and update the code in a single location.

A *subroutine* performs a task for the code that invokes it. A *function* performs a task and then returns some value. The value may be the result of a calculation, or a status code indicating whether the function succeeded or failed.

Together, subroutines and functions are sometimes called *routines* or *procedures*. They are also sometimes called *methods*, particularly when they are subroutines or functions belonging to a class. Subroutines are also occasionally called *sub procedures*.

This chapter describes subroutines and functions. It explains the syntax for declaring and using each in a Visual Basic application. It also provides some tips for making routines more maintainable.

Subroutines

A `Sub` statement defines the subroutine's name. It declares the parameters that the subroutine takes as arguments and defines the parameters' data types. Code between the `Sub` statement and an `End Sub` statement determines what the subroutine does when it runs.

The syntax for defining a subroutine is as follows:

```
[attribute_list] [inheritance_mode] [accessibility] _
Sub subroutine_name([parameters]) [ Implements interface.subroutine ]
    [ statements ]
End Sub
```

The following sections describe the pieces of this declaration.

Attribute_List

The optional attribute list is a comma-separated list of attributes that apply to the subroutine. An attribute further refines the definition of a class, method, variable, or other item to give more information to the compiler and the runtime system.

> *Applying an attribute to a class, variable, method, or other code entity is sometimes called* decorating *the entity.*

Attributes are specialized and address issues that arise when you perform very specific programming tasks. For example, the `Conditional` attribute means the subroutine is conditional upon the definition of some compiler constant. Example program AttributeConditional, which is available for download on the book's web site, uses the following code to demonstrate the `Conditional` attribute:

```
#Const DEBUG_LIST_CUSTOMERS = True
' #Const DEBUG_LIST_EMPLOYEES = True

Private Sub Form1_Load() Handles MyBase.Load
    ListCustomers()
    ListEmployees()

    txtResults.Select(0, 0)
End Sub

<Conditional("DEBUG_LIST_CUSTOMERS")> _
Private Sub ListCustomers()
    txtResults.Text &= "ListCustomers" & vbCrLf
End Sub

<Conditional("DEBUG_LIST_EMPLOYEES")> _
Private Sub ListEmployees()
    txtResults.Text &= "ListEmployees" & vbCrLf
End Sub
```

The code defines the compiler constant `DEBUG_LIST_CUSTOMERS`. The value `DEBUG_LIST_EMPLOYEES` is not defined, because it is commented out.

This program's `Form1_Load` event handler calls subroutines `ListCustomers` and `ListEmployees`. `ListCustomers` is defined using the `Conditional` attribute with parameter `DEBUG_LIST_CUSTOMERS`. That tells the compiler to generate code for the routine only if `DEBUG_LIST_CUSTOMERS` is defined. Because that constant is defined, the compiler generates code for this subroutine.

Subroutine `ListEmployees` is defined using the `Conditional` attribute with parameter `DEBUG_LIST_EMPLOYEES`. Because that constant is not defined, the compiler does not generate code for this subroutine and, when `Form1_Load` calls it, the subroutine call is ignored.

The following text shows the output from this program:

```
ListCustomers
```

Visual Basic 2008 defines around 200 attributes. Many have fairly specialized purposes that won't interest you most of the time, but some are pretty useful. For example, the `Browsable` attribute determines whether a property or event should be listed in the Properties window. It is fairly general and useful, so it's described shortly. In contrast, the `System.EnterpriseServices` `.ApplicationQueuing` attribute enables queuing for an assembly and allows it to read method calls from message queues. This attribute is only useful in very specialized circumstances, so it isn't described here.

Many attributes give metadata for editors and the IDE, so you will often see their effects only when you view an object in an editor or the IDE. If you are building a control or component, you can put one on a form and then see its properties in the Properties window. In that case, many kinds of attributes will be useful. If you're building an `Employee` class that's used only in code, fewer attributes are useful in any obvious way.

However, Visual Basic 2008 comes with a powerful `PropertyGrid` control that lets you display an object's properties on a form much as the Properties window displays them to a developer. That control honors all of the property-related attributes and gives them a whole new level of usefulness.

The following list describes some of the most useful attributes. Most of them are in the System. Component-Model namespace. Check the online help to find the namespaces for the others and to learn about each attribute's parameters. Even these most useful attributes are fairly specialized and advanced so you may not immediately see their usefulness. If one of them doesn't make sense, skip it and scan the list again after you have more experience with such topics as building custom controls.

❑ `AttributeUsage` — You can build your own custom attributes by inheriting from the `Attribute` class. You can give your attribute class the `AttributeUsage` attribute to specify how your attribute can be used. You can determine whether an item can have multiple instances of your attribute, whether your attribute can be inherited by a derived class, and the kinds of things that can have your attribute (assembly, class, method, and so forth).

❑ `Browsable` — This indicates whether a property or event should be displayed in an editor such as the Properties window. If you pass the attribute's constructor the value `False`, the Properties window does not display the property.

❑ `Category` — This indicates the grouping that should hold the property or event in a visual designer such as the Properties window. For example, if the user clicks the Categorized button in the Properties window, the window groups the properties by category. This attribute tells which category should hold the property. Note that the category names are not magic. You can use any string you like and the Properties window will make a new category for you if necessary.

❑ `DefaultEvent` — This gives a class's default event name. If the class is a control or component and you double-click it in a form, the code editor opens to this event. For example, the default event for a `Button` is `Click`, so when you double-click a `Button` at design time, the code editor opens the control's `Click` event handler.

❑ `DefaultProperty` — This gives a class's default property name. Suppose that the `Employee` component has `LastName` set as its default property. Then suppose that you select the form and click the `FormBorderStyle` property in the Properties window. Now you click an `Employee`. Because `Employee` doesn't have a `FormBorderStyle` property, the Properties window displays its default property: `LastName`.

❑ `DefaultValue` — This gives a property a default value. If you right-click the property in the Properties window and select Reset, the property is reset to this value. Be sure to use a valid value. For example, don't set this to the string `"unknown"` if the property is an Integer.

❑ `Description` — This gives a description of the item. If a property has a `Description` and you select the property in the Properties window, the window displays the description text at the bottom.

Visual Basic 2008 carries this one step further and also allows you to use XML comments to provide a description of routines and their parameters for use by IntelliSense. For more information, see the section "XML Comments" in Chapter 14, "Program and Module Structure."

❑ `Localizable` — This determines whether a property should be localizable. If this is `True`, localized values are automatically stored in the appropriate resource files. If this is `False` (the default), all locales share the same property value.

To try this out, set the form's `Localizable` property to `True` and enter a value for the property. Then set the form's `Language` property to another language and give the localizable property a new value. Visual Basic automatically applies the right value for the user's locale when it runs the program.

❑ `MergableProperty` — This indicates whether or not the property can be merged with the same property provided by other components in the Properties window. If this is `False` and you select more than one instance of a control with the property, the Properties window does not display the property.

If this is `True` and you select more than one control with the property, the Properties window displays the value if the controls all have the same value. If you enter a new value, all of the controls are updated. This is the way the `Text` property works for `TextBox`, `Label`, and many other kinds of controls.

❑ `ParenthesizePropertyName` — This indicates whether editors such as the Properties window should display parentheses around the property's name. If the name has parentheses, the Properties window moves it to the top of the list when displaying properties alphabetically or to the top of its category when displaying properties by category.

❑ `ReadOnly` — This indicates whether designers should treat this property as read-only. For example, the Properties window displays the property grayed out and doesn't let the user change its value. This attribute is a little strange in practice because `ReadOnly` is a Visual Basic keyword. If you enter just the attribute name `ReadOnly`, Visual Basic gets confused. Either use the full name `System.ComponentModel.ReadOnly` or enclose the name in square brackets as in `<[ReadOnly](True)>....`

❑ `RecommendedAsConfigurable` — This indicates that a property should be tied to the configuration file. When you select the object at design time and expand the "(Dynamic Properties)" item, the property is listed. If you click the ellipsis to the right, a dialog appears that lets you map the property to a key in the configuration file.

❑   RefreshProperties — This indicates how an editor should refresh the object's *other* properties if *this* property is changed. The value can be Default (do not refresh the other properties), Repaint (refresh all other properties), or All (re-query and refresh all properties).

❑   Conditional — This indicates that the method is callable if a compile-time constant such as DEBUG or MY_CONSTANT is defined. If the constant is not defined, code for the method is still generated and parameters in the method call are checked against the parameter types used by the method, but calls to the method are ignored at runtime. If the method has more than one Conditional attribute, the method is callable if any of the specified compile-time constants is defined.

Note that the constant must be defined in the main program not in the component if you are building a component. Select the main program, open the Project menu, select the Properties item at the bottom, open the Configuration Properties folder, click Build, and in the Custom constants text box enter a value such as IS_DEFINED=True.

You can also use the compiler directive #if to exclude code completely from compilation. However, if you eliminate a method in this way, any calls to the routine will generate compile-time errors because the method doesn't exist. The Conditional attribute lets you hide a method while still allowing the code to contain calls to it.

❑   DebuggerHidden — This tells debuggers whether a method should be debuggable. If DebuggerHidden is True, the IDE skips over the method and will not stop at breakpoints inside it.

❑   DebuggerStepThrough — This tells debuggers whether to let the developer step through a method in the debugger. If DebuggerStepThrough is True, the IDE will not step through the method, although it will stop at any breakpoints inside it.

❑   ToolboxBitmap — This tells the IDE where to find a control or component's Toolbox bitmap. This can be a file, or it can be a type in an assembly that contains the bitmap and the bitmap's name in the assembly. It's awkward but essential if you're developing controls or components.

❑   NonSerializedAttribute — This indicates that a member of a serializable class should not be serialized. This is useful for excluding values that need not be serialized.

❑   Obsolete — This indicates that the item (class, method, property, or whatever) is obsolete. Optionally, you can specify the message that the code editor should display to the developer if code uses the item (for example, "Use the NewMethod instead"). You can also indicate whether the IDE should treat using this item as a warning or an error.

❑   Serializable — This indicates that a class is serializable. All public and private fields are serialized by default. Note that some routines require a class to be serializable even though you don't use the serialization yourself. Also note that attributes in the System.Xml.Serialization namespace can provide a lot of control over serializations.

❑   ThreadStaticAttribute — This indicates that a Shared class variable should not be shared across threads. Different threads get their own copies of the variable and all instances of the class within each thread share the thread's copy.

Finding the attributes that you need for a particular task can be tricky. It helps to realize that attribute classes inherit either directly or indirectly from the Attribute *class. You can get information about the* Attribute *class at* msdn2.microsoft.com/en-us/library/system.attribute.aspx. *You can see a list of classes that inherit from* Attribute *at* msdn2.microsoft.com/en-us/library/2e39z096.aspx.

Inheritance_Mode

The *inheritance_mode* can be one of the values Overloads, Overrides, Overridable, NotOverridable, MustOverride, Shadows, or Shared. These values determine how a subroutine declared within a class inherits from the parent class or how it allows inheritance in derived classes. The following list explains the meanings of these keywords:

❑ Overloads — Indicates that the subroutine has the same name as another subroutine defined for this class. The parameter list must be different in the different versions so that Visual Basic can tell them apart (if they are the same, this works just like Overrides described next). If you are overloading a subroutine defined in a parent class, you must use this keyword. If you are overloading only subroutines in the same class, you can omit the keyword. If you use the keyword in any of the overloaded subroutines, however, you must include it for them all.

❑ Overrides — Indicates that this subroutine replaces a subroutine in the parent class that has the same name and parameters.

❑ Overridable — Indicates that a derived class can override this subroutine. This is the default for a subroutine that overrides another one.

❑ NotOverridable — Indicates that a derived class cannot override this subroutine. You can only use this with a subroutine that overrides another one.

❑ MustOverride — Indicates that any derived classes must override this subroutine. When you use this keyword, you omit all subroutine code and the End Sub statement, as in the following code:

```
MustOverride Sub Draw()
MustOverride Sub MoveMap(ByVal X As Integer, ByVal Y As Integer)
MustOverride Sub Delete()
...
```

If a class contains a subroutine declared MustOverride, you must declare the class using the MustInherit keyword. Otherwise, Visual Basic won't know what to do if you call this subroutine, because it contains no code.

MustOverride is handy for defining a subroutine that derived classes must implement, but for which a default implementation in the parent class doesn't make sense. For example, suppose that you make a Drawable class that represents a shape that can be drawn and that you will derive specific shape classes such as Rectangle, Ellipse, Line, and so forth. To let the program draw a generic shape, the Drawable class defines the Draw subroutine. Because Drawable doesn't have a particular shape, it cannot provide a default implementation of that subroutine. To require the derived classes to implement Draw, the Drawable class declares it MustOverride.

❏ `Shadows` — Indicates that this subroutine replaces an item (probably a subroutine) in the parent class that has the same name, but not necessarily the same parameters. If the parent class contains more than one overloaded version of the subroutine, this subroutine shadows them all. If the derived class defines more than one overloaded version of the subroutine, they must all be declared with the `Shadows` keyword.

❏ `Shared` — Indicates that this subroutine is associated with the class itself, rather than with a specific instance of the class. You can invoke it using the class's name (`ClassName.SharedSub`) or using a specific instance (`class_instance.SharedSub`). Because the subroutine is not associated with a specific class instance, it cannot use any properties or methods that are provided by a specific instance. The subroutine can only use other `Shared` properties and methods, as well as globally available variables.

Accessibility

A subroutine's *accessibility* clause can take one of these values: `Public`, `Protected`, `Friend`, `Protected Friend`, or `Private`. These values determine which pieces of code can invoke the subroutine. The following list explains these keywords:

❏ `Public` — Indicates that there are no restrictions on the subroutine. Code inside or outside of the subroutine's class or module can call it.

❏ `Protected` — Indicates that the subroutine is accessible only to code in the same class or in a derived class. You can only use the `Protected` keyword with subroutines declared inside a class.

❏ `Friend` — Indicates that the subroutine is available to all code inside or outside of the subroutine's module within the same project. The difference between this and `Public` is that `Public` allows code outside of the project to access the subroutine. This is generally only an issue for code libraries (DLLs) and control libraries. For example, suppose that you build a code library containing dozens of routines and then you write a program that uses the library. If the library declares a subroutine with the `Public` keyword, the code in the library and the code in the main program can use the subroutine. In contrast, if the library declares a subroutine with the `Friend` keyword, only the code in the library can access the subroutine, not the code in the main program.

❏ `Protected Friend` — Indicates that the subroutine has both `Protected` and `Friend` status. The subroutine is available only within the same project and within the same class or a derived class.

❏ `Private` — Indicates that the subroutine is available only within the class or module that contains it.

To reduce the amount of information that developers must remember, you should generally declare subroutines with the most restricted accessibility that allows them to do their jobs. If you can, declare the subroutine `Private`. Then, developers working on other parts of the application don't even need to know that the subroutine exists. They can create other routines with the same name if necessary and won't accidentally misuse the subroutine.

Later, if you discover that you need to use the subroutine outside of its class or module, you can change its declaration to allow greater accessibility.

Subroutine_Name

The subroutine's name must be a valid Visual Basic identifier. That means it should begin with a letter or an underscore. It can then contain zero or more letters, numbers, and underscores. If the name begins with an underscore, it must include at least one other character so that Visual Basic can tell it apart from a line continuation character.

Many developers use *camel case* when naming subroutines so a subroutine's name consists of several descriptive words with their first letters capitalized. A good method for generating subroutine names is to use a short phrase beginning with a verb and describing what the subroutine does. Some examples include `LoadData`, `SaveNetworkConfiguration`, and `PrintExpenseReport`.

Subroutine names with leading underscores can be hard to read, so you should either save them for special purposes or avoid them entirely. Names such as `_1` and `__` (two underscores) are particularly confusing.

Parameters

The *parameters* section of the subroutine declaration defines the arguments that the subroutine takes as parameters. The parameter declarations define the numbers and types of the parameters. This section also gives the names by which the subroutine will know the values.

Declaring parameters is very similar to declaring variables. See Chapter 15, "Data Types, Variables, and Constants," for information on variable declarations, data types, and other related topics.

The following sections describe some of the more important details related to subroutine parameter declarations.

ByVal

If you include the optional `ByVal` keyword before a parameter's declaration, the subroutine makes its own local copy of the parameter with procedure scope. The subroutine can modify this value all it wants and the corresponding value in the calling procedure isn't changed.

For example, consider the following code. The main program initializes the variable `A` and prints its value in the Output window. It then calls subroutine `DisplayDouble`, which declares its parameter `X` with the `ByVal` keyword. It doubles `X` and displays the new value. Because the parameter `X` is declared `ByVal`, the subroutine has its own local copy of the variable, so doubling it doesn't change the value of the variable `A` in the main program. When the subroutine ends and the main program resumes, it displays the value of variable `A`.

```
Private Sub Main()
    Dim A As Integer = 12
    Debug.WriteLine("Main: " & A)
    DisplayDouble(A)
    Debug.WriteLine("Main: " & A)
End Sub

Private Sub DisplayDouble(ByVal X As Integer)
    X *= 2
    Debug.WriteLine("DisplayDouble: " & X)
End Sub
```

The following text shows the results:

```
Main: 12
DisplayDouble: 24
Main: 12
```

ByRef

If you declare a parameter with the `ByRef` keyword, the subroutine does not create a separate copy of the parameter variable. Instead, it uses a reference to the original parameter passed into the subroutine and any changes the subroutine makes to the value are reflected in the calling subroutine.

Consider the following code. This code is the same as the previous example except that the `DisplayDouble` subroutine declares its parameter using the `ByRef` keyword. As before, the main program initializes the variable `A` and prints its value in the Output window. It then calls subroutine `DisplayDouble`, which doubles its parameter `X` and displays the new value. Because `X` is declared `ByRef`, this doubles the value of the variable `A` that was passed by the main program into the subroutine. When the subroutine ends and the main program resumes, it displays the new doubled value of variable `A`.

```
Private Sub Main()
    Dim A As Integer = 12
    Debug.WriteLine("Main: " & A)
    DisplayDouble(A)
    Debug.WriteLine("Main: " & A)
End Sub

Private Sub DisplayDouble(ByRef X As Integer)
    X *= 2
    Debug.WriteLine("DisplayDouble: " & X)
End Sub
```

The following shows the results:

```
Main: 12
DisplayDouble: 24
Main: 24
```

Arrays Declared ByVal and ByRef

If you declare an array parameter using `ByVal` or `ByRef`, those keywords apply to the array itself, not to the array's values. In either case, the subroutine can modify the values inside the array.

The `DoubleArrayValues` subroutine shown in the following code has a parameter named `arr`. This parameter is an array of integers and is declared `ByVal`. The routine loops through the array, doubling each of its values. It then loops through the array, displaying the new values. Next, the subroutine assigns the variable `arr` to a new array of integers. It loops through the array, again displaying the new values.

```
Private Sub DoubleArrayValues(ByVal arr() As Integer)
    ' Double the values.
    For i As Integer = arr.GetLowerBound(0) To arr.GetUpperBound(0)
        arr(i) *= 2
    Next i

    ' Display the values.
    For i As Integer = arr.GetLowerBound(0) To arr.GetUpperBound(0)
        Debug.WriteLine(arr(i))
    Next i
    Debug.WriteLine("----------")

    ' Create a new array of values.
    arr = New Integer() {-1, -2}

    ' Display the values.
    For i As Integer = arr.GetLowerBound(0) To arr.GetUpperBound(0)
        Debug.WriteLine(arr(i))
    Next i
    Debug.WriteLine("----------")
End Sub
```

The following code declares an array of integers containing the values 1, 2, and 3. It invokes the subroutine `DoubleArrayValues` and then loops through the array, displaying the values after `DoubleArrayValues` returns.

```
Dim the_values() As Integer = {1, 2, 3}
DoubleArrayValues(the_values)

For i As Integer = the_values.GetLowerBound(0) To the_values.GetUpperBound(0)
    Debug.WriteLine(the_values(i))
Next i
```

The following text shows the results. The `DoubleArrayValues` subroutine lists the array's doubled values 2, 4, 6, assigns a new array to its local variable `arr`, and then displays the new values −1 and −2. When `DoubleArrayValues` returns, the main program displays its version of the values. Notice that the values were updated by `DoubleArrayValues` but that the subroutine's assignment of its `arr` variable to a new array had no effect on the main program's array `the_values`.

```
2
4
6
----------
-1
-2
----------
2
4
6
```

Now suppose that the subroutine `DoubleArrayValues` was declared with the following statement:

```
Private Sub DoubleArrayValues(ByRef arr() As Integer)
```

In this case, when `DoubleArrayValues` assigns a new array to its `arr` variable, the calling routine sees the change, so the `the_values` array receives the new array. The following text shows the new results:

```
2
4
6
----------
-1
-2
----------
-1
-2
```

Parenthesized Parameters

There are a couple ways that a subroutine can fail to update a parameter declared using the `ByRef` keyword. The most confusing occurs if you enclose a variable in parentheses when you pass it to the subroutine. Parentheses tell Visual Basic to evaluate their contents as an expression. Visual Basic creates a temporary variable to hold the result of the expression and then passes the temporary variable into the procedure. If the procedure's parameter is declared `ByRef`, the subroutine updates the temporary variable but not the original variable, so the calling routine doesn't see any change to its value.

The following code calls subroutine `DisplayDouble`, passing it the variable `A` surrounded by parentheses. Subroutine `DisplayDouble` modifies its parameter's value, but the result doesn't get back to the variable `A`.

```
Private Sub Main()
    Dim A As Integer = 12
    Debug.WriteLine("Main: " & A)
    DisplayDouble((A))
    Debug.WriteLine("Main: " & A)
End Sub

Private Sub DisplayDouble(ByRef X As Integer)
    X *= 2
    Debug.WriteLine("DisplayDouble: " & X)
End Sub
```

The following text shows the results:

```
Main: 12
DisplayDouble: 24
Main: 12
```

Chapter 15, "Data Types, Variables, and Constants," has more to say about parameters declared with the `ByVal` and `ByRef` keywords.

Optional

If you declare a parameter with the `Optional` keyword, the code that uses it may omit that parameter. When you declare an optional parameter, you must give it a default value for the subroutine to use if the parameter is omitted by the calling routine.

The `DisplayError` subroutine in the following code takes an optional string parameter. If the calling routine provides this parameter, the subroutine displays it. If the calling routine leaves this parameter out, then `DisplayError` displays its default message "An error occurred." The `PlaceOrder` subroutine checks its `the_customer` parameter. If this parameter is `Nothing`, `PlaceOrder` calls `DisplayError` to show the message "Customer is Nothing in subroutine PlaceOrder." Next, subroutine `PlaceOrder` calls `the_customer`'s `IsValid` function. If `IsValid` returns `False`, the subroutine calls `DisplayError`. This time it omits the parameter so `DisplayError` presents its default message.

```
Private Sub DisplayError(Optional ByVal error_message As String = _
 "An error occurred")
    MsgBox(error_message)
End Sub

Private Sub PlaceOrder(ByVal the_customer As Customer, _
 ByVal order_items() As OrderItem)
    ' See if the_customer exists.
    If the_customer Is Nothing Then
        DisplayError("Customer is Nothing in subroutine PlaceOrder")
        Exit Sub
    End If

    ' See if the_customer is valid.
    If Not the_customer.IsValid() Then
        DisplayError()
        Exit Sub
    End If

    ' Generate the order.
    ...
End Sub
```

Optional parameters must go at the end of the parameter list. If one parameter uses the `Optional` keyword, all of the following parameters must use it, too.

Optional parameters are particularly useful for initializing values in a class's constructor. The following code shows a `DrawableRectangle` class. Its constructor takes as parameters the rectangle's position and size. All the parameters are optional, so the main program can omit them if it desires. Because each parameter has default values, the constructor always knows it will have the four values, so it can always initialize the object's `Bounds` variable.

```
Public Class DrawableRectangle
    Public Bounds As Rectangle

    Public Sub New( _
     Optional ByVal X As Integer = 0, _
     Optional ByVal Y As Integer = 0, _
     Optional ByVal Width As Integer = 100, _
```

```
      Optional ByVal Height As Integer = 100)
          Bounds = New Rectangle(X, Y, Width, Height)
      End Sub
      ...
  End Class
```

Note that overloaded subroutines cannot differ only in optional parameters. If a call to the subroutine omitted the optional parameters, Visual Basic would be unable to tell which version of the subroutine to use.

Optional versus Overloading

Different developers have varying opinions on whether you should use optional parameters or overloaded routines under various circumstances. For example, suppose that the FireEmployee method could take one or two parameters giving either the employee's name or the name and reason for dismissal. You could make this a subroutine with the reason parameter optional, or you could make one overloaded version of the FireEmployee method for each possible parameter list.

One argument in favor of optional parameters is that overloaded methods might duplicate a lot of code. However, it is easy to make each version of the method call another version that allows more parameters, passing in default values. For example, in the following code the first version of the FireEmployee method simply invokes the second version:

```
  Public Sub FireEmployee(ByVal employee_name As String)
      FireEmployee(employee_name, "Unknown reason")
  End Sub

  Public Sub FireEmployee(ByVal employee_name As String, ByVal reason As String)
      ...
  End Sub
```

Method overloading is generally superior when the different versions of the routine need to do something different. You might be able to make a single routine with optional parameters take different actions based on the values of its optional parameters, but separating the code into overloaded routines will probably produce a cleaner solution.

Parameter Arrays

Sometimes it is convenient to allow a subroutine to take a variable number of parameters. For example, a subroutine might take as parameters the addresses of people who should receive e-mail. It would loop through the names to send each a message.

One approach is to include a long list of optional parameters. For example, the e-mail subroutine might set the default value for each of its parameters to an empty string. Then it would need to send e-mail to every address parameter that was not empty.

Unfortunately, this type of subroutine would need to include code to deal with each optional parameter separately. This would also place an upper limit on the number of parameters the subroutine can take (however many you are willing to type in the subroutine's parameter list).

A better solution is to use the `ParamArray` keyword to make the subroutine's final argument a parameter array. A *parameter array* contains an arbitrary number of parameter values. At runtime, the subroutine can loop through the array to process the parameter values.

The `DisplayAverage` subroutine shown in the following code takes a parameter array named `values`. It checks the array's bounds to make sure it contains at least one value. If the array isn't empty, the subroutine adds the values it contains and divides by the number of values to calculate the average.

```
' Display the average of a series of values.
Private Sub DisplayAverage(ByVal ParamArray values() As Double)
    ' Do nothing if there are no parameters.
    If values Is Nothing Then Exit Sub
    If values.Length < 1 Then Exit Sub

    ' Calculate the average.
    Dim total As Double = 0
    For i As Integer = LBound(values) To UBound(values)
        total += values(i)
    Next i

    ' Display the result.
    MessageBox.Show((total / values.Length).ToString)
End Sub
```

The following code shows one way the program could use this subroutine. In this example, `DisplayAverage` would display the average of the integers 1 through 7, which is 4.

```
DisplayAverage(1, 2, 3, 4, 5, 6, 7)
```

Parameter arrays are subject to the following restrictions:

❑   A subroutine can have only one parameter array, and it must come last in the parameter list.

❑   All other parameters in the parameter list must *not* be optional.

❑   All parameter lists are declared `ByVal`, so any changes the subroutine makes to the array's contents do not affect the calling routine.

❑   Parameter array values are implicitly optional, so the calling routine can provide any number of values (including zero) for the array. However, you cannot use the `Optional` keyword when you declare the parameter array.

❑   All the items in the parameter array must have the same data type. However, you can use an array that contains the generic `Object` data type and then it can hold just about anything. The downside is you may need to convert the items into a more specific type (for example, using `DirectCast` or `CInt`) to use their features.

The calling routine can pass any number of values (including zero) for the parameter array. It can also pass the value `Nothing`, in which case the subroutine's parameter array has value `Nothing`.

The program can also pass an array of the appropriate data type in place of the parameter array values. The following two calls to the `DisplayAverage` subroutine produce the same result inside the `DisplayAverage` subroutine:

```
DisplayAverage(1, 2, 3, 4, 5, 6, 7)

Dim values() As Double = {1, 2, 3, 4, 5, 6, 7}
DisplayAverage(values)
```

Implements interface.subroutine

An *interface* defines a set of properties, methods, and events that a class implementing the interface must provide. An interface is a lot like a class with all of its properties, methods, and events declared with the `MustOverride` keyword. Any class that inherits from the base class must provide implementations of those properties, methods, and events.

The `IDrawable` interface shown in the following code defines a `Draw` subroutine, a `Bounds` function, and a property named `IsVisible`. The `DrawableRectangle` class begins with the statement `Implements IDrawable`. That tells Visual Basic that the class will implement the `IDrawable` interface. If you make the class declaration, type the `Implements` statement, and then press the Enter key, Visual Basic automatically fills in the declarations you need to satisfy the interface. In this example, it creates the empty `Bounds` function, `Draw` subroutine, and `IsVisible` property procedures shown here. All you need to do is fill in the details.

Developers often begin the name of interfaces with a capital I so that it's obvious that it's an interface.

```
Public Interface IDrawable
    Sub Draw(ByVal gr As Graphics)
    Function Bounds() As Rectangle
    Property IsVisible() As Boolean
End Interface

Public Class DrawableRectangle
    Implements IDrawable

    Public Function Bounds() As System.Drawing.Rectangle _
      Implements IDrawable.Bounds

    End Function

    Public Sub Draw(ByVal gr As System.Drawing.Graphics) _
      Implements IDrawable.Draw

    End Sub

    Public Property IsVisible() As Boolean Implements IDrawable.IsVisible
        Get

        End Get
        Set(ByVal Value As Boolean)

        End Set
    End Property
End Class
```

If you look at the previous code, you can see where the subroutine declaration's `Implements interface.subroutine` clause comes into play. In this case, the `Draw` subroutine implements the `IDrawable` interface's `Draw` method.

When you type the `Implements` statement and press the Enter key, Visual Basic generates empty routines to satisfy the interface; then you don't need to type the `Implements interface.subroutine` clause yourself. Visual Basic enters this for you.

The only time you should need to modify this statement is if you change the interface's name or subroutine name or you want to use some other subroutine to satisfy the interface. For example, you could give the `DrawableRectangle` class a `DrawRectangle` method and add `Implements IDrawable.Draw` to its declaration. Visual Basic doesn't care what you call the routine, as long as *some* routine implements `IDrawable.Draw`.

Statements

A subroutine's *statements* section contains whatever Visual Basic code is needed to get the routine's job done. This can include all the usual variable declarations, `For` loops, `Try` blocks, and other Visual Basic paraphernalia.

The subroutine's body cannot include module, class, subroutine, function, structure, enumerated type, or other file-level statements. For example, you cannot define a subroutine within another subroutine.

One new statement that you can use within a subroutine is `Exit Sub`. This command makes the subroutine immediately exit and return control to the calling routine. Within a subroutine, the `Return` statement is equivalent to `Exit Sub`.

You can use `Exit Sub` or `Return` as many times as you like to allow the subroutine to exit under different conditions. For example, the following subroutine checks whether a phone number has a 10-digit or 7-digit format. If the phone number matches a 10-digit format, the subroutine exits. Then if the phone number matches a 7-digit format, the subroutine exits. If the number doesn't match either format, the subroutine displays an error message to the user.

```
Private Sub ValidatePhoneNumber(ByVal phone_number As String)
    ' Check for a 10-digit phone number.
    If phone_number Like "###-###-####" Then Exit Sub

    ' Check for a 7-digit phone number.
    If phone_number Like "###-####" Then Return

    ' The phone number is invalid.
    MsgBox("Invalid phone number " & phone_number, _
        MsgBoxStyle.Exclamation, _
        "Invalid Phone Number")
End Sub
```

Functions

Functions are basically the same as subroutines, except that they return some sort of value. The syntax for defining a function is as follows:

```
[attribute_list] [inheritance_mode] [accessibility] _
Function function_name([parameters]) [As return_type] [ Implements
interface.function ]
    [ statements ]
End Function
```

This is almost the same as the syntax for defining a subroutine. See the section, "Subroutines," earlier in this chapter for information about most of this declaration's clauses.

One difference is that a function ends with the `End Function` statement rather than `End Sub`. Similarly a function can exit before reaching its end using `Exit Function` rather than `Exit Sub`.

The one really new piece in the declaration is the clause `As return_type` that comes after the function's parameter list. This tells Visual Basic the type of value that the function will return.

The function can set its return value in one of two ways. First, it can set its name equal to the value it wants to return. The `Factorial` function shown in the following code calculates the factorial of a number. Written N!, the factorial of N is N * (N −1) * (N −2) … * 1. The function initializes its result variable to 1, and then loops over the values between 1 and the `number` parameter, multiplying these values to the result. It finishes by setting its name, `Factorial`, equal to the result value that it should return.

```
Private Function Factorial(ByVal number As Integer) As Double
    Dim result As Double = 1

    For i As Integer = 2 To number
        result *= i
    Next i

    Factorial = result
End Function
```

A function can assign and reassign its return value as many times as it wants to before it returns. Whatever value is assigned last becomes the function's return value.

The second way a function can assign its return value is to use the `Return` keyword followed by the value that the function should return. The following code shows the `Factorial` function rewritten to use the `Return` statement:

```
Private Function Factorial(ByVal number As Integer) As Double
    Dim result As Double = 1

    For i As Integer = 2 To number
        result *= i
    Next i

    Return result
End Function
```

343

The `Return` statement is roughly equivalent to setting the function's name equal to the return value, and then immediately using an `Exit Function` statement. The `Return` statement may allow the compiler to perform extra optimizations, however, so it is generally preferred to setting the function's name equal to the return value.

Property Procedures

Property procedures are routines that can represent a property-like value. A normal read-write property procedure contains a function for returning the property's value and a subroutine for assigning it.

The following code shows property procedures that implement a `Value` property. The `Property Get` procedure is a function that returns the value in the private variable `m_Value`. The `Property Set` subroutine saves a new value in the `m_Value` variable.

```
Private m_Value As Single

Property Value() As Single
    Get
        Return m_Value
    End Get
    Set(ByVal Value As Single)
        m_Value = Value
    End Set
End Property
```

Although the property is implemented as a pair of property procedures, the program could treat the value as a simple property. For example, suppose that the `OrderItem` class contains the previous code. Then the following code sets the `Value` property for the `OrderItem` object named `paper_item`:

```
paper_item.Value = 19.95
```

You can add property procedures to any type of object module. For example, you can use property procedures to implement a property for a form or for a class of your own.

It's less obvious that you can also use property procedures in a code module. The property procedures look like an ordinary variable to the routines that use them. If you place the previous example in a code module, the program could act as if there were a variable named `Value` defined in the module.

For more information on property procedures, see the section "Property Procedures" in Chapter 15, "Data Types, Variables, and Constants."

Extension Methods

Extension methods allow you to add a new method to an existing class without rewriting it or deriving a new class from it. To make an extension method, decorate the method declaration with the `Extension` attribute. Then make a normal subroutine or function that takes one or more parameters. The first

parameter determines the class that the method extends. The method can use that parameter to learn about the item for which them method was called. The other parameters are passed into the method so it can use them to perform its chores.

For example, the following code adds a `MatchesRegexp` subroutine to the `String` class. The `Extension` attribute tells Visual Basic that this is an extension method. The method's first parameter is a `String` so this method extends the `String` class. The second parameter is a regular expression. The method returns True if the `String` matches the regular expression.

```
' Return True if a String matches a regular expression.
<Extension()> _
Public Function MatchesRegexp(ByVal the_string As String, _
 ByVal regular_expression As String) As Boolean
    Dim reg_exp As New Regex(regular_expression)
    Return reg_exp.IsMatch(the_string)
End Function
```

The following code shows how a program might use this method to decide whether the string stored in variable `phone_number` looks like a valid 7-digit United States phone number:

```
If Not phone_number.MatchesRegexp("^[2-9]\d{2}-\d{4}$") Then
    MessageBox.Show("Not a valid phone number")
End If
```

Example program ValidatePhone, which is available for download on the book's web site, demonstrates the `MatchesRegexp` extension method. It also uses the `MatchesRegexp` method to define the following three additional extension methods that determine whether a string looks like a valid 7- or 10-digit United States phone number. These methods simply call the `MatchesRegexp` method, passing it appropriate regular expressions.

```
' Return True if a String looks like a 7-digit US phone number.
<Extension()> _
Public Function IsValidPhoneNumber7digit(ByVal the_string As String) _
 As Boolean
    Return the_string.MatchesRegexp("^[2-9]\d{2}-\d{4}$")
End Function

' Return True if a String looks like a 10-digit US phone number.
<Extension()> _
Public Function IsValidPhoneNumber10digit(ByVal the_string As String) _
 As Boolean
    Return the_string.MatchesRegexp("^([2-9]\d{2}-){2}\d{4}$")
End Function

' Return True if a String looks like a 7- or 10-digit US phone number.
<Extension()> _
Public Function IsValidPhoneNumberUS(ByVal the_string As String) _
 As Boolean
    Return IsValidPhoneNumber7digit(the_string) OrElse _
            IsValidPhoneNumber10digit(the_string)
End Function
```

If you build a class and later need to change its features, it's usually easiest to modify its code directly. That will cause less confusion than extension methods, which may lie in some obscure module that seems unrelated to the original class. If you need to add methods to existing classes that you cannot modify directly, such as `String` and other classes defined by Visual Basic and the .NET Framework, extension methods can be extremely useful.

Lambda Functions

Lambda functions are functions that are defined in a single statement.

A lambda function's definition begins with the `Function` keyword. Next comes the function's name and any parameters that it requires, followed by a single statement that evaluates to the value that the function should return.

Example program LambdaFunction, which is available for download on the book's web site, contains the following code fragment:

```
' Define a lambda function that adds two integers.
Dim plus = Function(i1 As Integer, i2 As Integer) i1 + i2

' Get A and B.
Dim A As Integer = Integer.Parse(txtA.Text)
Dim B As Integer = Integer.Parse(txtB.Text)

' Call the lambda function to calculate the result.
txtResult.Text = plus(A, B).ToString
```

This code starts by defining a variable named `plus`. This variable holds a reference to a lambda function that takes two integers as parameters and returns their sum. The code then gets input values from text boxes and calls the `plus` function, passing it those values. It converts the result into a string and displays it in the `txtResult` text box.

This example creates a variable to hold a reference to a lambda function and then invokes the function by using that variable. It could just as easily have invoked the lambda function itself while defining it.

Example program InlineFunction, which is also available for download on the book's web site, demonstrates this in the following line of code. This line defines the function and invokes it without ever saving a reference to it.

```
txtResult.Text = _
    (Function(i1 As Integer, i2 As Integer) i1 + i2)(A, B).ToString
```

Because lambda functions are declared in a single line of code, they are also called *inline functions*. A lambda function defined inside a subroutine or function is also sometimes called a *nested function*.

> To the extent that anyone distinguishes between lambda and inline functions, the second example is more properly called an inline function because the function is contained within the line that uses it and is never given a name.

No matter which method the program uses to define a lambda function, it could then pass the function to another routine that will later call the function. For example, suppose subroutine `PerformCalculations` takes as a parameter the function it should use to perform its calculations. The following code shows how a program could call subroutine `PerformCalculations` while passing it the previous lambda functions:

```
' Define the plus function.
Dim plus = Function(i1 As Integer, i2 As Integer) i1 + i2

' Call PerformCalculations passing it the lambda function.
PerformCalculations(plus)

' Call PerformCalculations passing it an inline lambda function.
PerformCalculations(Function(i1 As Integer, i2 As Integer) i1 + i2)
```

Inline functions were invented for use by LINQ and are most often used with LINQ. For more information about LINQ, see Chapter 21, "LINQ."

Relaxed Delegates

If you assign a variable to the value in a variable of a different type, Visual Basic automatically converts the value into the correct type under some circumstances. If you set a Single variable equal to an Integer variable, Visual Basic automatically converts the Integer into a Single.

If `Option Strict` is off, then you can also do the reverse: if you assign an Integer variable equal to a Single variable, Visual Basic converts the Single into an Integer (if it can).

In a similar manner, relaxed delegates let Visual Basic convert method parameters from one data type to another under certain circumstances. If the code invokes a subroutine by using a delegate, Visual Basic tries to convert parameters when it can. Probably the easiest way to understand how this works is to consider an example.

The following code declares a delegate type named `TestDelegate`. Methods that match this delegate should be subroutines that take a Control as a parameter.

```
' Declare the delegate type.
Private Delegate Sub TestDelegate(ByVal ctl As Control)
```

The following code defines three subroutines that take parameters of different types. The first takes an Object as a parameter, the second takes a TextBox, and the third takes no parameters. Note that the first subroutine cannot work if `Option Strict` is on. `Option Strict` disallows late binding so the code cannot use a `Text` property provided by a generic Object.

```
' A more general parameter type.
Private Sub Test1(ByVal obj As Object)
    obj.Text = "Test1" ' Needs Option Strict off.
End Sub

' A more specific parameter type.
```

347

```
    Private Sub Test2(ByVal text_box As TextBox)
        text_box.Text = "Test2"
    End Sub

    ' Parameter omitted.
    Private Sub Test3()
        txtField3.Text = "Test3"
    End Sub
```

The following code declares three variables of the `TestDelegate` type and sets them equal to the addresses of the three test subroutines:

```
    ' Make variables of the delegate type
    ' hold references to the subroutines.
    Private Sub1 As TestDelegate = AddressOf Test1
    Private Sub2 As TestDelegate = AddressOf Test2 ' Needs Option Strict off.
    Private Sub3 As TestDelegate = AddressOf Test3
```

The first assignment works even though subroutine `Test1` does not exactly match the delegate type. Subroutine `Test1` takes an Object as a parameter and `TestDelegate` takes a Control as a parameter. When Visual Basic invokes the `Sub1` variable, it will pass the subroutine a Control object as a parameter because `Sub1` has type `TestDelegate`, and that type takes a Control as a parameter. A Control is a type of Object, so Visual Basic can safely pass a Control in place of an Object parameter. That allows the code assigning `Sub1` to the address of subroutine `Test1` to work.

The second line of code that assigns variable `Sub2` to subroutine `Test2` works only if `Option Strict` is off. When Visual Basic invokes the `Sub2` variable, it will pass the subroutine a Control object as a parameter because `Sub1` has type `TestDelegate`, and that type takes a Control as a parameter. Subroutine `Test2` takes a TextBox as a parameter, and not every Control is a TextBox. That means at design time Visual Basic cannot tell whether it can safely invoke the `Sub2` delegate so, if `Option Strict` is on, Visual Basic flags this assignment as an error. If `Option Strict` is off, Visual Basic allows the assignment, although the program will crash if it tries to pass a control that is not a TextBox into `Sub2` at runtime.

> This is similar to setting a TextBox variable equal to the value in a Control variable. If `Option Strict` is on, Visual Basic will not allow that assignment.

The final assignment sets variable `Sub3` to the address of subroutine `Test3`. Subroutine `Test3` takes no parameters. This is a special case that Visual Basic allows: if the method does not need to use the parameters specified by the delegate, it can omit its parameters. Note that the method must omit all or none of the parameters; it cannot omit some and not others.

The following code invokes the subroutines pointed to by the three `TestDelegate` variables, passing each a reference to a different TextBox. `Sub1` treats `txtField1` as an Object, `Sub2` treats `txtField2` as a TextBox, and `Sub3` ignores its parameter completely.

```
    Sub1(txtField1)
    Sub2(txtField2)
    Sub3(txtField3)
    ' Test3(txtField3) ' This doesn't work.
```

The final line of code, that invokes subroutine Test3 directly, doesn't work. Omitting the parameter list from a method only works if you access the method from a delegate. If you call the method directly, the parameter list must match the one declared for the method.

Example program RelaxedDelegates, which is available for download on the book's web site, demonstrates this code.

All of these relaxed delegate rules are somewhat confusing. They give you a little more flexibility, but they can make the code a lot more confusing. You may wonder why you should bother. In fact, if you use delegates such as those shown in this example, you might want to avoid using relaxed delegates to keep the code easier to understand.

These rules also apply to event handlers, and in that context they are fairly useful. They let you change an event handler's parameter types to make them more general or more specific, or to omit them.

The following code shows a simple, standard Button Click event handler. It takes two parameters of types Object and EventArgs. In this example, the code reads a text file into a text box.

```
Private Sub btnLoad_Click(ByVal sender As System.Object, _
 ByVal e As System.EventArgs) Handles btnLoad.Click
    txtContents.Text = System.IO.File.ReadAllText(txtFile.Text)
End Sub
```

Many event handlers must deal explicitly with the control that raised their event. In that case, the first thing the event handler usually does is to convert the generic sender parameter from an Object into a more specific control type.

The following code defines a Button Click event handler similar to the previous one but this one declares its sender parameter to be of type Button. This works as long as the event is actually raised by a Button, so the sender parameter really is a button. If you were to attach this event handler to a TextBox's TextChanged event, the program would crash when Visual Basic tries to convert the TextBox into a Button when it raises the event.

```
' Needs Option Strict off.
Private Sub btnLoad2_Click(ByVal btn As Button, _
 ByVal e As Object) Handles btnLoad2.Click
    txtContents.Text = System.IO.File.ReadAllText(txtFile.Text)
End Sub
```

Note that this version requires Option Strict off. If Option Strict is on, Visual Basic will not allow this subroutine to handle a Button's Click event. This is similar to the way Option Strict prevents you from setting a Button variable equal to a generic Object variable.

The previous code declares its parameters to have a more restrictive type than those passed into it by the control raising the event. You can also make the parameters more general. You could declare the e parameter to be of type Object instead of EventArgs. Usually, that doesn't help you much. It could be useful if you want to use the same event handler to catch different kinds of events that provide different types of arguments, but it's hard to imagine a really good example where that wouldn't be confusing.

A more common situation is where the event handler ignores its parameters completely. Usually each Button has its own Click event handler so you don't need to look at the parameters to figure out which button was clicked.

The following code defines a Button Click event handler that takes no parameters. When the user clicks the btnLoad3 Button, Visual Basic doesn't pass the event handler any parameters. This code is easier to read than the previous versions, partly because the Sub statement fits all on one line.

```
Private Sub btnLoad3_Click() Handles btnLoad3.Click
    txtContents.Text = System.IO.File.ReadAllText(txtFile.Text)
End Sub
```

Example program RelaxedEventHandlers, which is available for download on the book's web site, demonstrates relaxed event handlers.

Relaxed delegates may add more confusion than they're worth if you use delegate variables, but they can be useful for simplifying event handlers. Declaring parameters with a more specific type (for example, Button instead of Object) can make the code easier to write and understand, although it has the large drawback of requiring Option Strict off. Omitting parameters when you don't need them is an even better technique. It simplifies the code without forcing you to turn Option Strict off.

Partial Methods

A partial method is a private subroutine that is declared in one place and implemented in another. The code includes a subroutine declaration that uses the Partial keyword and that has an empty body. Another part of the class declares the method again, this time without the Partial keyword and providing a method body.

What's the point? Partial methods were invented for the convenience of code generators. The details are somewhat technical and not relevant for developers at this point so they are only briefly considered here.

Partial methods were designed as a more efficient alternative to events. Rather than raising an event for a class to catch, the generated code can call a partial method. If the method has no body, the compiler optimizes the call away and nothing happens, much as would be the case if an object did not catch an event.

Originally Microsoft meant to allow a partial method declaration to include a default body to execute in case no other body was defined. That feature didn't make the cut for Visual Basic 2008. Perhaps it will appear in a future version.

The following list summarizes the differences between event handlers and partial methods.

❑ An event can be caught by any number of event handlers but a partial method has only one body.

❑ An event can be declared Public, Private, or Friend but a partial method must be Private.

❑ Raising an event requires some overhead even if no event handlers catch it. If a partial method has no body, the compiler ignores calls to it so there's no overhead.

❑ A program can add and remove event handlers at runtime but a partial method is given a body or not at design time.

❑ Just about any piece of code can catch an object's events but only that object can see its partial method (because it's private).

Partial methods are really intended for use by code generators, but it's conceivable that you might find a use for them. It's also worth knowing about them so you know what's going on if you see them in automatically generated code.

Example program PartialMethods, which is available for download on the book's web site, uses the following code to define the `TestMethod` subroutine:

```
Public Class Form1
    ' Define the TestMethod subroutine without a method body.
    Partial Private Sub TestMethod(ByVal msg As String)

    End Sub

    ' Other code omitted...
End Class
```

The example uses the following code in a separate module to define the method's body:

```
Partial Public Class Form1
    ' Define the implementation for TestMethod.
    Private Sub TestMethod(ByVal msg As String)
        MessageBox.Show(msg)
    End Sub
End Class
```

When you click the program's button, the code calls subroutine `TestMethod`, passing it a string to display. If you comment out the method's body definition, the program ignores this call.

There are a couple of ways you can achieve results similar to methods without using partial methods. First, you can make a class raise an event. If no code catches the event, the event is essentially ignored much as a partial method call is ignored if you have not defined the method body.

A second approach is to decorate a method with the `Conditional` attribute. In that case, Visual Basic removes the method and any calls to it from the code if the condition is not satisfied. The AttributeConditional example program, which is available for download on the book's web site, demonstrates this approach. For more information about that example, see the section "Attribute_List" earlier in this chapter.

Partial methods are also somewhat similar to interfaces, which also define a method's signature but don't provide an implementation.

Finally, partial methods are similar to classes with overridable methods. Any derived classes can override the overridable methods to give them method bodies. If the parent class gives the method a body, the child class can leave it alone and inherit the parent's version as a default.

Partial methods are really intended for use by code generators, but you can use them if you wish.

Summary

Subroutines and functions let you break an application into manageable, reusable pieces. A subroutine performs a series of commands. A function performs a series of commands and returns a value.

Property procedures use paired functions and subroutines to provide the behavior of a simple property using routines.

These form the fundamental building blocks of the procedural part of an application. Chapters 25 through 29 explain the other half of an application's structure: the objects that encapsulate the application's behavior. Together, the program's objects and its procedural subroutines and functions define the application.

This chapter explains how to break an otherwise unwieldy expanse of code into subroutines and functions of manageable size. It also explains techniques related to subroutines and functions, such as extension methods and relaxed delegates, that let you use existing classes and events in new ways.

The chapters so far have not explained how to write anything other that straight-line code that executes one statement after another with no deviation. Most programs need to follow more complex paths of execution, performing some statements only under certain conditions and repeating others a given number of times. Chapter 18, "Program Control Statements," describes the statements that a Visual Basic program uses to control the flow of code execution. These include decision statements (`If Then Else`, `Select Case`, `IIF`, `Choose`) and looping statements (`For Next`, `For Each`, `Do While`, `While Do`, `Repeat Until`).

18

Program Control Statements

Program control statements tell an application which other statements to execute under a particular set of circumstances. They control the path that execution takes through the code. They include commands that tell the program to execute some statements but not others and to execute certain statements repeatedly.

The two main categories of control statements are *decision* (or *conditional*) *statements* and *looping statements*. The following sections describe in detail the decision and looping statements provided by Visual Basic .NET.

Decision Statements

A decision or conditional statement represents a branch in the program. It marks a place where the program can execute one set of statements or another, or possibly no statements at all, depending on some condition. These include `If`, `Choose`, and `Select Case` statements.

Single Line If Then

The single-line `If Then` statement has two basic forms. The first allows the program to execute a single statement if some condition is true. The syntax is as follows:

```
If condition Then statement
```

If the condition is true, the program executes the statement. In the most common form of single-line `If Then` statement, the statement is a single simple command (such as assigning a value to a variable or calling a subroutine).

The following example checks the `emp` object's `IsManager` property. If `IsManager` is `True`, the statement sets the `emp` object's `Salary` property to 90,000.

```
If emp.IsManager Then emp.Salary = 90000
```

The second form of the single-line `If Then` statement is more confusing and generally harder to debug and maintain. To prevent unnecessary confusion, many programmers switch to the multiline `If Then` statement described in the next section when the simple single-statement version won't work.

The second form of single-line `If Then` statement uses the `Else` keyword. The syntax is as follows:

```
If condition Then statement1 Else statement2
```

If the condition is true, the code executes the first statement. If the condition is false, the code executes the second statement. The decision about which statement to execute is an either-or decision; the code executes one statement or the other, but not both.

This type of single-line `If Then Else` statement can be confusing if it is too long to easily see in the code editor. For longer statements, a multiline `If Then Else` statement is easier to understand and debug. The performance of single-line and multiline `If Then Else` statements is comparable (in one test, the multiline version took only about 80 percent as long), so you should use the one that is easiest for you to read.

The statements executed by a single-line `If Then` statement can be simple commands (such as assigning a value to a variable). They can also be a series of simple statements separated by colons on the same line. For example, the following code tests the value of the Boolean variable `is_new_customer`. If `is_new_customer` is true, the program calls the customer object's `Initialize` method and then calls its `Welcome` method.

```
If is_new_customer Then customer.Initialize() : customer.Welcome()
```

Using more than one simple statement separated by colons like this can be perplexing. It gets even worse if you use single-line `If Then Else`, as shown here:

```
If order.Valid() Then order.Save() : order.Post() Else order.order.Delete()
```

The single-line `If Then` statement can also include `Else If` clauses. For example, the following code examines the variable X. If X is 1, the program sets variable `txt` to "One." If X has the value 2, the program sets `txt` to "Two." If X is not 1 or 2, the program sets `txt` to a question mark.

```
Dim txt As String
If X = 1 Then txt = "One" Else If X = 2 Then txt = "Two" Else txt = "?"
```

The code can include as many `Else If` clauses as you like, and each execution statement can be composed of multiple simple statements separated by colons. However, confusing code such as these examples can lead to puzzling bugs that are easy to avoid if you use multiline `If Then` statements instead.

In summary, if you can write a simple single-line `If Then` statement with no `Else If` or `Else` clauses, and the whole thing fits nicely on the line so that it's easy to see the whole thing without confusion, go ahead. If the statement is too long to read easily, contains `Else If` or `Else` clauses, or executes a series of statements separated by colons, you are usually better off using a multiline `If Then` statement. It may take more lines of code, but the code will be easier to read, debug, and maintain later.

Multiline If Then

A multiline `If Then` statement can execute more than one line of code when a condition is true. The syntax for the simplest form of multiline `If Then` statement is as follows:

```
If condition Then
    statements...
End If
```

If the condition is true, the program executes all the commands that come before the `End If` statement.

Like the single-line `If Then` statement, the multiline version can include `Else If` and `Else` clauses. For possibly historical reasons, `ElseIf` is spelled as a single word in the multiline `If Then` statement. The syntax is as follows:

```
If condition1 Then
    statements1...
ElseIf condition2
    statements2...
Else
    statements3...
End If
```

If the first condition is true, the program executes the first set of statements. If the first condition is false, the code examines the second condition and, if that one is true, the code executes the second set of statements. The program continues checking conditions until it finds one that is true and it executes the corresponding code.

If the program reaches an `Else` statement, it executes the corresponding code. If the program reaches the `End If` statement without finding a true condition or an `Else` clause, it doesn't execute any of the statement blocks.

It is important to understand that the program exits the `If Then` construction immediately after it has executed any block of statements. It does not examine the other conditions. This saves the program some time and is particularly important if the conditions involve functions. If each test calls a relatively slow function, skipping these later tests can save the program a significant amount of time.

Select Case

The `Select Case` statement lets a program execute one of several pieces of code depending on a single value. The basic syntax is as follows:

```
Select Case test_value
    Case comparison_expression1
        statements1
    Case comparison_expression2
        statements2
    Case comparison_expression3
        statements3
    ...
    Case Else
        else_statements
End Select
```

If `test_value` matches `comparison_expression1`, the program executes the statements in the block `statements1`. If `test_value` matches `comparison_expression2`, the program executes the statements in the block `statements2`. The program continues checking the expressions in the `Case` statements in order until it matches one, or it runs out of `Case` statements.

If `test_value` doesn't match any of the expressions in the `Case` statements, the program executes the code in the `else_statements` block. Note that you can omit the `Case Else` section. In that case, the program executes no code if `test_value` doesn't match any of the expressions.

`Select Case` is functionally equivalent to an `If Then Else` statement. The following code does the same thing as the previous `Select Case` code:

```
If test_value = comparison_expression1 Then
    statements1
ElseIf test_value = comparison_expression2 Then
    statements2
ElseIf test_value = comparison_expression3 Then
    statements3
...
Else
    else_statements
End If
```

`Select Case` is sometimes easier to understand than a long `If Then Else` statement. It is often faster as well, largely because `Select Case` doesn't need to reevaluate `test_value` for every `Case` statement. If `test_value` is a simple variable, the difference is insignificant, but if `test_value` represents a slow function call, the difference can be important. For example, suppose `test_value` represents a function that opens a database and looks up a value. The `Select Case` version will find the value once and use it in each comparison while the `If Then` version would reopen the database for each comparison.

The previous `If Then` example assumes the comparison expressions are constants. A comparison expression can also specify ranges using the `To` and `Is` keywords, and include a comma-separated list of expressions. These forms are described in the following sections. The final section describing `Select Case` discusses using enumerated values to control `Select Case` statements.

To

The `To` keyword specifies a range of values that `test_value` should match. The following code examines the variable `num_items`. If `num_items` is between 1 and 10, the program calls subroutine `ProcessSmallOrder`. If `num_items` is between 11 and 100, the program calls subroutine `ProcessLargeOrder`. If `num_items` is less than 1 or greater than 100, the program beeps.

```
Select Case num_items
    Case 1 To 10
        ProcessSmallOrder()
    Case 11 To 100
        ProcessLargeOrder()
    Case Else
        Beep()
End Select
```

Is

The `Is` keyword lets you perform logical comparisons using the test value. The word `Is` takes the place of the test value in the comparison expression. For example, the following code does almost the same things as the previous version. If the value `num_items` is less than or equal to 10, the program calls subroutine `ProcessSmallOrder`. If the first `Case` clause doesn't apply and `num_items` is less than or equal to 100, the program calls subroutine `ProcessLargeOrder`. If neither of these cases applies, the program beeps.

```
Select Case num_items
    Case Is <= 10
        ProcessSmallOrder()
    Case Is <= 100
        ProcessLargeOrder()
    Case Else
        Beep()
End Select
```

This version is slightly different from the previous one. If `num_items` is less than 1, this code calls subroutine `ProcessSmallOrder` whereas the previous version beeps.

You can use the operators =, <>, <, <=, >, and >= in an `Is` clause. (In fact, if you use a simple value in a `Case` clause as in `Case 7`, you are implicitly using `Is =` as in `Case Is = 7`.)

Comma-Separated Expressions

A comparison expression can include a series of expressions separated by commas. If the test value matches any of the comparison values, the program executes the corresponding code.

For example, the following code examines the `department_name` variable. If `department_name` is `R & D`, `Test`, or `Computer Operations`, the code adds the text `Building 10` to the `address_text` string. If `department_name` is `Finance`, `Purchasing`, or `Accounting`, the code adds `Building 7` to the address. More `Case` clauses could check for other `department_name` values and the code could include an `Else` statement.

```
Select Case department_name
    Case "R & D", "Test", "Computer Operations"
        address_text &= "Building 10"
    Case "Finance", "Purchasing", "Accounting"
        address_text &= "Building 7"
    ...
End Select
```

Note that you cannot use comma-separated expressions in a `Case Else` clause. For example, the following code doesn't work:

```
Case Else, "Corporate" ' This doesn't work.
```

You can mix and match constants, `To`, and `Is` expressions in a single `Case` clause, as shown in the following example. This code checks the variable `item_code` and calls subroutine `DoSomething` if the value is less than 10, between 30 and 40 inclusive, exactly equal to 100, or greater than 200.

```
Select Case item_code
    Case Is < 10, 30 To 40, 100, Is > 200
        DoSomething()
End Select
```

Complex comparison expressions are sometimes difficult to read. If an expression is too complicated, you should consider rewriting the code to make it easier to understand. Storing values in temporary variables can help.

Enumerated Values

`Select Case` statements work very naturally with lists of discrete values. You can have a separate `Case` statement for each value, or you can list multiple values for one `Case` statement in a comma-separated list.

Enumerated types defined by the `Enum` statement also work with discrete values, so they work well with `Select Case` statements. The enumerated type defines the values and the `Select Case` statement uses them, as shown in the following code fragment:

```
Private Enum JobStates
    Pending
    Assigned
    InProgress
    ReadyToTest
    Tested
    Released
End Enum
Private m_JobState As JobStates
...
Select Case m_JobState
    Case Pending
        ...
    Case Assigned
        ...
    Case InProgress
        ...
    Case ReadyToTest
        ...
    Case Tested
        ...
    Case Released
        ...
End Select
```

To catch bugs when changing an enumerated type, many developers include a `Case Else` statement that throws an exception. If you later add a new value to the enumerated type but forget to add corresponding code to the `Select Case` statement, the `Select Case` statement throws an error when it sees the new value, so you can fix the code.

For more information on enumerated types, see the section "Enumerated Data Types" in Chapter 15, "Data Types, Variables, and Constants."

IIf

The `IIf` statement evaluates a Boolean expression and then returns one of two values, depending on whether the expression is true or false. This statement may look more like an assignment statement or a function call than a decision statement such as `If Then`.

The syntax is as follows:

```
variable = IIf(condition, value_if_true, value_if_false)
```

For example, the following code examines an `Employee` object's `IsManager` property. If `IsManager` is `True`, the code sets the employee's `Salary` to 90,000. If `IsManager` is `False`, the code sets the employee's `Salary` to 10,000.

```
emp.Salary = IIf(emp.IsManager, 90000, 10000)
```

Note that the `IIf` statement returns an Object data type. If you have `Option Strict` turned on, Visual Basic will not allow this statement, because it assigns a result of type Object to an Integer variable. To satisfy Visual Basic, you must explicitly convert the value into an Integer, as in the following code:

```
emp.Salary = CInt(IIf(emp.IsManager, 90000, 10000))
```

The `IIf` statement has several drawbacks. First, it is confusing. When you type an `IIf` statement, IntelliSense will remind you that its parameters give a condition, a true value, and a false value. When you are reading the code, however, you must remember what the different parts of the statement mean. If you use `IIf` in some other statement, the chances for confusion increase. For example, consider the following code:

```
For i = 1 To CType(IIf(employees_loaded, num_employees, 0), Integer)
    ' Process employee i.
    ...
Next i
```

Code is generally much easier to understand if you replace `IIf` with an appropriate `If Then` statement.

Another drawback to `IIf` is that it evaluates both the true and false values whether the condition is true or false. For example, consider the following code. If the Boolean `use_groups` is `True`, the code sets `num_objects` to the result of the `CountGroups` function. If `use_groups` is `False`, the code sets `num_objects` to the result of the `CountIndividuals` function. `IIf` evaluates both functions no matter which value it actually needs. If the functions are time-consuming or executed inside a large loop, this can waste a lot of time.

```
num_objects = CType( _
    IIf(use_groups, CountGroups(), CountIndividuals()), Integer)
```

For an even more dangerous example, consider the following code. If `data_loaded` is `True`, this statement sets `num_loaded = num_employees`. If `data_loaded` is `False`, the code sets `num_loaded` to the value returned by the `LoadEmployees` function (which loads the employees and returns the number of employees it loaded).

```
num_loaded = CType(IIf(data_loaded, num_employees, LoadEmployees()), Integer)
```

IIf evaluates both the value `num_employees` and the value `LoadEmployees()` no matter what. If the employees are already loaded, `IIf` calls `LoadEmployees()` to load the employees again, ignores the returned result, and sets `num_loaded = num_employees`. `LoadEmployees` may waste quite a while loading the data that is already loaded. Even worse, the program may not be able to handle loading the data when it is already loaded.

A final drawback to `IIf` is that it is slower than a comparable `If Then Else` statement. In one test, `IIf` took roughly twice as long as a comparable `If Then` statement.

One case where you can argue that `IIf` is easier to understand is when you have a long series of very simple statements. In that case, `IIf` statements may allow you to easily see the common features in the code and notice if anything looks wrong. For example, the following code initializes several text boxes using strings. It uses an `IIf` statement to set a text box's value to `<Missing>` if the string is not yet initialized.

```
txtLastName.Text = IIf(last_name Is Nothing, "<Missing>", last_name)
txtFirstName.Text = IIf(first_name Is Nothing, "<Missing>", first_name)
txtStreet.Text = IIf(street Is Nothing, "<Missing>", street)
txtCity.Text = IIf(city Is Nothing, "<Missing>", city)
txtState.Text = IIf(state Is Nothing, "<Missing>", state)
txtZip.Text = IIf(zip Is Nothing, "<Missing>", zip)
```

To avoid confusing side effects, use `IIf` only if it makes the code easier to understand.

If

The `If` statement resolves some of the problems with the `IIf` statement. It evaluates a Boolean expression and then returns one of two values, depending on whether the expression is true or false, as `IIf` does. The difference is that `If` only evaluates the return value that it actually returns.

For example, the following code examines an `Employee` object's `IsManager` property. If `IsManager` is `True`, the code sets the employee's `Salary` to the result returned by the `GetManagerSalary` function and never calls function `GetEmployeeSalary`. If `IsManager` is `False`, the code sets the employee's `Salary` to the result of the `GetEmployeeSalary` function and never calls function `GetManagerSalary`. This is different from the way `IIf` works because `IIf` would call both functions no matter which value it was going to return. If the functions are time-consuming, using `If` can make the code more efficient.

```
emp.Salary = If(emp.IsManager, GetManagerSalary(), GetEmployeeSalary())
```

Other than the fact that `If` doesn't evaluate both of its possible return values, it behaves just as `IIf` does. For more information, see the previous section.

Choose

The `IIf` statement uses a Boolean expression to pick between two values. The `Choose` statement uses an integer to decide among any number of options. The syntax is as follows:

```
variable = Choose(index, value1, value2, value3, value4, ...)
```

If the `index` parameter is 1, `Choose` returns the first value, `value1`; if `index` is 2, `Choose` returns `value2`; and so forth. If `index` is less than 1 or greater than the number of values in the parameter list, `Choose` returns `Nothing`.

This statement has the same drawbacks as `IIf`. `Choose` evaluates all of the result values no matter which one is selected, so it can slow performance. It can be particularly confusing if the values are functions with side effects.

Often `Choose` is more confusing than a comparable `Select Case` statement. If the values look dissimilar (mixing integers, objects, function calls, and so forth), involve complicated functions, or are wrapped across multiple lines, a `Select Case` statement may be easier to read.

However, if the `Choose` statement's values are short and easy to understand, and the statement contains many values, the `Choose` statement may be easier to read. For example, the following `Choose` and `Select Case` statements do the same thing. Because the `Choose` statement's values are short and easy to understand, this statement is easy to read. The `Select Case` statement is rather long. If the program had more choices, the `Select Case` statement would be even longer, making it more difficult to read.

```
fruit = Choose(index, "apple", "banana", "cherry", "date")

Select Case index
    Case 1
        fruit = "apple"
    Case 2
        fruit = "banana"
    Case 3
        fruit = "cherry"
    Case 4
        fruit = "date"
End Select
```

Although it's not always clear whether a `Choose` statement or a `Select Case` statement will be easier to read, `Select Case` is certainly faster. In one test, `Choose` took more than five times as long as `Select Case`. If the code lies inside a frequently executed loop, the speed difference may be an issue.

`Choose` and `Select Case` are not your only options. You can also store the program's choices in an array, and then use the index to pick an item from the array. For example, the following code stores the strings from the previous example in the values array. It then uses the index to pick the right choice from the array.

```
Dim fruit_names() As String = {"apple", "banana", "cherry", "date"}

fruit = fruit_names(index - 1)
```

Notice that the code subtracts 1 from the index when using it to pick the right choice. The `Choose` *statement indexes its values starting with 1, but arrays in Visual Basic .NET start with index 0. Subtracting 1 allows the program to use the same index values used in the previous example.*

This version makes you think about the code in a different way. It requires that you know that the `fruit_names` array contains the names of the fruits that the program needs. If you understand the array's purpose, then the assignment statement is easy to understand.

The assignment code is even slightly faster than `Select Case`, at least if you can initialize the `fruit_names` array ahead of time.

If you find `Choose` easy to understand and it doesn't make your code more difficult to read in your particular circumstances, by all means use it. If `Select Case` seems clearer, use that. If you will need to perform the assignment many times and pre-building an array of values makes sense, using a value array might improve your performance.

Looping Statements

Looping statements make the program execute a series of statements repeatedly. The loop can run for a fixed number of repetitions, run while some condition is true, or run while some condition is false.

Broadly speaking, there are two types of looping statement. `For` loops execute a certain number of times that (in theory at least) is known. For example, a `For` loop may execute a series of statements exactly 10 times. Or, it may execute the statements once for each object in a certain collection. If you know how many items are in the collection, you know the number of times the loop will execute.

A `While` loop executes while a condition is true or until a condition is met. Without a lot more information about the application, it is impossible to tell how many times the code will execute. For example, suppose a program uses the `InputBox` function to get names from the user until the user clicks the Cancel button. In that case, there's no way for the program to guess how many values the user will enter before canceling.

The following sections describe the looping statements supported by Visual Basic .NET. The next two sections describe `For` loops, and the sections after those describe `While` loops.

Example program Loops, which is available for download on the book's web site, demonstrates some of these kinds of loops.

For Next

The `For Next` loop is the most common type of looping statement in Visual Basic. The syntax is as follows:

```
For variable [As data_type] = start_value To stop_value [Step increment]
    statements
    [Exit For]
    statements
    [Continue For]
    statements
Next [variable]
```

The value `variable` is the looping variable that controls the loop. When the program reaches the `For` statement, it sets variable equal to `start_value`. It then compares variable to `stop_value`. If variable has passed `stop_value`, the loop exits. Note that the loop may not execute even once depending on the start and stop values.

For example, the following loop runs for the values employee_num = 1, employee_num = 2, . . . , employee_num = num_employees. If the program has not loaded any employees so num_employees = 0, the code inside the loop is not executed at all.

```
For employee_num = 1 To num_employees
    ProcessEmployee(employee_num)
Next employee_num
```

After it compares variable to stop_value, the program executes the statements inside the loop. It then adds increment to variable and starts the process over, again comparing variable to stop_value. If you omit increment, the program uses an increment of 1.

Note that increment can be negative or a fractional number, as in the following example:

```
For i As Integer = 3 To 1 Step -0.5
    Debug.WriteLine(i)
Next i
```

If increment is positive, the program executes as long as variable <= stop_value. If increment is negative, the program executes as long as variable >= stop_value. This means that the loop would not execute infinitely if increment were to move variable away from stop_value. For example, in the following code start_value = 1 and increment = −1. The variable i would take the values i = 1, i = 0, i = −1, and so forth, so i will never reach the stop_value of 2. However, because increment is negative, the loop only executes while i >= 2. Because i starts with the value 1, the program immediately exits and the loop doesn't execute at all.

```
For i As Integer = 1 To 2 Step -1
    Debug.WriteLine(i)
Next i
```

Visual Basic doesn't require that you include the variable's name in the Next statement, although this makes the code easier to read. If you do specify the name in the Next statement, it must match the name you use in the For statement.

If you do not specify the looping variable's data type in the For statement and Option Explicit is on and Option Infer is off, then you must declare the variable before the loop. For example, the following loop declares the variable i outside of the loop:

```
Dim i As Integer

For i = 1 To 10
    Debug.WriteLine(i)
Next i
```

Declaring the looping variable in the For statement is a good practice. It limits the scope of the variable so you don't need to remember what the variable is for in other pieces of code. It keeps the variable's declaration close to the code where it is used, so it's easier to remember the variable's data type. It also lets you more easily reuse counter variables without fear of confusion. If you have several loops that need an arbitrarily named looping variable, they can all declare and use the variable i without interfering with each other.

The program calculates its `start_value` and `stop_value` before the loop begins and it never recalculates them, even if their values change. For example, the following code loops from 1 to `this_customer.Orders(1).NumItems`. The program calculates `this_customer.Orders(1) .NumItems` before executing the loop and doesn't recalculate that value even if it later changes. This saves the program time, particularly for long expressions such as this one, which could take a noticeable amount of time to reevaluate each time through a long loop.

```
For item_num As Integer = 1 To this_customer.Orders(1).NumItems
    this_customer.ProcessItem(item_num)
Next item_num
```

If you must reevaluate `stop_value` every time the loop executes, use a `While` loop instead of a `For` loop.

The `Exit For` statement allows the program to leave a `For` loop before it would normally finish. For example, the following code loops through the `employees` array. When it finds an entry with the `IsManager` property set to `True`, it saves the employee's index and uses `Exit For` to immediately stop looping.

```
Dim manager_index As Integer

For i As Integer = employees.GetLowerBound(0) To _
                employees.GetUpperBound(0)
    If employees(i).IsManager Then
        manager_index = i
        Exit For
    End If
Next i
```

The `Exit For` statement exits only the `For` loop immediately surrounding the statement. If a `For` loop is nested within another `For` loop, the `Exit For` statement only exits the inner loop.

The `Continue For` statement makes the loop jump back to its `For` statement, increment its looping variable, and start the loop over again. This is particularly useful if the program doesn't need to execute the rest of the steps within the loop's body and wants to start the next iteration quickly.

Your code can change the value of the control variable inside the loop, but that's generally not a good idea. The `For Next` loop has a very specific intent, and modifying the control variable inside the loop violates that intent, making the code more difficult to understand and debug. If you must modify the control variable in more complicated ways than are provided by a `For Next` loop, use a `While` loop instead. Then programmers reading the code won't expect a simple incrementing loop.

Non-integer For Next Loops

Usually a `For Next` loop's control variable is an integral data type such as an Integer or Long, but it can be any of the fundamental Visual Basic numeric data types. For example, the following code uses a variable declared as Single to display the values 1.0, 1.5, 2.0, 2.5, and 3.0:

```
For x As Single = 1 To 3 Step 0.5
    Debug.WriteLine(x.ToString("0.0"))
Next x
```

Because floating-point numbers cannot exactly represent every possible value, however, these data types are subject to rounding errors that can lead to unexpected results in For Next loops. The previous code works as you would expect, at least on my computer. The following code, however, has problems. Ideally, this code would display values between 1 and 2, incrementing them by 1/7. Because of rounding errors, however, the value of x after seven trips through the loop is approximately 1.85714316. The program adds 1/7 to this and gets 2.0000003065381731. This is greater than the stopping value 2, so the program exits the loop and the Debug statement does not execute for x = 2.

```
For x As Single = 1 To 2 Step 1 / 7
    Debug.WriteLine(x)
Next x
```

One solution to this type of problem is to convert the code into a loop that uses an Integer control variable. Integer variables do not have the same problems with rounding errors that floating-point numbers do, so you have more precise control over the values used in the loop.

The following code does roughly the same thing as the previous code. It uses an Integer control variable, however, so this loop executes exactly eight times as desired. The final value printed into the Output window by the program is 2.

```
Dim x As Single

x = 1
For i As Integer = 1 To 8
    Debug.WriteLine(x)
    x += CSng(1 / 7)
Next i
```

If you look at the value of variable x in the debugger, you will find that its real value during the last trip through the loop is roughly 2.0000001702989851. If this variable were controlling the For loop, the program would see that this value is greater than 2, so it would not display its final value.

For Each

A For Each loop iterates over the items in a collection, array, or other container class that supports For Each loops. The syntax is as follows:

```
For Each variable [As object_type] In group
    statements
    [Exit For]
    statements
    [Continue For]
    statements
Next [variable]
```

Here, group is a collection, array, or other object that supports For Each. As in For Next loops, the control variable must be declared either in or before the For statement if you have Option Explicit on and Option Infer off.

To support For Each, *the group object must implement the* System.Collections.IEnumerable *interface. This interface defines a* GetEnumerator *method that returns an enumerator. For more information, see the next section, "Enumerators."*

The control variable must be of a data type compatible with the objects contained in the group. If the group contains `Employee` objects, the variable could be an `Employee` object. It could also be a generic Object or any other class that readily converts into an `Employee` object. For example, if `Employee` inherits from the `Person` class, then the variable could be of type `Person`.

Visual Basic doesn't automatically understand what kinds of objects are stored in a collection or array until it tries to use them. If the control variable's type is not compatible with an object's type, the program generates an error when the `For Each` loop tries to assign the control variable to that object's value.

That means if a collection or array contains more than one type of object, the control variable must be of a type that can hold all of the objects. If the objects in a collection do not inherit from a common ancestor class, the code must use a control variable of type Object.

Like `For Next` loops, `For Each` loops support the `Exit For` and `Continue For` statements.

As is the case with `For Next` loops, declaring the looping variable in the `For Each` statement is a good practice. It limits the scope of the variable, so you don't need to remember what the variable is for in other pieces of code. It keeps the variable's declaration close to the code where it is used, so it's easier to remember the variable's data type. It also lets you more easily reuse counter variables without fear of confusion. If you have several loops that need an arbitrarily named looping variable, they can all declare and use the variable `obj`, `person`, or whatever else makes sense without interfering with each other.

Your code can change the value of the control variable inside the loop, but that has no effect on the loop's progress through the collection or array. The loop resets the variable to the next object inside the group and continues as if you had never changed the variable's value. To avoid confusion, don't bother.

Changes to a collection are immediately reflected in the loop. For example, if the statements inside the loop add a new object to the end of the collection, then the loop continues until it processes the new item. Similarly if the loop's code removes an item from the end of the collection (that it has not yet reached), the loop does not process that item.

The exact effect on the loop depends on whether the item added or removed comes before or after the object the loop is currently processing. For example, if you remove an item before the current item, the loop has already examined that item, so there is no change to the loop's behavior. If you remove an item after the current one, the loop doesn't examine it. If you remove the current item, the loop seems to get confused and exits without raising an error.

Additions and deletions to an array are *not* reflected in the loop. If you use a `ReDim` statement to add items to the end of the array, the loop does not process them. If you try to access those objects, however, the program generates an "Index was outside the bounds of the array" error.

If you use `ReDim` to remove items from the end of the array, the loop processes those items anyway! If you modify the values in the array, for example, you change an object's properties or set an array entry to an entirely new object, the loop sees the changes.

To avoid all these possible sources of confusion, don't modify a collection or array while a `For Each` loop is examining its contents.

One common scenario when dealing with collections is to examine every item in the collection and remove some of them. If you use a `For Each` loop, removing the loop's current item makes the loop exit prematurely.

Another approach that seems like it might work (but doesn't) is to use a `For Next` loop, as shown in the following code. If the code removes an object from the collection, the loop skips the next item because its index has been reduced by one and the loop has already passed that position in the collection. Worse still, the control variable `i` will increase until it reaches the original value of `employees.Count`. If the loop has removed any objects, the collection no longer holds that many items. The code tries to access an index beyond the end of the collection and throws an error.

```
Dim emp As Employee

For i As Integer = 1 To employees.Count
    emp = CType(employees(i), Employee)
    If emp.IsManager Then employees.Remove(i)
Next i
```

One solution to this problem is to use a `For Next` loop to examine the collection's objects in reverse order, as shown in the following example. In this version, the code never needs to use an index after it has been deleted because it is counting backwards. The index of an object in the collection also doesn't change unless that object has already been examined by the loop. The loop examines every item exactly once, no matter which objects are removed.

```
For i As Integer = employees.Count To 1 Step -1
    emp = CType(employees(i), Employee)
    If emp.IsManager Then employees.Remove(i)
Next i
```

Enumerators

An *enumerator* is an object that lets you move through the objects contained by some sort of container class. For example, collections, arrays, and hash tables provide enumerators. This section discusses enumerators for collections, but the same ideas apply for these other classes.

You can use an enumerator to view the objects in a collection but not to modify the collection itself. You can use the enumerator to alter the objects in the collection, but you can generally not use it to add, remove, or rearrange the objects in the collection.

Initially, an enumerator is positioned before the first item in the collection. Your code can use the enumerator's `MoveNext` method to step to the next object in the collection. `MoveNext` returns `True` if it successfully moves to a new object or `False` if there are no more objects in the collection.

The `Reset` method restores the enumerator to its original position before the first object, so you can step through the collection again.

The `Current` method returns the object that the enumerator is currently reading. Note that `Current` returns a generic Object, so you will probably need to use `CType` to convert the result into a more specific data type before you use it. Invoking `Current` throws an error if the enumerator is not currently reading any object. That happens if the enumerator is before the first object or after the last object.

The following example uses an enumerator to loop through the items in a collection named `m_Employees`. It declares an `Employee` variable named `emp` and an `IEnumerator` object named `employee_enumerator`. It uses the collection's `GetEnumerator` method to obtain an enumerator for the collection. The program then enters a `While` loop. If `employee_enumerator.MoveNext` returns `True`, the enumerator has successfully moved to the next object in the collection. As long as it has read an object, the program uses `CType` to convert the generic object returned by `Current` into an `Employee` object, and it displays the `Employee` object's `Title`, `FirstName`, and `LastName` values. When it has finished processing all of the objects in the collection, `employee_enumerator.MoveNext` returns `False` and the `While` loop ends.

```
Dim emp As Employee
Dim employee_enumerator As IEnumerator
employee_enumerator = m_Employees.GetEnumerator()
Do While (employee_enumerator.MoveNext)
    emp = CType(employee_enumerator.Current, Employee)
    Debug.WriteLine(emp.Title & " " & emp.FirstName & " " & emp.LastName)
Loop
```

Some containers support enumerators that use more specific data types. For example, a program can use a generic `List` *that contains a specific kind of object such as* `Employee`. *Then it can use a generic enumerator of the correct type, in this case* `IEnumerator(Of Employee)`. *In that case, the enumerator's* `Current` *property returns an* `Employee` *instead of an* `Object` *so the code does not need to convert it into an* `Employee` *before using its methods.*

Example program EnumerateEmployees, which is available for download on the book's web site, creates a `List(Of Employee)`. *It then creates an* `IEnumerator(Of Employee)` *for the list and uses it to loop through the list. For more information on generics, see Chapter 29, "Generics."*

A `For Each` loop provides roughly the same access to the items in a container class as an enumerator. Under some circumstances, however, an enumerator may provide a more natural way to loop through a container class than a `For Each` loop. For example, an enumerator can skip several items without examining them closely. You can also use an enumerator's `Reset` method to restart the enumeration. To restart a `For Each` loop, you would need to repeat the loop, possibly by placing it inside yet another loop that determines when to stop looping.

The Visual Basic documentation states that an enumerator is valid only as long as you do not modify the collection. If you add or remove an object to or from the collection, the enumerator throws an "invalid operation" exception the next time you use it. In at least some cases, however, this doesn't seem to be true, and an enumerator can still work even if you modify its collection. This could lead to extremely confusing situations, however. To avoid unnecessary confusion, do not modify a collection while you are accessing it with an enumerator.

The `IEnumerable` interface defines the features needed for enumerators so any class that implements the `IEnumerable` interface provides enumerators. Any class that supports `For Each` must also implement the `IEnumerable` interface, so any class that supports `For Each` also supports enumerators. A few of the classes that implement `IEnumerable` include the following:

Array	HybridDictionary	SqlDataReader
ArrayList	ListDictionary	Stack
Collection	MessageQueue	String
CollectionBase	OdbcDataReader	StringCollection
ControlCollection	OleDbDataReader	StringDictionary
DataView	OracleDataReader	TableCellCollection
DictionaryBase	Queue	TableRowCollection
DictionaryEntries	ReadOnlyCollectionBase	XmlNode
Hashtable	SortedList	XmlNodeList

Iterators

An *iterator* is similar in concept to an enumerator. It also provides methods that allow you to step through the objects in some sort of container object. Iterators are more specialized than enumerators and work with a particular kind of class. While you can use a nonspecific IEnumerator object to step through the items contained in any class that implements IEnumerable (an array, collection, hash table, or whatever), a certain iterator class is associated with a specific container class.

For example, a GraphicsPath object represents a series of connected lines and curves. A GraphicsPathIterator object can step through the line and curve data contained in a GraphicsPath object.

Iterators are much more specialized than enumerators. How you use them depends on what you need to do and on the kind of iterator, so they are not described in detail here.

Do Loop Statements

Visual Basic .NET supports three basic forms of Do Loop statements. The first form is a loop that repeats forever. The syntax is as follows:

```
Do
    statements
    [Exit Do]
    statements
    [Continue Do]
    statements
Loop
```

This kind of `Do Loop` executes the code it contains until the program somehow ends the loop. The following loop processes work orders. It calls the `WorkOrderAvailable` function to see if a work order is available. If an order is available, the code calls `ProcessWorkOrder` to process it. The code then repeats the loop to look for another work order.

```
Do
    ' See if a work order is available.
    If WorkOrderAvailable() Then
        ' Process the next work order.
        ProcessWorkOrder()
    End If
Loop
```

This example keeps checking for work orders forever. Most programs include some method for the loop to end so that the program can eventually stop. For example, the loop might use the `Exit Do` statement described shortly to end the loop if the user clicks a Stop button.

The second and third forms of `Do Loop` statements both include a test to determine whether they should continue looping. The difference between the two versions is where they place the test.

The next version of `Do Loop` places its test at the beginning, so the test is evaluated before the code is executed. If the test initially indicates that the loop should not continue, the statements inside the loop are never executed. The syntax is as follows:

```
Do {While | Until} condition
    statements
    [Exit Do]
    statements
    [Continue Do]
    statements
Loop
```

The final version of `Do Loop` places its test at the end. In this version, the statements inside the loop are executed before the loop performs its test. That means that the code is always executed at least once. The syntax is as follows:

```
Do
    statements
    [Exit Do]
    statements
    [Continue Do]
    statements
Loop {While | Until} condition
```

If the code uses the `While` keyword, the loop executes as long as the condition is true. If the code uses the `Until` keyword, the loop executes as long as the condition is false. Note that the statement `Until condition` is equivalent to `While Not condition`. Visual Basic provides these two variations so that you can pick the one that makes your code more readable. Use the one that makes the most sense to you.

The `Exit Do` statement allows the program to leave the nearest enclosing loop before it would normally finish. The `Continue Do` statement makes the loop jump back to its `Do` statement and start the loop over again. This is particularly useful if the program doesn't need to execute the rest of the steps within the loop and wants to quickly start the next iteration. Unlike a `For` loop, the `Do` loop does not automatically increment a looping variable or move to the next object in a collection. The code must explicitly change the loop's condition before calling `Continue Do` or else the loop will continue forever.

While End

A `While End` loop is equivalent to a `Do While` loop. The syntax is as follows:

```
While condition
    statements
    [Exit While]
    statements
    [Continue While]
    statements
End While
```

This is equivalent to the following `Do While` loop:

```
Do While condition
    statements
    [Exit Do]
    statements
    [Continue Do]
    statements
Loop
```

The `Exit While` statement exits a `While End` loop just as an `Exit Do` statement exits a `Do While Loop`. Similarly `Continue While` makes the program return to the top of the loop just as `Continue Do` does for `Do` loops.

The difference between `While End` and `Do While Loop` is stylistic, and you can use whichever seems clearer to you. Because `Do Loop` provides more flexibility, having four different versions using `While` or `Until` at the start or finish of the loop, you might want to stick to them for consistency's sake.

Exit and Continue

The `Exit` and `Continue` statements are described in the previous sections but they deserve a quick summary.

The `Exit` statement lets you end a loop early. The `Continue` statement lets you jump to the start of a loop before reaching its end.

Both of these statements work only on the innermost loop of the appropriate type. For example, an `Exit For` statement exits the innermost `For` loop surrounding the statement.

Example program ExitAndContinue, which is available for download on the book's web site, demonstrates the Exit and Continue statements.

GoTo

A `GoTo` statement unconditionally tells the program to jump to a specific location in the code. Because it tells the program what to do, it is a program control statement. The syntax is as follows:

```
    GoTo line_label
    ...
line_label:
    ...
```

Though `GoTo` by itself isn't a decision statement, it is often used to mimic a decision statement. For example, the following code fragment uses `GoTo` to mimic an `If Then Else` statement. It examines the `purchase_total` variable. If `purchase_total` is less than 1000, the code jumps to the line labeled `SmallOrder`. If `purchase_total` is greater than or equal to 1000, the program continues to execute the code that processes a larger order.

```
    If purchase_total < 1000 Then GoTo SmallOrder
    ' Process a large order.
    ...
    Exit Sub

SmallOrder:
    ' Process a small order.
    ...
```

The following code does roughly the same thing as the previous version but without the `GoTo` statement:

```
If purchase_total < 1000 Then
    ' Process a large order.
    ...
Else
    ' Process a small order.
    ...
End If
```

Similarly, `GoTo` is sometimes used to build a loop. The following code uses `GoTo` to jump backward in the code to call subroutine `DoSomething` 10 times:

```
    Dim i As Integer = 1
StartLoop:
    DoSomething()
    i += 1
    If i <= 10 Then GoTo StartLoop
```

The following code does the same thing without the `GoTo` statement:

```
For i As Integer = 1 To 10
    DoSomething()
Next i
```

The problem with the GoTo statement is its flexibility. By using GoTo in a haphazard way, an undisciplined programmer can make the program jump all over the place with little rhyme or reason. This can lead to *spaghetti code* (so called because a diagram showing the program's flow of control can look like a pile of spaghetti) that is extremely difficult to understand, debug, and maintain.

Many programming teams prohibit any use of GoTo because it can lead to this kind of code. Some even believe GoTo should be removed from the Visual Basic language. You can always use If Then Else statements, For Next loops, While loops, and other control statements in place of GoTo statements, so GoTo is not absolutely necessary.

However, some programmers feel that GoTo simplifies code under certain very specific circumstances. The following code begins by performing some sort of initialization. It may open databases, create temporary files, connect to the Internet, and perform other startup chores. It then executes a series of tasks, each of which may fail or otherwise make it pointless for the program to continue. If any of these steps sets the variable should_stop to True, the program uses a GoTo statement to jump to its clean-up code. This code closes any open database, deletes temporary files, closes permanent files, and performs any other necessary clean up chores.

```
        ' Get started, open database, open files, etc.
        Initialize()

        ' Perform a long series of tasks.
        DoStuff1()
        If should_stop Then GoTo CleanUp

        DoStuff2()
        If should_stop Then GoTo CleanUp

        DoStuff3()
        If should_stop Then GoTo CleanUp

        ...

    CleanUp:
        ' Close database, delete temporary files, etc.
        PerformCleanUp()
```

The GoTo statement in this code lets the program jump to the clean-up code any time it needs to stop performing its tasks. That may be because a task failed, the user canceled the operation, or all the tasks are finished.

Note that this is a very specific use of GoTo. The code only jumps forward, never backward. It also only jumps to clean-up code, not to some arbitrary point in the code. These facts help make the GoTo statement easier to understand and prevent spaghetti code.

The following code does the same thing as the previous version without using GoTo. At each step, the program checks the value of should_stop to see if it should continue working through its tasks.

```
' Get started, open database, open files, etc.
Initialize()

' Perform a long series of tasks.
DoStuff1()

If Not should_stop Then DoStuff2()

If Not should_stop Then DoStuff3()

' Close database, delete temporary files, etc.
PerformCleanUp()
```

The following code shows another version that doesn't use `GoTo`. This version places the code that formerly contained the `GoTo` statement in a new subroutine. Instead of using `GoTo`, this routine uses `Exit Sub` to stop performing tasks early if necessary.

```
Sub DoWork()
    ' Get started, open database, open files, etc.
    Initialize()

    ' Perform all of the tasks.
    PerformTasks()

    ' Close database, delete temporary files, etc.
    PerformCleanUp()
End Sub

' Perform a long series of tasks.
Sub PerformTasks()
    DoStuff1()
    If should_stop Then Exit Sub

    DoStuff2()
    If should_stop Then Exit Sub

    DoStuff3()
    If should_stop Then Exit Sub
End Sub
```

Conceptually, an `Exit Sub` statement is little different from a `GoTo` statement. After all, it, too, is an unconditional jump command. However, `Exit Sub` has a very specific, well-known effect: it makes the program stop executing the current subroutine. It cannot make the program jump around arbitrarily, possibly leading to spaghetti code.

If you ever feel tempted to use `GoTo`, take a few moments to think about ways you might rewrite the code. If the only ways you can think of to rewrite the code are more confusing than the original version, go ahead and use `GoTo`. You should probably add some fairly detailed comments to ensure that the `GoTo` statement doesn't cause trouble later.

Summary

Control statements form the heart of any program. Decision statements determine what commands are executed, and looping statements determine how many times they are executed.

Single-line and multiline `If Then` statements, as well as `Select Case`, are the most commonly used decision statements. `IIf` and `Choose` statements are often more confusing and sometimes slower, so usually you should use `If Then` and `Select Case` statements instead. Under some specific circumstances, however, `IIf` and `Choose` may make your code more readable. Use your judgment and pick the method that makes the most sense in your application.

`For Next`, `For Each`, and `Do Loop` are the most common looping statements. Some container classes also support enumerators that let you step through the items in the container. An enumerator can be more natural than a `For Each` loop under some circumstances.

A `While End` loop is equivalent to `Do While` loop. You can use whichever you think makes more sense, although you might want to use `Do While` because it is more consistent with the other forms of `Do Loop`.

Finally, the `GoTo` statement is often used in a decision statement or to create a loop. Unfortunately, undisciplined use of `GoTo` statements can lead to spaghetti code that is extremely hard to understand, debug, and maintain. To avoid later frustration, you should avoid using `GoTo` statements whenever possible, and provide good comments where `GoTo` is necessary. Some programmers use `GoTo` in very specialized cases, whereas others avoid it at all costs. You can always rewrite code to avoid `GoTo` statements, and usually that is better in the long run.

Using the control statements described in this chapter, you can build extremely complex and powerful applications. In fact, you can build applications that are so complex that it is difficult to ensure that they work correctly. Even a relatively simple application sometimes encounters errors. Chapter 19, "Error Handling," explains how you can protect an application from these and other unexpected errors and let it take action to correct any problems or at least to avoid crashing.

19

Error Handling

Although it is theoretically possible to write a program that perfectly predicts every possible situation that it might encounter, in practice that's very difficult for nontrivial programs. For large applications, it is very difficult to plan for every eventuality. Errors in the program's design and implementation can introduce bugs that give unexpected results. Users and corrupted databases may give the application values that it doesn't know how to manage.

Similarly, changing requirements over time may introduce data that the application was never intended to handle. The Y2K bug is a good example. When engineers wrote accounting, auto registration, financial, inventory, and other systems in the 1960s and 1970s, they didn't think their programs would still be running in the year 2000. At the time, disk storage and memory were relatively expensive, so they stored years as 2-byte values (for example, 89 meant 1989). When the year 2000 rolled around, the applications couldn't tell whether the value 01 meant the year 1901 or 2001. In one humorous case, an auto registration system started issuing horseless carriage license plates to new cars because it thought cars built in 00 must be antiques.

The Y2K problem wasn't really a bug. It was a case of software used with data that wasn't part of its original design.

This chapter explains different kinds of exceptional conditions that can arise in an application. These range from unplanned data (as in the Y2K problem) to bugs where the code is just plain wrong. With some advanced planning, you can build a robust application that can keep running gracefully, even when the unexpected happens.

Bugs versus Unplanned Conditions

Several different types of unplanned conditions can derail an otherwise high-quality application. How you should handle these conditions depends on their nature.

For this discussion, a *bug* is a mistake in the application code. Some bugs become apparent right away and are easy to fix. These usually include simple typographic errors and cases where you misuse an object (for example, by using the wrong control property). Other bugs are subtler and may only be detected long after they occur. For example, a data-entry routine might place invalid

characters into a rarely used field in a `Customer` object. Only later when the program tries to access that field will you discover the problem. This kind of bug is difficult to track down and fix, but there are some proactive steps you can take to make these sorts of bugs easier to find.

> *On a historical note, the term* bug *has been used since at least the time of the telegraph to mean some sort of defect. Probably the origin of the term in computer science was an actual moth that was caught between two relays in an early computer in 1945. For a bit more information, including a picture of this first computer bug, see* `www.jamesshuggins.com/h/tek1/first_computer_bug.htm`.

An *unplanned condition* is some predictable condition that you don't want to happen, but that you know could happen despite your best efforts. For example, there are many ways that a simple printing operation can fail. The printer might be unplugged, disconnected from its computer, disconnected from the network, out of toner, out of paper, experiencing a memory fault, clogged by a paper jam, or just plain broken. These are not bugs, because the application software is not at fault. There is some condition outside of the program's control that must be fixed.

Another common unplanned condition occurs when the user enters invalid data. You may want the user to enter a value between 1 and 10 in a text box, but the user might enter 0, 9999, or "lunch" instead.

Catching Bugs

By definition, bugs are unplanned. No programmer sits down and thinks, "Perhaps I'll put a bug in this variable declaration."

Because bugs are unpredictable, you cannot know ahead of time where a bug will lie. However, you can watch for behavior in the program that indicates that a bug may be present. For example, suppose that you have a subroutine that sorts a purchase order's items by cost. If the routine receives an order with 100,000 items, something is probably wrong. If one of the items is a computer keyboard with a price of $73 trillion, something is probably wrong. If the customer who placed the order doesn't exist, something is probably wrong.

This routine could go ahead and sort the 100,000 items with prices ranging from a few cents to $73 trillion. Later, the program would try to print a 5000-page invoice with no shipping or billing address. Only then would the developers realize that there is a problem.

Rather than trying to work around the problematic data, it would be better if the sorting routine immediately told developers that something is wrong so that they can start trying to find the cause of the problem. Bugs are easier to find the sooner they are detected. This bug will be easier to find if the sorting routine notices it, rather than waiting until the application tries to print an invalid invoice. Your routines can protect themselves and the program as a whole by proactively validating inputs and outputs, and reporting anything suspicious to developers.

Some developers object to making routines spend considerable effort validating data that they know is correct. After all, one routine generated this data and passed it to another, so you *know* that it is correct because the first routine did its job properly. That's only true if every routine that touches the data works perfectly. Because bugs are by definition unexpected, you cannot safely assume that all the routines are perfect and that the data remains uncorrupted.

Many companies these days use automated testing tools to try to flush out problems early. Regression testing tools can execute code to verify that its outcome isn't changed after you have made modifications to other parts of the application. If you build a suite of testing routines to validate data and subroutines' results, you may be able to work them into an automated testing system, too.

To prevent validation code from slowing down the application, you can use the `Debug` object's `Assert` method to check for strange conditions. When you are debugging the program, these statements throw an error if they detect something suspicious. When you make a release build to send to customers, the `Debug.Assert` code is removed from the application. That makes the application faster and doesn't inflict cryptic error messages on the user.

You can also use the `DEBUG`, `TRACE`, and `CONFIG` compiler constants to add other input and output validation code.

Example program SortOrders, which is available for download on the book's web site, uses the following code to validate a subroutine's inputs. (This program doesn't actually do anything, it just shows how to write input validation code.)

```
Private Sub SortOrderItems(ByVal the_order As Order)
    ' Validate input.
    Debug.Assert(the_order.Items IsNot Nothing, "No items in order")
    Debug.Assert(the_order.Customer IsNot Nothing, "No customer in order")
    Debug.Assert(the_order.Items.Count < 100, "Too many order items")
    ...

    ' Sort the items.
    ...

    ' Validate output.
#If DEBUG Then
    ' Verify that the items are sorted.
    Dim order_item1 As OrderItem
    Dim order_item2 As OrderItem
    order_item1 = DirectCast(the_order.Items(1), OrderItem)
    For i As Integer = 2 To the_order.Items.Count
        order_item2 = DirectCast(the_order.Items(i), OrderItem)
        Debug.Assert(order_item1.Price <= order_item2.Price, _
            "Order items not properly sorted")
        order_item1 = order_item2
    Next i
#End If
End Sub
```

The subroutine starts by validating its input. It verifies that the `Order` object it is passed has an `Items` collection and that its `Customer` variable is not `Nothing`. It also verifies that the order contains fewer than 100 items. If a larger order comes along during testing, developers can increase this number to 200 or whatever value makes sense, but there's no need to start with an unreasonably large default.

Before the subroutine exits, it loops through the sorted items to verify that they are correctly sorted. If any item has cost less than the one before, the program throws an error. Because this test is contained within an `#If DEBUG Then` statement, this code is removed from release builds.

After you have tested the application long enough, you should have discovered most of these types of errors. When you make the release build, the compiler automatically removes the validation code, making the finished executable smaller and faster.

Catching Unexpected Conditions

Although you don't want an unexpected condition to happen, with some careful thought, you can predict where an unexpected condition might occur. Typically, these situations arise when the program must work with something outside of its own code. For example, when the program needs to access a file, printer, web page, floppy disk, or CD-ROM, that item may be unavailable. Similarly, whenever the program takes input from the user, the user may enter invalid data.

Notice how this differs from the bugs described in the previous section. After sufficient testing, you should have found and fixed most of the bugs. No amount of testing can remove the possibility of unexpected conditions. No matter what code you use, the user may still remove a floppy disk from the drive before the program is ready.

Whenever you know that an unexpected condition might occur, you should write code to protect the program from dangerous conditions. It is generally better to test for these conditions explicitly rather than simply attempting to perform whatever action you were planning and then catching an error if one occurs. Testing for problem conditions generally gives you more complete information about what's wrong. It's also usually faster than catching an error because the structured error handling described shortly comes with considerable overhead.

For example, the following statement sets an integer variable using the value the user entered in a text box:

```
Dim num_items As Integer = Integer.Parse(txtNumItems.Text)
```

The user might enter a valid value in the text box. Unfortunately, the user may also enter something that is not a number, a value that is too big to fit in an integer, or a negative number when you are expecting a positive number. The user may even leave the field blank.

Example program ValidateInteger, which is available for download on the book's web site, uses the following code to validate integer input:

```
' Check for blank entry.
Dim num_items_txt As String = txtNumItems.Text
If num_items_txt.Length < 1 Then
    MessageBox.Show("Please enter Num Items")
    txtNumItems.Focus()
    Exit Sub
End If

' See if it's numeric.
```

```
    If Not IsNumeric(num_items_txt) Then
        MessageBox.Show("Num Items must be a number")
        txtNumItems.Select(0, num_items_txt.Length)
        txtNumItems.Focus()
        Exit Sub
    End If

    ' Assign the value.
    Dim num_items As Integer
    Try
        num_items = Integer.Parse(txtNumItems.Text)
    Catch ex As Exception
        MessageBox.Show("Error in Num Items." & vbCrLf & ex.Message)
        txtNumItems.Select(0, num_items_txt.Length)
        txtNumItems.Focus()
        Exit Sub
    End Try

    ' Check that the value is between 1 and 100.
    If num_items < 1 Or num_items > 100 Then
        MessageBox.Show("Num Items must be between 1 and 100")
        txtNumItems.Select(0, num_items_txt.Length)
        txtNumItems.Focus()
        Exit Sub
    End If
```

The code checks that the field is not blank and uses the IsNumeric function to verify that the field contains a vaguely numeric value.

Unfortunately, the IsNumeric function doesn't exactly match the behavior of functions such as Integer.Parse. IsNumeric returns False for values such as &H10, which is a valid hexadecimal value that Integer.Parse can correctly interpret. IsNumeric also returns True for values such as 123456789012345 that lie outside of the values allowed by integers and 1.2, which is numeric but not an integer. Because IsNumeric doesn't exactly match Integer.Parse, the program still needs to use a Try Catch block to protect itself when it actually tries to convert the string into an integer.

The code finishes by verifying that the value lies within a reasonable bound. If the value passes all of these checks, the code uses the value.

A typical subroutine might need to read and validate many values, and retyping this code would be cumbersome. A better solution is to move it into an IsValidInteger function and then call the function as needed.

You can write similar routines to validate other types of data fields such as phone numbers, e-mail addresses, street addresses, and so on.

Global Exception Handling

Normally, you should try to catch an error as close as possible to the place where it occurs. If an error occurs in a particular subroutine, it will be easiest to fix the bug if you catch it in that subroutine.

However, bugs often arise in unexpected places. Unless you protect every subroutine with error-handling code (a fairly common strategy), a bug may arise in code that you have not protected. In early versions of Visual Basic, you could not catch the bug, so the application crashed. In the most recent versions of Visual Basic, however, you can define a global error handler to catch any bug that isn't caught by other error-handling code.

To define application-level event handlers, double-click My Project in the Project Explorer. Open the Application tab and click the View Application Events button. This opens a code window for application-level events.

In the left drop-down list, select (MyApplication Events). Then in the right drop-down list, you can select one of several events including `NetworkAvailabilityChanged`, `Shutdown`, `Startup`, `StartupNextInstance`, and `UnhandledException`. Select the last of these commands to open the `UnhandledException` event handler.

In the event handler, you can take whatever action is appropriate for the error. Because you probably didn't anticipate the error, there's usually little chance that the program can correct it properly. However, you can at least log the error and possibly save data before shutting down the application.

The event parameter `e` has an `ExitApplication` property that you can set to `True` or `False` to tell Visual Basic whether the application should terminate.

Example program GlobalException, which is available for download on the book's web site, uses the following code to display a message giving the unhandled exception's error message. It then sets `e.ExitApplication` to `False`, so the program keeps running.

```
Private Sub MyApplication_UnhandledException( _
 ByVal sender As Object, ByVal e As _
 System.Windows.Forms.UnhandledExceptionEventArgs) _
 Handles Me.UnhandledException
    MessageBox.Show("Exception caught globally" & vbCrLf & _
        e.Exception.Message)
    e.ExitApplication = False
End Sub
```

When you run the application in the IDE, Visual Basic stops execution in the debugger when it reaches the statement that causes the error, so the `UnhandledException` event never executes. If you run the compiled executable, however, the `UnhandledException` event fires and the global error-handler runs.

Structured Error Handling

Visual Basic .NET introduced structured error handling using the `Try` block. The syntax is as follows:

```
Try
    try_statements...
[Catch ex As exception_type_1
    exception_statements_1...]
[Catch ex As exception_type_2
    exception_statements_2...]
...
[Catch
    final_exception_statements...]
[Finally
    finally_statements...]
End Try
```

The program executes the code in the `try_statements` block. If any of that code throws an exception, the program jumps to the first `Catch` statement.

If the exception matches `exception_type_1`, the program executes the code in `exception_statements_1`. The exception type might match the `Catch` statement's exception class exactly, or it might be a subclass of the listed class. For example, suppose that the code in the `try_statements` block performs a calculation that divides by zero. That raises a `DivideByZeroException`. That class inherits from the `ArithmeticException` class, which inherits from `SystemException`, which inherits from `Exception`. That means the code would stop at the first `Catch` statement it finds that looks for `DivideByZeroException`, `ArithmeticException`, `SystemException`, or `Exception`.

If the raised exception does not match the first exception type, the program checks the next `Catch` statement. The program keeps comparing the exception to `Catch` statements until it finds one that applies, or it runs out of `Catch` statements.

Be sure to arrange `Try` statements so the most specific come first. Otherwise, a more general statement will catch errors before a more specific statement has a chance. For example, the generic `Exception` class includes all other exceptions, so if the first `Try` statement catches `Exception`, no other `Catch` statements will ever execute.

If two `Catch` statements are unrelated, so neither will catch the other's exceptions, put the exception more likely to occur first. That will make the code more efficient because it looks for the most common problems first. It also keeps the code that is most likely to execute near the top where it is easier to read.

If no `Catch` statement matches the exception, the exception "bubbles up" to the next level in the call stack and Visual Basic moves to the routine that called the current one. If that routine has appropriate error-handling code, it deals with the error. If that routine can't catch the error, then the exception bubbles up again until Visual Basic eventually either finds error-handling code that can catch the exception, or it runs off the top of the call stack. If it runs off the call stack, Visual Basic calls the global `UnhandledException` event handler described in the previous section, if one exists. If there is no `UnhandledException` event handler, the program crashes.

If you include a `Catch` statement with no exception type, that block matches any exception. If the raised exception doesn't match any of the previous exception types, the program executes the `final_exception_statements` block of code. Note that the statement `Catch ex As Exception` also matches all exceptions, so it's just good as `Catch` by itself. It also gives you easy access to the exception object's properties and methods.

There are several ways you can figure out what exception classes to use in `Catch` statements. First, you can spend a lot of time digging through the online help. An easier method is to let the program crash and then look at the error message it produces. Figure 19-1 shows the error message a program throws when it tries to convert the non-numeric string `"Hello"` into an integer with `Integer.Parse`. From the exception dialog's title, it's easy to see that the program should look for a `FormatException`.

Another way to decide what types of exceptions to catch is to place a final generic `Catch ex As Exception` statement at the end of the `Catch` list. Place code inside that `Catch` block that displays either the exception's type name (use `TypeName`) or the result of its `ToString` method. When you encounter new exception types, you can give them their own `Catch` statements and take more action that's appropriate to that exception type.

> *It may not be possible to take meaningful action when you catch certain exceptions. For example, if a program uses up all of the available memory, Visual Basic throws an `OutOfMemoryException`. If there is no memory available, then you may have trouble doing anything useful. Similarly, if there's a problem with the file system, you may be unable to write error descriptions into a log file.*

After it has finished running the code in `try_statements` and it has executed any necessary exception code in a `Catch` block, the program executes the code in `finally_statements`. You can use the `Finally` section to execute code whether the code in `try_statements` succeeds or fails.

You do not need to include any `Catch` statements in a `Try` block, but leaving them all out defeats the `Try` block's purpose. If the `try_statements` raise an error, the program doesn't have any error code to execute, so it sends the error up the call stack. Eventually, the program finds an active error handler or the error pops off the top of the stack and the program crashes. You may as well not bother with the `Try` block if you aren't going to use any `Catch` sections.

A `Try` block must include at least one `Catch` or `Finally` section, although those sections do not need to contain any code. For example, the following `Try` block calls subroutine `DoSomething` and uses an empty `Catch` section to ignore any errors that occur:

```
Try
    DoSomething()
Catch
End Try
```

Using an empty `Finally` section is legal but not terribly useful. The following code doesn't protect the program from any exceptions and doesn't do anything in the `Finally` block. You may as well just omit the `Try` block.

```
Try
    DoSomething()
Finally
End Try
```
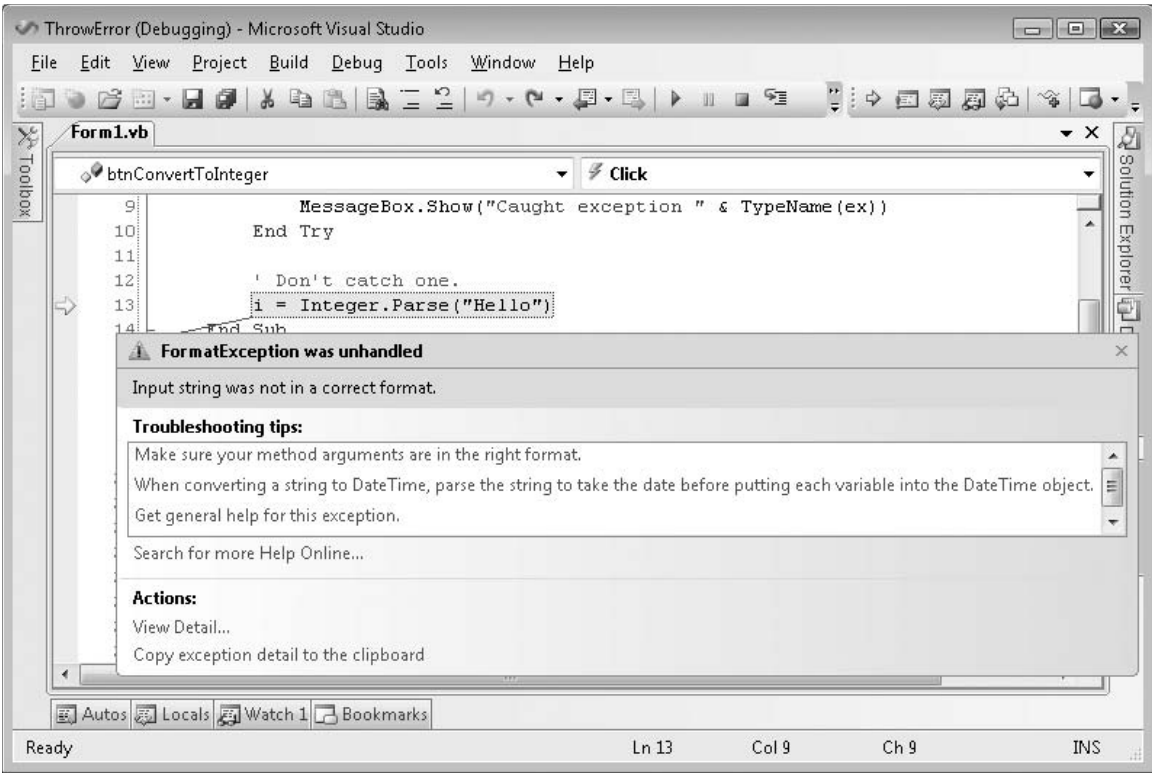
Figure 19-1: When a program crashes, the message it generates tells you the type of exception it raised.

Example program ThrowError, which is available for download on the book's web site, shows how a program can use a `Try Catch` block to handle errors.

Exception Objects

When a `Catch` statement catches an exception, its exception variable contains information about the error that raised the exception. Different exception classes may provide different features, but they all provide the basic features defined by the `Exception` class from which they are all derived. The following table lists the most commonly used `Exception` class properties and methods.

Item	Purpose
InnerException	The exception that caused the current exception. For example, suppose that you write a tool library that catches an exception and then throws a new custom exception describing the problem in terms of your library. You should set `InnerException` to the exception that you caught before you throw the new exception.
Message	Returns a brief message that describes the exception.

(continued)

Item	Purpose
Source	Returns the name of the application or object that threw the exception.
StackTrace	Returns a string containing a stack trace giving the program's location when the error occurred.
TargetSite	Returns the name of the method that threw the exception.
ToString	Returns a string describing the exception and including the stack trace.

Example program ShowExceptionInfo, which is available for download on the book's web site, displays an exception's `Message`, `StackTrace`, and `ToString` values.

At a minimum, the program should log or display the `Message` value for any unexpected exceptions so you know what exception occurred. It might also log the `StackTrace` or the result of `ToString` so you can see where the exception occurred.

The following text shows the results of the `ToString` method produced by a `DivideByZeroException` exception object:

```
System.DivideByZeroException: Attempted to divide by zero.
    at ShowExceptionInfo.Form1.CheckVacationPay() in C:\Documents and
Settings\Rod\Local Settings\Application Data\Temporary
Projects\ShowExceptionInfo\Form1.vb:line 25
    at ShowExceptionInfo.Form1.CalculateEmployeeSalaries() in C:\Documents and
Settings\Rod\Local Settings\Application Data\Temporary
Projects\ShowExceptionInfo\Form1.vb:line 18
    at ShowExceptionInfo.Form1.btnCalculate_Click(Object sender, EventArgs e)
in
C:\Documents and Settings\Rod\Local Settings\Application Data\Temporary
Projects\ShowExceptionInfo\Form1.vb:line 5
```

The `StackTrace` and `ToString` values can help developers find a bug, but they can be intimidating to end users. Even the abbreviated format used by the exception's `Message` property is usually not very useful to a user. When the user clicks the "Find Outstanding Invoices" button, the message "Attempted to divide by zero" doesn't really tell the user what the problem is or what to do about it.

When a program catches an error, a good strategy is to record the full `ToString` message in a log file or e-mail it to a developer. Then display a message that restates the error message in terms that the user can understand. For example, the program might say the following: "Unable to total outstanding invoices. A bug report has been sent to the development team." The program should then try to continue as gracefully as possible. It may not be able to finish this calculation, but it should not crash, and it should allow the user to continue working on other tasks if possible.

StackTrace Objects

An exception object's `ToString` and `StackTrace` methods return textual representations of the program's stack trace. Your code can also use `StackTrace` objects to examine the program's execution position without generating an error.

The following code shows how a program can display a simple stack trace in the Immediate window:

```
Imports System.Diagnostics
...
Dim stack_trace As New System.Diagnostics.StackTrace(True)
Debug.WriteLine(stack_trave.ToString())
```

The `StackTrace` class also provides methods for exploring call frames in the stack. The `FrameCount` property and the `GetFrame` and `GetFrames` methods give you access to `StackFrame` objects representing the frames. `StackFrame` objects provide some additional detail not listed by the `StackTrace` object's `ToString` method such as each code's file name, line number, and column number. Example program ClimbStackTrace, which is available for download on the book's web site, shows how a program can climb through the layers of a stack trace and display information about each call level.

Throwing Exceptions

In addition to catching exceptions, your program may need to generate its own exceptions. Because handling an exception is called *catching* it, raising an exception is called *throwing* it. (This is just a silly pun. People also catch lions and colds, but I don't think many people throw them. It's as good a term as any, however.)

To throw an error, the program creates an instance of the type of exception it wants to generate, passing the constructor additional information describing the problem. The program can set other exception fields if you like. For example, it might set the exception's `Source` property to tell any other code that catches the error where it originated. The program then uses the `Throw` statement to raise the error. If an error handler is active somewhere in the call stack, Visual Basic jumps to that point and the error handler processes the exception.

Example program DrawableRect, which is available for download on the book's web site, uses the following code to show how the `DrawableRectangle` class can protect itself against invalid input:

```
Public Class DrawableRectangle
    Public Sub New(ByVal new_x As Integer, ByVal new_y As Integer, _
     ByVal new_width As Integer, ByVal new_height As Integer)
       ' Verify that new_width > 0.
      If new_width <= 0 Then
          Dim ex As New ArgumentException( _
              "DrawableRectangle must have a width greater than zero", _
                 "new_width")
          Throw ex
       End If

       ' Verify that new_height> 0.
       If new_height <= 0 Then
          Throw New ArgumentException( _
            "DrawableRectangle must have a height greater than zero", _
                 "new_height")
```

```
          End If

          ' Save the parameter values.
          ...
      End Sub
      ...
  End Class
```

The class's constructor takes four arguments: an X and Y position, and a width and height. If the width is less than or equal to zero, the program creates a new `ArgumentException` object. It passes the exception's constructor a description string and the name of the argument that is invalid. After creating the exception object, the program uses the `Throw` statement to raise the error. The code checks the object's new height similarly, but it creates and throws the exception in a single statement to demonstrate another style for throwing an error.

The following code shows how a program might use a `Try` block to protect itself while creating a new `DrawableRectangle` object:

```
  Try
      Dim rect As New DrawableRectangle(10, 20, 0, 100)
  Catch ex As Exception
      MessageBox.Show(ex.Message)
  End Try
```

When your application needs to throw an exception, it's easiest to use an existing exception class. There are a few ways to get lists of exception classes so that you can find one that makes sense for your application. First, Appendix O, "Useful Exception Classes," lists some of the more useful exception classes. The online help topic, "Introduction to Exception Handling in Visual Basic .NET" at `msdn.microsoft.com/library/default.asp?url=/library/en-us/dv_vstechart/html/vbtchexceptionserrorsinvisualbasicnet.asp` also has a good list of exception classes at the end. Microsoft's web page `msdn2.microsoft.com/library/zbea8bay.aspx` provides a very long list of exception classes that are derived from the `System.Exception` class.

Another method for finding exception classes is to open the Object Browser (select the View menu's Object Browser command) and search for "Exception." Figure 19-2 shows the Object Browser displaying roughly 400 matches, many of which are exception classes. The `System.FormatException` class is selected, so the Object Browser is showing that class's description.

When you throw exceptions, you must use your judgment about selecting these classes. For example, Visual Basic uses the `System.Reflection.AmbiguousMatchException` class when it tries to bind a subroutine call to an object's method, and it cannot determine which overloaded method to use. This happens at a lower level than your program will act, so you won't use that class for exactly the same purpose. It may be useful, for example, if your routine parses a string and, based on the string, cannot decide what action to take. In that case, you might use this class to represent the error, even though you're not using it exactly as it was originally intended.

Before you use one of these classes, look it up in the online help to make sure that it fits your purpose. If there's no good fit, you can always create your own as described in the following section, "Custom Exceptions."
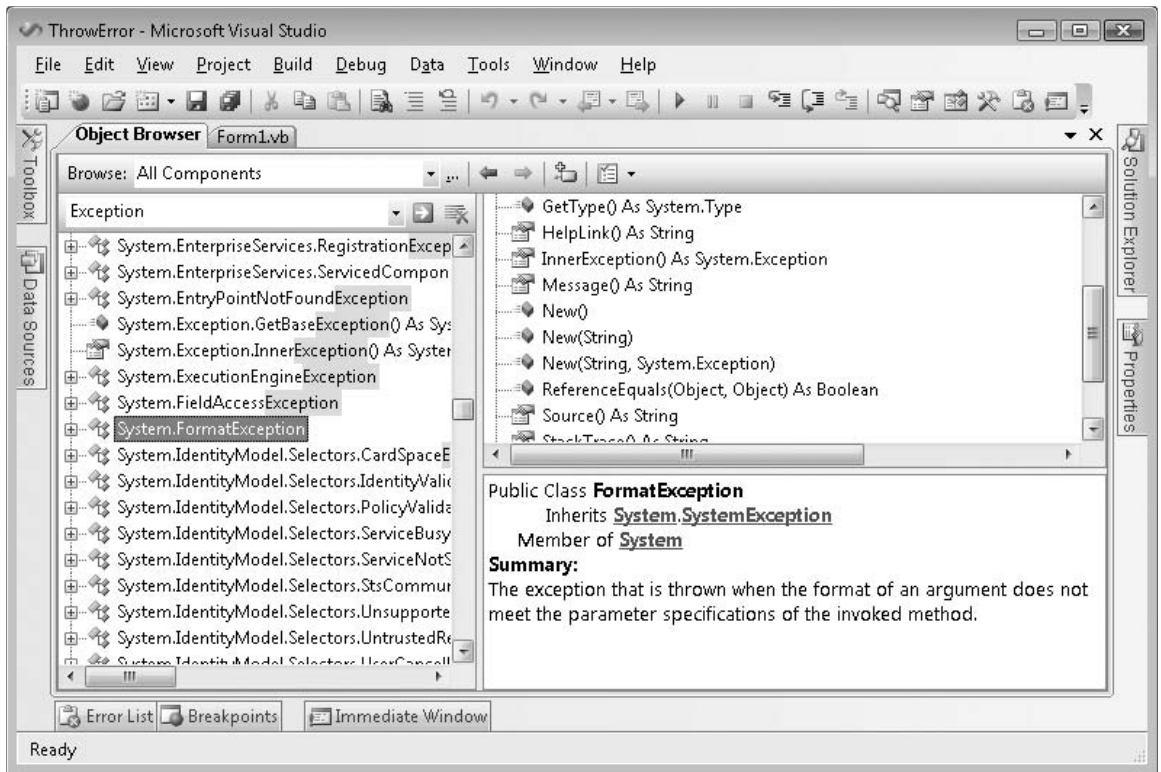
Figure 19-2: You can use the Object Browser to find exception classes.

Specialized classes and libraries sometimes have their own particular exception classes. For example, serialization and cryptographic objects have their own sets of exception classes that make sense within their own domains. Usually, these are fairly specialized, so you won't need to throw them in your program unless you are re-raising an error you received from a serialization or cryptographic object.

Custom Exceptions

When your application needs to raise an exception, it's easiest to use an existing exception class. Reusing existing exception classes makes it easier for developers to understand what the exception means. It also prevents exception proliferation, where the developer needs to watch for dozens or hundreds of types of exceptions.

Sometimes, however, the predefined exceptions don't fit your needs. For example, suppose that you build a class that contains data that may exist for a long time. If the program tries to use an object that has not refreshed its data for a while, you want to raise some sort of "data expired" exception. You could squeeze this into the System.TimeoutException class, but that exception doesn't quite fit this use. The Expired class is a better fit, but it's part of the System.Net.Cookie namespace. Using it would require your application to include the System.Net.Cookie namespace just to define the exception class, even if the program has nothing to do with cookies. In this case, it would probably be better to create your own exception class.

Building a custom exception class is easy. Make a new class that inherits from the `System .ApplicationException` class. Then, provide constructor methods to let the program create instances of the class. That's all there is to it.

By convention, an exception class's name should end with the word `Exception`. Also by convention, you should provide at least three overloaded constructors. The first takes no parameters and initializes the exception with a default message describing the general type of error.

The other two versions take as parameters an error message, and an error message plus an inner exception object. These constructors pass their parameters to the base class's constructors to initialize the object appropriately.

For completeness, you can also make a constructor that takes as parameters a `SerializationInfo` object and a `StreamingContext` object. This version can also pass its parameters to a base class constructor to initialize the exception object, so you don't need to do anything special with the parameters. This constructor is useful if the exception will be serialized and deserialized. If you're not sure whether you need this constructor, you probably don't. If you do include it, however, you will need to import the `System.Runtime.Serialization` namespace in the exception class's file to define the `SerializationInfo` and `StreamingContext` classes.

Example program CustomException, which is available for download on the book's web site, uses the following code to define the `ObjectExpiredException` class:

```
Imports System.Runtime.Serialization

Public Class ObjectExpiredException
    Inherits System.ApplicationException

    ' No parameters. Use a default message.
    Public Sub New()
        MyBase.New("This object has expired")
    End Sub

    ' Set the message.
    Public Sub New(ByVal new_message As String)
        MyBase.New(new_message)
    End Sub

    ' Set the message and inner exception.
    Public Sub New(ByVal new_message As String, _
      ByVal inner_exception As Exception)
        MyBase.New(new_message, inner_exception)
    End Sub

    ' Include SerializationInfo object and StreamingContext objects.
    Public Sub New(ByVal info As SerializationInfo, _
      ByVal context As StreamingContext)
        MyBase.New(info, context)
    End Sub
End Class
```

After you have defined the exception class, you can throw and catch it just as you can throw and catch any exception class defined by Visual Basic. For example, the following code throws an `ObjectExpiredException` error:

```
Throw New ObjectExpiredException("This Customer object has expired.")
```

The parent class `System.ApplicationException` automatically handles the object's `Message`, `StackTrace`, and `ToString` properties so you don't need to implement them yourself.

Visual Basic Classic Error Handling

Structured error handling using the `Try` block is a relatively recent innovation, appearing in the first versions of Visual Basic .NET. Visual Basic 6 and earlier versions used a more line-oriented syntax sometimes called *Visual Basic Classic Error Handling*. Although the `Try` block is generally preferred, you can still use classic error handling in your Visual Basic .NET applications. In fact, you can use both styles in the same program, although not in the same routine. The section "Structured versus Classic Error Handling" later in this chapter discusses the pros and cons of each.

A classic error handler begins with an `On Error` statement that tells Visual Basic what it should do if it encounters an error. This statement can take one of four forms: `On Error GoTo` *line*, `On Error Resume Next`, `On Error GoTo 0`, and `On Error GoTo -1`.

Example program ClassicErrorHandling, which is available for download on the book's web site, demonstrates many of the concepts described in the following sections.

On Error GoTo Line

After this statement, if Visual Basic encounters an error, it enters error-handling mode and jumps to the indicated line. The error handler that begins at the indicated line can take whatever action is appropriate.

The following code executes the statement `On Error GoTo LoadPayrollError` and then calls subroutine `LoadPayrollFile`. If that routine causes an error, Visual Basic jumps to the line labeled `LoadPayrollError`. The error-handling code displays a message and exits the subroutine. The program then executes the statement `On Error GoTo PrintPaychecksError` and calls the `PrintPaychecks` routine. If that routine throws an error, the code starting at the `PrintPaychecksError` label executes. After it has finished its work, the routine uses an `Exit Sub` statement to end without falling into the error-handling code that follows.

```
Private Sub ProcessPayroll()
    ' Load the payroll file.
    On Error GoTo LoadPayrollError
    LoadPayrollFile()

    On Error GoTo PrintPaychecksError
    ' Print paychecks.
```

```
        PrintPaychecks()

        ' We're done.
        Exit Sub

    LoadPayrollError:
        MessageBox.Show("Error loading the payroll file.")
        Exit Sub

    PrintPaychecksError:
        MessageBox.Show("Error printing paychecks.")
        Exit Sub
    End Sub
```

The program can leave error-handling mode using the statements `Exit Sub`, `Exit Function`, `Exit Property`, `Resume`, or `Resume Next`.

An `Exit Sub`, `Exit Function`, or `Exit Property` statement makes the program immediately leave the routine in which the error occurred, and that's the end of error-handling mode for this error.

The `Resume` statement makes the program resume execution with the statement that caused the error. If the problem has not been fixed, the error will occur again and the program may enter an infinite loop. You should use the `Resume` statement only if there is a chance that the error has been fixed. For example, if the program tries to read from a floppy disk and the drive is empty, the program could ask the user to insert the disk and then it could try to read the disk again.

The `Resume Next` statement makes the program resume execution with the statement after the one that caused the error. This statement is appropriate when the program cannot fix the problem but should continue anyway. For example, suppose that a program fails to read a value from a file. It might want to continue anyway so that it can close the file in the next statement.

On Error Resume Next

After this statement, if Visual Basic encounters an error, it skips the statement that caused the error and resumes execution with the following statement. If the program doesn't care whether the statement completed, `On Error Resume Next` lets it continue without checking for errors.

If the program needs to take action when an error occurs, it can use the `Err` object to check for errors after each statement. For example, the following code uses the `On Error Resume Next` statement and then calls subroutine `DoSomething`. When the subroutine returns, the program checks the `Err` object's `Number` property to see if an error occurred. If there is an error, the program displays a message and exits the subroutine. If subroutine `DoSomething` did not cause an error, the program calls subroutine `DoSomethingElse` and performs a similar check for errors.

```
On Error Resume Next
DoSomething()
If Err.Number <> 0 Then
    MessageBox.Show("Error in DoSomething")
    Exit Sub
```

```
    End If

    DoSomethingElse()
    If Err.Number <> 0 Then
        MessageBox.Show("Error in DoSomethingElse")
        Exit Sub
    End If
    ...
```

A program can also use this statement to check for different kinds of errors and take appropriate action. The following example takes no special action if there is no error. If `Err.Number` is 11, the program tried to divide by zero. In that case, the code sets variable `X` to a default value. If there is some other error, the program tells the user and exits the subroutine.

```
    ' Try to calculate X.
    On Error Resume Next
    X = CalculateValue()

    Select Case Err.Number
        Case 0   ' No error. Do nothing.
        Case 11  ' Divide by zero. Set a default value.
            X = 1000
        Case Else  ' Unexpected error. Tell the user.
            MessageBox.Show("Error calculating X." & vbCrLf & Err.Description)
            Exit Sub
    End Select
    ...
```

On Error GoTo 0

The `On Error GoTo 0` statement disables any active error handler. You should deactivate an error handler when it no longer applies to what the program is doing. The following code installs an error handler while it loads some data. When it is finished loading the data, it uses `On Error GoTo 0` to deactivate the error handler before it performs other tasks.

```
        On Error GoTo LoadDataError
        ' Load the data.
        ...
        ' Done loading data.
        On Error GoTo 0
        ...
        Exit Sub

    LoadDataError:
        MessageBox.Show("Error loading data." & vbCrLf & Err.Description)
        Exit Sub
    End Sub
```

Deactivating the error handler stops the program from taking inappropriate action for an error. In the previous example, it might confuse the user to say there was an error loading data when the program was doing something else. In other cases, the program might incorrectly try to fix problems that are not there if you leave an old error handler installed. For example, the program might ask the user to insert a floppy disk when it had already finished reading from the disk.

Deactivating old error handlers also lets the program fail if an unexpected error occurs. That lets developers discover and handle new types of failure, possibly by adding a new error handler.

On Error GoTo −1

The `On Error GoTo −1` statement is very similar to `On Error GoTo 0`. It deactivates any active error handler. However, it also ends error-handling mode if it is running. Example program OnErrorGoToMinus1, which is available for download on the book's web site, uses the following code to show the difference:

```
Dim i As Integer
Dim j As Integer = 0

    On Error GoTo DivideError1
    i = 1 \ j                           ' This raises an error.

DivideError1:                           ' We enter error-handling mode here.
    On Error GoTo -1                    ' This ends error-handling mode.
    On Error Resume Next                ' Ignore errors in the future.
    i = 1 \ j                           ' This error is ignored.
    Exit Sub

    On Error GoTo DivideError2
    i = 1 \ j                           ' This raises an error.
    Exit Sub

DivideError2:                           ' We enter error-handling mode here.
    On Error GoTo 0                     ' This does NOT end error-handling mode.
    On Error Resume Next                ' Doesn't work in error-handling mode.
    i = 1 \ j                           ' This error is not caught and crashes the
                                          program.

    Exit Sub
```

The program uses `On Error GoTo DivideError1` to install an error handler and then executes a command that causes a divide-by-zero error.

The error-handling code uses `On Error GoTo −1` to end error-handling mode and continue execution. It then calls `On Error Resume Next` to ignore further errors and performs another calculation that divides by zero. Because the `On Error Resume Next` statement is in effect, the program ignores this error.

Next, the code uses `On Error GoTo DivideError2` to install another error handler. It divides by zero again to jump to the error handler and enter error-handling mode.

This time, the error handler uses the `On Error GoTo 0` statement. This uninstalls the current error handler (`On Error GoTo DivideError2`) but does not end error-handling mode. The program then uses the `On Error Resume Next` statement. Unfortunately, this statement is ignored while the program is running in error-handling mode. If the program used a `Resume` statement to exit error-handling mode, this statement would then have an effect, but it does nothing until error-handling mode ends. Now, when the program divides by zero again, there is no active error handler, so the program crashes.

To avoid confusion, you should not use this style of error handling with error-handling code running through the body of a routine. Instead, place error-handling code at the end of the routine and use `Exit Sub`, `Exit Function`, `Exit Property`, `Resume`, or `Resume Next` to return to the routine's main body of code. The `On Error GoTo -1` statement is usually more confusing than it's worth.

Error-Handling Mode

Undoubtedly the most confusing part of classic error handling is error-handling mode. The `On Error GoTo line` statement makes the program enter a special error-handling mode that remains in effect until the error handler calls `Exit Sub`, `Exit Function`, `Exit Property`, `Resume`, `Resume Next`, or `On Error GoTo -1`. While in error-handling mode, most other error-handling statements do not work as they normally do. Generally, their effects only take place when error-handling mode finally ends. In the example in the previous section, the final `On Error Resume Next` statement has no effect because it executes while the program is in error handling mode.

Trying to execute error-handling statements within error handling mode is one of the most common mistakes programmers make when working with error-handling mode. The error-handling code must be safe, or the program will crash (or at least the error will propagate up to the calling routine).

If you really need to perform operations that might crash within the error handler's code, move that code into a subroutine. That routine can use its own error-handling code to protect itself from another error. The following example demonstrates this approach. The `SetDefaultValue` subroutine uses its own `On Error Resume Next` statement to avoid crashing if it has problems of its own.

```
Private i, j As Integer

Private Sub PerformCalculation()
    On Error GoTo EquationError
    i = 1 \ j
    Exit Sub

EquationError:
    SetDefaultValue()
    Resume Next
End Sub

Private Sub SetDefaultValue()
    On Error Resume Next
    i = 2 \ j
End Sub
```

Structured versus Classic Error Handling

The newer structured error-handling approach provided by the `Try` statement has several advantages over classic error handling. First, classic error handling doesn't make it immediately obvious whether a piece of code is protected by an error handler. To determine whether a statement is protected, you must look back through the code until you find an `On Error` statement. If you come to a labeled line, you also must track down any places where a `GoTo` or a `Resume` *line* statement could jump to that line and see what error handler might be installed at the time.

Classic error handling also doesn't make it obvious whether the code is running in error-handling mode. In some cases, it is impossible to tell until runtime. The following code uses an `On Error GoTo` statement to protect itself and then initializes an integer from a value that the user enters in a text box. If the user enters a valid integer, the code works normally and keeps running in normal (not error-handling) mode. If the user enters a value that is not a valid integer, the program jumps to the label `BadFormat` and enters error-handling mode. There's no way to tell before runtime whether the program will be in error-handling mode when it reaches the following comment.

```
    Dim i As Integer
    On Error GoTo BadFormat
    i = CInt(txtNumber.Text)
BadFormat:
    ' Are we in error-handling mode here?
    ...
```

Finally, you cannot nest classic error-handling code. If you must perform a risky action in an error handler, you must place the code in a separate subroutine that contains its own error-handling code to protect itself.

Structured error handling addresses these shortcomings. By looking at the enclosing `Try` or `Catch` block, you can easily tell whether a line of code is protected (inside the `Try` block) or part of an error handler (in the `Catch` block).

You can even nest `Try` statements, as shown in the following code. The program tries to initialize an integer from a value that the user entered in a text box. If the user enters an invalid value, the code moves into the first `Catch` block. There it tries to set the value of the integer using a calculation. If that calculation fails (for example, if `j` is 0), the next `Catch` block sets the variable to a default value.

```
  ' Get the user's value.
  Try
      i = Integer.Parse(txtNumber.Text)
  Catch ex As Exception
      ' The user's value is no good.
      ' Calculate a different value.
      Try
          i = 1 \ j
      Catch ex2 As Exception
          ' The calculated value is no good.
          ' Use a default value.
          i = 3
      End Try
  End Try
```

Finally, the `Try` block doesn't have a bewildering error-handling mode. The potential for confusion there alone is probably worth using structured error handling.

One of the few advantages to classic error handling is that it is easier to ignore errors by using the `On Error Resume Next` statement. The following code uses classic error handling to execute three subroutines and ignore any errors they produce:

```
On Error Resume Next
DoSomething()
DoSomethingElse()
DoSomethingMore()
...
```

The following version shows the same code using structured error handling. This version is quite a bit more verbose and much less readable.

```
Try
    DoSomething()
Catch
End Try

Try
    DoSomethingElse()
Catch
End Try

Try
    DoSomethingMore()
Catch
End Try
...
```

The Err Object

When an error occurs, Visual Basic initializes an object named `Err`. You can use this object's properties to learn more about the error. These properties correspond to those provided by the exception objects used by the `Try` statement's `Catch` sections. The following table lists these properties.

Property	Purpose
Description	A message describing the error.
Erl	The line number at which the error occurred.
HelpContext	The help context ID for the error.
HelpFile	The full path to the help file describing the error.
LastDLLError	A system error code generated by a call to a DLL (if appropriate).
Number	The error number. The value `0` means no error has occurred.
Source	The name of the object or application that caused the error.

The `Err` object also provides three useful methods for working with errors: `Clear`, `Raise`, and `GetException`. The `Clear` method clears the object's information and resets it for the next statement. If the statement following an error does not raise an error itself, the `Err` object may still show the previous error unless you clear it, as shown in the following code:

```
On Error Resume Next
X = Single.Parse(txtX.Text)
If Err.Number <> 0 Then
    MessageBox.Show(Err.Description) ' Display the error.
    Err.Clear                       ' Clear the error.
End If

Y = Single.Parse(txtY.Text)
If Err.Number <> 0 Then
    MessageBox.Show(Err.Description) ' Display the error.
    Err.Clear                       ' Clear the error.
End If
...
```

The `Err` object's `Raise` method generates an error. For example, the following statement raises error number 5, "Procedure call or argument is invalid":

```
Err.Raise(5)
```

Finally, the `GetException` method returns an `Exception` object representing the `Err` object's error. You can use this object just as you can use any other exception object. In particular, you can use its `StackTrace` property to get a trace showing where the error occurred.

If you use classic error handling, you can use the `Err` object to learn about the error. If you use structured error handling with the `Try` statement, you can use the `Exception` objects provided by `Catch` statements, and you can do without the `Err` object.

Debugging

Visual Basic provides a rich set of tools for debugging an application. Using the development environment, you can stop the program at different lines of code and examine variables, change variable values, look at the call stack, and call routines to exercise different pieces of the application. You can step through the program, executing the code one statement at a time to see what it is doing. You can even make some modifications to the source code and let the program continue running.

Chapter 7, "Debugging," describes tools that the development environment provides to help you debug an application. These include tools for stepping through the code, breakpoints, and windows such as the Immediate, Locals, and Call Stack windows. See Chapter 7 for details.

In addition to setting breakpoints in the code, you can use the `Stop` statement to pause execution at a particular line. This can be particularly useful for detecting unexpected values during testing. For example, the following statement stops execution if the variable `m_NumEmployees` is less than 1 or greater than 100:

```
If (m_NumEmployees < 1) Or (m_NumEmployees > 100) Then Stop
```

Summary

In practice, it's extremely difficult to anticipate every condition that can occur within a large application. You should try to predict as many incorrect situations as possible, but you should also plan for unforeseen errors. You should write error-checking code that makes bugs obvious when they occur and recovers from them if possible. You may not be able to anticipate every possible bug, but with a little thought you can make the program detect and report obviously incorrect values.

You should also look for unexpected conditions (such as the user entering a phone number in a Social Security number field) and make the program react gracefully. Your program cannot control everything in its environment (such as the user's actions, printer status, and network connectivity), but it should be prepared to act when things aren't exactly the way they should be.

When you do encounter an error, you can use tools such as breakpoints, watches, and the development environment's Locals, Auto, Immediate, and Call Stack windows to figure out where the problem begins and how to fix it. You may never be able to remove every last bug from a 100,000-line program, but you can make any remaining bugs appear so rarely that the users can do their jobs in relative safety.

Chapters 8 through 13 focused on controls, forms, and other user interface objects. Chapters 14 through 18 moved the focus to the code that lies behind the user interface. Chapter 20, "Database Controls and Objects," covers database topics that fall into both the user interface and non-user interface categories. It describes database controls that you can use to build an application's user interface as well as components and other objects that you can use behind the scenes to manipulate databases.

20

Database Controls
and Objects

The Windows Forms controls described in Chapter 8, "Selecting Windows Forms Controls," allow the application and the user to communicate. They let the application display data to the user, and they let the user control the application.

Visual Basic's database controls play roughly the same role between the application and a database. They move data from the database to the application, and they allow the application to send data back to the database.

Database programming is an enormous topic, and many books have been written that focus exclusively on database programming. This is such a huge field that no general Visual Basic book can adequately cover it in any real depth. However, database programming is also a very important topic, and every Visual Basic programmer should know at least something about using databases in applications.

This chapter explains how to build data sources and use drag-and-drop tasks to create simple table- and record-oriented displays. It also explains the most useful controls and objects that Visual Basic provides for working with databases. Although this is far from the end of the story, it will help you get started building basic database applications.

> *Note that the example programs described in this chapter refer to database locations as they are set up on my test computer. If you download them from the book's web site (*`www.vb-helper`*`.com/vb_prog_ref.htm`*), you will have to modify many of them to work with the database locations on your computer.*

Automatically Connecting to Data

Visual Studio provides tools that make getting started with databases remarkably easy. Although the process is relatively straightforward, it does involve a lot of steps. The steps also allow several variations, so describing every possible way to build a database connection takes a long time.

To make the process more manageable, the following two sections group the steps in two pieces: connecting to the data source and adding data controls to the form.

Connecting to the Data Source

To build a simple database program, start a new application and select the Data menu's Add New Data Source command to display the Data Source Configuration Wizard shown in Figure 20-1.

Visual Studio allows you to use databases, web services, and objects as data sources for your application. The most straightforward choice is Database.

Select the type of data source you want add and click Next to select a data connection on the page shown in Figure 20-2.
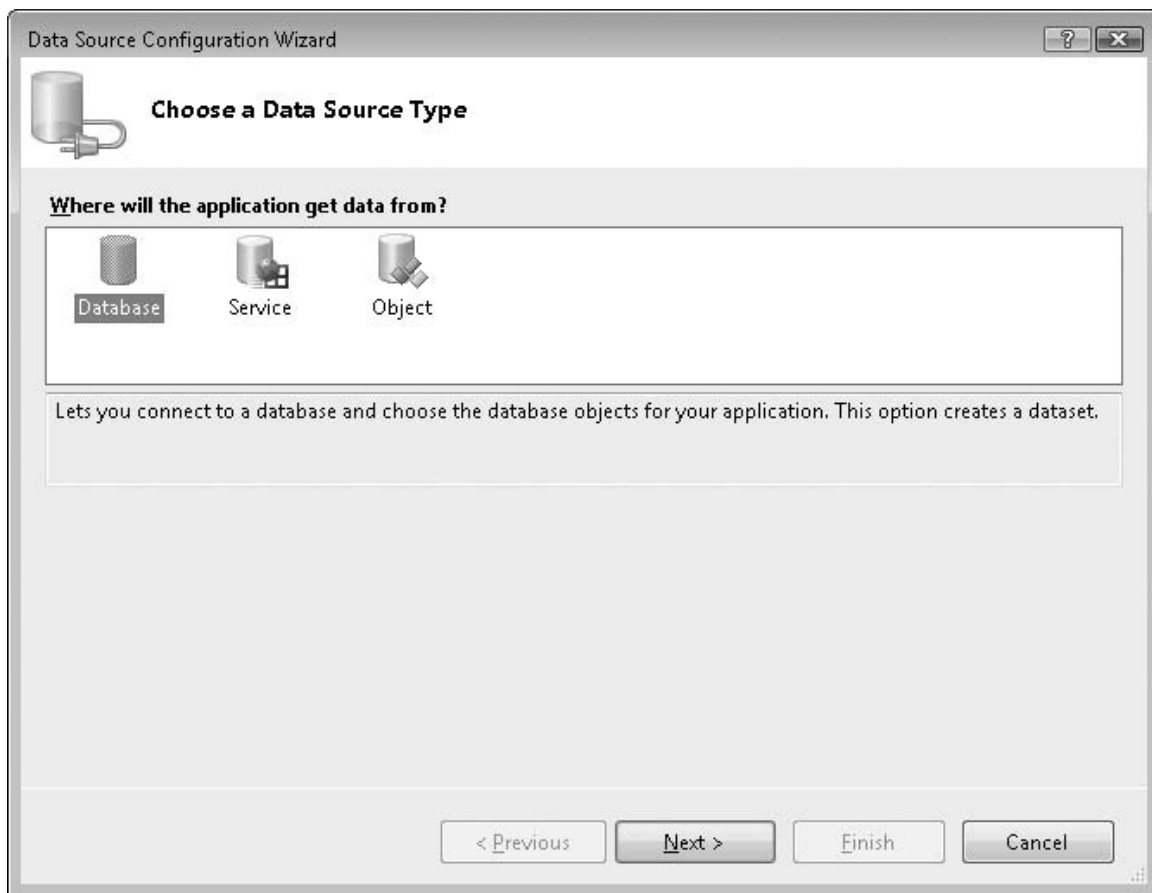
Figure 20-1: The Data Source Configuration Wizard lets you add or configure data sources.
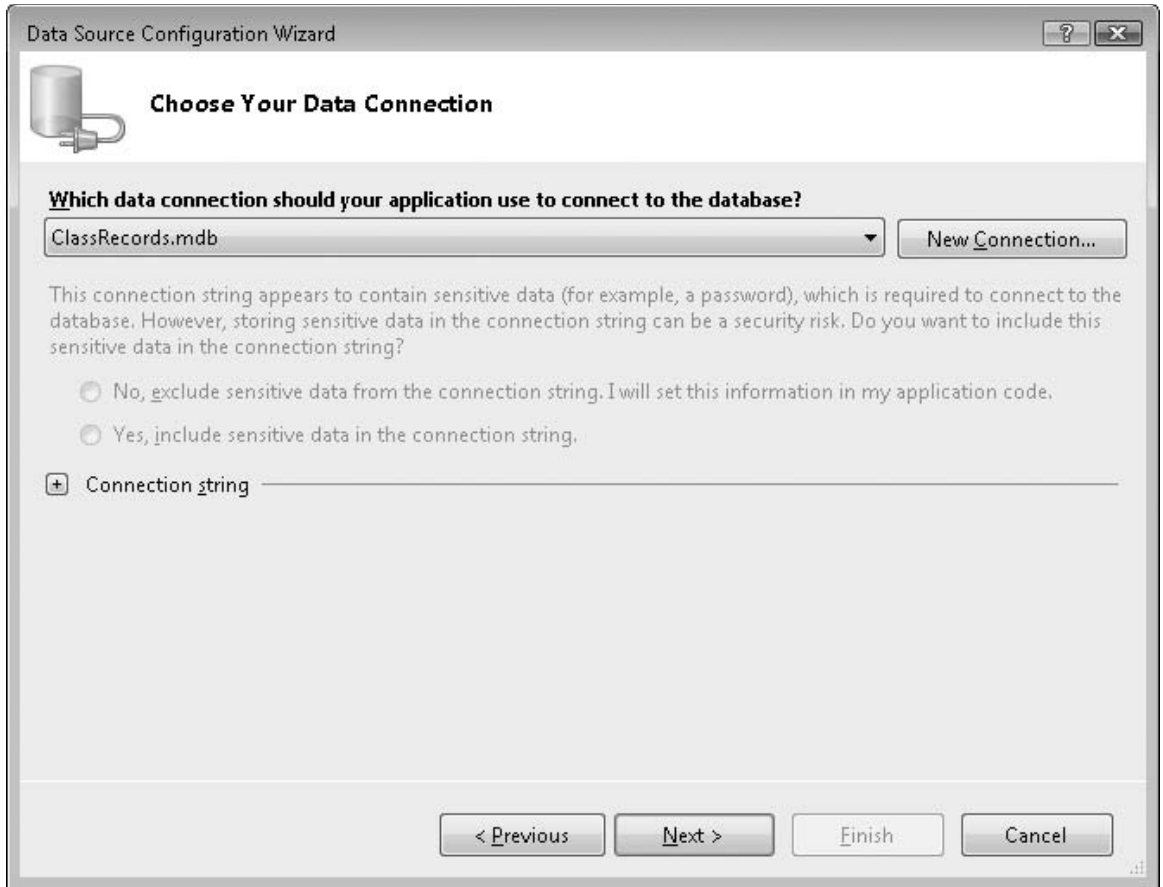
Figure 20-2: Pick the data connection or click New Connection to create a new one.

If you have previously created data connections, you can select one from the drop-down list. If you have not created any data connections, click the New Connection button to open the Choose Data Source dialog shown in Figure 20-3. This dialog lets you pick the type of data source you will use. For example, you can use it to select Microsoft Access databases, ODBC data sources, Microsoft SQL Server, and Oracle databases. This example assumes you will be using a Microsoft Access database.

If the dialog shown in Figure 20-4 appears first, you can skip the dialog in Figure 20-3 as long as it has selected the correct data source type. If you want to change the data source, click the Change button shown in Figure 20-4 to open the dialog shown in Figure 20-3.
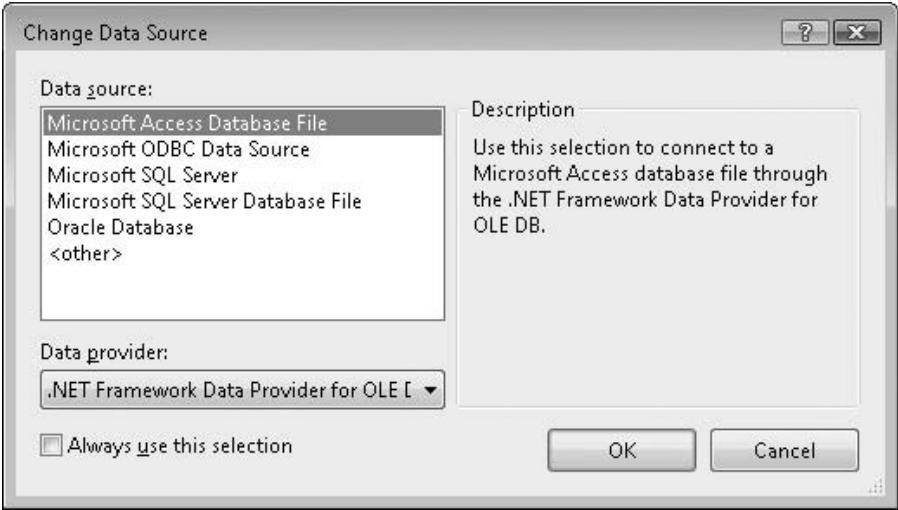
Figure 20-3: Select the data source type for a new connection.

After you select a data source type, a dropdown lists available providers for that type. Pick a provider and click Continue to show the dialog in Figure 20-4.

Figure 20-4: Use the Add Connection dialog box to create a data connection.

Depending on the type of database you selected in Figure 20-3, this dialog box may not look exactly like Figure 20-4. For example, if you selected the SQL Server database type, the Add Connection dialog asks for a data source and server name rather than a database file name.

Enter the necessary data in the Add Connection dialog box. For a SQL Server database, select the server name, authentication method, database name, and other information. For a Microsoft Access database, enter the file name or click the Browse button shown in Figure 20-4 and find the database file. Enter a user name and password if necessary and click OK.

When you return to the Data Source Configuration Wizard shown in Figure 20-2, the new connection should be selected in the drop-down list. If you click the plus sign next to the Connection string label, the wizard shows the connection information it will use to connect the data source to the database. For example, this information might look like the following:

```
Provider=Microsoft.Jet.OLEDB.4.0;Data
Source=|DataDirectory|\ClassRecords.mdb
```

When you click Next, the wizard tells you that you have selected a local database file that is not part of the project and it asks if you want to add it to the project. If you click Yes, the wizard adds the database to the project so it shows up in Project Explorer. If you plan to distribute the database with the application, you may want to do this to make it easier to manage the database and the Visual Basic source code together.

Next, the wizard asks whether you want to save the connection string in the project's configuration file. If you leave this check box selected, the wizard adds the configuration string to the project's `app .config` file.

The following shows the part of the configuration file containing the connection string:

```
<connectionStrings>
    <add name="StudentTest.My.MySettings.ClassRecordsConnectionString"
        connectionString="Provider=Microsoft.Jet.OLEDB.4.0;
Data Source=|DataDirectory|\ClassRecords.mdb;
Persist Security Info=True;Jet OLEDB:Database Password=MyPassword"
        providerName="System.Data.OleDb" />
</connectionStrings>
```

Later, the program uses the `Settings.Default.ClassRecordsConnectionString` values to get this value and connect to the database. You can easily make the program connect to another data source by changing this configuration setting and then restarting the application.

You should never save real database passwords in the configuration file. The file is stored in plain text and anyone can read it. If you need to use a password, store a connection string that contains a place-holder for the real password. Then at runtime, load the connection string and replace the placeholder with a real password entered by the user.

Adding Data Controls to the Form

At this point you have defined the basic connection to the database. Visual Studio knows where the database is and how to build an appropriate connection string to open it. Now you must decide what data to pull out of the database and how to display it on the form.

Click Next to display the dialog box shown in Figure 20-5. This page shows the objects available in the database. In this example, the database contains two tables named Students and TestScores. By clicking the plus signs next to the objects, you can expand them to see what they contain. In Figure 20-5, the tables are expanded so you can see the fields they contain.
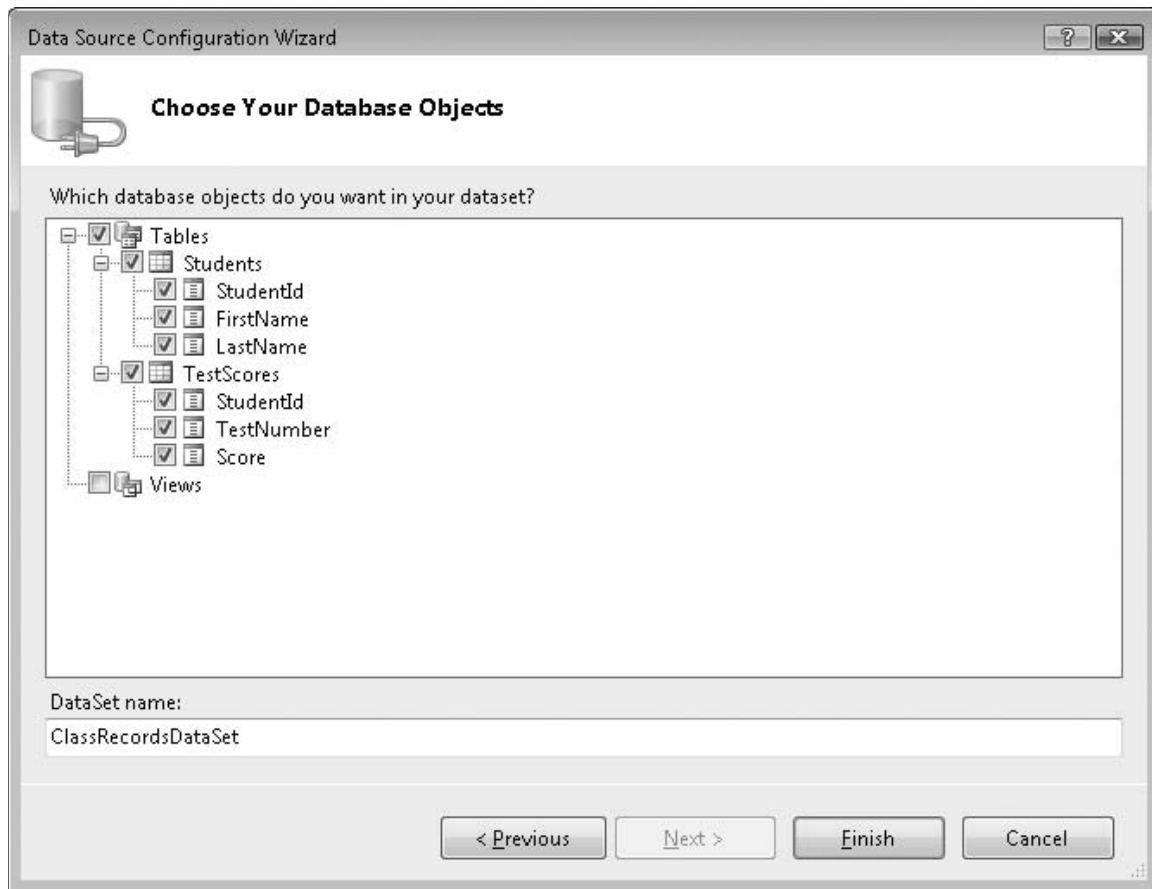
Figure 20-5: Select the database objects that you want included in the data source.

Select the database objects that you want to include in the data source. In Figure 20-5, both of the tables are selected.

When you click Finish, the wizard adds a couple objects to the application. The Solution Explorer lists the new file `ClassRecordsDataSet.xsd`. This is a schema definition file that describes the data source.

When you double-click the schema file, Visual Basic opens it in the editor shown in Figure 20-6. This display shows the tables defined by the schema and their fields.

The line between the files with the little key on the left and the infinity symbol on the right indicates that the tables are joined by a one-to-many relationship. In this example, the `Students.StudentId` field and `TestScores.StudentId` field form a foreign key relationship. That means every `StudentId` value in the TestScores table must correspond to some `StudentId` value in the Students table. When you double-click the relationship link or right-click it and select Edit Relation, the editor displays the dialog box shown in Figure 20-7. You can use this editor to modify the relation.

At the bottom of the tables shown in Figure 20-6, you can see two table adapter objects containing the labels Fill, GetData(). These represent data adapter objects that the program will later use to move data from and to the data source.
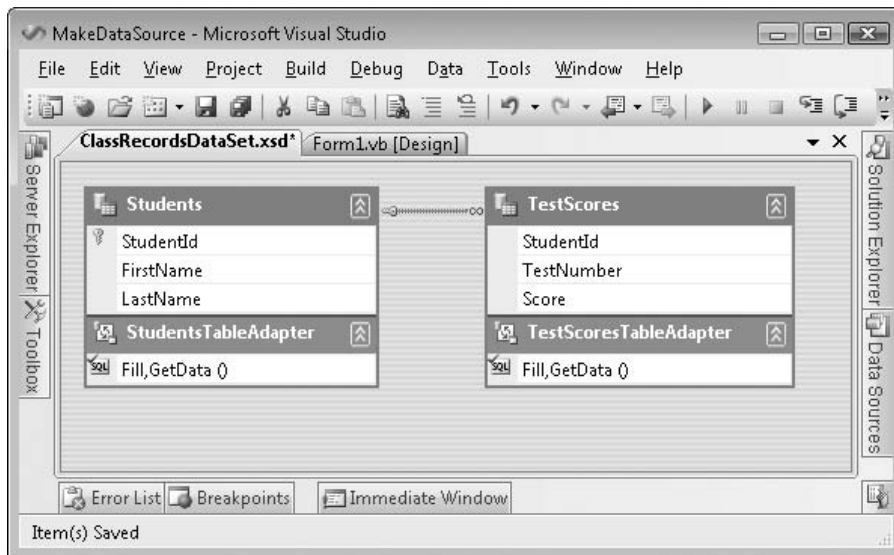
Figure 20-6: The Schema Editor shows the tables defined by the schema and their relationships.

Figure 20-7: Use this dialog box to edit relationships among data source tables.

In addition to adding the schema file to Solution Explorer, the Data Source Configuration Wizard also added a new `DataSet` object to the Data Sources window shown in Figure 20-8. (If this window is not visible, select the Data menu's Show Data Sources command.)

You can use the plus and minus signs to expand and collapse the objects in the `DataSet`. In Figure 20-8, the `DataSet` is expanded to show its tables, and the tables are expanded to show their fields. Notice that the TestScores table is listed below the Students table because it has a parent/child relationship with that table.

It takes a lot of words and pictures to describe this process, but using the wizard to build the data source is actually quite fast. After you have created the data source, you can build a simple user interface with almost no extra work. Simply drag objects from the Data Sources window onto the form.

When you click and drag a table from the Data Sources window onto the form, Visual Basic automatically creates `BindingNavigator` and `DataGridView` controls, and other components to display the data from the table. Figure 20-9 shows the result at runtime.
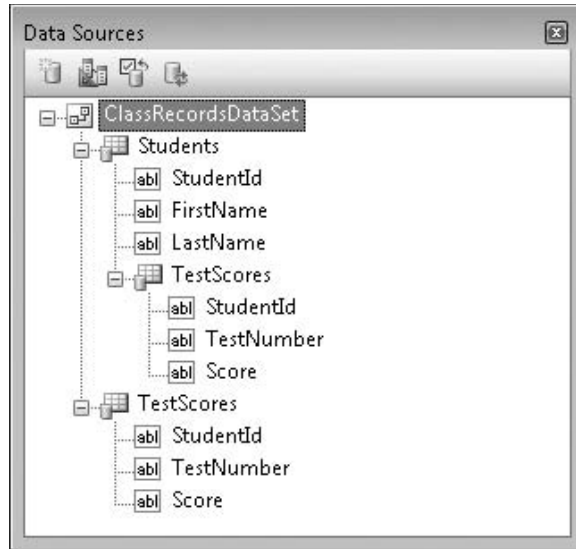
Figure 20-8: The Data Sources window lists the new data source.
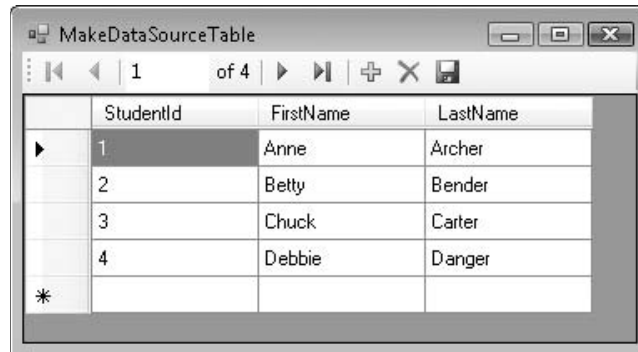
Figure 20-9: Drag and drop a table from the Data Sources window onto the form to create a simple DataGridView.

Instead of dragging an entire table onto the form, you can drag individual database columns. In that case, Visual Basic adds controls to the form to represent the column. Figure 20-10 shows the columns from the Students table dragged onto a form.

If you select a table in the Data Sources window, a drop-down arrow appears on the right. Open the dropdown to give the table a different display style, as shown in Figure 20-11. For example, if you set a table's style to Details and drag the table onto a form, Visual Basic displays the table's data using a record detail view similar to the one shown in Figure 20-10 instead of the grid shown in Figure 20-9.

Similarly, you can change the display styles for specific database columns. Select a column in the Data Sources window and click its drop-down arrow to make it display in a text box, label, link label, combo box, or other control. Now, when you drag the column onto a form, or when you drag the table onto the form to build a record view, Visual Basic uses this type of control to display the column's values.
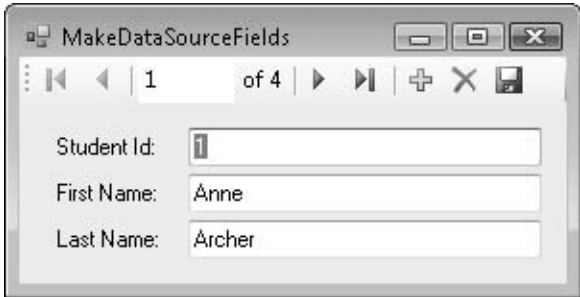
Figure 20-10: Drag and drop table columns onto a
form to create a record-oriented view instead of a grid.
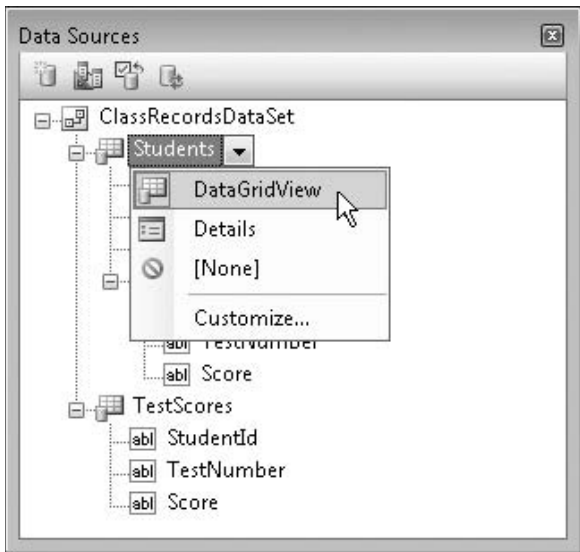
Figure 20-11: Use the dropdown in the Data Sources
window to give a table a different display style.

Automatically Created Objects

When you drag database tables and columns from the Data Sources window onto a form, Visual Basic does a lot more than simply placing a `DataGridView` control on a form. It also creates about two dozen other controls and components. Five of the more important of these objects are the `DataSet`, `TableAdapter`, `BindingSource`, `BindingNavigator`, and `TableAdapterManager`.

The program stores data in a `DataSet` object. A single `DataSet` object can represent an entire database. It contains `DataTable` objects that represent database tables. Each `DataTable` contains `DataRow` objects that represent rows in a table, and each `DataRow` contains items representing column values for the row.
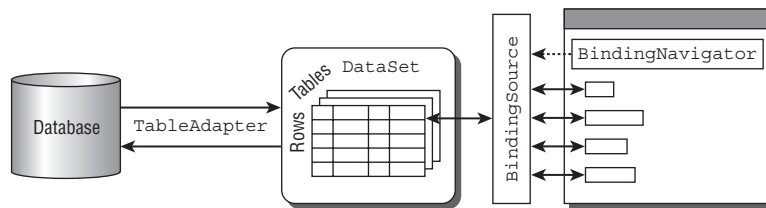
The `TableAdapter` object copies data between the database and the `DataSet`. It has methods for performing operations on the database (such as selecting, inserting, updating, and deleting records). Hidden inside the `TableAdapter` is a connection object that contains information on the database so that the `TableAdapter` knows where to find it.

The `TableAdapterManager` coordinates updates among different `TableAdapter`s. This is most useful for hierarchical data sets, a topic that is outside the scope of this book. The wizard-generated code also uses the `TableAdapterManager` to update the single data set it creates.

The `BindingSource` object encapsulates all of the `DataSet` object's data and provides programmatic control functions. These perform such actions as moving through the data, adding and deleting items, and so forth.

The `BindingNavigator` provides a user interface so the user can control the `BindingSource`.

Figure 20-12 shows the relationships among the `DataSet`, `TableAdapter`, `BindingSource`, and `BindingNavigator` objects. The `BindingNavigator` is the only one of these components that has a presence on the form.

Figure 20-12: Visual Basic uses DataSet, TableAdapter, BindingSource, and BindingNavigator objects to display data.

Even all these objects working together don't quite do everything you need to make the program display data. When it creates these objects, Visual Basic also adds the following code to the form:

```
Public Class Form1
    Private Sub StudentsBindingNavigatorSaveItem_Click( _
     ByVal sender As System.Object, ByVal e As System.EventArgs) _
     Handles StudentsBindingNavigatorSaveItem.Click
        Me.Validate()
        Me.StudentsBindingSource.EndEdit()
        Me.TableAdapterManager.UpdateAll(Me.ClassRecordsDataSet)
    End Sub

    Private Sub Form1_Load(ByVal sender As System.Object, _
     ByVal e As System.EventArgs) Handles MyBase.Load
        'TODO: This line of code loads data into the
```

```
        ' 'ClassRecordsDataSet.Students' table.
        ' You can move, or remove it, as needed.

Me.StudentsTableAdapter.Fill(Me.ClassRecordsDataSet.Students)
    End Sub
End Class
```

The `StudentsBindingNavigatorSaveItem_Click` event handler fires when the user clicks the `BindingNavigator` object's Save tool. This routine makes the `TableAdapter` save any changes to the Students table to the database.

The `Form1_Load` event handler makes the `TableAdapter` copy data from the database into the `DataSet` when the form loads.

Visual Basic builds all this automatically, and if you ran the program at this point, it would display data and let you manipulate it. It's still not perfect, however. It doesn't perform any data validation, and it will let you close the application without saving any changes you have made to the data. It's a pretty good start for such a small amount of work, however.

Other Data Objects

If you want a simple program that can display and modify data, then the solution described in the previous sections may be good enough. In that case, you can let Visual Basic do most of the work for you, and you don't need to dig into the lower-level details of database access.

You can also use objects similar to those created by Visual Basic to build your own solutions. You can create your own `DataSet`, `TableAdapter`, `BindingSource`, and `BindingNavigator` objects to bind controls to a database.

If you need to manipulate the database directly with code, it doesn't necessarily make sense to create all these objects. If you simply want to modify a record programmatically, it certainly doesn't make sense to create `DataGridView`, `BindingNavigator`, and `BindingSource` objects.

For cases such as this, Visual Basic provides several other kinds of objects that you can use to interact with databases. These objects fall into the following four categories:

❑ **Data containers** hold data after it has been loaded from the database into the application much as a `DataSet` does. You can bind controls to these objects to automatically display and manipulate the data.

❑ **Connections** provide information that lets the program connect to the database.

❑ **Data adapters** move data between a database and a data container.

❑ **Command objects** provide instructions for manipulating data. A command object can select, update, insert, or delete data in the database. It can also execute stored procedures in the database.

Data container and adapter classes are generic and work with different kinds of databases, whereas different types of connection and command objects are specific to different kinds of databases. For example, the connection objects `OleDbConnection`, `SqlConnection`, `OdbcConnection`, and `OracleConnection` work with Object Linking and Embedding Database (OLE DB); SQL Server, including Microsoft Data Engine (MSDE); Open Database Connectivity (ODBC); and Oracle databases, respectively. The SQL Server and Oracle objects work only with their specific brand of database, but they are more completely optimized for those databases and may give better performance.

Aside from the different database types they support, the various objects work in more or less the same way. The following sections explain how an application uses those objects to move data to and from the database. They describe the most useful properties, methods, and events provided by the connection, transaction, data adapter, and command objects.

Later sections describe the `DataSet` and `DataView` objects and tell how you can use them to bind controls to display data automatically.

Data Overview

An application uses three basic objects to move data to and from a database: a connection, a data adapter, and a data container such as a `DataSet`. The connection object defines the connection to the database. It contains information about the database's name and location, any user name and password needed to access the data, database engine information, and flags that determine the kinds of access the program will need.

The data adapter object defines a mapping from the database to the `DataSet`. It determines what data is selected from the database, and which database columns are mapped to which `DataSet` columns.

The `DataSet` object stores the data within the application. It can hold more than one table and can define and enforce relationships among the tables. For example, the database used in the earlier examples in this chapter has a TestScores table that has a StudentId field. The values in this field must be values listed in the Students table. This is called a *foreign key constraint*. The `DataSet` can represent this constraint and raise an error if the program tries to create a TestScores record with a StudentId value that does not appear in the Students table.

When the connection, data adapter, and `DataSet` objects are initialized, the program can call the data adapter's `Fill` method to copy data from the database into the `DataSet`. Later it can call the data adapter's `Update` method to copy any changes to the data from the `DataSet` back into the database. Figure 20-13 shows the process.

If you compare Figure 20-13 to Figure 20-12, you'll see several similarities. Both approaches use an adapter to copy data between the database and a `DataSet`. At first glance, it may seem that Figure 20-12 doesn't use a connection object, but actually the `TableAdapter` contains a connection object internally that it uses to access the database.

One major difference is that Figure 20-12 uses a `BindingSource` to provide an extra layer between the `DataSet` and the program's controls. It also includes a `DataNavigator` object that lets the user control the `BindingSource` to move through the data.

As in the previous example, a program using the objects shown in Figure 20-13 could call the data adapter's `Fill` method in a form's `Load` event handler. Later it could call the `Update` method when the user clicked a Save button, in the form's `FormClosing` event handler, or whenever you wanted to save the data.
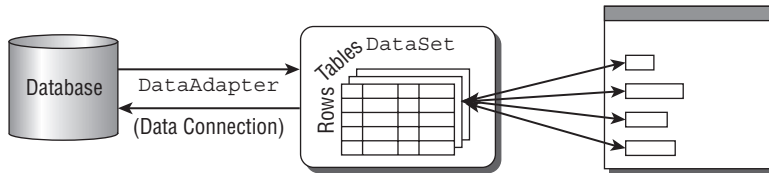
Figure 20-13: An application uses connection, data adapter, and DataSet objects to move data to and from the database.

Connection Objects

The connection object manages the application's connection to the database. It allows a data adapter to move data in and out of a `DataSet`.

The different flavors of connection object (`OleDbConnection`, `SqlConnection`, `OdbcConnection`, `OracleConnection`, and so on) provide roughly the same features, but there are some differences. Check the online help to see if a particular property, method, or event is supported by one of the flavors. The web page `http://msdn2.microsoft.com/en-us/library/32c5dh3b(vs.71).aspx` provides links to pages that explain how to connect to SQL Server, OLE DB, ODBC, and Oracle data sources. Other links lead to information on the `SqlConnection`, `OleDbConnection`, and `OdbcConnection` classes.

If you will be working extensively with a particular type of database (for example, SQL Server), you should also review the features provided by its type of connection object to see if it has special features for that type of database.

Some connection objects can work with more than one type of database. For example, the `OleDbConnection` object works with any database that has an OLE DB (Object Linking and Embedding Database) provider. Similarly the `OdbcConnection` object works with databases that have ODBC (Open Database Connectivity) providers such as MySQL.

Generally, connections that work with a specific kind of database (such as `SqlConnection` and `OracleConnection`) give better performance. If you think you might later need to change databases, you can minimize the amount of work required by sticking to features that are shared by all the types of connection objects.

> *The Toolbox window does not automatically display tools for these objects. To add them, right-click the Toolbox tab where you want them and select Choose Items. Select the check boxes next to the tools you want to add (for example, OracleCommand or OdbcConnection) and click OK.*

The following table describes the most useful properties provided by the `OleDbConnection` and `SqlConnection` classes.

Property	Purpose
ConnectionString	The string that defines the connection to the database.
ConnectionTimeout	The time the object waits while trying to connect to the database. If this timeout expires, the object gives up and raises an error.
Database	Returns the name of the current database.
DataSource	Returns the name of the current database file or database server.
Provider	(`OleDbConnection` only) Returns the name of the OLE DB database provider (for example, Microsoft.Jet.OLEDB.4.0).
ServerVersion	Returns the database server's version number. This value is available only when the connection is open and may look like 04.00.0000.
State	Returns the connection's current state. This value can be `Closed`, `Connecting`, `Open`, `Executing` (executing a command), `Fetching` (fetching data), and `Broken` (the connection was open but then broke; you can close and reopen the connection).

The `ConnectionString` property includes many fields separated by semicolons. The following text shows a typical `ConnectionString` value for an `OleDbConnection` object that will open an Access database. The text here shows each embedded field on a separate line, but the actual string would be all run together in one long line.

```
Jet OLEDB:Global Partial Bulk Ops=2;
Jet OLEDB:Registry Path=;
Jet OLEDB:Database Locking Mode=1;
Data Source="C:\Personnel\Data\Personnel.mdb";
Mode=Share Deny None;
Jet OLEDB:Engine Type=5;
Provider="Microsoft.Jet.OLEDB.4.0";
Jet OLEDB:System database=;
Jet OLEDB:SFP=False;
persist security info=False;
Extended Properties=;
Jet OLEDB:Compact Without Replica Repair=False;
Jet OLEDB:Encrypt Database=False;
Jet OLEDB:Create System Database=False;
Jet OLEDB:Don't Copy Locale on Compact=False;
User ID=Admin;
Jet OLEDB:Global Bulk Transactions=1"
```

The data source value will be different on your system. In this example, the database is at `C:\Personnel\Data\Personnel.mdb`*. You would need to change it to match the location of the data on your system.*

Many of these properties are optional and you can omit them. Remembering which ones are optional (or even which fields are allowed for a particular type of connection object) is not always easy. Fortunately, it's also not necessary. Instead of typing all these fields into your code or in the connection control's `ConnectString` property in the Properties window, you can let Visual Basic build the string for you.

Simply follow the steps described in the section "Connecting to the Data Source" earlier in this chapter. After you build or select the database connection, click the plus sign in Figure 20-2 to see its connection string. Use the mouse to highlight the connection string and then press Ctrl+C to copy it to the clipboard.

The following code fragment shows how a program can create, open, use, and close an `OleDbConnection` object. The code assumes the database name is in the text box `txtDatabase`.

```
' Make the connect string.
Dim connect_string As String = _
    "Provider=Microsoft.Jet.OLEDB.4.0;" & _
    "Data Source=""" & txtDatabase.Text & """;" & _
    "Persist Security Info=False"

' Open a database connection.
Dim conn_people As New OleDb.OleDbConnection(connect_string)
conn_people.Open()

' Do stuff with the connection.
'...

' Close the connection.
conn_people.Close()
conn_people.Dispose()
```

Example program CommandInsert, which is available for download on the book's web site, uses similar code to open a connection before inserting new data into the database.

The following table describes the most useful methods provided by the `OleDbConnection` and `SqlConnection` classes.

Method	Purpose
BeginTransaction	Begins a database transaction and returns a transaction object representing it. A transaction lets the program ensure that a series of commands are either all performed or all canceled as a group. See the section "Transaction Objects" later in this chapter for more information.
ChangeDatabase	Changes the currently open database.
Close	Closes the database connection.
CreateCommand	Creates a command object that can perform some action on the database. The action might select records, create a table, update a record, and so forth.
Open	Opens the connection using the values specified in the `ConnectionString` property.

The connection object's most useful events are `InfoMessage` and `StateChange`. The `InfoMessage` event occurs when the database provider issues a warning or informational message. The program can read the message and take action or display it to the user. The `StateChange` event occurs when the database connection's state changes.

Note that the method for using a connection object shown in Figure 20-12 relies on the data adapter's `Fill` and `Update` methods, not on the connection object's `Open` and `Close` methods. `Fill` and `Update` automatically open the connection, perform their tasks, and then close the connection so that you don't need to manage the connection object yourself. For example, when the program calls `Fill`, the data adapter quickly opens the connection, copies data from the database into the `DataSet`, and then closes the database. When you use this model for database interaction, the data connections are open only very briefly.

Transaction Objects

A transaction defines a set of database actions that should be executed "atomically" as a single unit. Either all of them should occur or none of them should occur, but no action should execute without all of the others.

The classic example is a transfer of money from one account to another. Suppose that the program tries to subtract money from one account and then add it to another. After it subtracts the money from the first account, however, the program crashes. The database has lost money — a bad situation for the owners of the accounts.

On the other hand, suppose that the program performs the operations in the reverse order: first it adds money to the second account and then subtracts it from the first. This time if the program gets halfway through the operation before crashing, the database has created new money — a bad situation for the bank.

The solution is to wrap these two operations in a database transaction. If the program gets halfway through the transaction and then crashes, the database engine unwinds the transaction, so the data looks as if nothing had happened. This isn't as good as performing the whole transaction flawlessly, but at least the database is consistent and the money has been conserved.

To use transactions in Visual Basic, the program uses a connection object's `BeginTransaction` method to open a transaction. It then creates command objects associated with the connection and the transaction, and it executes them. When it has finished, the program can call the transaction object's `Commit` method to make all the actions occur, or it can call `Rollback` to cancel them all.

Example program Transactions, which is available for download on the book's web site, uses the following code to perform two operations within a single transaction. This code removes an amount of money from one account and adds the same amount to another account.

```
' Make a transfer.
Private Sub btnUpdate_Click() Handles btnUpdate.Click
    ' Open the connection.
    Dim connAccounts As New OleDbConnection(MakeConnectString())
    connAccounts.Open()

    ' Make the transaction.
```

```
        Dim trans As OleDbTransaction = _
            connAccounts.BeginTransaction(IsolationLevel.ReadCommitted)

        ' Make a Command for this connection.
        ' and this transaction.
        Dim cmd As New OleDbCommand( _
            "UPDATE Accounts SET Balance=Balance + ? WHERE AccountName=?", _
            connAccounts, _
            trans)

        ' Create parameters for the first command.
        cmd.Parameters.Add(New OleDbParameter("Balance", _
            Decimal.Parse(txtAmount.Text)))
        cmd.Parameters.Add(New OleDbParameter("AccountName", _
            "Alice's Software Emporium"))

        ' Execute the second command.
        cmd.ExecuteNonQuery()

        ' Create parameters for the second command.
        cmd.Parameters.Clear()
        cmd.Parameters.Add(New OleDbParameter("Balance", _
            -Decimal.Parse(txtAmount.Text)))
        cmd.Parameters.Add(New OleDbParameter("AccountName", _
            "Bob's Consulting"))

        ' Execute the second command.
        cmd.ExecuteNonQuery()

        ' Commit the transaction.
        If MessageBox.Show( _
            "Commit transaction?", _
            "Commit?", _
            MessageBoxButtons.YesNo, _
            MessageBoxIcon.Question) = Windows.Forms.DialogResult.Yes _
        Then
            ' Commit the transaction.
            trans.Commit()
        Else
            ' Rollback the transaction.
            trans.Rollback()
        End If

        ' Display the current balances.
        ShowValues(connAccounts)

        ' Close the connection.
        connAccounts.Close()
    End Sub
```

The code first creates a connection. It uses the `MakeConnectString` function to build an appropriate connection string.

Next the code uses the connection's `BeginTransaction` method to make the transaction object `trans`.

Next, the code defines an `OleDbCommand` object named `cmd`, setting its command text to "UPDATE Accounts SET Balance=Balance + ? WHERE AccountName=?" Note that it passes the transaction object into the command object's constructor to make the command part of the transaction.

The question marks in the command text represent parameters to the command. The program defines the parameters' values by adding two parameter objects to the command object. It then calls the command's `ExecuteNonQuery` method to perform the query.

The code clears the command's parameters, adds two parameters with different values, and calls the command's `ExecuteNonQuery` method again.

Now the program displays a message box asking whether you want to commit the transaction. When you click Yes, the program calls the transaction's `Commit` method and both of the update operations occur. When you click No, the program calls the transaction's `Rollback` method and both of the update operations are canceled.

The program finishes by calling `ShowValues` to display the updated data and by closing the connection.

Instead of clicking Yes or No when the program asks if it should commit the transaction, you can use the IDE to stop the program. When you then restart the program, you will see that neither update was processed.

In addition to the `Commit` and `Rollback` methods, transaction objects may provide other methods for performing more complex transactions. For example, the `OleDbTransaction` class has a `Begin` method that enables you to create a nested transaction. Similarly, the `SqlTransaction` class has a `Save` method that creates a "savepoint" that you can use to roll back part of the transaction. See the online help for the type of transaction object you are using to learn about these methods. The web page `http://msdn2.microsoft.com/en-us/library/2k2hy99x(vs.71).aspx` gives an overview of using transactions. Links at the bottom lead to information about the `OleDbTransaction`, `SqlTransaction`, and `OdbcTransaction` classes.

Data Adapters

A data adapter transfers data between a connection and a `DataSet`. This object's most important methods are `Fill` and `Update`, which move data from and to the database. A data adapter also provides properties and other methods that can be useful. The following table describes the object's most useful properties.

Property	Purpose
DeleteCommand	The command object that the adapter uses to delete rows.
InsertCommand	The command object that the adapter uses to insert rows.
SelectCommand	The command object that the adapter uses to select rows.
TableMappings	A collection of `DataTableMapping` objects that determine how tables in the database are mapped to tables in the `DataSet`. Each `DataTableMapping` object has a `ColumnMappings` collection that determines how the columns in the database table are mapped to columns in the `DataSet` table.
UpdateCommand	The command object that the adapter uses to update rows.

There are a couple of ways you can create the command objects. For example, if you use the Data Adapter Configuration Wizard (described shortly) to build the adapter at design time, the wizard automatically creates these objects. You can select the adapter and expand these objects in the Properties window to read their properties, including the `CommandText` property that defines the commands.

Another way to create these commands is to use a command builder object. If you attach a command builder to a data adapter, the adapter uses the command builder to generate the commands it needs automatically.

Example program GenerateCommands, which is available for download on the book's web site, uses the following code to determine the commands used by a data adapter. The code creates a new `OleDbCommandBuilder`, passing its constructor the data adapter. It then uses the command builder's `GetDeleteCommand`, `GetInsertCommand`, and `GetUpdateCommand` methods to learn about the automatically generated commands.

```
' Attach a command builder to the data adapter
' and display the generated commands.
Dim command_builder As New OleDbCommandBuilder(OleDbDataAdapter1)

Dim txt As String = ""

txt &= command_builder.GetDeleteCommand.CommandText & vbCrLf & vbCrLf
txt &= command_builder.GetInsertCommand.CommandText & vbCrLf & vbCrLf
txt &= command_builder.GetUpdateCommand.CommandText & vbCrLf & vbCrLf

txtCommands.Text = txt
txtCommands.Select(0, 0)
```

The following text shows the results of the previous `Debug` statements. The DELETE and UPDATE statements are wrapped across multiple lines. The command builder generated these commands based on the select statement `SELECT * From Books` that was used to load the `DataSet`.

```
DELETE FROM Books WHERE ((Title = ?) AND
    ((? = 1 AND URL IS NULL) OR (URL = ?)) AND
    ((? = 1 AND Year IS NULL) OR (Year = ?)) AND
    ((? = 1 AND ISBN IS NULL) OR (ISBN = ?)) AND
```

```
    ((? = 1 AND Pages IS NULL) OR (Pages = ?)))

 INSERT INTO Books (Title, URL, Year, ISBN, Pages) VALUES (?, ?, ?, ?, ?)

 UPDATE Books SET Title = ?, URL = ?, Year = ?, ISBN = ?, Pages = ? WHERE
    ((Title = ?) AND
      ((? = 1 AND URL IS NULL) OR (URL = ?)) AND
      ((? = 1 AND Year IS NULL) OR (Year = ?)) AND
      ((? = 1 AND ISBN IS NULL) OR (ISBN = ?)) AND
      ((? = 1 AND Pages IS NULL) OR (Pages = ?)))
```

A data adapter's `TableMappings` property enables you to change how the adapter maps data in the database to the `DataSet`. For example, you could make it copy the Employees table in the database into a `DataSet` table named People. You don't usually need to change the table and column names, however, and you can make these changes interactively at design time more easily than you can do this in code, so you will usually leave these values alone at runtime.

To create a data adapter control at design time, open a form in the Form Designer, select the Toolbox's Data tab, and double-click the appropriate data adapter control. (If the data adapter you want doesn't appear in the Toolbox, right-click the Toolbox, select Choose Items, and pick the data adapter that you want to use.)

When you create a data adapter, the Data Adapter Configuration Wizard appears. The wizard's first page lets you select or build a data connection much as the Data Source Configuration Wizard does in Figure 20-2. Select or create a connection as described in the section "Connecting to the Data Source" earlier in this chapter.

Click Next to display the page shown in Figure 20-14. Use the option buttons to select the method the adapter should use to work with the data source. This determines how the data adapter will fetch, update, delete, and insert data in the database. Select the "Use SQL Statements" option to make the adapter use simple SQL statements. Select the "Create new stored procedures" option to make the wizard generate stored procedures in the database. Select the "Use existing stored procedures" option to make the wizard use procedures you have already created. In Figure 20-14, only the first option is enabled because it is the only option available to the `OleDbDataAdapter` that was used in this example.

When you select the Use SQL Statements option and click Next, the form shown in Figure 20-15 appears. If you are experienced at writing SQL statements, enter the `SELECT` statement that you want the data adapter to use to select its data.

If you have less experience or are not familiar with the database's structure, click the Query Builder button to use the Query Builder shown in Figure 20-16. The area in the upper left shows the tables currently selected for use by the SQL query. Check boxes indicate which fields in the tables are selected. To add new tables to the query, right-click in this area and select Add Table.

Figure 20-16 shows the Query Builder. The top part shows that the Books table is included in the query and that its Title, Year, and Pages fields are selected.

Below the table and field selection area is a grid that lists the selected fields. Columns let you specify modifiers for each field. A field's Alias indicates the name the field is known by when it is returned by the query. In Figure 20-16, the Year field will be returned with the alias PubYear.

The Output check box determines whether the field is selected. This check box does the same thing as the one in the upper field selection area.

421
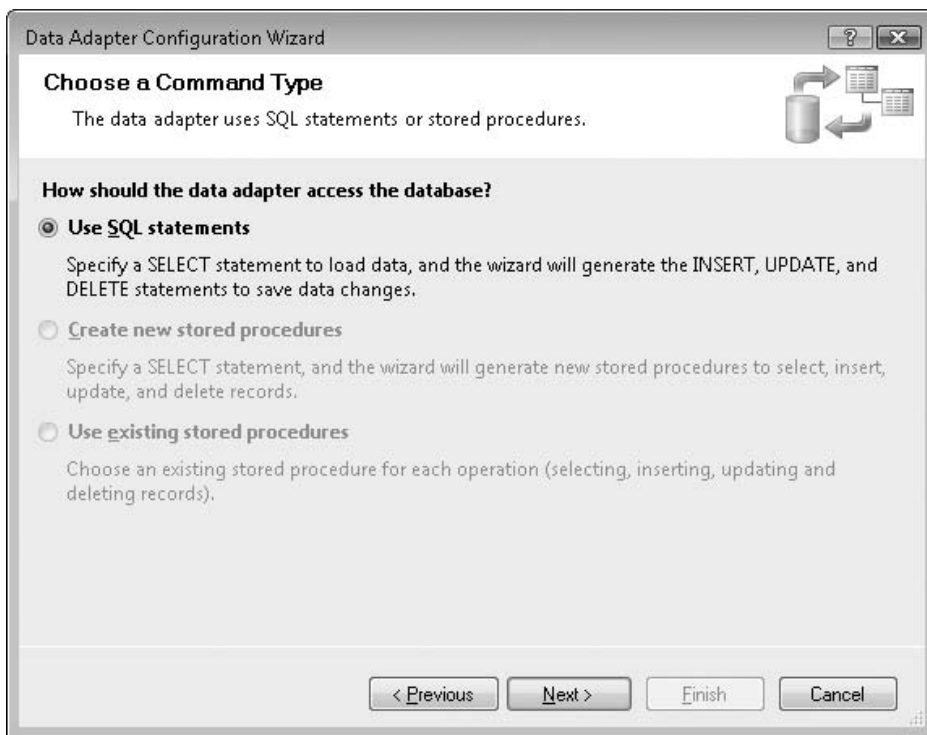
Figure 20-14: Select the method the data adapter will use to manipulate database data.
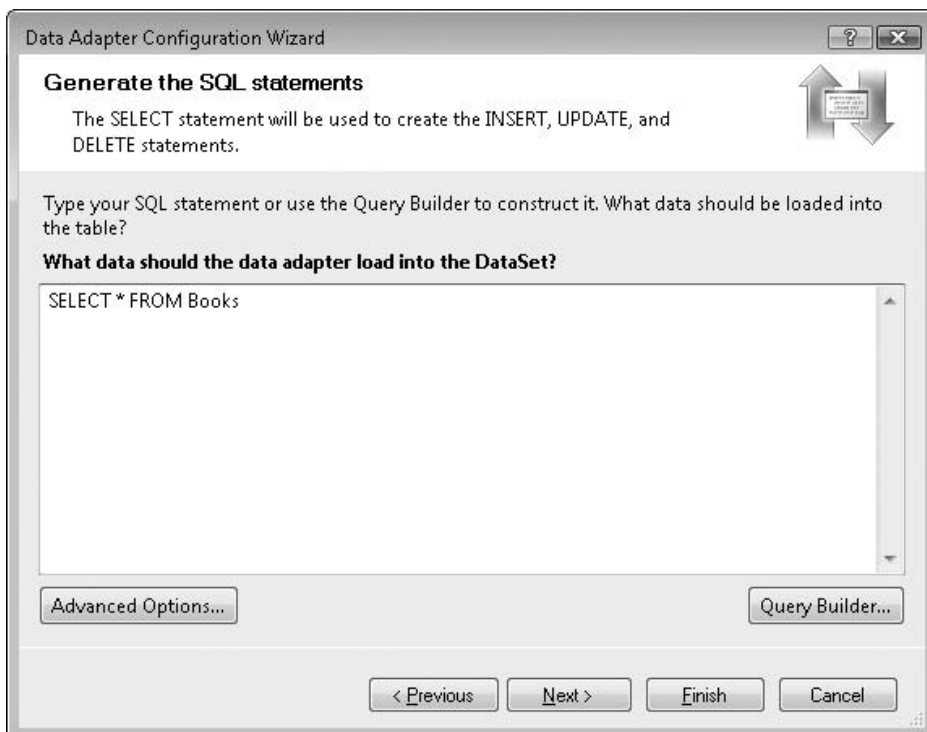
Figure 20-15: Enter a SQL SELECT statement or click the Query Builder button.
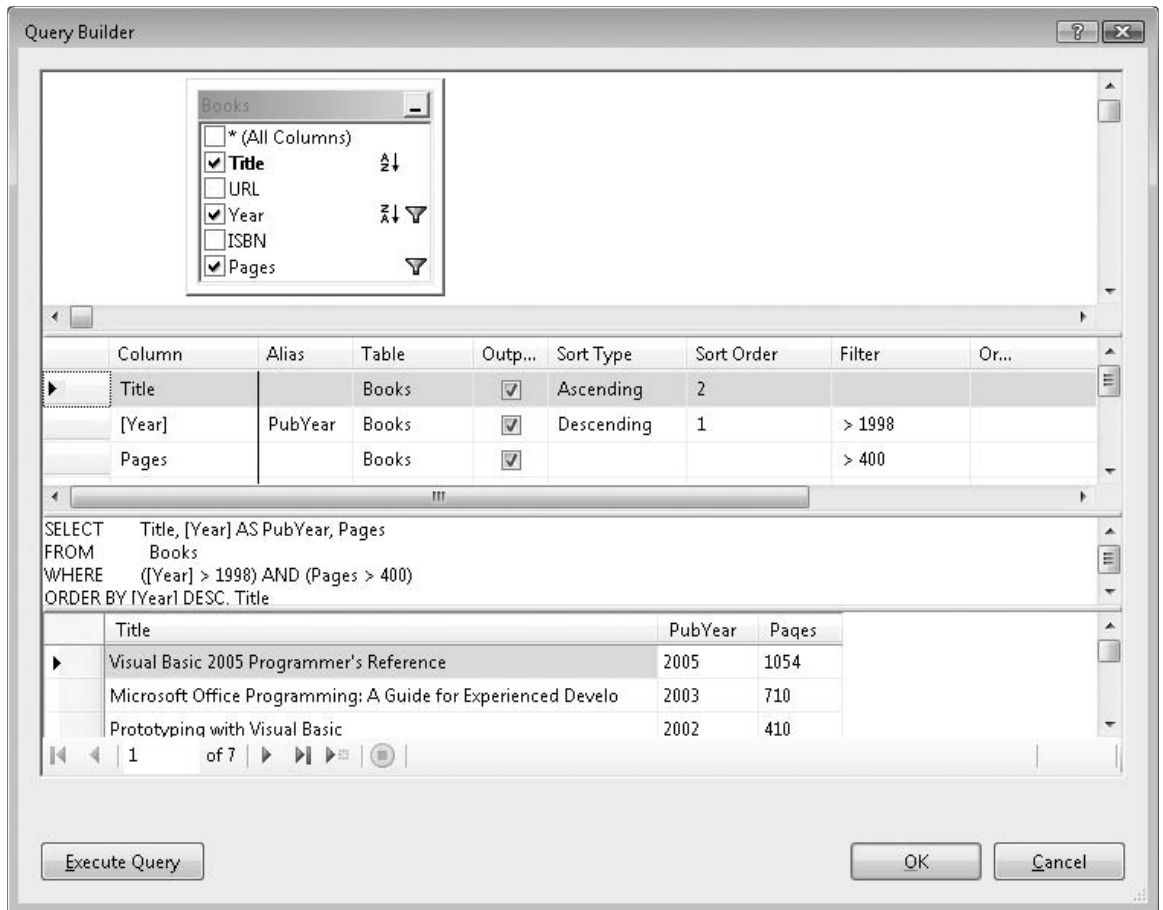
Figure 20-16: You can use the Query Builder to interactively define the data that a data adapter selects.

The Sort Type column lets you indicate that the results should be sorted in either ascending or descending order. Sort Order determines the order in which the fields are sorted. The query shown in Figure 20-16 sorts first by Year in descending order. If more than one book has the same Year, they are ordered by Title in ascending order.

The Filter column lets you add conditions to the fields. The values in Figure 20-16 make the query select records only where the Year is greater than 1998. Additional fields scrolled off to the right in Figure 20-16 let you add more filters combined with OR. For example, you could select books where the Year is greater than 1998 OR less than 1995.

If you place filters on more than one field, their conditions are combined with AND. For example, the values shown in Figure 20-16 select records where Year is greater than 1998 AND Pages is greater than 400.

Below the grid is a text box that shows the SQL code for the query. If you look at the query, you can see that it selects the fields checked in the field selection area at the top, uses an appropriate WHERE clause, and orders the results properly.

Click the Execute Query button to make the Query Builder run the query and display the results in the bottom grid. You can use this button to test the query to verify that it makes some sense before you finish creating the data adapter.

Click OK to close the Query Builder and return to the Data Adapter Configuration Wizard.

When you click Next, the Data Adapter Configuration Wizard displays a summary page indicating what it did and did not do while creating the data adapter. Depending on the query you use to select data, the wizard may not generate all the commands to select, update, insert, and delete data. For example, if the query joins more than one table, the wizard will be unable to figure out how to update the tables, so it won't generate insert, update, or delete commands.

Click Finish to close the wizard and see the new data adapter and its new connection object. You can see the adapter's DeleteCommand, InsertCommand, SelectCommand, and UpdateCommand objects in the Properties window. These objects'CommandText values show the corresponding SQL statements used by the objects. The wizard also generates default table mappings to transform database values into DataSet values.

Command Objects

The command object classes (OleDbCommand, SqlCommand, OdbcCommand, and OracleCommand) define database commands. The command can be a SQL query, or some non-query statement such as an INSERT, UPDATE, DELETE, or CREATE TABLE statement.

The object's Connection property gives the database connection object on which it will execute its command. CommandText gives the SQL text that the command represents.

The CommandType property tells the database the type of command text the command holds. This can be StoredProcedure (CommandText is the name of a stored procedure), TableDirect (CommandText is the name of one or more tables from which the database should return data), or Text (CommandText is a SQL statement).

The command object's Parameters collection contains parameter objects that define any values needed to execute the command text.

Example program CommandInsert, which is available for download on the book's web site, uses the following code to create an OleDbCommand object that executes the SQL statement INSERT INTO PeopleNames (FirstName, LastName) VALUES (?, ?). The question marks are placeholders for parameters that will be added later. The code then adds two new OleDbParameter objects to the command's Parameters collection. When the code invokes the command's ExecuteNonQuery method, the adapter replaces the question marks with these parameter values in the order in which they appear in the Parameters collection. In this example, the value of txtFirstName.Text replaces the first question mark and txtLastName.Text replaces the second.

```
Private Sub btnAdd_Click() Handles btnAdd.Click
    ' Make the connect string.
    Dim connect_string As String = _
        "Provider=Microsoft.Jet.OLEDB.4.0;" & _
        "Data Source=""" & txtDatabase.Text & """;" & _
        "Persist Security Info=False"

    ' Open a database connection.
    Dim conn_people As New OleDb.OleDbConnection(connect_string)
    conn_people.Open()

    ' Make a Command to insert data.
    Dim cmd As New OleDbCommand( _
        "INSERT INTO PeopleNames (FirstName, LastName) " & _
        "VALUES (?, ?)", _
        conn_people)

    ' Create parameters for the command.
    cmd.Parameters.Add(New OleDbParameter("FirstName", txtFirstName.Text))
    cmd.Parameters.Add(New OleDbParameter("LastName", txtLastName.Text))

    ' Execute the command.
    Try
        cmd.ExecuteNonQuery()
    Catch ex As Exception
        MessageBox.Show(ex.Message)
    End Try

    ' Show the current values.
    ShowValues(conn_people)

    ' Close the connection.
    conn_people.Close()
    conn_people.Dispose()
End Sub
```

The command object's `Transaction` property gives the transaction object with which it is associated. See the section "Transaction Objects" earlier in this chapter for more information about transactions.

The command object provides three methods for executing its `CommandText`. `ExecuteNonQuery` executes a command that is not a query and that doesn't return any values.

`ExecuteScalar` executes a command and returns the first column in the first row selected. This is useful for commands that return a single value such as `SELECT COUNT * FROM Users`.

`ExecuteReader` executes a `SELECT` statement and returns a data reader object (for example, `OleDbDataReader`). The program can use this object to navigate through the returned rows of data.

The command object's two other most useful methods are `CreateParameter` and `Prepare`. As you may be able to guess, `CreateParameter` adds a new object to the command's `Parameters` collection. The `Prepare` method compiles the command into a form that the database may be able to execute more quickly. It is often faster to execute a compiled command many times using different parameter values than it is to execute many new commands.

425

DataSet

`DataSet` is the flagship object when it comes to holding data in memory. It provides all the features you need to build, load, store, manipulate, and save data similar to that stored in a relational database. It can hold multiple tables related with complex parent/child relationships and uniqueness constraints. It provides methods for merging `DataSet` objects, searching for records that satisfy criteria, and saving data in different ways (such as into a relational database or an XML file). In many ways, it is like a complete database stored in memory rather than on a disk.

One of the most common ways to use a `DataSet` object is to load it from a relational database when the program starts, use various controls to display the data and let the user manipulate it interactively, and then save the changes back into the database when the program ends.

In variations on this basic theme, the program can load its data from an XML file or build a `DataSet` in memory without using a database. The program can use controls bound to the `DataSet` to let the user view and manipulate complex data with little extra programming.

Example program MemoryDataSet, which is available for download on the book's web site, uses the following code to build and initialize a `DataSet` from scratch. It starts by creating a new `DataSet` object named `Scores`. It creates a `DataTable` named Students and adds it to the `DataSet` object's `Tables` collection.

```
Private Sub Form1_Load() Handles MyBase.Load
    ' Make the DataSet.
    Dim scores_dataset As New DataSet("Scores")

    ' Make the Students table.
    Dim students_table As DataTable = _
        scores_dataset.Tables.Add("Students")

    ' Add columns to the Students table.
    students_table.Columns.Add("FirstName", GetType(String))
    students_table.Columns.Add("LastName", GetType(String))
    students_table.Columns.Add("StudentId", GetType(Integer))

    ' Make the StudentId field unique.
    students_table.Columns("StudentId").Unique = True

    ' Make the combined FirstName/LastName unique.
    Dim first_last_columns() As DataColumn = { _
        students_table.Columns("FirstName"), _
        students_table.Columns("LastName") _
    }
    students_table.Constraints.Add( _
        New UniqueConstraint(first_last_columns))

    ' Make the TestScores table.
    Dim test_scores_table As DataTable = _
        scores_dataset.Tables.Add("TestScores")

    ' Add columns to the TestScores table.
    test_scores_table.Columns.Add("StudentId", GetType(Integer))
```

```
        test_scores_table.Columns.Add("TestNumber", GetType(Integer))
        test_scores_table.Columns.Add("Score", GetType(Integer))

        ' Make the combined StudentId/TestNumber unique.
        Dim studentid_testnumber_score_columns() As DataColumn = { _
            test_scores_table.Columns("StudentId"), _
            test_scores_table.Columns("TestNumber") _
        }
        test_scores_table.Constraints.Add( _
            New UniqueConstraint(studentid_testnumber_score_columns))

        ' Make a relationship linking the
        ' two tables' StudentId fields.
        scores_dataset.Relations.Add( _
            "Student Test Scores", _
            students_table.Columns("StudentId"), _
            test_scores_table.Columns("StudentId"))

        ' Make some student data.
        students_table.Rows.Add(New Object() {"Art", "Ant", 1})
        students_table.Rows.Add(New Object() {"Bev", "Bug", 2})
        students_table.Rows.Add(New Object() {"Cid", "Cat", 3})
        students_table.Rows.Add(New Object() {"Deb", "Dove", 4})

        ' Make some random test scores.
        Dim score As New Random
        For id As Integer = 1 To 4
            For test_num As Integer = 1 To 10
                test_scores_table.Rows.Add( _
                    New Object() {id, test_num, score.Next(65, 100)})
            Next test_num
        Next id

        ' Attach the DataSet to the DataGrid.
        grdScores.DataSource = scores_dataset
    End Sub
```

Next, the code uses the `DataTable` object's `Columns.Add` method to add FirstName, LastName, and StudentId columns to the table. It then sets the StudentId column's `Unique` property to `True` to make the `DataSet` prohibit duplicated StudentId values.

The program then makes an array of `DataColumn` objects containing references to the FirstName and LastName columns. It uses the array to create a `UniqueConstraint` and adds it to the table's `Constraints` collection. This makes the `DataSet` ensure that each record's FirstName/LastName pair is unique.

Similarly, the program creates the `TestScores` table, gives it StudentId, TestNumber, and Score columns, and adds a uniqueness constraint on the StudentId/TestNumber pair of columns.

Next, the code adds a relationship linking the Students table's StudentId column and the TestScores table's StudentId column.

The program then adds some Students records and some random TestScores records.

Finally, the program attaches the `DataSet` to a `DataGrid` control to display the result. The user can use the `DataGrid` to examine and modify the data just as if it had been loaded from a database.

The following table describes the `DataSet` object's most useful properties.

Property	Purpose
CaseSensitive	Determines whether string comparisons inside `DataTable` objects are case-sensitive.
DataSetName	The `DataSet` object's name. Often, you don't need to use this for much. If you need to use the `DataSet` object's XML representation, however, this determines the name of the root element.
DefaultViewManager	Returns a `DataViewManager` object that you can use to determine the default settings (sort order, filter) of `DataView` objects you create later.
EnforceConstraints	Determines whether the `DataSet` should enforce constraints while updating data. For example, if you want to add records to a child table before the master records have been created, you can set `EnforceConstraints` to `False` while you add the data. You should be able to avoid this sort of problem by adding the records in the correct order.
HasErrors	Returns `True` if any of the `DataSet` object's `DataTable` objects contains errors.
Namespace	The `DataSet`'s namespace. If this is nonblank, the `DataSet` object's XML data's root node includes an `xmlns` attribute as in `<Scores xmlns="my_namespace">`.
Prefix	Determines the XML prefix that the `DataSet` uses as an alias for its namespace.
Relations	A collection of `DataRelation` objects that represent parent/child relations among the columns in different tables.
Tables	A collection of `DataTable` objects representing the tables stored in the `DataSet`.

The `DataSet` object's XML properties affect the way the object reads and writes its data in XML form. For example, if the `Namespace` property is `my_namespace` and the `Prefix` property is `pfx`, the `DataSet` object's XML data might look like the following:

```
<pfx:Scores xmlns:pfx="my_namespace">
  <Students xmlns="my_namespace">
    <FirstName>Art</FirstName>
    <LastName>Ant</LastName>
    <StudentId>1</StudentId>
  </Students>
  <Students xmlns="my_namespace">
```

```
        <FirstName>Bev</FirstName>
        <LastName>Bug</LastName>
        <StudentId>2</StudentId>
      </Students>
      ...
      <TestScores xmlns="my_namespace">
        <StudentId>1</StudentId>
        <TestNumber>1</TestNumber>
        <Score>78</Score>
      </TestScores>
      <TestScores xmlns="my_namespace">
        <StudentId>1</StudentId>
        <TestNumber>2</TestNumber>
        <Score>81</Score>
      </TestScores>
      ...
    </pfx:Scores>
```

The following table describes the `DataSet` object's most useful methods.

Method	Purpose
AcceptChanges	Accepts all changes to the data that were made since the data was loaded, or since the last call to `AcceptChanges`. When you modify a row in the `DataSet`, the row is flagged as modified. If you delete a row, the row is marked as deleted but not actually removed. When you call `AcceptChanges`, new and modified rows are marked as `Unchanged` instead of `Added` or `Modified`, and deleted rows are permanently removed.
Clear	Removes all rows from the `DataSet` object's tables.
Clone	Makes a copy of the `DataSet` including all tables, relations, and constraints, but not including the data.
Copy	Makes a copy of the `DataSet` including all tables, relations, constraints, and the data.
GetChanges	Makes a copy of the `DataSet` containing only the rows that have been modified. This method's optional parameter indicates the type of changes that the new `DataSet` should contain (added, modified, deleted, or unchanged).
GetXml	Returns a string containing the `DataSet` object's XML representation.
GetXmlSchema	Returns the `DataSet` object's XML schema definition (XSD).
HasChanges	Returns `True` if any of the `DataSet` object's tables contains new, modified, or deleted rows.
Merge	Merges a `DataSet`, `DataTable`, or array of `DataRow` objects into this `DataSet`.

(continued)

429

Method	Purpose
ReadXml	Reads XML data from a stream or file into the `DataSet`.
ReadXmlSchema	Reads an XML schema from a stream or file into the `DataSet`.
RejectChanges	Undoes any changes made since the `DataSet` was loaded or since the last call to `AcceptChanges`.
WriteXml	Writes the `DataSet` object's XML data into a file or stream. It can optionally include the `DataSet` object's schema.
WriteXmlSchema	Writes the `DataSet` object's XSD schema into an XML file or stream.

Several of these methods mirror methods provided by other finer-grained data objects. For example, `HasChanges` returns `True` if any of the `DataSet` object's tables contain changes. The `DataTable` and `DataRow` objects also have `HasChanges` methods that return `True` if their more limited scope contains changes.

These mirrored methods include `AcceptChanges`, `Clear`, `Clone`, `Copy`, `GetChanges`, and `RejectChanges`. See the following sections that describe the `DataTable` and `DataRow` objects for more information.

DataTable

The `DataTable` class represents the data in one table within a `DataSet`. A `DataTable` contains `DataRow` objects representing its data, `DataColumn` objects that define the table's columns, constraint objects that define constraints on the table's data (for example, a uniqueness constraint requires that only one row may contain the same value in a particular column), and objects representing relationships between the table's columns and the columns in other tables. This object also provides methods and events for manipulating rows.

The following table describes the `DataTable` object's most useful properties.

Property	Purpose
CaseSensitive	Determines whether string comparisons inside the `DataTable` are case-sensitive.
ChildRelations	A collection of `DataRelation` objects that define parent/child relationships where this table is the parent. For example, suppose the `Orders` table defines order records and contains an `OrderId` field. Suppose that the `OrderItems` table lists the items for an order and it also has an `OrderId` field. One `Orders` record can correspond to many `OrderItems` records, all linked by the same `OrderId` value. In this example, `Orders` is the parent table and `OrderItems` is the child table.
Columns	A collection of `DataColumn` objects that define the table's columns (column name, data type, default value, maximum length, and so forth).

Property	Purpose
Constraints	A collection of `Constraint` objects represent restrictions on the table's data. A `ForeignKeyConstraint` requires that the values in some of the table's columns must be present in another table (for example, the `Addresses` record's `State` value must appear in the `States` table's `StateName` column). A `UniqueConstraint` requires that the values in a set of columns must be unique within the table (for example, only one `Student` record can have a given `FirstName` and `LastName` pair).
DataSet	The `DataSet` object that contains this `DataTable`.
DefaultView	Returns a `DataView` object that you can use to view, sort, and filter the table's rows.
HasErrors	Returns `True` if any of the `DataTable` object's rows contains an error.
MinimumCapacity	The initial capacity of the table. For example, if you know you are about to load 1000 records into the table, you can set this to 1000 to let the table allocate space all at once instead of incrementally as the records are added. That will be more efficient.
Namespace	The `DataTable` object's namespace. If this is nonblank, the `DataTable` object's XML records' root nodes include an `xmlns` attribute as in `<Students xmlns="my_namespace">`.
ParentRelations	A collection of `DataRelation` objects that define parent/child relationships where this table is the child. See the description of the `ChildRelations` property for more details.
Prefix	Determines the XML prefix that the `DataTable` uses as an alias for its namespace.
PrimaryKey	Gets or sets an array of `DataColumn` objects that define the table's primary key. The primary key is always unique and provides the fastest access to the records.
Rows	A collection of `DataRow` objects containing the table's data.
TableName	The table's name.

The `DataTable` object's XML properties affect the way the object reads and writes its data in XML form. For example, if the `Namespace` property is `my_namespace` and the `Prefix` property is `tbl1`, one of the `DataTable` object's XML records might look like the following:

```
<pfx:Students xmlns:pfx="my_namespace">
  <FirstName xmlns="my_namespace">Art</FirstName>
  <LastName xmlns="my_namespace">Ant</LastName>
  <StudentId xmlns="my_namespace">1</StudentId>
</pfx:Students>
```

The following table describes the `DataTable` object's most useful methods.

Method	Purpose
AcceptChanges	Accepts all changes to the table's rows that were made since the data was loaded or since the last call to `AcceptChanges`.
Clear	Removes all rows from the table.
Clone	Makes a copy of the `DataTable`, including all relations and constraints, but not including the data.
Compute	Computes the value of an expression using the rows that satisfy a filter condition. For example, the statement `tblTestScores.Compute ("SUM(Score)", "StudentId = 1")` calculates the total of the `tblTestScores DataTable` object's Score column where the StudentId is 1.
Copy	Makes a copy of the `DataTable` including all relations, constraints, and data.
GetChanges	Makes a copy of the `DataTable` containing only the rows that have been modified. This method's optional parameter indicates the type of changes that the new `DataSet` should contain (added, modified, deleted, or unchanged).
GetErrors	Gets an array of `DataRow` objects that contain errors.
ImportRow	Copies the data in a `DataRow` object into the `DataTable`.
LoadDataRow	This method takes an array of values as a parameter. It searches the table for a row with values that match the array's primary key values. If it doesn't find such a row, it uses the values to create the row. The method returns the `DataRow` object it found or creates.
NewRow	Creates a new `DataRow` object that matches the table's schema. To add the new row to the table, you can create a new `DataRow`, fill in its fields, and use the table's `Rows.Add` method.
RejectChanges	Undoes any changes made since the `DataTable` was loaded or since the last call to `AcceptChanges`.
Select	Returns an array of `DataRow` objects selected from the table. Optional parameters indicate a filter expression that the selected rows must match, sort columns and sort order, and the row states to select (new, modified, deleted, and so forth).

The `DataTable` object also provides several useful events, which are listed in the following table.

Event	Purpose
ColumnChanged	Occurs after a value has been changed in a row.
ColumnChanging	Occurs when a value is being changed in a row.
RowChanged	Occurs after a row has changed. A user might change several of a row's columns and `ColumnChanged` will fire for each one. `RowChanged` fires when the user moves to a new row.
RowChanging	Occurs when a row is being changed.
RowDeleted	Occurs after a row has been deleted.
RowDeleting	Occurs when a row is being deleted.

DataRow

A `DataRow` object represents the data in one record in a `DataTable`. This object is relatively simple. It basically just holds data for the `DataTable`, and the `DataTable` object does most of the interesting work.

The following table describes the `DataRow` object's most useful properties.

Property	Purpose
HasErrors	Returns `True` if the row's data has errors.
Item	Gets or sets one of the row's item values. Overloaded versions of this property use different parameters to identify the column. This parameter can be the column's zero-based index, its name, or a `DataColumn` object. An optional second parameter can indicate the version of the row so, for example, you can read the original value in a row that has been modified.
ItemArray	Gets or sets all of the row's values by using an array of generic `Objects`.
RowError	Gets or sets the row's error message text.
RowState	Returns the row's current state: `Added`, `Deleted`, `Modified`, or `Unchanged`.
Table	Returns a reference to the `DataTable` containing the row.

If a row has an error message defined by its `RowError` property, the `DataGrid` control displays a red circle containing a white exclamation point to the left of the row as an error indicator. If you hover the mouse over the error indicator, a tooltip displays the `RowError` text. In Figure 20-17, the third row has `RowError` set to "Missing registration."
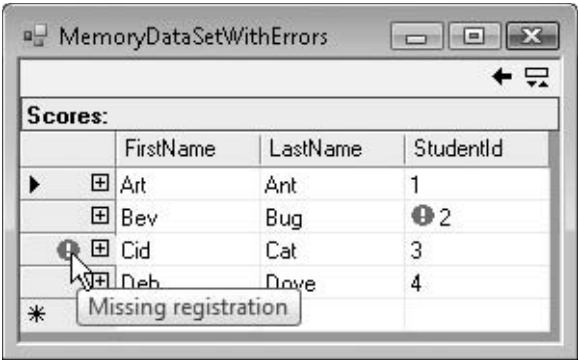
Figure 20-17: The DataGrid control marks a DataRow
that has a nonblank RowError.

Example program MemoryDataSetWithErrors, which is available for download on the book's web site, uses the following code to set errors on the second row's third column (remember, indexes start at zero) and on the third row. The result is shown in Figure 20-17.

```
students_table.Rows(1).SetColumnError(2, "Bad name format")
students_table.Rows(2).RowError = "Missing registration"
```

The following table describes the `DataRow` object's most useful methods.

Method	Purpose
AcceptChanges	Accepts all changes to the row that were made since the data was loaded or since the last call to `AcceptChanges`.
BeginEdit	Puts the row in data-editing mode. This suspends events for the row, so your code or the user can change several fields without triggering validation events. `BeginEdit` is implicitly called when the user modifies a bound control's value and `EndEdit` is implicitly called when you invoke `AcceptChanges`. Although the row is in edit mode, it stores the original and modified values, so you can retrieve either version, accept the changes with `EndEdit`, or cancel the changes with `CancelEdit`.
CancelEdit	Cancels the current edit on the row and restores its original values.
ClearErrors	Clears the row's column and row errors.
Delete	Deletes the row from its table.
GetChildRows	Returns an array of `DataRow` objects representing this row's child rows as specified by a parent/child data relation.
GetColumnError	Returns the error text assigned to a column.

Method	Purpose
GetParentRow	Returns a `DataRow` object representing this row's parent record as specified by a parent/child data relation.
GetParentRows	Returns an array of `DataRow` objects representing this row's parent records as specified by a data relation.
HasVersion	Returns `True` if the row has a particular version (`Current`, `Default`, `Original`, or `Proposed`). For example, while a row is being edited, it has `Current` and `Proposed` versions.
IsNull	Indicates whether a particular column contains a `NULL` value.
RejectChanges	Removes any changes made to the row since the data was loaded or since the last call to `AcceptChanges`.
SetColumnError	Sets error text for one of the row's columns. If a column has an error message, then a `DataGrid` control displays a red circle containing a white exclamation point to the left of the column's value as an error indicator. In Figure 20-17, the second row's second column has a column error set. If you hover the mouse over the error indicator, a tooltip displays the error's text.
SetParentRow	Sets the row's parent row according to a data relation.

DataColumn

The `DataColumn` object represents a column in a `DataTable`. It defines the column's name and data type, and your code can use it to define relationships among different columns.

The following table describes the `DataColumn` object's most useful properties.

Property	Purpose
AllowDBNull	Determines whether the column allows `NULL` values.
AutoIncrement	Determines whether new rows automatically generate auto-incremented values for the column.
AutoIncrementSeed	Determines the starting value for an auto-increment column.
AutoIncrementStep	Determines the amount by which an auto-incrementing column's value is incremented for new rows.
Caption	Gets or sets a caption for the column. Note that some controls may not use this value. For example, the `DataGrid` control displays the column's `ColumnName`, not its `Caption`.

(continued)

Property	Purpose
ColumnMapping	Determines how the column is saved in the table's XML data. This property can have one of the values `Attribute` (save the column as an attribute of the row's element), `Element` (save the column as a subelement), `Hidden` (don't save the column), and `SimpleContent` (save the column as `XmlText` inside the row's element). If a column is hidden, the `DataGrid` control doesn't display its value. See the text following this table for an example.
ColumnName	Determines the name of the column in the `DataTable`. Note that data adapters use the column name to map database columns to `DataSet` columns, so, if you change this property without updating the table mapping, the column will probably not be filled.
DataType	Determines the column's data type. Visual Basic raises an error if you change this property after the `DataTable` begins loading data. Visual Basic supports the data types `Boolean`, `Byte`, `Char`, `DateTime`, `Decimal`, `Double`, `Int16`, `Int32`, `Int64`, `SByte`, `Single`, `String`, `TimeSpan`, `UInt16`, `UInt32`, and `UInt64`.
DefaultValue	Determines the default value assigned to the column in new rows.
Expression	Sets an expression for the column. You can use this to create calculated columns. For example, the expression `Quantity * Price` makes the column display the value of the `Quantity` column times the value of the `Price` column.
MaxLength	Determines the maximum length of a text column.
Namespace	The column's namespace. If this is nonblank, the rows' XML root nodes include an `xmlns` attribute as in `<StudentId xmlns="my_namespace">12</StudentId>`.
Ordinal	Returns the column's index in the `DataTable` object's `Columns` collection.
Prefix	Determines the XML prefix that the `DataColumn` uses as an alias for its namespace. For example, if `Namespace` is `my_namespace` and `Prefix` is `pfx`, then a row's `StudentId` field might be encoded in XML as `<pfx:StudentId xmlns:pfx="my_namespace">12</pfx:StudentId>`.
ReadOnly	Determines whether the column allows changes after a record is created.
Table	Returns a reference to the `DataTable` containing the column.
Unique	Determines whether different rows in the table can have the same value for this column.

Example program MemoryDataSetXmlMappedColumns, which is available for download on the book's web site, uses the following code to define XML column mappings for the Students table. It indicates that the table's FirstName and LastName columns should be saved as attributes of the row elements, and that the StudentId column should be saved as `XmlText`. Note that you cannot use the `SimpleContent ColumnMapping` if any other column has a `ColumnMapping` of `Element` or `SimpleContent`.

```
students_table.Columns("FirstName").ColumnMapping = MappingType.Attribute
students_table.Columns("LastName").ColumnMapping = MappingType.Attribute
students_table.Columns("StudentId").ColumnMapping = MappingType.SimpleContent
```

The following text shows some of the resulting XML Students records:

```
<Students FirstName="Art" LastName="Ant">1</Students>
<Students FirstName="Bev" LastName="Bug">2</Students>
<Students FirstName="Cid" LastName="Cat">3</Students>
<Students FirstName="Deb" LastName="Dove">4</Students>
```

The following code makes the FirstName and LastName columns elements of the Students rows, and it makes the `StudentId` an attribute:

```
students_table.Columns("FirstName").ColumnMapping = MappingType.Element
students_table.Columns("LastName").ColumnMapping = MappingType.Element
students_table.Columns("StudentId").ColumnMapping = MappingType.Attribute
```

The following shows the resulting records:

```
<Students StudentId="1">
  <FirstName>Art</FirstName>
  <LastName>Ant</LastName>
</Students>
<Students StudentId="2">
  <FirstName>Bev</FirstName>
  <LastName>Bug</LastName>
</Students>
<Students StudentId="3">
  <FirstName>Cid</FirstName>
  <LastName>Cat</LastName>
</Students>
<Students StudentId="4">
  <FirstName>Deb</FirstName>
  <LastName>Dove</LastName>
</Students>
```

DataRelation

A `DataRelation` object represents a parent/child relationship between sets of columns in different tables. For example, suppose that a database contains a Students table containing FirstName, LastName, and StudentId fields. The TestScores table has the fields StudentId, TestNumber, and Score. The StudentId fields connect the two tables in a parent/child relationship. Each Students record may correspond to any number of TestScores records. In this example, Students is the parent table, and TestScores is the child table.

437

The following code defines this relationship. It uses the Students.StudentId field as the parent field and the TestScores.StudentId field as the child field.

```
' Make a relationship linking the two tables' StudentId fields.
scores_dataset.Relations.Add( _
    "Student Test Scores", _
    students_table.Columns("StudentId"), _
    test_scores_table.Columns("StudentId"))
```

A `DataRelation` can also relate more than one column in the two tables. For example, two tables might be linked by the combination of the LastName and FirstName fields.

Most programs don't need to manipulate a relation after it is created. The `DataSet` object's `Relations.Add` method shown in the previous code creates a relation and thereafter the program can usually leave it alone. However, the `DataRelation` object does provide properties and methods in case you do need to modify one. The following table describes the `DataRelation` object's most useful properties.

Property	Purpose
`ChildColumns`	Returns an array of `DataColumn` objects representing the child columns.
`ChildKeyConstraint`	Returns the `ForeignKeyConstraint` object for this relation. You can use this object to determine the relation's behavior when the program updates, deletes, or modifies the values used in the relationship. For example, if the StudentId field links the Students and TestScores tables and you delete a Students record, you can use this object to make the database automatically delete any corresponding TestScores records.
`ChildTable`	Returns a `DataTable` object representing the relation's child table.
`DataSet`	Returns a reference to the `DataSet` containing the relation.
`Nested`	Determines whether the child data should be nested within parent rows in the `DataSet`'s XML representation. See the text following this table for more detail.
`ParentColumns`	Returns an array of `DataColumn` objects representing the parent columns.
`ParentKeyConstraint`	Returns the `UniqueConstraint` object for this relation. This object requires that the values in the parent's columns are unique within the parent table.
`ParentTable`	Returns a `DataTable` object representing the relation's parent table.
`RelationName`	Determines the relation's name.

Normally, tables are stored separately in a `DataSet` object's XML representation, but you can use the `Nested` property to make the XML include one table's records inside another's. For example, suppose that the Students and TestScores tables are linked by a common StudentId field. If you set this relation's `Nested` property to `True`, the XML data would include the TestScores for a student within the Students record, as shown in the following:

```
<Students>
  <FirstName>Deb</FirstName>
  <LastName>Dove</LastName>
  <StudentId>4</StudentId>
  <TestScores>
    <StudentId>4</StudentId>
    <TestNumber>1</TestNumber>
    <Score>81</Score>
  </TestScores>
  <TestScores>
    <StudentId>4</StudentId>
    <TestNumber>2</TestNumber>
    <Score>68</Score>
  </TestScores>
  ...
</Students>
```

Example program MemoryDataSetNestedXml, which is available for download on the book's web site, demonstrates this nested XML structure.

Note that in this representation the TestScores table's StudentId value is redundant because the same value is contained in the Students element's StudentId subelement. If you set the TestScores.StudentId column's `ColumnMapping` value to `Hidden`, you can remove the redundant values and get the following result:

```
<Students>
  <FirstName>Deb</FirstName>
  <LastName>Dove</LastName>
  <StudentId>4</StudentId>
  <TestScores>
    <TestNumber>1</TestNumber>
    <Score>81</Score>
  </TestScores>
  <TestScores>
    <TestNumber>2</TestNumber>
    <Score>68</Score>
  </TestScores>
  ...
</Students>
```

Constraints

A constraint imposes a restriction on the data in a table's columns. `DataSets` support two kinds of constraint objects:

❑ `ForeignKeyConstraint` restricts the values in one table based on the values in another table. For example, you could require that values in the Addresses table's State field must exist in the States table's StateName field. That would prevent the program from creating an Addresses record where State is XZ.

❑ `UniqueConstraint` requires that the combination of one or more fields within the same table must be unique. For example, an Employee table might require that the combination of the FirstName and LastName values be unique. That would prevent the program from creating two Employees records with the same FirstName and LastName.

The following sections describe each of these types of constraint objects in greater detail.

ForeignKeyConstraint

In addition to requiring that values in one table must exist in another table, a `ForeignKeyConstraint` can determine how changes to one table propagate to the other. For example, suppose that the Addresses table has a `ForeignKeyConstraint` requiring that its State field contain a value that is present in the States table's StateName field. If you delete the States table's record for Colorado, the constraint could automatically delete all of the Addresses records that used that state's name.

The following table describes the `ForeignKeyConstraint` object's most useful properties.

Property	Purpose
`AcceptRejectRule`	Determines the action taken when the `AcceptChanges` method executes. This value can be `None` (do nothing) or `Cascade` (update the child fields' values to match the new parent field values).
`Columns`	Returns an array containing references to the constraint's child columns.
`ConstraintName`	Determines the constraint's name.
`DeleteRule`	Determines the action taken when a row is deleted. This value can be `Cascade` (delete the child rows), `None` (do nothing), `SetDefault` (change child field values to their default values), or `SetNull` (change child field values to `NULL`).
`RelatedColumns`	Returns an array containing references to the constraint's parent columns.
`RelatedTable`	Returns a reference to the constraint's parent table.
`Table`	Returns a reference to the constraint's child table.
`UpdateRule`	Determines the action taken when a row is updated. This value can be `Cascade` (update the child rows' values to match), `None` (do nothing), `SetDefault` (change child field values to their default values), or `SetNull` (change child field values to `NULL`).

The following code makes a foreign key constraint relating the Students.StudentId parent field to the TestScores.StudentId child field:

```
scores_dataset.Relations.Add( _
    "Student Test Scores", _
    students_table.Columns("StudentId"), _
    test_scores_table.Columns("StudentId"))
```

Example program MemoryDataSet, which is available for download on the book's web site, uses similar code to define a relationship between its `Students` and `TestScores` tables.

UniqueConstraint

If you want to require the values in a single column to be unique, you can set the column's `Unique` property to `True`. This automatically creates a `UniqueConstraint` object and adds it to the `DataTable`. The following code shows how a program can make the Students table's StudentId column require unique values:

```
students_table.Columns("StudentId").Unique = True
```

You can use the `UniqueConstraint` object's constructors to require that a group of fields has a unique combined value. The following code makes an array of `DataColumn` objects representing the Students table's FirstName and LastName fields. It passes the array into the `UniqueConstraint` object's constructor to require that the FirstName/LastName pair be unique in the table.

```
' Make the combined FirstName/LastName unique.
Dim first_last_columns() As DataColumn = { _
    students_table.Columns("FirstName"), _
    students_table.Columns("LastName") _
}
students_table.Constraints.Add( _
    New UniqueConstraint(first_last_columns))
```

After executing this code, the program could add two records with the same FirstName and different LastNames or with the same LastName and different FirstNames, but it could not create two records with the same FirstName and LastName values.

The following table describes the `UniqueConstraint` object's properties.

Property	Purpose
Columns	Returns an array of `DataColumn` objects representing the columns that must be unique. `ConstraintName` determines the name of the constraint.
IsPrimaryKey	Returns `True` if the columns form the table's primary key.
Table	Returns a reference to the `DataTable` that contains the constraint.

Example program MemoryDataSet, which is available for download on the book's web site, defines several uniqueness constraints including a constraint requiring that `StudentId` be unique and a constraint requiring that the `FirstName` and `LastName` combination be unique.

DataView

A `DataView` object represents a customizable view of the data contained in a `DataTable`. You can use the `DataView` to select some or all of the `DataTable`'s data and display it sorted in some manner without affecting the underlying `DataTable`.

A program can use multiple `DataViews` to select and order a table's data in different ways. You can then bind the `DataViews` to controls such as the `DataGrid` control to display the different views. If any of the views modifies its data, for example by adding or deleting a row, the underlying `DataTable` object's data is updated and any other views that need to see the change are updated as well.

Example program DataGrids, which is available for download on the book's web site, uses the following code to demonstrate `DataGrid` controls:

```
Private Sub Form1_Load() Handles MyBase.Load
    ' Make a DataTable.
    Dim contacts_table As New DataTable("Contacts")

    ' Add columns.
    contacts_table.Columns.Add("FirstName", GetType(String))
    contacts_table.Columns.Add("LastName", GetType(String))
    contacts_table.Columns.Add("Street", GetType(String))
    contacts_table.Columns.Add("City", GetType(String))
    contacts_table.Columns.Add("State", GetType(String))
    contacts_table.Columns.Add("Zip", GetType(String))

    ' Make the combined FirstName/LastName unique.
    Dim first_last_columns() As DataColumn = { _
        contacts_table.Columns("FirstName"), _
        contacts_table.Columns("LastName") _
    }
    contacts_table.Constraints.Add( _
        New UniqueConstraint(first_last_columns))

    ' Make some contact data.
    contacts_table.Rows.Add(New Object() {"Art", "Ant", _
        "1234 Ash Pl", "Bugville", "CO", "11111"})
    contacts_table.Rows.Add(New Object() {"Bev", "Bug", _
        "22 Beach St", "Bugville", "CO", "22222"})
    contacts_table.Rows.Add(New Object() {"Cid", "Cat", _
        "3 Road Place Lane", "Programmeria", "KS", "33333"})
    contacts_table.Rows.Add(New Object() {"Deb", "Dove", _
        "414 Debugger Way", "Programmeria", "KS", "44444"})
```

```
        contacts_table.Rows.Add(New Object() {"Ed", "Eager", _
            "5746 Elm Blvd", "Bugville", "CO", "55555"})
        contacts_table.Rows.Add(New Object() {"Fran", "Fix", _
            "647 Foxglove Ct", "Bugville", "CO", "66666"})
        contacts_table.Rows.Add(New Object() {"Gus", "Gantry", _
            "71762-B Gooseberry Ave", "Programmeria", "KS", "77777"})
        contacts_table.Rows.Add(New Object() {"Hil", "Harris", _
            "828 Hurryup St", "Programmeria", "KS", "88888"})

        ' Attach grdAll to the DataTable.
        grdAll.DataSource = contacts_table
        grdAll.CaptionText = "All Records"

        ' Make a DataView for State = CO.
        Dim dv_co As New DataView(contacts_table)
        dv_co.RowFilter = "State = 'CO'"
        grdCO.DataSource = dv_co
        grdCO.CaptionText = "CO Records"

        ' Make a DataView for FirstName >= E.
        Dim dv_name As New DataView(contacts_table)
        dv_name.RowFilter = "FirstName >= 'E'"
        grdName.DataSource = dv_name
        grdName.CaptionText = "LastName >= E"
    End Sub
```

The code builds a `DataTable` named `Contacts` containing the fields `FirstName`, `LastName`, `Street`, `City`, `State`, and `Zip`. It places a uniqueness constraint on the `FirstName`/`LastName` pair and adds some rows of data to the table. It then binds the `DataTable` to the `DataGrid` control named `grdAll`. Next the program makes a `DataView` named `dv_co` based on the table, sets its `RowFilter` property to make it select rows where the `State` field has the value CO, and binds the `DataView` to the `DataGrid` named `grdCO`. Finally, the code makes another `DataView` with `RowFilter` set to select records where the `FirstName` field is greater than or equal to E and binds that `DataView` to the `grdName` `DataGrid`.

Figure 20-18 shows the result. The `DataGrid` on the top is bound to the `DataTable` and shows all the table's rows. The second `DataGrid` is bound to the `dv_co` `DataView` and displays records where `State = CO`. The bottom `DataGrid` is bound to the `dv_name` `DataView`, so it displays records where `FirstName >= E`. If you use any of these `DataGrid` controls to modify the data, the other grids immediately show the updates.

The `DataView` class is geared more toward data display than toward storage. It basically refers to data stored in a `DataTable` object, so it doesn't provide the same features for managing relations and constraints that the `DataTable` does. It does, however, provide links to the `DataRow` objects it represents. From those objects, you can get back to the rows'`DataTable` objects if necessary.

Figure 20-18: Different DataView objects can show different views of the same data.

The following table describes the `DataView` object's most useful properties.

Property	Purpose
AllowDelete	Determines whether the `DataView` allows row deletion. If this is `False`, any bound controls such as the `DataGrid` will not allow the user to delete rows.
AllowEdit	Determines whether the `DataView` allows row editing. If this is `False`, any bound controls (such as the `DataGrid`) will not allow the user to edit rows.
AllowNew	Determines whether the `DataView` allows new rows. If this is `False`, any bound controls (such as the `DataGrid`) will not allow the user to add rows.
Count	Returns the number of rows selected by the view.
Item	Returns a `DataRowView` object representing a row in the view.

Property	Purpose
RowFilter	A string that determines the records selected by the view.
RowStateFilter	The state of the records that should be selected by the view. This can be Added, CurrentRows (unchanged, new, and modified rows), Deleted, ModifiedCurrent (current version of modified rows), ModifiedOriginal (original version of modified rows), None, OriginalRows (original, unchanged, and deleted rows), and Unchanged.
Sort	A string giving the columns that should be used to sort the data. For example, "State, City, Zip" sorts by State, then City, and then Zip in descending order.
Table	Specifies the underlying DataTable object.

The following table describes some of the most useful DataView methods.

Method	Purpose
AddNew	Adds a new row to the underlying DataTable.
Delete	Deletes the row with a specific index from the underlying DataTable.
Find	Returns the index of a row that matches the view's sort key columns. This method returns –1 if no row matches the values it is passed. It raises an error if the number of values it receives does not match the number of the DataView's key values.
FindRows	Returns an array of DataRowView objects representing rows that match the view's sort key columns.

The DataView object's Sort property determines not only the fields by which the data is sorted but also the key fields used by the Find method. The following code makes the dv_name DataView sort by FirstName and LastName. It then uses the Find method to display the index of a row with FirstName = Hil and LastName = Harris.

```
dv_name.Sort = "FirstName, LastName"
MessageBox.Show(dv_name.Find(New String() {"Hil", "Harris"}).ToString)
```

DataRowView

A DataRow object can hold data for more than one state. For example, if a DataTable row has been modified, its DataRow object contains the row's original data and the new modified values.

The DataRowView object represents a view of a DataRow object in a particular state. That state can be one of Current, Default, Original, or Proposed.

A `DataView` object holds `DataRowView` objects representing a view of a `DataTable` selecting particular rows in a particular state.

The `DataRowView` object's purpose is to represent a row in a specific state so this object is relatively simple. It basically indicates the chosen state and refers to a `DataRow`.

The following table describes the `DataRowView` object's most useful properties.

Property	Purpose
DataView	The `DataView` that contains the `DataRowView`.
IsEdit	Returns `True` if the row is in editing mode.
IsNew	Returns `True` if the row is new.
Item	Gets or sets the value of one of the row's fields.
Row	The `DataRow` object that this `DataRowView` represents.
RowVersion	The version of the `DataRow` represented by this object (`Current`, `Default`, `Original`, or `Proposed`).

Simple Data Binding

Binding a simple property such as `Text` to a data source is relatively easy. First, create a `DataSet`, `DataTable`, or `DataView` to act as the data source. You can create this object at design time using controls or at runtime using object variables.

If you build the data source at design time, you can also bind the property at design time. Select the control that you want to bind and open the Properties window. Expand the (DataBindings) entry and find the property you want to bind (for example, `Text`). Click the drop-down arrow on the right, and use the pop-up display to select the data source item that you want to bind to the property.

Figure 20-19 shows the pop-up binding the `txtTitle` control's `Text` property to the `dsBooks` `DataSet` object's Books table's `Title` field.

At runtime, your code can bind a simple property to a data source by using the control's `DataBindings` collection. This collection's `Add` method takes as parameters the name of the property to bind, the data source, and the name of the item in the data source to bind.

The following statement binds the `txtUrl` control's `Text` property to the `dsBooks` `DataSet` object's Books table's `URL` field:

```
txtUrl.DataBindings.Add("Text", dsBooks.Books, "URL")
```
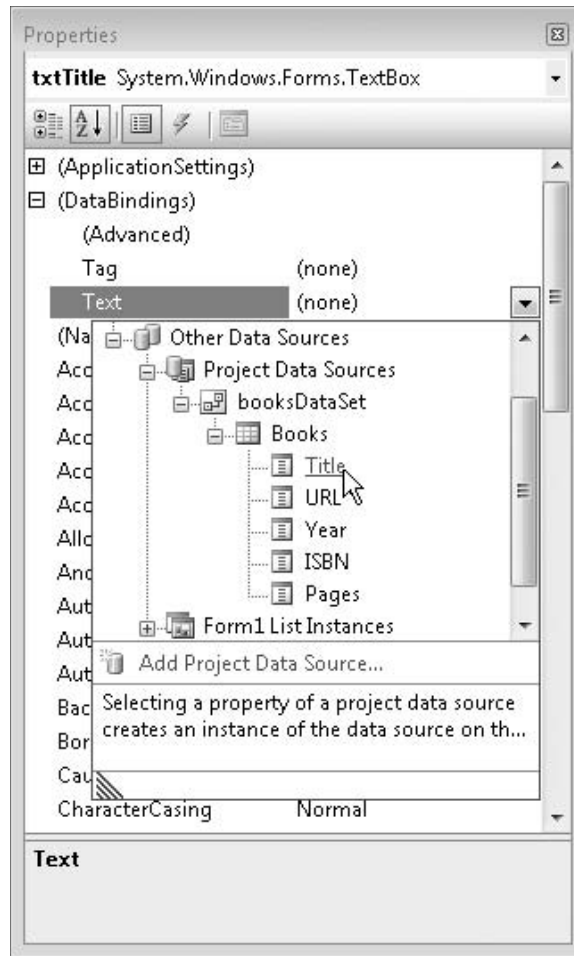
Figure 20-19: You can bind a simple control property to a data source at design time.

When you bind the first property, Visual Basic adds a BindingSource *to the form. You can reuse this* BindingSource *to bind other properties. When you open the dropdown shown in Figure 20-19, expand the existing* BindingSource *to reuse it rather than creating a new one.*

That's all there is to binding simple properties. By itself, however, this binding doesn't provide any form of navigation. If you were to bind the Text properties of a bunch of TextBox controls and run the program, you would see the data for the data source's first record and nothing else. To allow the user to navigate through the data source, you must use a CurrencyManager object.

CurrencyManager

Some controls such as the DataGrid control provide their own forms of navigation. If you bind a DataGrid to a DataSet, it allows the user to examine the DataSet object's tables, view and edit data, and follow links between the tables. The DataGrid provides its own methods for navigating through the data. For simpler controls, such as the TextBox, which can display only one data value at a time, you must provide some means for the program to navigate through the data source's records.

A data source manages its position within its data by using a CurrencyManager object. The CurrencyManager supervises the list of Binding objects that bind the data source to controls such as TextBoxes.

The following table describes the CurrencyManager object's most useful properties.

Property	Purpose
Bindings	A collection of the bindings that the object manages.
Count	Returns the number of rows associated with the CurrencyManager.
Current	Returns a reference to the current data object (row).
List	Returns an object that implements the IList interface that provides the data for the CurrencyManager. For example, if the data source is a DataSet or DataTable, this object is a DataView.
Position	Gets or sets the current position within the data. For example, in a DataTable this is the row number.

The CurrencyManager also provides some methods for manipulating the data. The following table describes the CurrencyManager object's most useful methods.

Method	Purpose
AddNew	Adds a new item to the data source.
CancelCurrentEdit	Cancels the current editing operation.
EndCurrentEdit	Ends the current editing operation, accepting any changes.
Refresh	Refills the bound controls.
RemoveAt	Removes the data source item at a specified index.

The `CurrencyManager` class raises a `PositionChanged` event when its position in the data changes.

Example program BindSimple, which is available for download on the book's web site, uses the following code to navigate through a `DataSet`:

```
Public Class Form1
    Private WithEvents m_CurrencyManager As CurrencyManager

    Private Sub Form1_Load() Handles MyBase.Load
        'TODO: This line of code loads data into the _
        'BooksDataSet.Books' table. You can move, or remove it, as needed.
        Me.BooksTableAdapter.Fill(Me.BooksDataSet.Books)

        ' Get the CurrencyManager.
        m_CurrencyManager = DirectCast(Me.BindingContext( _
            BooksBindingSource), CurrencyManager)

        ' Display the record number.
        m_CurrencyManager_PositionChanged()
    End Sub

    ' Move to the previous record.
    Private Sub btnPrev_Click() Handles btnPrev.Click
        If m_CurrencyManager.Position = 0 Then
            Beep()
        Else
            m_CurrencyManager.Position -= 1
        End If
    End Sub

    ' Move to the next record.
    Private Sub btnNext_Click() Handles btnNext.Click
        If m_CurrencyManager.Position >= m_CurrencyManager.Count - 1 Then
            Beep()
        Else
            m_CurrencyManager.Position += 1
        End If
    End Sub

    ' Go to the first record.
    Private Sub btnFirst_Click() Handles btnFirst.Click
        m_CurrencyManager.Position = 0
    End Sub

    ' Go to the last record.
    Private Sub btnLast_Click() Handles btnLast.Click
        m_CurrencyManager.Position = m_CurrencyManager.Count - 1
    End Sub

    Private Sub m_CurrencyManager_PositionChanged() _
     Handles m_CurrencyManager.PositionChanged
        lblPosition.Text = _
```

449

```
                (m_CurrencyManager.Position + 1) & " of " & _
                m_CurrencyManager.Count
        End Sub

        ' Add a record.
        Private Sub btnAdd_Click() Handles btnAdd.Click
            m_CurrencyManager.AddNew()
            txtTitle.Focus()
        End Sub

        ' Delete the current record.
        Private Sub btnDelete_Click() Handles btnDelete.Click
            If MessageBox.Show("Are you sure you want to remove this record?", _
                "Confirm?", MessageBoxButtons.YesNo, MessageBoxIcon.Question) _
                = Windows.Forms.DialogResult.Yes _
            Then
                m_CurrencyManager.RemoveAt(m_CurrencyManager.Position)
            End If
        End Sub
    End Class
```

When the form loads, the program fills its data set and saves a reference to a `CurrencyManager` object to control the data set's `Books` table. It then calls subroutine `m_CurrencyManager_PositionChanged` to display the current record's index (this is described shortly).

The first, last, previous, and next record buttons all work by changing the `CurrencyManager`'s `Position` property. For example, the previous record button's event handler checks whether the current position is greater than zero and if it is the code decreases the position by one.

Similarly the next record button increases the current position by one if the `CurrencyManager` is not already displaying the last record.

The first and last record buttons set the position to the indexes of the first and last records, respectively.

Whenever the `CurrencyManager`'s position changes, its `PositionChanged` event handler executes. This code displays the current record's index in a label for the user to see.

When the user clicks the add record button, the code calls the `CurrencyManager`'s `AddNew` method to make a new record. It also sets focus to the first text box to make filling in the new record easier.

Finally, when the user clicks the delete record button, the code confirms the deletion and then calls the `CurrencyManager`'s `RemoveAt` method to delete the record.

Figure 20-20 shows the BindSimple program in action.
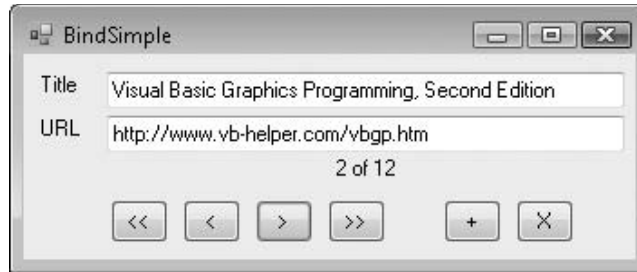
Figure 20-20: This program's buttons use a CurrencyManager to let the user add, delete, and navigate through a table's records.

Example program BindSimpleMemoryDataSet, which is available for download on the book's web site, is similar to program BindSimple except it uses a `DataSet` built in memory rather than one loaded from a database.

Complex Data Binding

For some controls (such as the `TextBox` and `Label`) binding the `Text` property is good enough. Other controls, however, do not display a simple textual value.

For example, suppose that you have a database containing a Users table with fields FirstName, LastName, and UserType. The UserTypes table has fields UserTypeId and UserTypeName. The Users. UserType field contains a value that should match UserTypes.UserTypeId. The UserTypes. UserTypeName field contains values such as Programmer, Project Manager, Department Manager, Program Manager, and Lab Director.

When you build a form to display the Users table data, you would like to use a `ComboBox` to allow the user to select only the allowed choices Programmer, Project Manager, and so on. However, the Users table doesn't store those string values. Instead it stores the `UserTypeId` value corresponding to the `UserTypeName` value that the user selects. When the user picks a `UserTypes.UserTypeName` value, the `ComboBox` should look up the corresponding `UserTypes.UserTypeId` value and save it in the Users. UserType field.

Clearly the simple binding strategy used for `TextBox`es won't work here. Binding this control requires two rather complicated steps: defining the `DataSet` and binding the control. Each piece of the operation is easy, but you must do everything correctly. If you miss any detail, the `ComboBox` won't work, and Visual Basic's error messages probably won't give you enough information to figure out how to fix the problem.

Example program BindComboBox, which is available for download on the book's web site, demonstrates this technique. You may want to download this example and copy the included database ComputerUsers.mdb into a new directory so you can follow along.

The first step is building a data connection. Select the Data menu's Add New Data Source command. Use the Data Source Configuration Wizard to make a data source that selects both the Users and UserTypes tables from the database.

Next, create a `ComboBox` named `cboUserType` to the form. In the Properties window, select the control's `DataSource` property and click the drop-down arrow on the right. Select the UserTypes table as shown in Figure 20-21. This tells the `ComboBox` where to look up values.

When you set this property, Visual Basic also adds a `DataSet`, `BindingSource`, and `TableAdapter` to the form. These components provide access to the UserTypes table.

Set the `ComboBox`'s `DisplayMember` property to the field in the lookup table (specified by the `DataSource` property) that the control will display to the user. In this example, the field is `UserTypeName`.

Set the `ComboBox`'s `ValueMember` property to the field in the lookup table that represents the value that the `ComboBox` will need to read and write from the database. In this example, that's the `UserTypeId` field.

Next, you need to bind the `ComboBox` to the field that it must read and write in the database. In this example, that's the Users table's UserType field. To simplify this binding, add a new `BindingSource` to the form. Change its name to UsersBindingSource and set its `DataSource` property to the `ComputerUsersDataSet` as shown in Figure 20-22. Then set the `BindingSource` object's `DataMember` property to the Users table.
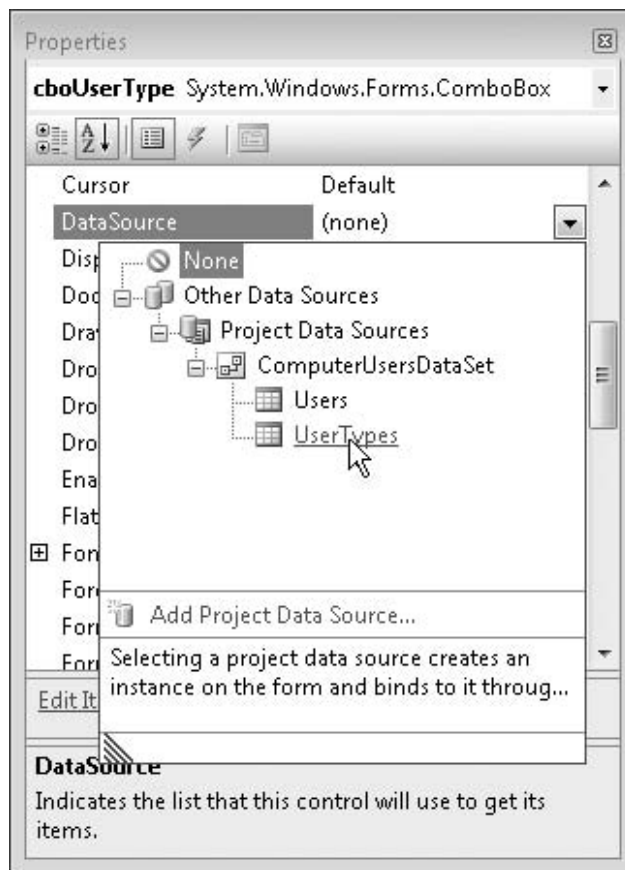
Figure 20-21: Set the ComboBox's DataSource property to the UserTypes table.
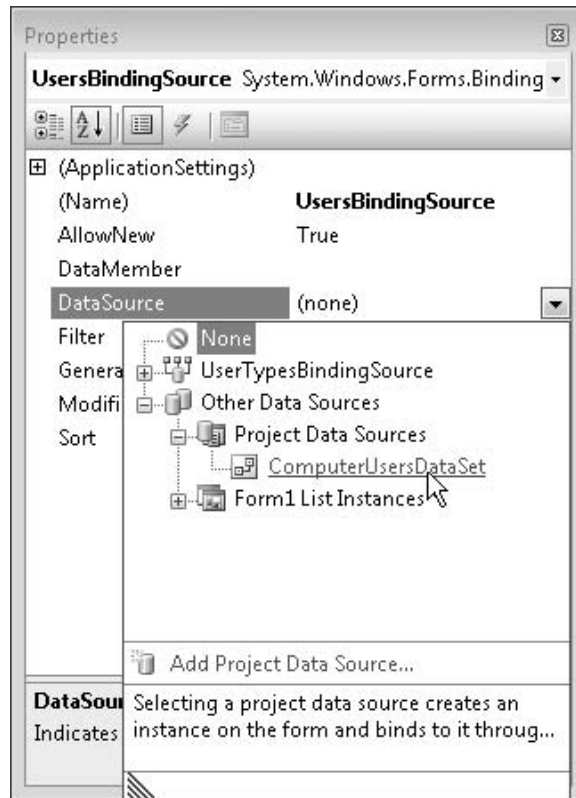
Figure 20-22: Set the BindingSource object's
DataSource to the ComputerUsersDataSet.

The last ComboBox property you need to set is SelectedValue. Click the ComboBox, open the Properties window, and expand the (DataBindings) entry at the top. Click the drop-down arrow to the right of the SelectedValue property and select the field that the control must read and write in the database. For this example, that's the UsersBindingSource object's UserType field. Figure 20-23 shows the Property window setting this property.

Next, create TextBox controls to display the Users table's FirstName and LastName fields. In the Properties window, open their (Data Bindings) items and set their Text properties to the UsersBindingSource object's FirstName and LastName fields.

Finally, to give the user a way to navigate through the data, add a BindingNavigator to the form. Set this component's BindingSource property to UsersBindingSource and the program is ready to run. Figure 20-24 shows the BindComboBox example program, which is available for download on the book's web site, in action.
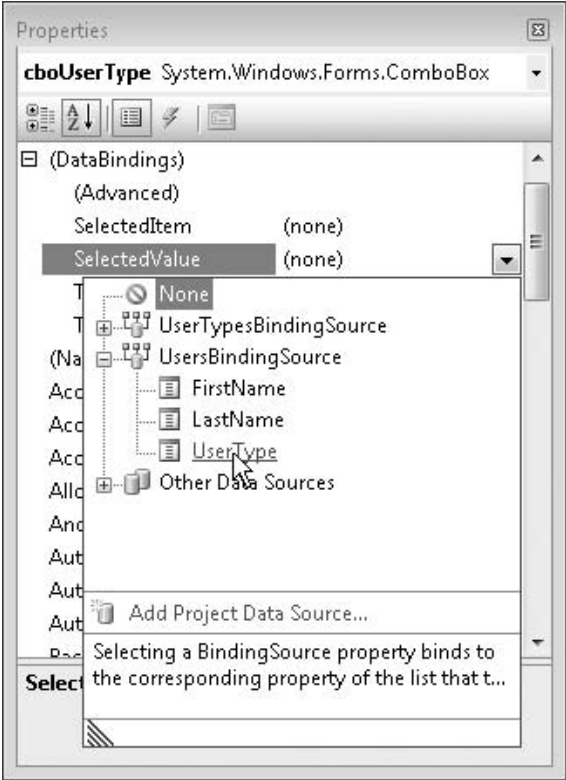
Figure 20-23: Set the BindingSource object's
SelectedValue to the UsersBindingSource object's
UserType field.

The choices allowed by the ComboBox are taken from the values in the UserTypes table's UserTypeName field. If you select a new user value from the ComboBox, the control automatically makes the appropriate change to the Users table.
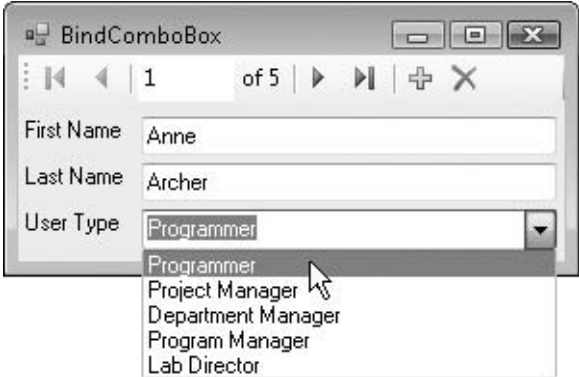
Figure 20-24: At runtime, the ComboBox displays the
field bound to its DisplayMember property while
updating the field bound to its SelectedValue property.

The steps for binding a `ListBox` control are exactly the same as those for binding a `ComboBox`. Example program BindListBox, which is available for download on the book's web site, works much as program BindComboBox does, except it uses a `ListBox` instead of a `ComboBox`. As you move through the records, the `ListBox` selects the appropriate user type for each user record.

Summary

Working with databases in Visual Basic is an enormous topic. This chapter does not cover every detail of database programming, but it does explain the basics. It tells how to build data sources and how to drag and drop tables and fields from the Data Sources window onto a form. It describes the most important database controls and objects, such as connection, data adapter, `DataSet`, and `DataTable` objects. It also explains the fundamentals of simple and complex data binding, and using `CurrencyManager` objects to navigate through data.

For more information on database programming in Visual Basic .NET, see a book about database programming. Database programming has changed considerably in recent versions of Visual Basic, so be sure to get a book that's up to date. Older books explain many of the fundamental database objects such as `DataSet`, `DataTable`, `DataRow`, and `CurrencyManager`, but they won't cover new objects such as `TableAdapter`, `DataConnector`, and `DataNavigator`. Books covering Visual Basic 2005 and more recent editions should be the most useful. For example, the book *Expert One-on-One Visual Basic 2005 Database Programming* by Roger Jennings (Wrox, 2005) provides much greater depth on this topic.

If you must build and maintain large databases, you should also read books about database management. These can tell you how to design, build, and maintain a database throughout the application's lifetime. You should also read about the particular kinds of databases that you need to use. For example, if you are working with SQL Server databases, get a good book on using SQL Server.

Becoming an expert database developer is a big task, but the techniques described in this chapter should at least get you started.

The controls and other objects described in this chapter help a program manipulate data in a database. They help a program connect to a database, read and update data, and display the data on a form.

Chapter 21, "LINQ," explains another way to load and manipulate data. LINQ allows a program to perform complex queries similar to those provided by SQL to select data from lists, collections, arrays, and other data structures within the program's code.

LINQ

LINQ (Language Integrated Query) is a new data selection mechanism designed to give programs the ability to select data in the same way from *any* data source. Ideally the program would be able to use exactly the same method to fetch data whether it's stored in arrays, lists, relational databases, XML data, Excel worksheets, or some other data store. Currently the LINQ API supports data stored in relational databases, objects within the program stored in arrays or lists, and XML data.

LINQ is a complex topic. LINQ provides dozens of extension methods that apply to all sorts of objects that hold data such as arrays, dictionaries, and lists. Visual Basic provides a LINQ query syntax that converts SQL-like queries into calls to LINQ functions.

LINQ tools are divided into the three categories summarized in the following list:

- ❑ LINQ to Objects refers to LINQ functions that interact with Visual Basic objects such as arrays, dictionaries, and lists. Most of this chapter presents examples using these kinds of objects to demonstrate LINQ concepts.

- ❑ LINQ to XML refers to LINQ features that read and write XML data. Using LINQ, you can easily move data between XML hierarchies and other Visual Basic objects.

- ❑ LINQ to ADO.NET refers to LINQ features that let you write LINQ-style queries to extract data from relational databases.

The first section, "Introduction to LINQ," provides an intuitive introduction to LINQ. Many of the details about LINQ functions are so complex and technical that they can be hard to understand, but the basic ideas are really quite simple. The introduction gives examples that demonstrate the essential concepts to try to give you an understanding of the basics.

The section, "Basic LINQ Query Syntax," describes the most useful LINQ query commands. These let you perform complex queries that select, filter, and arrange data taken from program objects. The next section, "Advanced LINQ Query Syntax," describes additional LINQ query commands.

The next section, "LINQ Functions," describes functions that are provided by LINQ but that are not supported by Visual Basic's LINQ query syntax. To use these functions, you must apply them to the arrays, dictionaries, lists, and other objects that they extend.

The next section, "LINQ Extension Methods," explains how LINQ extends objects such as arrays, dictionaries, and lists. It describes method-based queries and explains how you can write your own extensions to increase the power of method-based queries.

Finally, after describing the tools provided by LINQ, the remainder of the chapter describes the three main categories of LINQ usage: LINQ to Objects, LINQ to XML, and LINQ to ADO.NET.

LINQ to Objects is a bit easier to cover effectively than LINQ to XML and LINQ to ADO.NET because it doesn't require that you have any special knowledge beyond Visual Basic itself. To understand LINQ to XML properly, you need to understand XML, which is a complex topic in its own right. Similarly to get the most out of LINQ to ADO.NET, you need to understand relational databases such as SQL Server, a huge topic about which many books have been written.

Because LINQ to Objects is easiest to cover, this chapter focuses mostly on it, and most of the examples throughout the chapter deal with LINQ to Objects. The final sections of the chapter do provide some information about LINQ or XML and LINQ to ADO.NET, however, to give you an idea of what is possible in those arenas.

The book's web site contains 20 example programs that demonstrate the techniques described in this chapter. Go to the book's web site to download those examples.

> *LINQ is one of the newest features in Visual Basic so it is possible that its syntax and details will change in the next releases. In fact, they may even change between the time this chapter was written and the time you read it.*
>
> *If changes are needed, I will post addendums and revised example programs on the book's web site. To learn about any changes, visit the book's web site. If you sign up for the VB Helper newsletters at* `www.vb-helper.com/newsletter.html`, *you'll receive weekly tips and tricks, in addition to notification when this book's web page changes.*

Introduction to LINQ

The LINQ API provides relatively low-level access to data in these storage formats. Visual Basic provides a higher-level layer above the LINQ API that makes querying data sources easier. This higher-level layer uses *query expressions* to define the data that should be selected from a data source. These expressions use a SQL-like syntax so they will be familiar to developers who have worked with relational databases.

For example, suppose a program defines a `Customer` class that provides typical customer properties such as `Name`, `Phone`, `StreetAddress`, `AccountBalance`, and so forth. Suppose also that the list `all_customers` holds all of the application's `Customer` objects. Then the following expression defines a query that selects customers with negative account balances. The results are ordered by balance in ascending order so customers with the most negative balances (who owe the most) are listed first. (Example program LinqLambda, which is available for download on the book's web site, defines a simple `Customer` class and performs a similar query.)

```
   Dim overdue_custs = _
       From cust In all_customers _
       Where cust.AccountBalance < 0
       Order By cust.AccountBalance Ascending _
       Select cust.Name, cust.AccountBalance
```

Behind the scenes, Visual Basic transforms the query expression into calls to the LINQ API and fetches the selected data. The program can then loop through the results as shown in the following code:

```
   For Each cust In overdue_custs
       Debug.WriteLine(cust.Name & ": " & cust.AccountBalance)
   Next cust
```

There are a couple of interesting things to note about this code. First, the previous code fragments do not declare data types for the expression or the looping variable `cust` in the `For Each` loop. The data types for both of these variables are inferred automatically by Visual Basic. If you stop the program while it is executing and use the `TypeName` function to see what types these variables have, you'll find that they have the following ungainly names:

```
   <SelectIterator>d__b(Of Customer,VB$AnonymousType_0(Of String,Decimal))
   VB$AnonymousType_0(Of String,Decimal)
```

The first line of this gibberish means the `overdue_custs` query result is an iterator that loops through `Customer` objects and returns objects of an anonymous type (which is internally named `VB$AnonymousType_0`) that contains String and Decimal fields. The second line indicates that the `cust` variable used in the `For Each` loop has the same anonymous type `VB$AnonymousType_0`.

Because these variables have such awkward names, you don't really want to try to guess them. It's much easier to leave `Option Infer` on and let Visual Basic infer them for you.

In fact, as the previous code fragments show, you never even need to know what these data types are. The code can define the query without declaring its types, and the `For Each` loop can iterate through the results without knowing the data type of the looping variable.

Because the code doesn't need to know what these data types really are, they are called *anonymous types*.

A second interesting fact about this code is that the program doesn't actually fetch any data when the query expression is defined. It only accesses the data source (in this case the `all_customers` list) when the code tries to access the result in the `For Each` loop. Many programs don't really need to distinguish between when the expression is declared and when it is executed. For example, if the code iterates through the results right after defining the query, there isn't much difference. However, if it may be a long time between defining the query and using it or if the query takes a long time to execute, the difference may matter.

Third, if you have any experience with relational databases, you'll notice that the `Select` clause is in a different position from where it would be in a SQL statement. In SQL the `Select` clause comes first whereas in LINQ it comes at the end. This placement is due to implementation issues Microsoft encountered while implementing IntelliSense for LINQ. The concept is similar in SQL and LINQ. In both cases the `Select` clause tells which "fields" you want to select from the data. As long as you remember the difference in position (or let IntelliSense help you remember), it shouldn't be too confusing.

Basically IntelliSense doesn't know what "fields" you can select until it knows what fields are available. In the previous example, the From *clause indicates that the data will be selected from* all_customers, *a list of* Customer *objects. It isn't until after the* From *clause that IntelliSense knows that the* Select *statement can pick from the* Customer *class's properties.*

Though it is a new language, LINQ is quite complicated. LINQ's keywords are quite powerful and flexible so they offer great opportunities for building powerful queries. LINQ's flexibility also offers opportunities for creating confusing code that is difficult to understand and debug. Complex LINQ queries are all the more difficult to debug because Visual Basic doesn't let you step through them while they execute as it does with code.

The rest of this chapter describes LINQ in greater detail. The following sections explain the most useful LINQ keywords that are supported by Visual Basic. The next major section describes LINQ extension functions that you can use to query objects such as arrays and lists but that are not supported by LINQ queries.

Basic LINQ Query Syntax

The following text shows the typical syntax for a LINQ query:

```
From ... Where ... Order By ... Select ...
```

The following sections describe these four basic clauses. The sections after those describe some of the other most useful LINQ clauses.

From

The From clause is the only one that is required. It tells where the data comes from and defines the name by which it is known within the LINQ query. Its basic form is:

```
From query_variable In data_source
```

Here *query_variable* is a variable that you are declaring to manipulate the items selected from the *data_source*. This is similar to declaring a looping variable in a For or For Each statement.

You can supply a data type for *query_variable* if you know its type, although due to the anonymous types used by LINQ, it's often easiest to let LINQ infer the data type automatically. For example, the following query explicitly indicates that the query variable per is from the Person class:

```
Dim query = From cust As Customer In all_customers
```

The From clause can include more than one query variable and data source. In that case, the query selects data from all of the data sources. For example, the following query selects objects from the all_customers and all_orders lists:

```
Dim query = From cust In all_customers, ord In all_orders
```

This query returns the cross-product of the objects in the two lists. In other words, for every object in the all_customers list, the query returns that object paired with every object in the all_orders list.

If all_customers contains Ann, Bob, and Cindy, and all_orders contains orders numbered 1, 2, 3, then the following text shows the results returned by this query:

```
Ann        Order 1
Ann        Order 2
Ann        Order 3
Bob        Order 1
Bob        Order 2
Bob        Order 3
Cindy      Order 1
Cindy      Order 2
Cindy      Order 3
```

Usually, you will want to use a Where clause to join the objects selected from the two lists. For example, if customers and orders are related by a common CustomerId property, then you might use the following query to select customers together with their orders rather than all orders:

```
Dim query = From cust In all_customers, ord In all_orders _
    Where cut.CustomerId = ord.CustomerId
```

If Ann, Bob, and Cindy have CustomerId values 1, 2, 3, and the three orders have the corresponding CustomerId values, then the previous query would return the following results:

```
Ann        Order 1
Bob        Order 2
Cindy      Order 3
```

Where

The Where clause applies filters to the records selected by the From clause. It can include tests involving the objects selected and properties of those objects. The previous example shows a particularly useful kind of query that joins objects from two data sources that are related by common property values. Although the Where clause is often used for simple joins, it can also execute functions on the selected objects and their properties.

For example, suppose the GoodCustomer class inherits from Customer, a class that has AccountBalance and PaymentLate properties. Also suppose the all_customers list contains Customer and GoodCustomer objects.

The OwesALot function defined in the following code returns True if a Customer owes more than $50. The query that follows selects objects from all_customers where the objects is not a GoodCustomer and has a PaymentLate property of True and for which function OwesALot returns True.

```
Private Function OwesALot(ByVal cust As Customer) As Boolean
    Return cust.AccountBalance < -50
End Function
...
Dim query = From cust In all_customers _
    Where Not (TypeOf cust Is GoodCustomer) _
        AndAlso cust.PaymentLate _
        AndAlso OwesALot(cust)
```

The `Where` clause can include just about any Boolean expression, usually involving the selected objects and their properties. As the previous example shows, it can include `Not`, `Is`, `AndAlso`, and function calls. It can also include `And`, `Or`, `OrElse`, `Mod`, and `Like`.

Expressions can use any of the arithmetic, date, string, or other comparison operators. The following query selects `Order` objects from `all_orderitems` where the `OrderDate` property is after April 5, 2008:

```
Dim query = From ord In all_orders _
    Where ord.OrderDate > #4/5/2008#
```

Order By

The `Order By` clause makes a query sort the objects selected according to one or more values. Usually the values are properties of the objects selected. For example, the following query selects `Customer` objects from the `all_customers` list and sorts them by their `LastName` and `FirstName` properties:

```
Dim query = From cust In all_customers _
    Order By cust.LastName, cust.FirstName
```

In this example, customers are sorted first by last name. If two customers have the same last name, then they are sorted by first name.

An `Order By` clause can also sort objects based on calculated values. For example, suppose some customers' names are surrounded by parentheses. Because "(" comes alphabetically before letters, those customers would normally end up at the beginning of the sorted list. The following query uses a `String` class's `Replace` method to remove parentheses from the values used in sorting so all names are positioned in the list as if they did not contain parentheses:

```
Dim query = From cust In all_customers _
    Order By cust.LastName.Replace("(", "").Replace(")", ""), _
            cust.FirstName.Replace("(", "").Replace(")", "")
```

Note that the values used for ordering results are not the values selected by the query. The previous queries do not specify what results they select so LINQ takes its default action and selects the `Customer` objects in the `all_customers` list. See the next section, "Select," for information on determining the values that the query selects.

To arrange items in descending order, simply add the keyword `Descending` after an ordering expression. Each expression can have its own `Descending` keyword so you can arrange them independently. The following query orders customers by `LastName` descending. If several customers have the same `LastName`, they are arranged by their `FirstName` values in ascending order.

```
Dim query = From cust In all_customers _
    Order By cust.LastName Descending, cust.FirstName
```

Select

The `Select` clause lists the fields that the query should select into its result. This can be an entire record taken from a data source or it can be one or more fields taken from the data sources. It can include the results of functions and calculations on the fields. It can even include more complicated results such as the results of nested queries.

You can add an alias to any of the items that the query selects. This is particularly useful for calculated results.

The following query selects objects from `all_customers`. It gives the first selected field the alias `Name`. That field's value is the customer's first and last name separated by a space. The query also selects the customer's `AccountBalance` property, giving it the alias `Balance`.

```
Dim query = From cust In all_customers
    Select Name = cust.FirstName & " " & cust.LastName, _
        Balance = Cust.AccountBalance
```

The result of the query is an `IEnumerable` that contains objects of an anonymous type that holds two fields: `Name` and `Balance`.

The following code shows how you might display the results. Notice that the code does not declare a data type for the looping variable `cust`. The objects in the query result have an anonymous type, so the code lets Visual Basic infer its data type.

```
For obj In query
    Debug.WriteLine(obj.Name & " " & FormatCurrency(obj.Balance))
Next obj
```

You can also use the `New` keyword to create objects of an anonymous type. The following query builds a result similar to the previous query but uses `New`:

```
Dim query = From cust In all_customers
    Select New With { _
        .Name = cust.FirstName & " " & cust.LastName, _
        .Balance = Cust.AccountBalance}
```

This version emphasizes that you are creating new objects, but it is more verbose and doesn't seem to have any other real benefits.

The previous queries return objects of an anonymous type. If you like, you can define a type to hold the results and then create new objects of that type in the `Select` clause. For example, suppose the `CustInfo` class has `Name` and `Balance` properties. The following query selects the same data as the previous query but this time saves the results in a new `CustInfo` object:

```
Dim query = From cust In all_customers
    Select New CustInfo With { _
        .Name = cust.FirstName & " " & cust.LastName, _
        .Balance = Cust.AccountBalance}
```

The result of this query contains `CustInfo` objects, not objects of an anonymous type. The following code shows how a program can use an explicitly typed looping variable to display these results:

```
For ci As CustInfo In query
    Debug.WriteLine(ci.Name & " " & FormatCurrency(ci.Balance))
Next ci
```

If the `CustInfo` class provides a constructor that takes a name and account balance as parameters, you can achieve a similar result by using the constructor instead of the `With` keyword. The following query provides a result similar to the previous one:

```
Dim query = From cust In all_customers
    Select New CustInfo( _
        cust.FirstName & " " & cust.LastName, _
        Cust.AccountBalance)
```

From all of these different kinds of examples, you can see the power of LINQ. You can also see the potential for confusion. The `Select` clause in particular can take a number of different forms and can return a complicated set of results. If you stick to the simplest syntax, however, your code will be reasonably easy to understand.

The following example shows one of the more complicated queries that uses only basic LINQ syntax. It selects data from multiple sources, uses a common field to join them, adds an additional `Where` filter, uses multiple values to order the results, and returns the `Customer` and `Order` objects that meet its criteria.

```
Dim query = From cust In all_customers, ord In all_orders _
    Where cust.CustId = ord.CustId AndAlso _
        cust.AccountBalance < 0 _
    Order By cust.CustId, ord.OrderDate _
    Select cust, ord
```

Note that the `Select` clause changes the scope of the variables involved in the query. After the query reaches the `Select` clause, it can only refer to items in that clause, later.

For example, the following query selects customer first and last names. The `Order By` clause comes after the `Select` clause so it can only refer to items included in the `Select` clause. This example orders the results by the `LastName` and `FirstName` fields picked by the `Select` clause.

```
Dim query = From cust In all_customers _
    Select cust.FirstName, cust.LastName _
    Order By LastName, FirstName
```

Because the original `cust` variable is not chosen by the `Select` clause, the `Order By` clause cannot refer to it.

Note also that if the `Select` clause gives a result an alias, then any later clause must refer to the alias. For example, the following query selects the customers' last and first names concatenated into a field known by the alias `FullName` so the `Order By` clause must use the alias `FullName`:

```
Dim query = From cust In all_customers _
    Select FullName = cust.LastName & ", " & cust.FirstName _
    Order By FullName
```

Usually, it is easiest to place `Order By` and other clauses before the `Select` clause to avoid confusion.

Using LINQ Results

A LINQ query expression returns an `IEnumerable` containing the query's results. A program can iterate through this result and process the items that it contains.

To determine what objects are contained in the `IEnumerable` result, you need to look carefully at the `Select` clause. If this clause chooses a simple value such as a string or integer, then the result contains those simple values.

For example, the following query selects customer first and last names concatenated into a single string. The result is a string, so the query's `IEnumerable` result contains strings and the `For Each` loop treats them as strings.

```
Dim query = From cust In all_customers _
    Select cust.FirstName & " " & cust.LastName

For Each cust_name As String In query
    Debug.WriteLine(cust_name)
Next cust_name
```

Often the `Select` clause chooses some sort of object. The following query selects the `Customer` objects contained in the `all_customers` list. The result contains `Customer` objects, so the code can explicitly type its looping variable and treat it as a `Customer`.

```
Dim query = From cust In all_customers _
    Select cust

For Each cust As Customer In query
    Debug.WriteLine(cust.LastName & " owes " & cust.AccountBalance)
Next cust
```

The previous example selects objects with a known class: `Customer`. Many queries select objects of an anonymous type. Any time a `Select` clause chooses more than one item, Visual Basic defines an anonymous type to hold the results. In that case, the code should let Visual Basic infer the type of the objects in the result (and the looping variable in a `For Each` statement). The code can then access the fields picked by the `Select` clause and defined in the anonymous type.

The following query selects only the `Customer` objects' `FirstName` and `LastName` properties. The result is an object with an anonymous type and having those two properties. The code lets Visual Basic infer the type for the looping variable `obj`. It can then access the `FirstName` and `LastName` properties defined for the anonymous type, but no other `Customer` properties area available because the `Select` clause didn't choose them.

```
Dim query = From cust In all_customers _
    Select cust.FirstName, cust.LastName

For Each obj In query
    Debug.WriteLine(obj.LastName & ", " & obj.FirstName)
Next obj
```

Advanced LINQ Query Syntax

The previous sections describe the basic LINQ commands that you might expect to use regularly. Simple queries such as the following are reasonably intuitive and easy to use:

```
Dim query = From cust In all_customers, ord In all_orders _
    Where cust.CustId = ord.CustId AndAlso _
        cust.AccountBalance < 0 _
    Order By cust.CustId, ord.OrderDate _
    Select cust, ord
```

However, there's much more to LINQ than these simple queries. The following sections describe some of the more advanced LINQ commands that are less intuitive and that you probably won't need to use as often.

Join

The `Join` keyword selects data from multiple data sources matching up corresponding fields. The following pseudo-code shows the `Join` command's syntax:

```
From variable1 In data source1 _
Join variable2 In datasource2 _
On variable1.field1 Equals variable2.field2
```

For example, the following query selects objects from the `all_customers` list. For each object it finds, it also selects objects from the `all_orders` list where the two records have the same `CustId` value.

```
Dim query = From cust As Customer In all_customers _
    Join ord In all_orders _
    On cust.CustId Equals ord.CustId
```

A LINQ `Join` is similar to a SQL join except the `On` clause only allows you to select objects where fields are equal and the `Equals` keyword is required.

The following query selects a similar set of objects but without using the `Join` keyword. Here the `Where` clause makes the link between the `all_customer` and `all_orders` lists:

```
Dim query = From cust As Customer In all_customers, ord In all_orders _
    Where cust.CustId = ord.CustId
```

This is slightly more flexible because the `Where` clause can make tests that are more complicated than the `Join` statement's `Equals` clause.

The `Group Join` statement selects data much as a `Join` statement does, but it returns the results differently. The `Join` statement returns an `IEnumerable` object that holds whatever is selected by the query (the `cust` and `ord` objects in the previous example).

The `Group By` statement returns the same objects but in a different arrangement. Each item in the `IEnumerable` result contains an object of the first type (`cust` in the previous example) plus another `IEnumerable` that holds the corresponding objects of the second type (`ord` in the previous example).

Actually, the main result is a `GroupJoinIterator`, *but that inherits from* `IEnumerable` *so you can treat it as such.*

For example, the following query selects customers and their corresponding orders much as the previous examples do. The new clause `Into CustomerOrders` means the `IEnumerable` containing the orders for each customer should be called `CustomerOrders`. The `=Group` part means `CustomerOrders` should contain the results of the grouping.

```
Dim query = _
    From cust In all_customers _
        Group Join ord In all_orders _
        On cust.CustId Equals ord.CustId _
        Into CustomerOrders = Group
```

The following code shows how a program might display these results:

```
For Each c In query
    ' Display the customer.
    Debug.WriteLine(c.cust.ToString())

    ' Display the customer's orders.
    For Each o In c.CustomerOrders
        Debug.WriteLine(Space$(4) & "OrderId: " & o.OrderId & _
            ", Date: " & o.OrderDate & vbCrLf
    Next o
Next c
```

Each item in the main `IEnumerable` contains a `cust` object and an `IEnumerable` named `CustomerOrders`. Each `CustomerOrders` object contains `ord` objects corresponding to the `cust` object.

This code loops through the query's results. Each time through the loop, it displays the `cust` object's information and then loops through its `CustomerOrders`, displaying each `ord` object's information indented.

Example program JoinExamples, which is available for download on the book's web site, demonstrates these types of `Join` queries.

Group By

Like the `Group Join` clause, the `Group By` clause lets a program select data from a flat, relational style format and build a hierarchical arrangement of objects. It also returns an `IEnumerable` that holds objects, each containing another `IEnumerable`.

The following code shows the basic `Group By` syntax:

```
From variable1 In datasource1 _
Group items By value Into groupname = Group
```

Here *items* is a list of items whose properties you want selected into the group. In other words, the properties of the *items* variables are added to the objects in the nested `IEnumerable`.

If you omit the *items* parameter, the query places the objects selected by the rest of the query into the nested IEnumerable.

The *value* property tells LINQ on what field to group objects. This value is also stored in the top-level IEnumerable values.

The groupname parameter gives a name for the group. The objects contained in the top-level IEnumerable get a property with this name that is an IEnumerable containing the grouped values.

Finally, the = Group clause indicates that the group should contain the fields selected by the query.

If this definition seems a bit confusing, an example should help. The following query selects objects from the all_orders list. The Group By statement makes the query group orders with the same CustId value.

```
Dim query1 = From ord In all_orders _
    Order By ord.CustId, ord.OrderId _
    Group ord By ord.CustId Into CustOrders = Group
```

The result is an IEnumerable that contains objects with two fields. The first field is the CustId value used to define the groups. The second field is an IEnumerable named CustOrders that contains the group of order objects for each CustId value.

The following code shows how a program might display the results in a TreeView control:

```
Dim root1 As TreeNode = trvResults.Nodes.Add("Orders grouped by CustId")
For Each obj In query1
    ' Display the customer id.
    Dim cust_node As TreeNode = root1.Nodes.Add("Cust Id: " & obj.CustId)

    ' List this customer's orders.
    For Each ord In obj.CustOrders
        cust_node.Nodes.Add("OrderId: " & ord.OrderId & _
            ", Date: " & ord.OrderDate)
    Next ord
Next obj
```

The code loops through the top-level IEnumerable. Each time through the loop, it displays the group's CustId and the loops through the group's CustOrders IEnumerable displaying each order's ID and date.

The following example is a bit more complicated. It selects objects from the all_customers and all_orders lists, and uses a Where clause to join the two. The Group By clause indicates that the results should be grouped by the customer object cust. That means results that have the same cust object are grouped together. It also means the cust object is included in the resulting top-level IEnumerable's objects much as CustId was included in the previous example.

```
Dim query2 = From cust In all_customers, ord In all_orders _
    Where cust.CustId = ord.CustId _
    Order By cust.CustId, ord.OrderId _
    Group ord By cust Into CustomerOrders = Group
```

The following code displays the results:

```
Dim root2 As TreeNode = trvResults.Nodes.Add("Orders grouped by CustId")
For Each obj In query2
    ' Display the customer info.
    Dim cust_node As TreeNode = _
        root2.Nodes.Add("Customer: " & obj.cust.ToString())

    ' List this customer's orders.
    For Each ord In obj.CustomerOrders
        cust_node.Nodes.Add("OrderId: " & ord.OrderId & _
            ", Date: " & ord.OrderDate)
    Next ord
Next obj
```

The code loops through the top-level `IEnumerable` displaying each customer's information. Notice that the `cust` object is available at this level because it was used to group the results.

For each customer, the code loops through the `CustomerOrders` group and displays each order's information.

Example program SimpleGroupBy, which is available for download on the book's web site, demonstrates the previous two types of `Group By` statements.

Another common type of query uses the `Group By` clause to apply some aggregate function to the items selected in a group. The following query selects order and order item objects, grouping each order's items and displaying each order's total price:

```
Dim query1 = From ord In all_orders, ord_item In all_order_items _
    Order By ord.CustId, ord.OrderId _
    Where ord.OrderId = ord_item.OrderId _
    Group ord_item By ord Into _
        TotalPrice = Sum(ord_item.Quantity * ord_item.UnitPrice), _
        OrderItems = Group
```

The query selects objects from the `all_orders` and `all_order_items` lists using a `Where` clause to join them.

The `Group ord_item` piece places the fields of the `ord_item` object in the group. The `By ord` piece makes each group hold items for a particular `ord` object.

The `Into` clause selects two values. The first is a sum over all of the group's `ord_item` objects adding up the `ord_items`' `Quantity` times `UnitPrice` fields. The second value selected is the group named `OrderItems`.

The following code shows how a program might display the results in a TreeView control named `trvResults`:

```
Dim root1 As TreeNode = trvResults.Nodes.Add("Orders")
For Each obj In query1
    ' Display the order id.
    Dim cust_node As TreeNode = _
        root1.Nodes.Add("Order Id: " & obj.ord.OrderId & _
            ", Total Price: " & FormatCurrency(obj.TotalPrice))

    ' List this order's items.
    For Each ord_item In obj.OrderItems
        cust_node.Nodes.Add(ord_item.Description & ": " & _
            ord_item.Quantity & " @ " & _
            FormatCurrency(ord_item.UnitPrice))
    Next ord_item
Next obj
```

Each loop through the query results represents an order. For each order, the program creates a tree node showing the order's ID and the `TotalPrice` value that the query calculated for it.

Next, the code loops through the order's items stored in the `OrderItems` group. For each item, it creates a tree node showing the item's `Description`, `Quantity`, and `TotalPrice` fields.

Example program GroupByWithTotals, which is available for download on the book's web site, demonstrates this `Group By` statement.

Aggregate Functions

The previous section explained how a `Group By` query can use the `Sum` aggregate function. LINQ also supports the reasonably self-explanatory aggregate functions `Average`, `Count`, `LongCount`, `Max`, and `Min`.

The following query selects order objects and their corresponding order items. It uses a `Group By` clause to calculate aggregates for each of the orders' items.

```
Dim query1 = From ord In all_orders, ord_item In all_order_items _
    Order By ord.CustId, ord.OrderId _
    Where ord.OrderId = ord_item.OrderId _
    Group ord_item By ord Into _
        TheAverage = Average(ord_item.UnitPrice * ord_item.Quantity), _
        TheCount = Count(ord_item.UnitPrice * ord_item.Quantity), _
        TheLongCount = LongCount(ord_item.UnitPrice * ord_item.Quantity), _
        TheMax = Max(ord_item.UnitPrice * ord_item.Quantity), _
        TheMin = Min(ord_item.UnitPrice * ord_item.Quantity), _
        TheSum = Sum(ord_item.Quantity * ord_item.UnitPrice)
```

The following code loops through the query's results and adds each order's aggregate values to a string named `txt`. It displays the final results in a text box named `txtResults`.

```
    For Each obj In query1
        ' Display the order info.
        txt &= "Order " & obj.ord.OrderId & _
            ", Average: " & obj.TheAverage & _
            ", Count: " & obj.TheCount & _
            ", LongCount: " & obj.TheLongCount & _
            ", Max: " & obj.TheMax & _
            ", Min: " & obj.TheMin & _
            ", Sum: " & obj.TheSum & _
            vbCrLf
    Next obj
    txtResults.Text = txt
```

Set Operations

If you add the `Distinct` keyword to a query, LINQ keeps only one instance of each value selected. For example, the following query returns a list of IDs for customers who placed an order before 4/15/2008:

```
    Dim query = From ord In all_orders _
        Where ord.OrderDate < #4/15/2008# _
        Select ord.CustId _
        Distinct
```

The code examines objects in the `all_orders` list with `OrderDate` fields before 4/15/2008. It selects those objects' `CustId` fields and uses the `Distinct` keyword to remove duplicates. If a particular customer placed several orders before 4/15/2008, this query only lists that customer's ID once.

LINQ also provides `Union`, `Intersection`, and `Except` extension methods, but they are not supported by Visual Basic's LINQ syntax. See the section "LINQ Functions" later in this chapter for more information.

Example program SetExamples, which is available for download on the book's web site, demonstrates these set operations.

Limiting Results

LINQ includes several keywords for limiting the results returned by a query.

`Take` makes the query keep a specified number of results and discard the rest.

`Take While` makes the query keep selected results as long as some condition holds and then discard the rest.

`Skip` makes the query discard a specified number of results and keep the rest.

`Skip While` makes the query discard selected results as long as some condition holds and then keep the rest.

The following code demonstrates each of these commands:

```
Dim q1 = From cust In all_customers Take 5
Dim q2 = From cust In all_customers Take While cust.FirstName.Contains("n")
Dim q3 = From cust In all_customers Skip 3
Dim q4 = From cust In all_customers Skip While cust.FirstName.Contains("n")
```

The first query selects the first five customers and ignores the rest.

The second query selects customers as long as the `FirstName` field contains the letter "n." It then discards any remaining results, even if a later customer's `FirstName` contains an "n."

The third query discards the first three customers and then selects the rest.

The final query skips customers as long as their `FirstName` values contain the letter "n" and then keeps the rest.

Example program LimitingExamples, which is available for download on the book's web site, demonstrates these commands.

LINQ Functions

LINQ provides several functions (implemented as extension methods) that are not supported by Visual Basic's LINQ syntax. Though you cannot use these in LINQ queries, you can apply them to the results of queries to perform useful operations.

For example, the following code defines a query that looks for customers named Rod Stephens. It then applies the `FirstOrDefault` extension method to the query to return either the first object selected by the query or `Nothing` if the query selects no objects.

```
Dim rod_query = From cust In all_customers _
    Where cust..LastName = "Stephens" AndAlso cust.FirstName = "Rod"
Dim rod As Person = rod_query.FirstOrDefault()
```

The following list describes some of the more useful of these extension methods:

❑ `Aggregate` — Uses a function specified by the code to calculate a custom aggregate.

❑ `DefaultIfEmpty` — If the query's result is not empty, it returns the result. If the result is empty, returns an `IEnumerable` containing a default value. Optionally can also specify the default value (for example, a new object rather than Nothing) to use if the query's result is empty.

❑ `Concat` — Concatenates two sequences into a new sequence.

❑ `Contains` — Determines whether the result contains a specific value.

❑ `ElementAt` — Returns an element at a specific position in the query's result. If there is no element at that position, it throws an exception.

❑ `ElementAtOrDefault` — Returns an element at a specific position in the query's result. If there is no element at that position, it returns a default value for the data type.

❑ Empty — This Shared IEnumerable method creates an empty IEnumerable.

❑ Except — Returns the items in one IEnumerable that are not in a second IEnumerable.

❑ First — Returns the first item in the query's result. If the query contains no results, it throws an exception.

❑ FirstOrDefault — Returns the first item in the query's result. If the query contains no results, it returns a default value for the data type. For example, the default value for an Integer is 0 and the default value for object references is Nothing.

❑ Intersection — Returns the intersection of two IEnumerable objects. In other words, it returns an IEnumerable containing items that are in both of the original IEnumerable objects.

❑ Last — Returns the last item in the query's result. If the query contains no results, it throws an exception.

❑ LastOrDefault — Returns the last item in the query's result. If the query contains no results, it returns a default value for the data type.

❑ Range — This Shared IEnumerable method creates an IEnumerable containing a range of integer values.

❑ Repeat — This Shared IEnumerable method creates an IEnumerable containing a value of a given type repeated a specific number of times.

❑ SequenceEqual — Returns True if two sequences are identical.

❑ Single — Returns the single item selected by the query. If the query does not contain exactly one result, it throws an exception.

❑ SingleOrDefault — Returns the single item selected by the query. If the query contains no results, it returns a default value for the data type. If the query contains more than one item, it throws an exception.

❑ Union — Returns the union of two IEnumerable objects. In other words, it returns an IEnumerable containing items that are in either of the original IEnumerable objects.

Example program FunctionExamples, which is available for download on the book's web site, demonstrates most of these functions. Example program SetExamples demonstrates Except, Intersection, and Union.

LINQ also provides conversion functions that convert results into new data types. The following list describes these methods:

❑ AsEnumerable — Converts the result into a typed IEnumerable(Of T).

❑ AsQueryable — Converts an IEnumerable into an IQueryable.

❑ OfType — Removes items that cannot be cast into a specific type.

❑ ToArray — Places the results in an array.

❑ ToDictionary — Places the results in a Dictionary using a selector function to set each item's key.

❑   `ToList` — Converts the result into a `List(Of T)`.

❑   `ToLookup` — Places the results in a `Lookup` (one-to-many dictionary) using a selector function to set each item's key.

Note that the `ToArray`, `ToDictionary`, `ToList`, and `ToLookup` functions force the query to execute immediately instead of waiting until the program accesses the results.

LINQ Extension Methods

Many of the newest features in Visual Studio were added to support LINQ. Extension methods, lambda functions, anonymous types, and many of the other features new to Visual Studio were added to make building LINQ easier.

Visual Basic doesn't *really* execute LINQ queries. Instead it converts them into a series of function calls (provided by extension methods) that perform the query. Though the LINQ query syntax is generally easier to use, it is sometimes helpful to understand what those function calls look like.

The following sections explain the general form of these function calls. They explain how the function calls are built, how you can use these functions directly in your code, and how you can extend LINQ to add your own LINQ query methods.

Method-Based Queries

Suppose a program defines a `List(Of Customer)` named `all_customers` and then defines the following query expression. This query finds customers that have `AccountBalance` values less than zero, orders them by `AccountBalance`, and returns an `IEnumerable` object that can enumerate their names and balances. (Example program LinqLambda, which is available for download on the book's web site, defines a simple `Customer` class and performs a similar query.)

```
Dim q1 = _
    From cust In all_customers _
    Where cust.AccountBalance < 0 _
    Order By cust.AccountBalance _
    Select cust.Name, cust.AccountBalance
```

To perform this selection, Visual Basic converts the query into a series of function calls to form a *method-based* query that performs the same tasks as the original query. For example, the following method-based query returns roughly the same results as the original LINQ query:

```
Dim q2 = all_customers. _
    Where(AddressOf OwesMoney). _
    OrderBy(AddressOf OrderByAmount). _
    Select(AddressOf SelectFields)
```

This code calls the `all_customers` list's `Where` method. It passes that method the address of the function `OwesMoney`, which returns True if a `Customer` object has a negative account balance.

The code then calls the OrderBy method of the result returned by Where. It passes the OrderBy method the address of the function OrderByAmount, which returns a Decimal value that OrderBy can use to order the results of Where.

Finally, the code calls the Select method of the result returned by OrderBy. It passes Select the address of a function that returns a CustInfo object representing each of the selected Customer objects. The CustInfo class contains the Customer's Name and AccountBalance values.

The exact series of method calls generated by Visual Studio to evaluate the LINQ query is somewhat different from the one shown here. The version shown here uses OwesMoney, OrderByAmount, and SelectFields methods that I defined in the program to help pick, order, and select data. The method-based query generated by Visual Basic uses automatically generated anonymous types and lambda expressions so it is much uglier.

The following code shows the OwesMoney, OrderByAmount, and SelectFields methods:

```vb
Private Function OwesMoney(ByVal c As Customer) As Boolean
    Return c.AccountBalance < 0
End Function

Private Function OrderByAmount(ByVal c As Customer) As Decimal
    Return c.AccountBalance
End Function

Private Function SelectFields(ByVal c As Customer, _
 ByVal index As Integer) As CustInfo
    Return New CustInfo() With _
        {.CustName = c.Name, .Balance = c.AccountBalance}
End Function
```

Function OwesMoney simply returns True if a Customer's balance is less than zero. The Where method calls OwesMoney to see if it should pick a particular Customer for output.

Function OrderByAmount returns a Customer's balance. The OrderBy method calls OrderByAmount to order Customer objects.

Function SelectFields returns a CustInfo object representing a Customer.

That explains where the functions passed as parameters come from, but what are Where, OrderBy, and Select? After all, Where is called as if it were a method provided by the all_customers object. But all_customers is a List(Of Customer) and that has no such method.

In fact, Where is an extension method added to the IEnumerable interface by the LINQ library. The generic List class implements IEnumerable so it gains the Where extension method.

Similarly LINQ adds other extension methods to the IEnumerable interface such as Any, All, Average, Count, Distinct, First, GroupBy, OfType, Repeat, Sum, Union, and many more.

Method-Based Queries with Lambda Functions

Lambda functions, or anonymous functions, make building method-based queries somewhat easier. When you use lambda functions, you don't need to define separate functions to pass as parameters to LINQ methods such as `Where`, `OrderBy`, and `Select`. Instead you can pass a lambda function directly into the method.

The following code shows a revised version of the previous method-based query. Here the method bodies have been included as lambda functions.

```
Dim q3 = all_customers. _
    Where(Function(c As Customer) c.AccountBalance < 0). _
    OrderBy(Of Decimal)(Function(c As Customer) c.AccountBalance). _
    Select(Of CustInfo)( _
        Function(c As Customer, index As Integer) _
            Return New CustInfo() With _
                {.CustName = c.Name, .Balance = c.AccountBalance} _
    )
```

Although this is more concise, not requiring you to build separate functions, it can also be a lot harder to read and understand. Passing a simple lambda function to the `Where` or `OrderBy` method may not be too confusing, but if you need to use a very complex function you may be better off making it a separate routine.

The following code shows a reasonable compromise. This code defines three lambda functions but saves them in delegate variables. It then uses the variables in the calls to the LINQ functions. This version is more concise than the original version and doesn't require separate functions, but it is easier to read than the previous version that uses purely inline lambda functions.

```
' Query with LINQ and inline function delegates.
Dim owes_money = Function(c As Customer) c.AccountBalance < 0
Dim cust_balance = Function(c As Customer) c.AccountBalance
Dim new_custinfo = Function(c As Customer) New CustInfo() With _
    {.Name = c.Name, .Balance = c.AccountBalance}

Dim q4 = all_customers. _
    Where(owes_money). _
    OrderBy(Of Decimal)(cust_balance). _
    Select(Of CustInfo)(new_custinfo)
```

Note that LINQ cannot always infer a lambda function's type exactly so sometimes you need to give it some hints. The `Of Decimal` and `Of CustInfo` clauses in the previous code tell LINQ the data types returned by the `cust_balance` and `new_custinfo` functions.

Instead of using these clauses, you could define the functions' return types in their declarations. The `Func` delegate types defined in the `System` namespace let you explicitly define parameters and return types for functions taking between zero and four parameters. For example, the following code shows how you might define the `cust_balance` function, indicating that it takes a `Customer` as a parameter and returns a `Decimal`:

```
Dim cust_balance As Func(Of Customer, Decimal) = _
    Function(c As Customer) c.AccountBalance
```

If you use this version of cust_balance, then you can leave out the Of Decimal clause in the previous query.

No matter which version of the method-based queries you use, the standard LINQ query syntax is usually easier to understand, so you may prefer to use that version whenever possible. Unfortunately, many references describe the LINQ extension methods as if you are going to use them in method-based queries rather than in LINQ queries. For example, the description of the OrderBy method might include the following definition:

```
<Extension()> _
Public Shared Function OrderBy(Of TSource, TKey) _
    (ByVal source As IEnumerable(Of TSource), _
     ByVal key_selector As Func(Of TSource, TKey)) _
    As OrderedSequence(Of TSource)
```

Here the Extension attribute indicates that this is a function that extends another class. The type of the first parameter, in this case the parameter source has type IEnumerable(Of TSource), gives the class that this method extends. The other parameters are passed to this method. In other words, this code allows you to call the OrderBy function for an object of type IEnumerable(Of TSource), passing it a key_selector of type Func(Of TSource, TKey). Confusing enough for you? For more information on extension methods, see the section "Extension Methods" in Chapter 17, "Subroutines and Functions."

This is technically correct but not necessarily very useful. If you look closely at the examples in the previous section, you can see how this definition matches up with the use of the OrderBy method and the OrderByAmount function. In those examples, TSource corresponds to the Customer class and TKey corresponds to the Decimal type. In the definition of OrderBy shown here, the source parameter has type IEnumerable(Of Customer). The key_selector parameter is the OrderByAmount function, which takes a Customer (TSource) parameter and returns a Decimal (TKey). The OrderBy method itself returns an IEnumerable(Customer), corresponding to IEnumerable(TSource).

It all works but what a mess. The following syntax is much more intuitive:

```
Order By <value1> [Ascending/Descending], _
         <value2> [Ascending/Descending], _
         ...
```

Generally, you should try to use the LINQ query syntax whenever possible, so most of the rest of this chapter assumes you will do so and describes LINQ methods in this manner rather than with confusing method specifications.

One time when you cannot easily use this type of syntax specification is when you want to extend the results of a LINQ query to add new features. The following section explains how you can write extension methods to provide new features for LINQ results.

Extending LINQ

LINQ queries return some sort of IEnumerable object. (Actually they return some sort of SelectIterator creature but the result implements IEnumerable.) The items in the result may be simple types such as Customer objects or strings, or they may be of some bizarre anonymous type that

groups several selected fields together, but whatever the items are, the result is some sort of `IEnumerable`.

Because the result is an `IEnumerable`, you can add new methods to the result by creating extension methods for `IEnumerable`.

For example, the following code defines a standard deviation function. It extends the `IEnumerable(Of Decimal)` interface so the method applies to the results of a LINQ query that fetches `Decimal` values.

```
' Return the standard deviation of
' the values in an IEnumerable(Of Decimal).
<Extension()> _
Public Function StdDev(ByVal source As IEnumerable(Of Decimal)) As Decimal
    ' Get the total.
    Dim total As Decimal = 0
    For Each value As Decimal In source
        total += value
    Next value

    ' Calculate the mean.
    Dim mean As Decimal = total / source.Count

    ' Calculate the sums of the deviations squared.
    Dim total_devs As Decimal = 0
    For Each value As Decimal In source
        Dim dev As Decimal = value - mean
        total_devs += dev * dev
    Next value

    ' Return the standard deviation.
    Return Math.Sqrt(total_devs / (source.Count - 1))
End Function
```

There are a couple of different definitions for standard deviation. This topic is outside the scope of this book so it isn't explored here. For more information, see `mathworld.wolfram.com/ StandardDeviation.html`.

Now, the program can apply this method to the result of a LINQ query that selects `Decimal` values. The following code uses a LINQ query to select `AccountBalance` values from the `all_customers` list where the `AccountBalance` is less than zero. It then calls the query's `StdDev` extension method and displays the result.

```
Dim bal_due = _
    From cust In all_customers _
    Where cust.AccountBalance < 0 _
    Select cust.AccountBalance
MessageBox.Show(bal_due.StdDev())
```

The following code performs the same operations without storing the query in an intermediate variable:

```
MessageBox.Show( _
    (From cust In all_customers _
     Where cust.AccountBalance < 0 _
     Select cust.AccountBalance).StdDev())
```

Similarly, you can make other extension methods for IEnumerable to perform other calculations on the results of LINQ queries.

The following version of the StdDev extension method extends IEnumerable(Of T). To process an IEnumerable(Of T), this version also takes as a parameter a selector function that returns a Decimal value for each of the objects in the IEnumerable(Of T).

```
<Extension()> _
Public Function StdDev(Of T)(ByVal source As IEnumerable(Of T), _
 ByVal selector As Func(Of T, Decimal)) As Decimal
    ' Get the total.
    Dim total As Decimal = 0
    For Each value As T In source
        total += selector(value)
    Next value

    ' Calculate the mean.
    Dim mean As Decimal = total / source.Count

    ' Calculate the sums of the deviations squared.
    Dim total_devs As Decimal = 0
    For Each value As T In source
        Dim dev As Decimal = selector(value) - mean
        total_devs += dev * dev
    Next value

    ' Return the standard deviation.
    Return Math.Sqrt(total_devs / (source.Count - 1))
End Function
```

For example, if a LINQ query selects Customer objects, the result implements IEnumerable(Of Customer). In that case, the selector function should take as a parameter a Customer object and it should return a Decimal. The following code shows a simple selector function that returns a Customer's AccountBalance:

```
Private Function TotalBalance(ByVal c As Customer) As Decimal
    Return c.AccountBalance
End Function
```

The following code shows how a program can use this version of StdDev with this selector function. The LINQ query selects Customer objects with AccountBalance values less than zero. The code then calls the query's StdDev method, passing it the address of the selector function. The new version of StdDev uses the selector to calculate the standard deviation of the selected Customer objects' AccountBalance values, and then the code displays the result.

```
    Dim stddev_due = _
        From cust In all_customers _
        Where cust.AccountBalance < 0 _
        Select cust
    Dim result As Decimal = stddev_due.StdDev(AddressOf TotalBalance)
    MessageBox.Show(result)
```

For a final example, consider the following `Randomize` method, which also extends `IEnumerable (Of T)`. It uses the `IEnumerable`'s `ToArray` method to copy the values into an array, randomizes the array, and returns the array.

```
    <Extension()> _
    Public Function Randomize(Of T) _
     (ByVal source As IEnumerable(Of T)) As IEnumerable(Of T)
        Dim rand As New Random
        Dim values() As T = source.ToArray()
        Dim num_values As Integer = values.Length
        For i As Integer = 0 To num_values - 2
            Dim j As Integer = rand.Next(i, num_values)
            Dim temp As T = values(i)
            values(i) = values(j)
            values(j) = temp
        Next i

        Return values
    End Function
```

The following code shows how a program might use this method to select `Customer` objects from the `all_customers` list and then randomize the result. You could add `Where` and other clauses to the LINQ query without changing the way `Randomize` is used.

```
    Dim random_custs = _
        (From cust In all_customers _
         Select cust).Randomize()
```

For more information on extension methods, see the section "Extension Methods" in Chapter 17, "Subroutines and Functions."

LINQ to Objects

LINQ to Objects refers to methods that let a program extract data from objects that are extended by LINQ extension methods. These methods extend `IEnumerable(Of T)` so that they apply to any class that implements `IEnumerable(Of T)` including `Dictionary(Of T)`, `HashSet(Of T)`, `LinkedList(Of T)`, `Queue(Of T)`, `SortedDictionary(Of T)`, `SortedList(Of T)`, `Stack(Of T)`, and others.

For example, the following code searches the `all_customers` list for customers with negative account balances. It orders them by account balance and returns their names and balances.

```
    Dim overdue_custs = _
        From cust In all_customers _
        Where cust.AccountBalance < 0
        Order By cust.AccountBalance Ascending _
        Select cust.Name, cust.AccountBalance
```

The result of this query is an `IEnumerable` object that the program can iterate through to take action for the selected customers.

All of the examples shown previously in this chapter use LINQ to Objects so this section says no more about them. See the previous sections for more information and examples.

LINQ to XML

LINQ to XML refers to methods that let a program move data between XML objects and other data-containing objects. For example, using LINQ to XML you can select customer data and use it to build an XML document.

LINQ provides a new selection of XML elements. These classes contained in the System.Xml.Linq namespace correspond to the classes in the System.Xml namespace. The names of the new classes begin with "X" instead of "Xml." For example, the LINQ class representing an element is `XElement` whereas the System.Xml class is `XmlElement`.

The LINQ versions of the XML classes provide many of the same features as the System.Xml versions, but they also provide support for new LINQ features.

The following section describes one of the most visible features of the LINQ XML classes: XML literals. The two sections after that introduce methods for using LINQ to move data into and out of XML objects.

XML Literals

In addition to features similar to those provided by the System.Xml classes, the new System.Xml.Linq classes provide new LINQ-oriented features. One of the most visible of those features is the ability to use XML literal values. For example, the following code creates an `XDocument` object that contains three `Customer` elements:

```
    Dim xml_literal As XElement = _
        <AllCustomers>
            <Customer FirstName="Ann" LastName="Archer">100.00</Customer>
            <Customer FirstName="Ben" LastName="Best">-24.54</Customer>
            <Customer FirstName="Carly" LastName="Cant">62.40</Customer>
        </AllCustomers>
```

Visual Basic LINQ translates this literal into an XML object hierarchy holding a root element named `AllCustomers` that contains three `Customer` elements. Each `Customer` element has two attributes `FirstName` and `LastName`.

To build the same hierarchy using System.Xml objects would take a lot more work. The CustomersToXml example program, which is available for download on the book's web site, includes a System.Xml version in addition to the previous LINQ literal version. The System.Xml version takes 26 lines of code and is much harder to read than the LINQ literal version.

Other LINQ XML classes such as `XDocument`, `XComment`, `XCdata`, and `XProcessingInstruction` also have literal formats, although usually it's easier to use an `XElement` instead of an `XDocument`, and the others are usually contained in an `XElement` or `XDocument`.

The Visual Basic code editor also provides some extra enhancements to make writing XML literals easier. For example, if you type a new XML tag, when you type the closing ">" character the editor automatically adds a corresponding closing tag. If you type "<Customer>" the editor adds the "</Customer>" tag. Later if you change a tag's name, the code editor automatically changes the corresponding closing tag.

Together these LINQ XML literal tools make building hard-coded XML data much easier than it is using the System.Xml objects.

LINQ Into XML

To select data into XML objects, you can use syntax similar to the syntax you use to build an XML literal. You then add the special characters `<%=  ...  %>` to indicate a "hole" within the literal. Inside the hole, you replace the ellipsis with a LINQ query that extracts data from Visual Basic objects and uses them to build new XML objects.

For example, suppose the `all_customers` list contains `Customer` objects. The following code builds an `XElement` object that contains `Customer` XML elements for all of the `Customer` objects:

```
Dim x_all As XElement = _
    <AllCustomers>
        <%= From cust In all_customers _
            Select New XElement("Customer", _
            New XAttribute("FirstName", cust.FirstName), _
            New XAttribute("LastName", cust.LastName), _
            New XText(cust.Balance.ToString("0.00"))) _
        %>
    </AllCustomers>
```

The following text shows a sample of the resulting XML element:

```
<AllCustomers>
    <Customer FirstName="Ann" LastName="Archer">100.00</Customer>
    <Customer FirstName="Ben" LastName="Best">-24.54</Customer>
    <Customer FirstName="Carly" LastName="Cant">62.40</Customer>
</AllCustomers>
```

You can have more than one hole within the XML literal. Within the hole, you can add LINQ query code as usual. For example, you can use a `Where` clause to filter the objects copied into the XML element.

The following code uses an XML literal that contains two holes. The first uses a `Where` clause to select customers with non-negative balances and the second selects customers with negative balances. It places these two groups of customers inside different sub-elements within the resulting XML.

```
' Separate customers with positive and negative balances.
Dim separated As XElement = _
    <AllCustomers>
        <PositiveBalances>
            <%= From cust In x_all.Descendants("Customer") _
                Where CDec(cust.Value) >= 0 _
                Order By CDec(cust.Value) Descending _
                Select New XElement("Customer", _
                New XAttribute("FirstName", _
                    CStr(cust.Attribute("FirstName"))), _
                New XAttribute("LastName", _
                    CStr(cust.Attribute("LastName"))), _
                New XText(cust.Value)) _
            %>
        </PositiveBalances>
        <NegativeBalances>
            <%= From cust In x_all.Descendants("Customer") _
                Where CDec(cust.Value) < 0 _
                Order By CDec(cust.Value) Descending _
                Select New XElement("Customer", _
                New XAttribute("FirstName", _
                    CStr(cust.Attribute("FirstName"))), _
                New XAttribute("LastName", _
                    CStr(cust.Attribute("LastName"))), _
                New XText(cust.Value)) _
            %>
        </NegativeBalances>
    </AllCustomers>
```

The following text shows the resulting XML element:

```
<AllCustomers>
    <PositiveBalances>
        <Customer FirstName="Dan" LastName="Dump">117.95</Customer>
        <Customer FirstName="Ann" LastName="Archer">100.00</Customer>
        <Customer FirstName="Carly" LastName="Cant">62.40</Customer>
    </PositiveBalances>
    <NegativeBalances>
        <Customer FirstName="Ben" LastName="Best">-24.54</Customer>
        <Customer FirstName="Frank" LastName="Fix">-150.90</Customer>
        <Customer FirstName="Edna" LastName="Ever">-192.75</Customer>
    </NegativeBalances>
</AllCustomers>
```

Example program LinqToXml, which is available for download on the book's web site, demonstrates these XML literals containing holes.

LINQ Out Of XML

The LINQ XML objects provide a standard assortment of LINQ functions that make moving data from those objects into `IEnumerable` objects simple. Using these functions, it's about as easy to select data from the XML objects as it is from `IEnumerable` objects such as arrays and lists.

Because the XML objects represent special hierarchical data structures, they also provide methods to help you search those data structures. For example, the `XElement` object provides a `Descendants` function that searches the object's descendants for elements of a certain type.

The following code extracts the `x_all` `XElement` object's `Customer` descendants. It selects their `FirstName` and `LastName` attributes, and the balance saved as each element's value.

```
Dim select_all = From cust In x_all.Descendants("Customer") _
    Order By CDec(cust.Value) _
    Select FName = cust.Attribute("FirstName").Value, _
           LName = cust.Attribute("LastName").Value, _
           Balance = cust.Value
```

The program can now loop through the `select_all` object just as it can loop through any other `IEnumerable` selected by a LINQ query.

The following query selects only customers with a negative balance:

```
Dim x_neg = From cust In x_all.Descendants("Customer") _
    Where CDec(cust.Value) < 0 _
    Select FName = cust.Attribute("FirstName").Value, _
           LName = cust.Attribute("LastName").Value, _
           Balance = cust.Value
```

Example program LinqToXml, which is available for download on the book's web site, demonstrates these XML literals containing holes.

The following table describes other methods supported by `XElement` that a program can use to navigate through an XML hierarchy. Most of the functions return `IEnumberable` objects that you can then use in LINQ queries.

Function	Returns
Ancestors	`IEnumerable` containing all ancestors of the element.
AncestorsAndSelf	`IEnumerable` containing this element followed by all ancestors of the element.
Attribute	The element's attribute with a specific name.
Attributes	`IEnumerable` containing the element's attributes.

Function	Returns
Descendants	IEnumerable containing all descendants of the element.
DescendantsAndSelf	IEnumerable containing this element followed by all descendants of the element.
DescendantNodes	IEnumerable containing all descendant nodes of the element. These include all nodes such as XElement and XText.
DescendantNodesAndSelf	IEnumerable containing this element followed by all descendant nodes of the element. These include all nodes such as XElement and XText.
Element	The first child element with a specific name.
Elements	IEnumerable containing the immediate children of the element.
ElementsAfterSelf	IEnumerable containing the siblings of the element that come after this element.
ElementsBeforeSelf	IEnumerable containing the siblings of the element that come before this element.
Nodes	IEnumerable containing the nodes that are immediate children of the element. These include all nodes such as XElement and XText.
NodesAfterSelf	IEnumerable containing the sibling nodes of the element that come after this element.
NodesBeforeSelf	IEnumerable containing the sibling nodes of the element that come before this element.

Most of these functions that return an IEnumerable take an optional parameter that you can use to indicate the names of the elements to select. For example, if you pass the Descendants function the parameter "Customer," then the function returns only the descendants of the element that are named Customer.

Example program LinqToXmlFunctions, which is available for download on the book's web site, demonstrates these XML functions.

In addition to these functions, Visual Basic's LINQ query syntax recognizes several axis selectors. In XML, an *axis* is a "direction" in which you can move from a particular node. These include such directions as the node's descendants, the node's immediate children, and the node's attributes.

The following table gives examples of shorthand expressions for node axes and their functional equivalents.

Shorthand	Meaning	Equivalent
`x...<Customer>`	Descendants named `Customer`.	`x.Descendants("Customer")`
`x.<Child>`	An element named `Child` that is a child of this node.	`x.Attributes("Child")`
`x.@<FirstName>`	The value of the `FirstName` attribute.	`x.Attributes("FirstName")` `.Value`
`x.@FirstName`	The value of the `FirstName` attribute.	`x.Attributes("FirstName")` `.Value`

For example, consider the following `XElement` literal:

```
Dim x_all As XElement = _
    <AllCustomers>
        <PositiveBalances>
            <Customer FirstName="Dan" LastName="Dump">117.95</Customer>
            <Customer FirstName="Ann" LastName="Archer">100.00</Customer>
            <Customer FirstName="Carly" LastName="Cant">62.40</Customer>
        </PositiveBalances>
        <NegativeBalances>
            <Customer FirstName="Ben" LastName="Best">-24.54</Customer>
            <Customer FirstName="Frank" LastName="Fix">-150.90</Customer>
            <Customer FirstName="Edna" LastName="Ever">-192.75</Customer>
        </NegativeBalances>
    </AllCustomers>
```

The following code uses axis shorthand to make several different selections:

```
' Select all Customer descendants of x_all.
Dim desc = x_all.Descendants("Customer")      ' Functional version.
Dim desc2 = x_all...<Customer>                ' LINQ query version.

' Select Customer descendants of x_all where FirstName attribute is Ben.
Dim ben = From cust In x_all.Descendants("Customer") _
    Where cust.@FirstName = "Ben"

' Select Customer descendants of x_all where FirstName attribute is Ann.
Dim ann = From cust In x_all...<Customer> _
    Where cust.@<FirstName> = "Ann"

' Starting at x_all, go to the NegativeBalances node and find
' its descendants that are Customer elements. Select those with
' value less than -50.
Dim neg_desc2 = From cust In x_all.<NegativeBalances>...<Customer> _
    Where CDec(cust.Value) < -50
```

Example program LinqAxes, which is available for download on the book's web site, demonstrates these LINQ query XML axes.

Note that `IEnumerable` objects allow indexing so you can use an index to select a particular item from the results of any of these functions that returns an `IEnumerable`. For example, the following statement starts at element `x_all`, goes to descendants named `NegativeBalances`, gets that element's `Customer` children, and then selects the second of them (indexes are numbered starting with zero):

```
Dim neg_cust1 = x_all...<NegativeBalances>.<Customer>(1)
```

Together the LINQ XML functions and query axes operators let you explore XML hierarchies quite effectively.

In addition to all of these navigational features, the LINQ XML classes provide the usual assortment of methods for manipulating XML hierarchies. Those functions let you find an element's parent, add and remove elements, and so forth. For more information, see the online help or the MSDN web site.

LINQ to ADO.NET

LINQ to ADO.NET, formerly known as DLinq, provides tools that let your applications apply LINQ-style queries to objects used by ADO.NET to store and interact with relational data.

LINQ to ADO.NET includes three components: LINQ to SQL, LINQ to Entities, and LINQ to DataSet. The following sections briefly give additional detail about these three pieces.

LINQ to SQL and LINQ to Entities

LINQ to SQL and LINQ to Entities are object-relational mapping (O/RM) tools that build strongly typed classes for modeling databases. They generate classes to represent the database and the tables that it contains. LINQ features provided by these classes allow a program to query the database model objects.

For example, to build a database model for use by LINQ to SQL, select the Project menu's Add New Item command and add a new "LINQ to SQL Classes" item to the project. This opens a designer where you can define the database's structure.

Now you can drag SQL Server database objects from the Server Explorer to build the database model. If you drag all of the database's tables onto the designer, you should be able to see all of the tables and their fields, primary keys, relationships, and other structural information.

LINQ to SQL defines a `DataContext` class to represent the database. Suppose a program defines a `DataContext` class named `dcTestScores` and creates an instance of it named `db`. Then the following code selects all of the records from the Students table ordered by first and last name:

```
Dim query = From stu In db.Students _
    Order By stu.FirstName, stu.LastName
```

Microsoft intends LINQ to SQL to be a quick tool for building LINQ-enabled classes for use with SQL Server databases. The designer can quickly take a SQL Server database, build a model for it, and then create the necessary classes.

The Entity Framework that includes LINQ to Entities is designed for use in more complicated enterprise scenarios. It allows extra abstraction that decouples a data object model from the underlying database. For example, the Entity Framework allows you to store pieces of a single conceptual object in more than one database table.

Building and managing SQL Server databases and the Entity Framework are topics too large to cover in this book so LINQ to SQL and LINQ to Entities are not described in more detail here. For more information, consult the online help or Microsoft's web site. Some of Microsoft's relevant web sites include:

❑   The LINQ Project (`msdn2.microsoft.com/en-us/netframework/aa904594.aspx`)

❑   A LINQ to SQL overview (`msdn2.microsoft.com/en-us/library/bb425822.aspx`)

❑   The ADO.NET Entity Framework Overview (`msdn2.microsoft.com/en-us/library/aa697427(vs.80).aspx`)

LINQ to DataSet

LINQ to DataSet lets a program use LINQ-style queries to select data from `DataSet` objects. A `DataSet` contains an in-memory representation of data contained in tables. While a `DataSet` represents data in a more concrete format than is used by the object models used in LINQ to SQL and LINQ to Entities, `DataSet`s are useful because they make few assumptions about how the data was loaded. A `DataSet` can hold data and provide query capabilities whether the data was loaded from SQL Server, some other relational database, or by the program's code.

The `DataSet` object itself doesn't provide many LINQ features. It is mostly useful because it holds `DataTable` objects that represent groupings of items, much as `IEnumerable` objects do.

The `DataTable` class does not directly support LINQ either, but it has an `AsEnumerable` method that converts the `DataTable` into an `IEnumerable`, which you already know supports LINQ.

> *Actually the* `AsEnumerable` *method converts the* `DataTable` *into an* `EnumerableRowCollection` *object but that object implements* `IEnumerable`.

Example program LinqToDataSetScores, which is available for download on the book's web site, demonstrates LINQ to DataSet concepts. This program builds a `DataSet` that contains two tables. The Students table has fields StudentId, FirstName, and LastName. The Scores table has fields StudentId, TestNumber, and Score.

The example program defines class-level variables `dtStudents` and `dtScores` that hold references to the two `DataTable` objects inside the `DataSet`.

The program uses the following code to select Students records where the LastName field comes before "D" alphabetically:

```
    Dim before_d = _
        From stu In dtStudents.AsEnumerable() _
        Where stu!LastName < "D" _
        Order By stu.Field(Of String)("LastName") _
        Select First = stu!FirstName, Last = stu!LastName

    dgStudentsBeforeD.DataSource = before_d.ToList
```

There are only a few differences between this query and previous LINQ queries. First, the `From` clause calls the `DataTable` object's `AsEnumerable` method to convert the table into something that supports LINQ.

Second, the syntax `stu!LastName` lets the query access the `LastName` field in the `stu` object. The `stu` object is a `DataRow` within the `DataTable`.

Third, the `Order By` clause uses the `stu` object's `Field(Of T)` method. The `Field(Of T)` method provides strongly typed access to the `DataRow` object's fields. In this example the `LastName` field contains string values. You could just as well have used `stu!LastName` in the `Order By` clause, but Visual Basic wouldn't provide strong typing.

Finally, the last line of code in this example sets a `DataGrid` control's `DataSource` property equal to the result returned by the query so the control will display the results. The `DataGrid` control cannot display the result directly so the code calls the `ToList` method to convert the result into a list, which the `DataGrid` can use.

The following list summarizes the key differences between this type of query and a normal LINQ to Objects query:

❑ The code must use the `DataTable` object's `AsEnumerable` method to make the object queryable.

❑ The code can access the fields in a `DataRow` as in `stu!LastName` or as in `stu.Field (Of String)("LastName")`.

❑ If you want to display the results in a `DataGrid` control, use the query's `ToList` method.

If you understand these key differences, the rest of the query is similar to those used by LINQ to Objects. The following code shows two other examples:

```
' Select all students and their scores.
Dim joined = _
    From stu In dtStudents.AsEnumerable() _
    Join score In dtScores.AsEnumerable() _
    On stu!StudentId Equals score!StudentId _
    Order By stu!StudentId, score!TestNumber _
    Select _
        ID = stu!StudentId, _
        Name = stu!FirstName & stu!LastName, _
        Test = score!TestNumber, _
        score!Score
dgJoined.DataSource = joined.ToList

' Select students with average scores >= 90.
```

```
    Dim letter_grade = Function(num_score As Double) _
        Choose(num_score \ 10, _
            New Object() {"F", "F", "F", "F", "F", "D", "C", "B", "A", "A"})

    ' Add Where Ave >= 90 after the Group By statement
    ' to select students getting an A.
    Dim grade_a = _
        From stu In dtStudents.AsEnumerable() _
            Join score In dtScores.AsEnumerable() _
            On stu!StudentId Equals score!StudentId _
        Group score By stu Into _
            Ave = Average(CInt(score!Score)), Group _
        Order By Ave _
        Select Ave, _
            Name = stu!FirstName & stu!LastName, _
            ID = stu!StudentId, _
            Grade = letter_grade(Ave)
    dgAverages.DataSource = grade_a.ToList
```

The first query selects records from the Students table and joins them with the corresponding records in the Scores table. It displays the results in the `dgJoined DataGrid` control.

Next, the code defines an inline function and saves a reference to it in the variable `letter_grade`. This function returns a letter grade for numeric scores between 0 and 100.

The next LINQ query selects corresponding Students and Scores records, and groups them by the Students records, calculating each Student's average score at the same time. The query orders the results by average and selects the students' names, IDs, and averages. Finally, the code displays the result in the `dgAverages DataGrid`.

LINQ to DataSet not only allows you to pull data out of a `DataSet`, it also provides a way to put data into a `DataSet`. If the query selects `DataRow` objects, then its `CopyToDataTable` method converts the query results into a new `DataTable` object that you can then add to a `DataSet`.

The following code selects records from the Students table for students with last name less than "D." It then uses `CopyToDataTable` to convert the result into a `DataTable` and displays the results in the `dgNewTable DataGrid` control. It sets the new table's name and adds it to the `dsScores DataSet` object's collection of tables.

```
    ' Make a new table.
    Dim before_d_rows = _
        From stu In dtStudents.AsEnumerable() _
        Where stu!LastName < "D" _
        Select stu
    Dim new_table As DataTable = before_d_rows.CopyToDataTable()
    dgNewTable.DataSource = new_table

    new_table.TableName = "NewTable"
    dsScores.Tables.Add(new_table)
```

The LinqToDataSetScores example program displays a tab control. The first tab holds a DataGrid control that uses the dsScores DataSet as its data source, so you can see all of the DataSet's tables including the new table.

Summary

LINQ provides the ability to perform SQL-like queries within Visual Basic. Depending on which form of LINQ you are using, the development environment may provide strong type checking and IntelliSense support.

LINQ to Objects allows a program to query arrays, lists, and other objects that implement the IEnumerable interface. LINQ to XML and the new LINQ XML classes allow a program to extract data from XML objects and to use LINQ to generate XML hierarchies. LINQ to ADO.NET (which includes LINQ to SQL, LINQ to Entities, and LINQ to DataSet) allow a program to perform queries on objects representing data in a relational database. Together these LINQ tools allow a program to select data in powerful new ways.

Visual Basic 2008 also includes many new features that support LINQ. Extension methods, inline or lambda functions, anonymous types, type inference, and object initializers all help make LINQ possible. If misused, some of these features can make code harder to read and understand, but used judiciously, they give you new options for program development.

For much more information on the various LINQ technologies, see the online help and the Web. The following list includes several useful Microsoft web pages that you can follow to learn more about LINQ:

❑ Hooked On LINQ [A wiki with some useful information, particularly its "5 Minute Overviews]

   ❑ http://www.hookedonlinq.com/LinqToSQL5MinuteOVerview.ashx

❑ The Linq Project

   ❑ http://msdn2.microsoft.com/en-us/vbasic/aa904594.aspx

❑ 101 Linq Samples [in C#]

   ❑ http://msdn2.microsoft.com/en-us/vcsharp/aa336746.aspx

❑ LINQ jump page

   ❑ http://msdn2.microsoft.com/en-us/library/bb397926(VS.90).aspx

❑ Visual Studio 2008 Samples (including hands-on LINQ labs)

   ❑ http://msdn2.microsoft.com/en-us/vbasic/bb330936.aspx

❑ The .NET Standard Query Operators

   ❑ http://msdn2.microsoft.com/en-us/library/bb394939.aspx

❑ LINQ to DataSet (by Erick Thompson, ADO.NET Program Manager, in the ADO.NET team blog)

   ❑ http://blogs.msdn.com/adonet/archive/2007/01/26/
querying-datasets-introduction-to-linq-to-dataset.aspx

❑   LINQ to SQL overview

  ❑   `http://msdn2.microsoft.com/en-us/library/bb425822.aspx`

❑   The ADO.NET Entity Framework Overview

  ❑   `http://msdn2.microsoft.com/en-us/library/aa697427(vs.80).aspx`

A LINQ query returns an `IEnumerable` object containing a list of results. If you call the result's `ToList` method, you can convert the result into a form that can be displayed by a `DataGrid` control. That is a technique used by several of the examples described in the section "LINQ to DataSet" earlier in this chapter.

Other chapters describe other controls provided by Visual Basic. Chapter 20, "Database Controls and Objects," described many objects and controls that you can use to display and manipulate data from a relational database. Earlier chapters described the many controls that you can put on Windows and WPF forms.

Even all of these different kinds of controls cannot satisfy every application's needs. Chapter 22, "Custom Controls," explains how you can build controls of your own to satisfy unfulfilled needs. These controls can implement completely new features or combine existing controls to provide a tidy package that is easy to reuse.

Custom Controls

Visual Basic .NET provides a rich assortment of controls that you can use to build applications. Nevertheless, those controls may not always be able to do what you need. In that case, you may want to build a control of your own. Building your own control lets you get exactly the behavior and appearance that you want.

Custom controls solve three significant problems. First, they let you package a particular behavior or appearance so that you can easily reuse it later. If you need to draw one engineering diagram, you can draw it on a `PictureBox`. If you need to draw many engineering diagrams (possibly in different applications), it would be easier to make an `EngineeringDiagram` control that can make all of the diagrams.

Second, developers are familiar with controls and comfortable using them. Any experienced Visual Basic developer understands how to create instances of a control, set its properties, call its methods, and respond to its events. If you build a custom control to perform some complex task, developers already know a lot about how to use it. You just need to explain the specific features of your control.

Finally, controls can easily save and restore property information at design time. A developer can set properties for a control at design time, and the control uses those properties at runtime. This is useful for graphical controls, where properties such as `Text`, `BackColor`, and `BorderStyle` determine the controls' appearance. It is also useful for non-graphical controls such as database connection, data adapter, `DataSet`, and `DataView` controls that use properties to determine what data is loaded and how it is arranged.

This chapter explains how to build custom controls. There are three main approaches to building custom controls. First, you can derive a control from an existing control. If a control already does most of what you want your custom control to do, you may be able to inherit from the existing control and avoid reimplementing all of its useful features.

The second way to build a custom control is to compose your control out of existing controls. For example, you might want to make a color selection control that enables the user to select red, green, and blue color components by using scroll bars, and then displays a sample of the resulting color. You could build this control using three scroll bars and a `PictureBox`. This gives you the advantages provided by the constituent controls without requiring you to reimplement their functionality.

Finally, you can build a custom control from scratch. This is the most work but gives you absolute control over everything that the control does.

This chapter explains the basics of building a control library project and testing its controls. It also describes the three approaches to building custom controls: deriving from an existing control, composing existing controls, and building a control from scratch.

A component is similar to a control that is invisible at runtime. Like controls, you can place components on a form at design time. Unlike controls, however, components do not sit on the form itself. Instead, they sit in the *component tray* below the form at design time, and they are invisible to the user at runtime. Most of this chapter's discussion of custom controls applies equally to custom components.

Custom Controls in General

Building a custom control requires six basic steps:

1. Create the control's project.
2. Make a Toolbox bitmap icon for the control.
3. Test the control in the UserControl Test Container.
4. Make a test project to debug the control more thoroughly.
5. Test the control at design time and runtime to make sure it works.
6. Give the control properties, methods, and events.

The following sections describe these steps.

Creating the Control Project

To make a new control library in Visual Basic, select the File menu's New Project command, select the Windows Control Library template, enter the project's name, and click OK. The library can contain several controls, so it may not always make sense to name the library after a single control. This example assumes that you are building a control that displays a smiley face. In that case, you might name the library FaceControls in case you want to add bored, sad, and other faces later.

Initially, Visual Basic gives the control library a single `UserControl` object named `UserControl1`. Change this file's name to something more descriptive such as SmileyFace. If you look at the file in the code editor, you should find that Visual Basic has automatically changed the control's class name to match.

Add code to the control to make it do whatever you want it to do. For a SmileyFace control, you might add properties such as `FaceColor`, `NoseColor`, and `EyeColor`. The control's `Paint` event handler will draw the smiley face.

Next use the Build menu to compile the control library. The project's `bin` directory contains the library's compiled `.dll` file.

Setting the Toolbox Icon

If you add the control to the form designer's Toolbox now, you'll see a default image that looks like a gear. To make your control display something more meaningful, you must set its Toolbox icon.

You can set the control's Toolbox icon by adding a `ToolboxBitmap` attribute to the control's class. The constructor for the `ToolboxBitmap` attribute can take as parameters the name of the bitmap file, or a class that contains the bitmap resource to use, or a class and the name of a bitmap resource to use (if the class contains more than one bitmap resource). This section assumes that you will use the last method. See the online help for more information. The web page `http://msdn.microsoft.com/library/en-us/cpref/html/frlrfSystemDrawingToolboxBitmapAttributeClassTopic.asp` describes the `ToolboxBitmapAttribute` class and its constructors.

Open Solution Explorer and double-click the My Project entry to view the project's property pages. Click the Resources tab and open the Add Resource drop-down list. Select the Add Existing File command, and select the bitmap file to create a new bitmap resource. Double-click the new bitmap to open it in the integrated Bitmap Editor and modify it if necessary. Use the Properties window to make the bitmap 16 × 16 pixels in size.

Set the pixel in the lower-left corner to the color that you want to use as the Toolbox bitmap's transparent color. Visual Basic will replace the pixels having this color with the Toolbox's background color. Draw and save the bitmap, and then close it.

Click the bitmap file in Solution Explorer and open the Properties window. Select the file's Build Action property, click the drop-down arrow on the right, and select Embedded Resource. Now when you compile the control library, this bitmap will be embedded as a resource inside the `.dll` file.

Next, open the control's module in the code editor, and insert a `ToolboxBitmap` attribute in front of the control's class declaration, as shown in the following code. This example tells Visual Basic that the control's Toolbox icon should come from the `SmileyFaceTool.bmp` resource embedded in the `SmileyFace` class. Note the line continuation character at the end of the first line so that the `ToolboxBitmap` statement is on the same code line as the class declaration.

```
<ToolboxBitmap(GetType(SmileyFace), "SmileyFaceTool.bmp")> _
Public Class SmileyFace
...
End Class
```

Now when you build the control library, the `SmileyFace` control includes the information it needs to display its Toolbox bitmap.

Testing in the UserControl Test Container

If you use the Debug menu's Start command to execute a control library project, Visual Studio displays a sample control in the UserControl Test Container shown in Figure 22-1. The drop-down list at the top lets you select different controls in the project. You can use the property grid on the right to experiment with different property values to see how the control behaves.
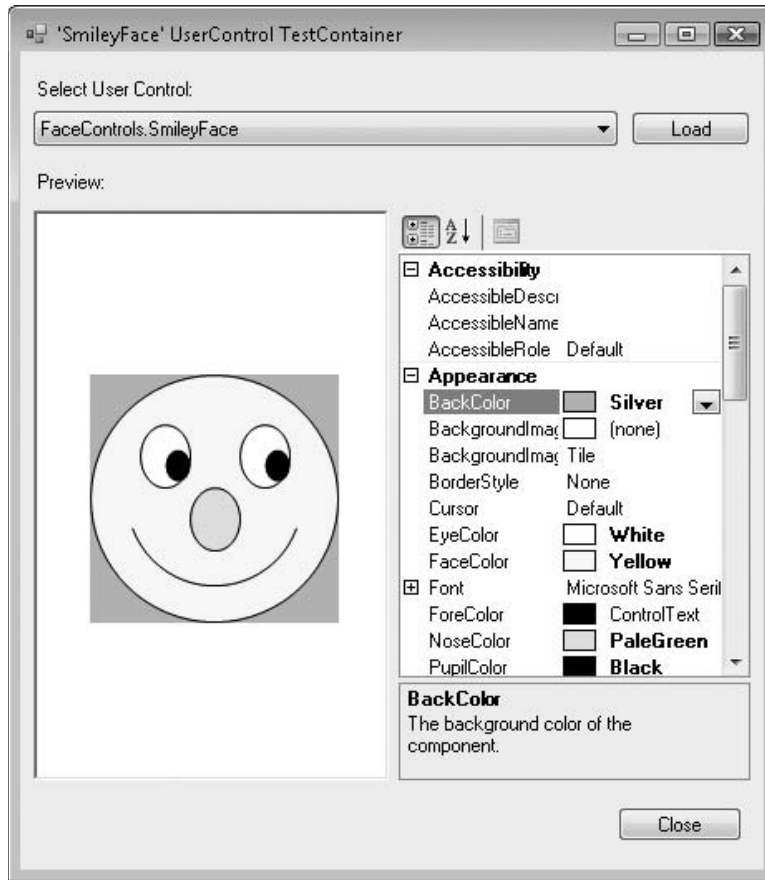
Figure 22-1: Visual Basic lets you preview controls in the UserControl
Test Container.

Example project FaceControls, which is available for download on the book's web site, contains the
SmileyFace control shown in Figure 22-1.

As its name implies, the UserControl Test Container only displays UserControls. If you create a control
that inherits from the Control class or from some other control, the UserControl Test Container does not
list it and will not display it. In that case, you must skip this step and move on to the next one, making a
test project.

Making a Test Project

The UserControl Test Container only lets you test UserControls, not those that inherit from the
Control class or some other control. It also only lets you test a control's properties. You can see
the control's design time behavior, but not how its methods and events work at runtime.

To test controls that are not UserControls and to test the control's runtime behavior, you must build a
test project. You can either build a completely separate project, or you can add a new Windows
application to the control's project.

To add an application to the control's project, open the File menu's Add submenu and select New Project. Select the Windows Application template, give the project a meaningful name (such as FaceControlsTest), and click OK. This adds the test project to the same solution that already contains the control library.

To make Visual Basic start execution with the test project, open the Solution Explorer, right-click the new project, and select Set as StartUp Project.

The FaceControls example solution, which is available for download on the book's web site, contains the FaceControls control library in addition to the test application FaceControlsTest.

When you open the new project's form, the Toolbox will contain a FaceControls Components section (assuming that the control project is named FaceControls) that holds icons representing the controls defined by the control library. You can use these tools just as you would use any other control tools.

When you create separate applications that are not part of the control library's solution, you must add the controls to the Toolbox manually. To add the controls, open a form in the form designer. Right-click the Toolbox, and select Choose Items. On the Choose Toolbox Items dialog box shown in Figure 22-2, click the Browse button. Select the `.dll` file in the control library's `bin` folder, and click Open to make the controls appear in the dialog's .NET Framework Components tab. Select the check boxes next to the controls (they should be checked by default), and click OK.

If you change the control's Toolbox icon, you must rebuild the control library's `.dll` file. Then open the test project's form, right-click the Toolbox, select Add/Remove Items again, click the Browse button, and reselect the control library's `.dll` file.
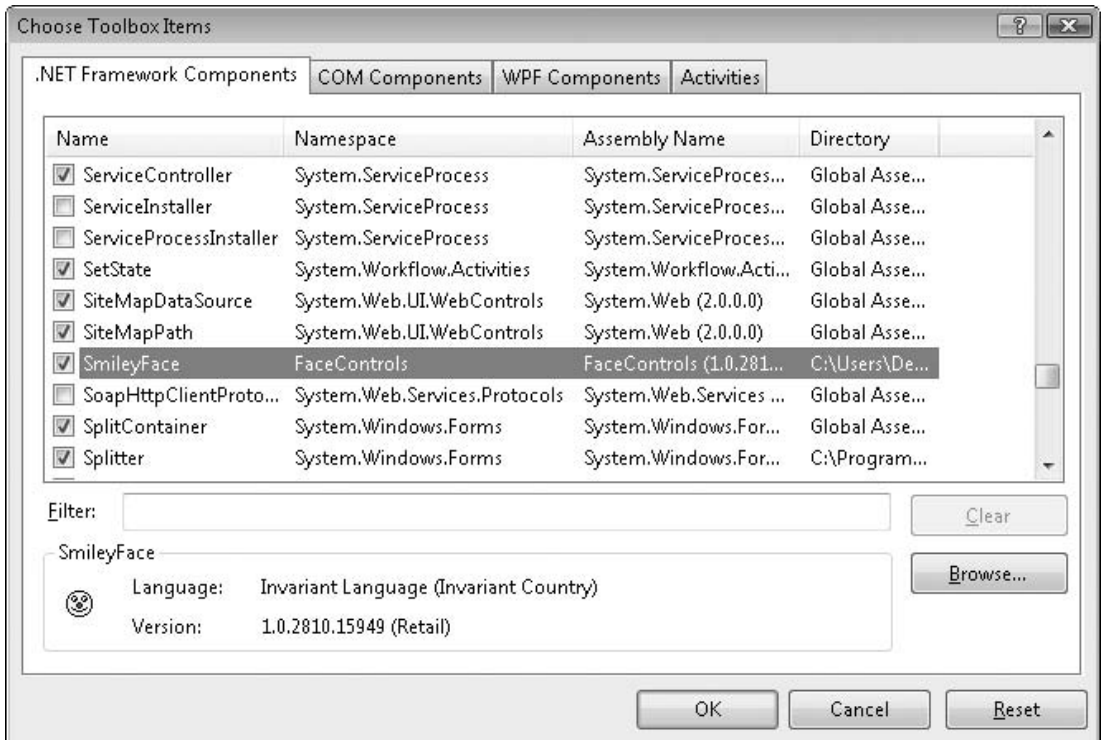
Figure 22-2: Use the Choose Toolbox dialog box to add your control to the Toolbox.

Test the Control

After you add it to the Toolbox, you can use the control on the test project's form just as you can use any other control. Click the Toolbox icon to select the control, and click and drag to place an instance of the control on the form. Double-click the control to place an instance of the control in a default location with a default size. Initially, Visual Basic sets the controls' names to their class's name followed by a number, as in `SmileyFace1`, `SmileyFace2`, and so forth.

Use the Properties window to set the controls' properties at design time. Use code to examine and modify the controls' properties, methods, and events at runtime.

Implement Properties, Methods, and Events

At this point, you can test the control, but if you haven't given it any properties, methods, and events, you can only work with the default behavior that it inherits from its parent class. If the control is to do something useful, you must give it new properties, methods, and events.

Controls implemented from scratch often use `Paint` event handlers to draw the control. Composite controls often respond to events raised by their constituent controls and take actions, which may include raising new events for the form containing the control. (A *composite control* combines several other controls into a new control. For more information, see the section "Composite Controls" later in this chapter.)

When a developer places the control on a form, the Properties window automatically displays any public properties that are not read-only. This feature is remarkably intelligent. If a property has the `Integer` data type, the Properties window will only allow the developer to enter an integer. If a property has an enumerated type, the Properties window automatically displays a drop-down list containing the allowed values.

If a property has the `Font` data type, the Properties window automatically provides an ellipsis to the right of the property's value and displays a font selection dialog box if the user clicks it. Similarly, if the property is a `Color`, `Image`, or `Date`, the Properties window provides an appropriate dialog box or drop-down list to let the user select the property's value.

If a property's data type is `OleDbDataConnection`, `DataSet`, `TextBox`, `Label`, or some other control or component type, the Properties window provides a drop-down list that lets the developer select from any appropriate item on the form. If the data type is `TextBox`, the drop-down will list all of the form's `TextBoxes`.
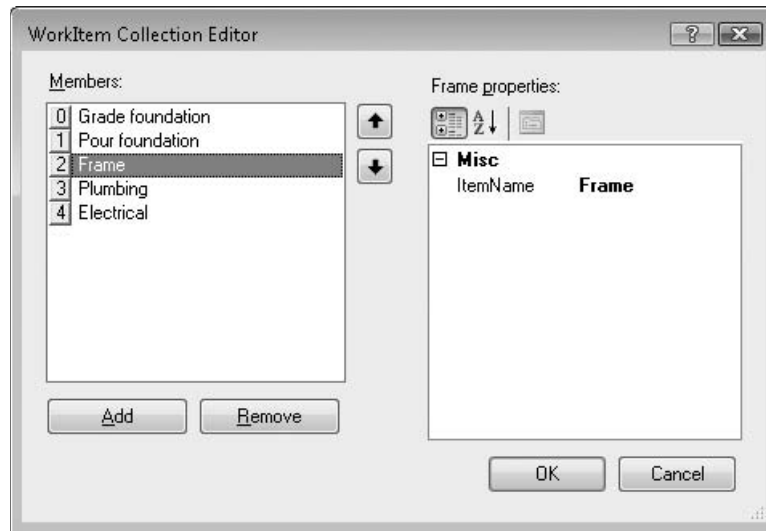
In fact, the Properties window can even handle custom controls and components that you build yourself. For example, suppose that you create a control named `EmployeeRegister`. You can then create another control that has a property of type `EmployeeRegister`. If the developer selects the control, opens the Properties window, clicks that property, and clicks the drop-down arrow on the right, Visual Basic will display a list of any `EmployeeRegister` controls on the form.

Even more miraculously, the Properties window can handle collections of objects that you define. For example, suppose your code defines a `WorkItem` class. It then defines a `UserControl` class named `WorkItemLister` that has a property named `WorkItems` of type `List(Of WorkItem)`.

If you add a `WorkItemLister` object to a form and select it, the Properties window lists the `WorkItems` property's value as `(Collection)` and displays a drop-down arrow to the right. If you click the arrow, Visual Basic displays the collection editor shown in Figure 22-3. This collection editor lets you build `WorkItem` objects at design time.

Similarly the UserControl Test Container can let you view and edit the control's `WorkItem` property.

> *The* `WorkItem` *class's* `ToString` *function lets objects know what to display for an instance of the class. The collection editor uses this function to display Grade foundation, Pour foundation, and the other work item names, instead of merely the class name.*

Figure 22-3: Visual Basic automatically provides collection editors for collection properties.

Example project WorkItemControls, which is available for download on the book's web site, includes a control project containing `WorkItem` controls in addition to a test project.

Assign Attributes

You can modify a control's behavior by adding attributes to its properties, methods, and events, and to its `Class` statement. The following code demonstrates some of the most useful control (or component) and property attributes for a `UserControl` named `EmployeeRegister`:

```
Imports System.ComponentModel

<ToolboxBitmap(GetType(EmployeeRegister), "EmployeeRegisterTool.bmp"), _
 DefaultProperty("TextValue"), _
 DefaultEvent("TheEvent"), _
 DesignTimeVisible(True)> _
Public Class EmployeeRegister
    ' Declare a public event.
```

```
        Public Event TheEvent()

        ' The TextValue property.
        Private m_TextValue As String = "Default Value"

        <Description("The object's text value."), _
         Category("String Values"), _
         Browsable(True), _
         DefaultValue("Default Value")> _
        Public Property TextValue() As String
            Get
                Return m_TextValue
            End Get
            Set(ByVal value As String)
                m_TextValue = value
            End Set
        End Property
    End Class
```

The `ToolboxBitmap` attribute tells Visual Basic that it can find a Toolbox bitmap for the class in the assembly containing the `EmployeeRegister` type, and that the bitmap resource's name is `EmployeeRegisterTool.bmp`.

The `DefaultProperty` attribute sets the component's default property. If you click an `EmployeeRegister` control in the form designer, the property named `TextValue` is initially selected in the Properties window.

> *The `DefaultProperty` doesn't always work as advertised because the Properties window tries to display the same property when you select different controls. For example, suppose that you click a `TextBox` control and select its `Name` property in the Properties window. If you then click an `EmployeeRegister` control, the Properties window shows its `Name` property because `EmployeeRegister` also has a `Name` property. On the other hand, if you select a `TextBox's` `MultiLine` property and then click an `EmployeeRegister` control, the Properties window selects the `TextValue` property because `EmployeeRegister` doesn't have a `MultiLine` property.*

The `DefaultEvent` attribute indicates the component's default event. If you double-click an `EmployeeRegister` control in the form designer, Visual Basic opens the code editor and displays the control's default event handler.

The `DesignTimeVisible` attribute determines whether the component is visible on the form designer at design time. If you set this to `False`, the control or component does not appear in the Toolbox. You can use this attribute to build a control that the program can create and manipulate at runtime but that the developer cannot create at design time.

The `TextValue` property's `Description` attribute gives the text displayed at the bottom of the Properties window when you select the property.

The `Category` attribute determines the category that contains the property when you select the Property window's Categorized button. This attribute's value can be any string. The Property window will make a new category with this name if it doesn't name an existing category.

The `Browsable` attribute determines whether the Property window displays the property. If you set this value to `False`, developers cannot set the property's value at design time.

Finally the `DefaultValue` property determines the default value for the property. If you set a control's property to this value, Visual Basic does not store the property's value with the form. Later, when it reloads the form, Visual Basic does not load any value for the property. This code shows one way to initialize a property's value when it declares `Private m_TextValue As String = "Default Value"`. To avoid confusion, you should generally initialize the private variable representing a property to the same value you set with `DefaultValue` attribute.

When you right-click a property in the Properties window and select the Reset command, Visual Basic sets the property to the value defined by the `DefaultValue` attribute. This is particularly useful for images and other objects where you might want to make the default value `Nothing`.

Example project EmployeeRegisterTest, which is available for download on the book's web site, includes the `EmployeeRegister` control.

You can learn more about the `ToolboxBitmap` attribute at `http://msdn2.microsoft.com/en-us/library/system.drawing.toolboxbitmapattribute.aspx`. You can learn more about other attribute classes at `msdn2.microsoft.com/library/2e39z096.aspx`.

Manage Design Time and Runtime

A control or component can use its predefined `DesignMode` property to determine whether it is running at design time or runtime and take different actions if that is appropriate. For example, a control might allow the developer to manipulate its data directly at design time but prevent the user from changing the data at runtime.

The following code shows how the control can check whether it is running at design or runtime:

```
If Me.DesignMode Then
    ' Let the developer manipulate the data at design time.
    ...
Else
    ' Don't let the user change the data at run time.
    ...
End If
```

Example project ShowModeTest, which is available for download on the book's web site, includes a simple control that displays a label indicating whether it is running in design more or run mode.

Derived Controls

If an existing control does almost what you need to do, you can derive a new control from the existing one. That enables you to take advantage of all of the existing control's features while adding new ones of your own.

To make a derived control, start a control library project as usual and give the library a meaningful name. Discard the default `UserControl1` class, add a new class, and give it an appropriate `Inherits` statement. For example, the following code derives the `RowSortingListView` class from the `ListView` class:

```
Public Class RowSortingListView
    Inherits ListView

End Class
```

That's about all there is to building a derived control. Now you just need to write code that implements new features and modifies inherited features. One particularly common task for derived controls is overriding the functionality provided by the parent control class. The `RowSortingListView` control provides a good example.

The standard `ListView` control lets a program display data items with subitems in a variety of ways. The control can display items as large icons, small icons, a list showing the items' names, or a detail list showing the items and their subitems. The list and detail displays even allow you to sort the items in ascending and descending order. Unfortunately, the `ListView` control doesn't use the subitems in the sort even to break ties. It sorts only on the main items' names.

For example, suppose that several items all have the item value Book and their first subitems contain book titles. If you set the `ListView` control's `Sorting` property to `Ascending` or `Descending`, the control will group these items together because they all have the same item value: Book. Unfortunately, the items' order in the list is arbitrary. The control does not sort the Book items by their titles.

Fortunately, the `ListView` control provides a back door for implementing custom sort orders. To implement a custom sort order, you set the `ListView` control's `ListViewItemSorter` property to an object that implements the `IComparer` interface. To satisfy the interface, this object must provide a `Compare` function that compares two `ListView` items and returns `-1`, `0`, or `1` to indicate whether the first item should be considered less than, equal to, or greater than the second item.

The `ListViewComparerAllColumns` class shown in the following code implements the `IComparer` interface. Its private `m_SortOrder` variable tells the object whether to sort in ascending or descending order. The class's constructor takes a parameter that sets this value. The `Compare` function converts the generic `Objects` that it is passed into `ListViewItems`. It calls the `ListViewItemValue` helper function to get strings containing the items and their subitems separated by Tab characters. It then uses the `String` class's `Compare` method to determine which value should come first in the sort order.

```
' Implements a ListViewItem comparer
' that sorts on all columns.
Private Class ListViewComparerAllColumns
    Implements IComparer

    ' Ascending or Descending.
    Private m_SortOrder As SortOrder

    ' Initialize with a sort order.
    Public Sub New(ByVal sort_order As SortOrder)
        m_SortOrder = sort_order
    End Sub

    ' Compare two items' subitems.
    Public Function Compare(ByVal x As Object, ByVal y As Object) As Integer _
     Implements System.Collections.IComparer.Compare
        ' Get the ListViewItems.
        Dim item_x As ListViewItem = DirectCast(x, ListViewItem)
        Dim item_y As ListViewItem = DirectCast(y, ListViewItem)

        ' Get the ListViewItems' values.
        Dim values_x As String = ListViewItemValue(item_x)
        Dim values_y As String = ListViewItemValue(item_y)

        ' Compare the values.
        If m_SortOrder = SortOrder.Ascending Then
            Return String.Compare(values_x, values_y)
        Else
            Return String.Compare(values_y, values_x)
        End If
    End Function

    ' Return a delimited string containing all of
    ' the ListViewItem's values.
    Private Function ListViewItemValue(ByVal lvi As ListViewItem, _
     Optional ByVal delimiter As String = vbTab) As String
        Dim txt As String = ""
        For i As Integer = 0 To lvi.SubItems.Count - 1
            txt &= delimiter & lvi.SubItems(i).Text
        Next i
        Return txt.Substring(delimiter.Length)
    End Function
End Class
```

The RowSortingListView control uses the ListViewComparerAllColumns class and the following code to sort its data using all of the items' values and their subitems' values. To provide the new sorting behavior, the control must override the Sorting property defined by the parent ListView class.

```
    ' Reimplement the Sorting property.
    Private m_Sorting As SortOrder
    Public Shadows Property Sorting() As SortOrder
        Get
            Return m_Sorting
        End Get
        Set(ByVal Value As SortOrder)
            ' Save the new value.
            m_Sorting = Value

            ' Make a new ListViewItemSorter if necessary.
            If m_Sorting = SortOrder.None Then
                MyBase.ListViewItemSorter = Nothing
            Else
                MyBase.ListViewItemSorter = _
                    New ListViewComparerAllColumns(m_Sorting)
            End If
        End Set
    End Property
```

The control defines a private `m_Sorting` variable to store the property's value and declares property procedures to let the program get and set it. The property is declared with the `Shadows` keyword, so it hides the definition of the parent class's `Sorting` property. That prevents the developer or a program that uses the `RowSortingListView` control from using the original `ListView` version of the property.

The `Sorting Property Get` procedure simply returns the value of `m_Sorting`.

The `Property Set` procedure saves the new value. Then if the new `Sorting` value is `None`, the code sets the control's inherited `ListViewItemSorter` property to `Nothing` to remove any previously installed sorter object. If `Sorting` is not `None`, the code sets the control's `ListViewItemSorter` property to a new `ListViewComparerAllColumns` object configured to sort the items in the proper order.

Adding new properties and methods that don't shadow those of the base class is even easier. Simply declare the property or method as you would for any other class. You can also create new events for the derived control just as you would add events to any other class.

Example program RowSortingListViewTest, which is available for download on the book's web site, demonstrates the `RowSortingListView` control.

Shadowing Parent Features

The `RowSortingListView` control's code implements a `Sorting` property that shadows the property in its parent class. You can provide new versions of methods and events in the same way.

For example, normally, the `ListView` control raises a `ColumnClick` event when the user clicks a column header. By default, the `RowSortingListView` control inherits that behavior, so it also raises the event when the user clicks a column header.

The following code replaces the parent class's `ColumnClick` event with a new version. The event declaration uses the `Shadows` keyword so this version hides the parent's version from the program that uses the `RowSortingListView` control so the program cannot receive the original version of the event.

The inherited version of `ColumnClick` passes the event handler a parameter that gives information about the event. The new version just returns the index of the column clicked. The control's `ColumnClick` event handler (which handles the `MyBase.ColumnClick` event) raises the new event handler. The control could also raise the event from some other code or not at all.

```
Public Shadows Event ColumnClick(ByVal column_number As Integer)

Private Sub RowSortingListView_ColumnClick(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.ColumnClickEventArgs) _
 Handles MyBase.ColumnClick
    RaiseEvent ColumnClick(e.Column)
End Sub
```

The following code shows how a program could handle the new event. This code simply displays the column number that the user clicked.

```
Private Sub RowSortingListView1_ColumnClick(ByVal column_number As Integer) _
 Handles RowSortingListView1.ColumnClick
    MessageBox.Show(column_number)
End Sub
```

Example program RowSortingListViewTest, which is available for download on the book's web site, demonstrates this technique.

In the same way, you can shadow a method provided by the parent class. The following code shows how the `RowSortingListView` class can replace its parent's `Clear` method. Instead of removing all of the data from the control, this version removes only items with text value `Book`.

```
Public Shadows Sub Clear()
    For Each item As ListViewItem In Me.Items
        If item.Text = "Book" Then item.Remove()
    Next item
End Sub
```

Hiding Parent Features

Sometimes you might want to completely hide a parent feature rather than replace it with a new version. For example, suppose you want to make a grid-like control that uses some of the special features of the `ListView` control. You decide to derive your control from the `ListView` control, but you don't want to write code to handle any of the control's display modes except the detail view. You can rely on developers' common sense and ask them not to use features that involve other display modes, or you can hide those features to prevent the developers who use your control from doing something stupid. In that case, you need to hide the properties, methods, and events that deal with the other display modes.

Hiding an event is easy. Declare a new event with the `Shadows` keyword as described in the previous section and then never raise the event. A program using the control can write an event handler for the event, but it will never be called.

Unfortunately, you cannot completely hide inherited properties and methods from the program using the control, but you can shadow them and make the new version do nothing or throw an exception.

The following code declares a shadowing version of the `ListView` control's `Clear` method. If the program invokes this method, the control throws the `MissingMethodException`.

```
Public Shadows Sub Clear()
    Throw New System.MissingMethodException("RowSortingListView", "Clear")
End Sub
```

The following code defines a shadowing version of the `Tag` property. It gives the property the `BrowsableAttribute` with the value `False`. This prevents the property from appearing in the Properties window at design time. If the program tries to read or set the control's `Tag` property at runtime, the control throws a `MissingFieldException`.

```
<System.ComponentModel.BrowsableAttribute(False)> _
Public Shadows Property Tag() As Object
    Get
        Throw New System.MissingFieldException("RowSortingListView", "Tag")
    End Get
    Set(ByVal Value As Object)
        Throw New System.MissingFieldException("RowSortingListView", "Tag")
    End Set
End Property
```

Composite Controls

A *composite control* combines several existing controls into one new control. For example, the ColorScrollerTest program, which is available for download on the book's web site and shown in Figure 22-4, defines a `ColorScroller` control that contains three labels, three scroll bars, and a panel. At runtime, the user can drag the scroll bars to select a color's red, green, and blue components. The control displays a sample of the color in the panel on the right.

Figure 22-4: The ColorScroller control lets the user select a color interactively by dragging scroll bars.

To build a composite control, start a new control library project as usual. Give the library a meaningful name, and change the name of the default control `UserControl1` to something more descriptive.

Next, in Solution Explorer, double-click the control to open it in the form designer. Use the Toolbox to add constituent controls to the `UserControl` just as you would add controls to a form. Set the controls' design-time properties using the Properties window.

Edit the code of the `UserControl` to make the constituent controls work together to provide the behavior that you want. For the `ColorScroller` control shown in Figure 22-4, you would make the scroll bars' events adjust the color displayed in the sample area on the right. You can handle the constituent controls' events, get and set their property values, and invoke their methods. You can also define new properties, methods, and events for the composite control.

The following code shows how the `ColorScroller` control works. It starts by declaring the `ColorChanged` event to tell the program when the user changes the control's selected color. It then includes property procedures that define the `SelectedColor` property. The `Property Get` procedure uses the `Color` class's `FromArgb` to convert the scroll bars' values into a color. The `Property Set` procedure sets the control's `Red`, `Green`, and `Blue` properties to the components of the new `Color` value. The `Red Property Get` procedure returns the value of the red scroll bar. The `Property Set` procedure sets the red scroll bar's value, displays the value in the red label, displays a sample of the current color, and raises the `ColorChanged` event. The `Green` and `Blue` property procedures are basically the same so they are not shown here. When the user changes the red scroll bar's value, the `hbarRed_Scroll` event handler sets the control's new `Red` property value. The event handlers for the `Green` and `Blue` scroll bars are similar, so they are not shown here.

```
Public Class ColorScroller
    ' Tell the program that the color has changed.
    Public Event ColorChanged(ByVal new_color As Color)

    ' Get or set the currently selected Color.
    Public Property SelectedColor() As Color
        Get
            Return Color.FromArgb( _
                255, _
                hbarRed.Value, _
                hbarGreen.Value, _
                hbarBlue.Value)
        End Get
        Set(ByVal value As Color)
            Red = value.R
            Green = value.G
            Blue = value.B
        End Set
    End Property

    ' Get: Return the color component value.
    ' Set: Set the scroll bar value,
    '      display the color, and
    '      raise the ColorChanged event.
    Public Property Red() As Byte
        Get
            Return CByte(hbarRed.Value)
        End Get
        Set(ByVal Value As Byte)
```

```
                hbarRed.Value = Value
                lblRed.Text = hbarRed.Value.ToString
                panSample.BackColor = SelectedColor
                RaiseEvent ColorChanged(SelectedColor)
            End Set
        End Property

        ' Green and Blue property procedures omitted...

        ' The user has changed a color value.
        ' Set the appropriate color component value.
        Private Sub hbarRed_Scroll() Handles hbarRed.Scroll
            Red = CByte(hbarRed.Value)
        End Sub

        ' Green and Blue scroll bar Scroll event handlers omitted...
    End Class
```

Composite controls are useful when you can build the behavior you want by using existing controls. They are most useful when you will need to use the combined controls many times, either in the same application or in several applications. If you need to implement these features only once, you can simply place the constituent controls right on a form and include code to handle their events.

Composite controls are also useful for keeping the related controls and their code together. This keeps the details of the controls and their code separate from the rest of the application. If the interactions among the controls are complex, it may make sense to build a separate UserControl to simplify the project.

Composite controls (or any control, for that matter) also provide a nice, clean separation between developers. If you build a complex control and add it to a large project, other developers can interact with the control only through the properties, methods, and events that it exposes. They cannot access the constituent controls directly, and that removes a potential source of bugs.

Controls Built from Scratch

If no existing control or group of controls can provide the behavior that you want, you can build a control completely from scratch. Start a new control library project as usual. Give the library a meaningful name and remove the default control UserControl1.

Add a new class, open it in the code editor, and add the statement Inherits Control. Then add whatever code you need to make the control do what you want.

The following code shows how the SimpleSmiley control works. When the control receives a Paint or Resize event, it calls subroutine DrawFace, passing it the Graphics object on which it should draw. Subroutine DrawFace clears the control using the parent's background color. It then calls a series of Graphics object methods to draw a smiley face on the control's surface. This drawing code isn't terribly relevant for this discussion, so it is omitted here to save space.

```
<ToolboxBitmap(GetType(SimpleSmiley), "SmileyFaceTool.bmp")> _
Public Class SimpleSmiley
    Inherits Control

    Private Sub SimpleSmiley_Paint(ByVal sender As Object, _
     ByVal e As System.Windows.Forms.PaintEventArgs) Handles Me.Paint
        DrawFace(e.Graphics)
    End Sub
    Private Sub SimpleSmiley_Resize(ByVal sender As Object, _
     ByVal e As System.EventArgs) Handles Me.Resize
        Me.Invalidate()
    End Sub

    ' Draw the smiley face.
    Private Sub DrawFace(ByVal gr As Graphics)
        If (Me.ClientSize.Width = 0) Or _
            (Me.ClientSize.Height = 0) Then Exit Sub

        gr.Clear(Me.BackColor)
        gr.SmoothingMode = Drawing2D.SmoothingMode.HighQuality

        ' Drawing code omitted...
    End Sub
End Class
```

Example solution SimpleSmileyControls, which is available for download on the book's web site, uses similar code to build a SimpleSmiley control. The test program SimpleSmileyControls demonstrates the control.

When you build your own control from scratch, you can make it do just about anything that you like. The obvious drawback is that you need to write code to make it do everything that you want. If there's already a control that does almost what you need, it is generally easier to derive a control from that one rather than building one from scratch.

If you can display the data in standard controls such as Label, TextBox, or TreeView controls, it would be easier to build a composite control. If you must display information by drawing it yourself anyway, a composite control won't help, so you might want to use this kind of control. For example, if you are building a mapping or drafting system, you might want to build a control from scratch to load and display maps and architectural drawings.

Components

A *component* is basically a control with no visible component at runtime. Instead of appearing on the form at design time, a component appears in the component tray below the form. Figure 22-5 shows a form containing several components.

You can select a component in the component tray and then view and modify its properties in the Properties window. In Figure 22-5, the FontDialog1 component is selected, so the Properties window is displaying that component's properties.

Building a component is just as easy as building a control. To make a new component, open the Project menu and select Add Component. Leave the Component Class template selected, enter the name you want to give the component, and click OK.
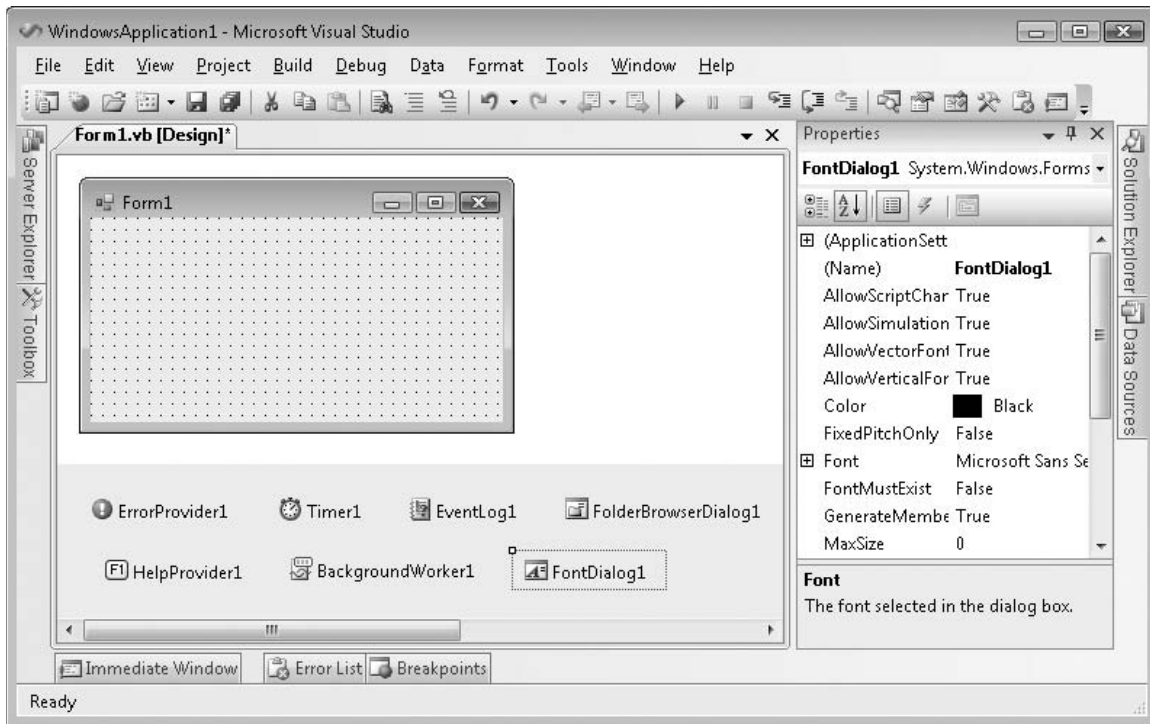
Figure 22-5: The form designer displays components in the component tray below the form.

Because a component is invisible at runtime, the component designer (the component's equivalent of the form designer) does not display a visible area. The designer does have a component tray, however, and you can place other components there to build composite components much as you can build composite controls.

You can add properties, methods, and events to the component just as you would add them to a control. You can also use the same attributes to modify the component and its properties and events. For example, you can give the component a Toolbox bitmap, a default property and event, add descriptions to properties, and assign properties to categories. In addition to displaying the bitmap in the Toolbox, Visual Basic also displays it in the component tray below the form when you add an instance of the component to the form.

Invisible Controls

You can make a control invisible at runtime by setting its `Visible` property to `False`. For example, the following code shows how the `InvisibleControl` class works. Whenever it needs to draw itself, the control's `DrawControl` method sets the control's `Visible` property equal to its `DesignMode` property, so the control is visible at design time and hidden at runtime.

```
Public Class InvisibleControl
    Inherits Control

    Private Sub InvisibleControl_Paint(ByVal sender As Object, _
     ByVal e As System.Windows.Forms.PaintEventArgs) Handles Me.Paint
        DrawControl(e.Graphics)
    End Sub

    Private Sub InvisibleControl_Resize() Handles Me.Resize
        Me.Invalidate()
    End Sub

    Private Sub DrawControl(ByVal gr As Graphics)
        Me.Visible = Me.DesignMode

        gr.Clear(Me.BackColor)
        Dim pen_wid As Integer = _
            (Me.ClientSize.Width + Me.ClientSize.Height) \ 20
        Using the_pen As New Pen(Me.ForeColor, pen_wid)
            gr.DrawEllipse(the_pen, _
                pen_wid \ 2, pen_wid \ 2, _
                Me.ClientSize.Width - pen_wid, _
                Me.ClientSize.Height - pen_wid)
        End Using
    End Sub
End Class
```

Example program InvisibleControlTest, which is available for download on the book's web site, uses similar code in its InvisibleControl.

If you want a control to be invisible at runtime, you should consider making it a component instead of a control. Components take fewer resources and don't take up space on the form at design time. The only reason you should use the Visible property to make a control invisible is if you want it to display some sort of complex data at design time, instead of an icon in the component tray, and you want the data hidden from the user at runtime.

Picking a Control Class

There are several ways you can build objects that sit on a form at design time. Depending on the features you need, these objects can inherit from the Component, Control, and UserControl classes. They can also inherit from an existing control class such as a Button, TextBox, or ListView.

The Component class is the simplest of these classes. It doesn't take up space on the form at design time, so it is appropriate when you don't want an object that is visible to the user. If you want a class with properties that you can set at design time, but that should be invisible at runtime, build a Component.

The Control class is visible on the form at design and runtime but it is simpler than the UserControl class and uses fewer resources. Unlike a UserControl, it cannot contain constituent controls. If you want a control that draws itself without using any constituent controls, make your control inherit from the Control class.

The `UserControl` class is visible on the form at design and runtime. Unlike the `Control` class, it can contain constituent controls. If you want a control that uses constituent controls, make your control inherit from the `UserControl` class.

Finally, if some existing class provides some of the features that you need to use, make your control inherit from that class. The standard Visual Basic controls are very powerful and extensively tested, so you can save yourself a considerable amount of time by taking advantage of their existing features.

Controls and Components in Executable Projects

Most of this chapter explains how to build a control library containing any number of controls and components. You can compile the library into a `.dll` file and use it in executable applications.

You can also build custom controls or components within an executable project. In that case, the controls or components are compiled into the executable rather than a separate `.dll` file, so you cannot use them in other applications. If these are very specialized objects that you probably won't need to use in other applications, this is not a major disadvantage and saves you the trouble of installing an extra `.dll` file with the application.

UserControls in Executable Projects

To add a custom `UserControl` to a project, open the Project menu and select Add User Control. Leave the User Control template selected, enter a name for the control, and click Add. Add constituent controls to the `UserControl` as usual.

Initially, the control does not appear in the Toolbox, so you cannot use it on a form. Select the Build menu's Build command to compile the control and the rest of the project. Visual Basic places the new control in a Toolbox section named after the project. If the project's name is Billing, it places the control in a Toolbox section named Billing Components. Now you can use the control as usual.

Inherited UserControls in Executable Projects

To build a `UserControl` that inherits from an existing `UserControl` class, select the Project menu's Add New Item command. In the resulting dialog, select the Inherited User Control template, enter a name for the control, and click Add. The Inheritance Picker dialog box shown in Figure 22-6 lists compiled components in the current project. Select the control from which you want to inherit and click OK.

You may need to hunt a bit to find the Inherited User Control template in the Add New Item dialog. If you can't find it, expand the Visual Basic Items entry on the left and select the Windows Forms category.
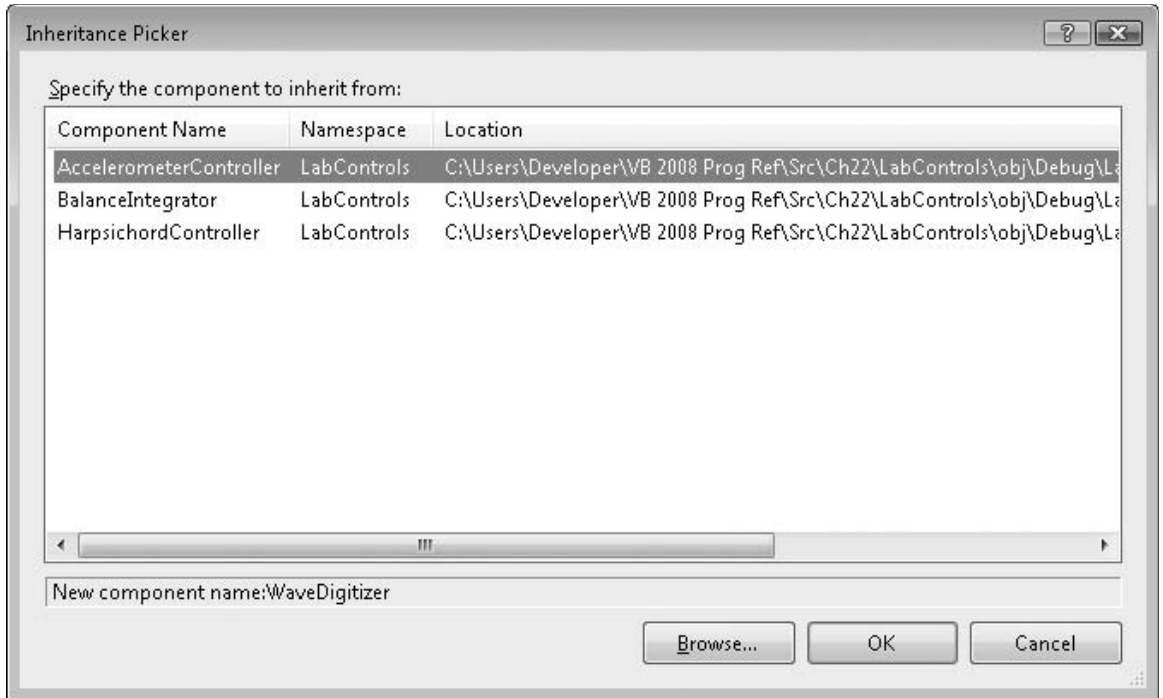
Figure 22-6: Use the Inheritance Picker to make a control that inherits from an existing UserControl.

Add properties, methods, and events to the control as usual. Select the Build menu's Build command to compile the control and add it to the Toolbox.

Alternatively, you can create a new class and add an `Inherits` statement that makes the class inherit from the previously built `UserControl`.

Controls in Executable Projects

To build a control that inherits from the `Control` class in an executable project, select the Project menu's Add Class command. Leave the Class template selected, enter a name for the control, and click Add. Add the statement `Inherits Control` to the control's code.

Add properties, methods, and events to the control as usual. For example, you may want to give the control `Paint` and `Resize` event handlers so that it can draw itself. Select the Build menu's Build command to compile the control and add it to the Toolbox.

Inherited Controls in Executable Projects

To build a control that inherits from a predefined control, select the Project menu's Add Class command. Leave the Class template selected, enter a name for the control, and click Add. Add an `Inherits` statement that makes the class inherit from another control.

513

Add properties, methods, and events to the control as usual. For example, you may want to override the parent class's behaviors. Select the Build menu's Build command to compile the control and add it to the Toolbox.

Components in Executable Projects

To add a component to an executable project, select the Project menu's Add Component command. Leave the Component Class template selected, enter a name for the component, and click Add.

Add properties, methods, and events to the component as usual. Then select the Build menu's Build command to compile the component and add it to the Toolbox.

Custom Component Security

This chapter implicitly assumes that any custom controls or components that you build are safe and trustworthy. It assumes that you don't need to worry about a control installing a virus on your computer or deleting a bunch of files. That's certainly true when you use a control that you write yourself (unless for some reason you want to destroy your operating system).

It's also true when you build a custom component inside an executable application. If a project's files include a custom control that the program uses, you know that the control is as safe as you write it.

In contrast, suppose you download a control library DLL from the Internet. If you use the controls in the DLL in your application, you cannot tell if the controls are safe. You can't even always tell if the DLL you download is the one that the author originally posted. It is possible that some scofflaw replaced the original DLL with a virus-infested version. In fact, it's possible that a prankster has replaced a DLL that you built yourself with another version that looks similar but that has malicious side effects.

Visual Studio provides two approaches for combating these problems: making a strongly named assembly and using a signature authority.

Strongly Named Assemblies

A *strongly named assembly* includes a manifest identifying the files that the assembly contains and a digital signature. Another program can verify the digital signature to verify that the assembly has not been tampered with since it was created.

Unfortunately, that doesn't guarantee that the assembly is actually what you think it is. An attacker could make a new assembly and then strongly sign it. If you verify the signature, you can tell that the attacker's version of the assembly hasn't been tampered with since it was written and that the viruses it contains are the original ones. The Microsoft web page Code Security and Signing in Components at `http://msdn2.microsoft.com/en-us/library/txzh776x(vs.71).aspx` says:

> Although providing a strong name for your assembly guarantees its identity, it is by no means a guarantee that the code can be trusted. Put another way, the strong name uniquely identifies and guarantees the identity of the assembly, but does not guarantee that you wrote it. Nevertheless, a trust decision can reasonably be made based on strong-name identity alone, provided that the assembly is a well-known assembly.

Although this is a pretty big loophole, it's still better than nothing.

To sign an assembly, start a new Visual Basic project as usual. Typically the assembly will be a DLL, control library, or other code project rather than a main program such as a Windows Forms or WPF application.

In Project Explorer, double-click My Project to open the project's Property pages and select the Signing tab, as shown in Figure 22-7.

Select the Sign the assembly check box. Then, open the key file drop-down list and select <New...>. On the resulting dialog box, enter the name that you want to give the file and optionally enter a password to protect the file. Then click OK.

At this point, Visual Studio builds the key file. It looks like gibberish, but contains all the ingredients needed to sign the assembly. When you build the assembly, Visual Studio uses the key file to sign the result. Build a main program, reference the assembly, and use its methods as you normally would.
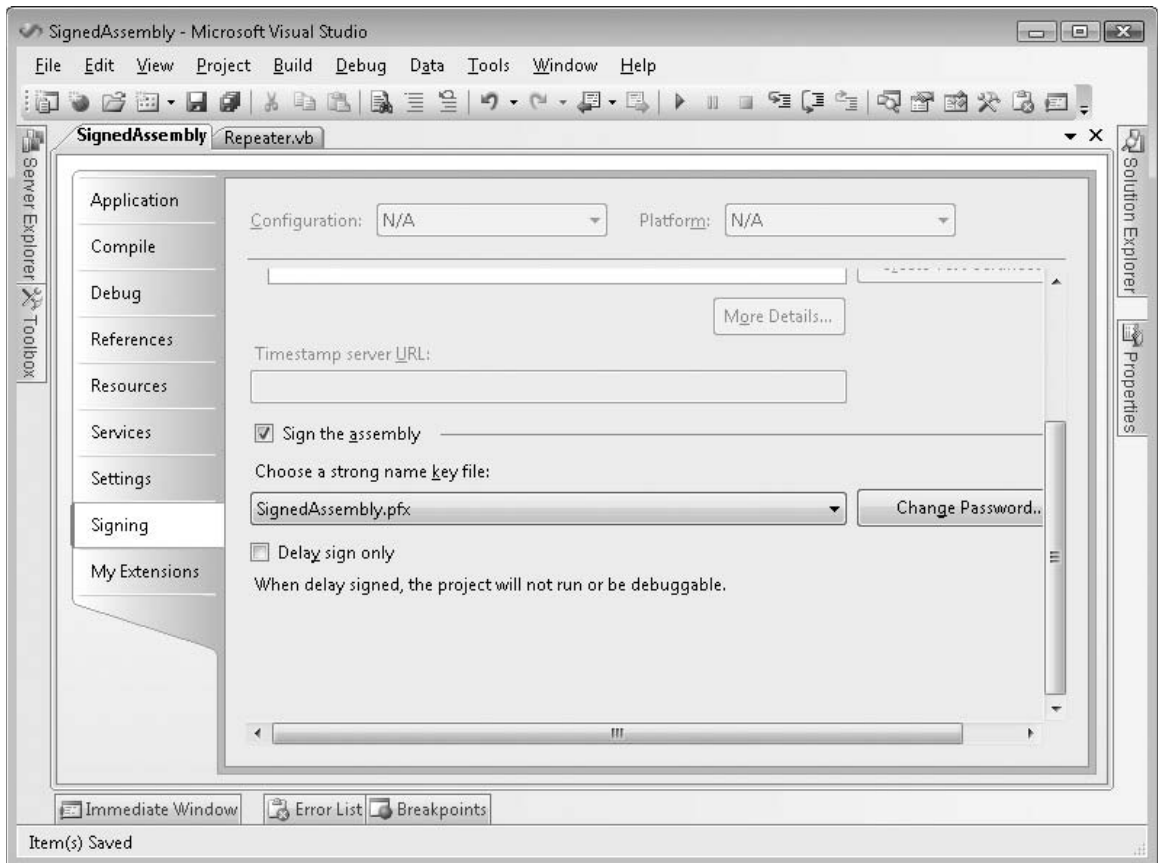
Figure 22-7: Use the Signing tab to sign an assembly.

When the executable program needs to use the assembly, it loads the assembly, hashes it, and verifies that the hash matches the signature. If the hash doesn't match, the program assumes the assembly has been corrupted and refuses to use it.

Example programs SignedAssembly, SignedAssemblyTest, and BreakSignature (which are all available for download on the book's web site) demonstrate signed assemblies.

The SignedAssembly DLL has been flagged to produce a signed assembly (the password for the key file is "password"). Compile it to produce the DLL.

The SignedAssemblyTest application uses the SignedAssembly DLL. If you run the program, everything should work normally.

Program BreakSignature can tamper with the signed assembly. Compile the program and copy the executable into the SignedAssemblyTest project's executable directory. When you click the Break button, the program reads the assembly into a byte array, adds one to the last byte in the array, and saves the change back into the file.

Now run the SignedAssemblyTest executable program from this directory. When you click the program's Repeat button, the program fails with the error message shown in Figure 22-8.

Figure 22-8: A program will refuse to load a signed assembly that has been modified.

Using a Signature Authority

Signing an assembly ensures that some villain hasn't meddled with the assembly since it was signed. If you built the assembly yourself, that gives you some assurance that the code is safe.

However, if someone else built the assembly and posted it on the Web, the signature only guarantees that the assembly contains whatever the original author put in it. It doesn't guarantee that that author didn't insert a virus. In fact, it doesn't guarantee that a hacker didn't replace the original author's assembly with a spoofed version signed by the hacker.

If you write an assembly that you want to share with others, you can make using your assembly safer by using a certificate authority.

A *certificate authority* is a company that sells digital certificates that guarantee the authenticity of a piece of signed code. The company verifies your identity, so they are certain that you are who you claim you are. It then gives you a certificate that you can use to sign assemblies. Later, when someone uses your assembly, they cannot only verify that it has been signed and that it has not been corrupted since you wrote it, but they can also verify that *you* wrote it.

Hackers won't use certificate authorities to spread viruses because they would have to identify themselves to the authority, and that would give you a way to track them down and sue them. The certificate still doesn't guarantee that the code is safe, but it does establish accountability if the code turns out to be dangerous.

For information on signing assemblies and using certificate authorities, see the Microsoft web pages Signing an Assembly with a Strong Name at `msdn2.microsoft.com/library/aa719592(VS.71)` `.aspx` and Code Security and Signing in Components at `msdn2.microsoft.com/library/` `txzh776x(VS.71).aspx`.

Summary

Visual Basic provides a large assortment of controls that you can use on your forms. When they don't do exactly what you need, you can build others.

If an existing control does most of what you need, derive a new control from that one. If a group of controls together with their properties, methods, and events can do what you need, combine them into a composite control that inherits from the `UserControl` class. If you want to build a new control from scratch, make a class that inherits from the `Control` class. Finally, if you want an object that is available at design time but invisible at runtime, build a component.

When you build a control or component, you can use attributes to give extra information to Visual Studio. The `ToolboxBitmap`, `DefaultProperty`, `DefaultEvent`, `DesignTimeVisible`, `Description`, `Category`, `Browsable`, and `DefaultValue` attributes are some of the more useful attributes for control and component classes.

Visual Basic provides many other features that you can use to build other kinds of control-related classes and their properties. An *extender provider* class adds new properties to the other controls on a form much as the `ErrorProvider` and `ToolTip` controls do. A *type converter* (which translates data from one type to another) can translate between values and text for display in the Properties window and can generate a customized list of choices for a property drop-down list. A *UI type editor* enables you to build a graphical editor that the developer can use to view and manipulate special property values. These are more advanced topics that lie beyond the scope of this book. My book *Expert One-on-One Visual Basic 2005 Design and Development* (Stephens, Wrox, 2006) explains these techniques. For more information, see the book's web pages on Wrox.com or `www.vb-helper.com/one_on_one.htm`.

Controls provide an interface between the user and the program. The user views controls to get information from the program and manipulates the controls to provide information to the program. Chapter 23, "Drag and Drop, and the Clipboard," covers another important way for the user to move data in and out of the program. It explains how the user can use drag and drop and the clipboard to move data between the program and other applications.

Drag and Drop, and the Clipboard

The clipboard is an object where programs can save and restore data. A program can save data in multiple formats and retrieve it later, or another program might retrieve the data. Windows, rather than Visual Basic, provides the clipboard, so it is available to every application running on the system, and any program can save or fetch data from the clipboard.

The clipboard can store remarkably complex data types. For example, an application can store a representation of a complete object in the clipboard for use by other applications that know how to use that kind of object.

Drag-and-drop support enables the user to drag information from one control to another. The controls may be in the same application or in different applications. For example, your program could let the user drag items from one list to another, or it could let the user drag files from Windows Explorer into a file list inside your program.

A drag occurs in three main steps. First, a *drag source* control starts the drag, usually when the user presses the mouse down on the control. The control starts the drag, indicating the data that it wants to drag and the type of drag operations it wants to perform (such as Copy, Link, or Move).

When the user drags over a control, that control is a possible *drop target*. The control examines the kind of data being dragged and the type of drag operation requested (such as Copy, Link, or Move). The drop target then decides whether it will allow the drop and what type of feedback it should give to the user. For example, if the user drags a picture over a label control, the label might refuse the drop and display a no drop icon (a circle with a line through it). If the user drags the picture over a `PictureBox` that the program is using to display images, it might display a drop link icon (a box with a curved arrow in it).

Finally, when the user releases the mouse, the current drop target receives the data and does whatever is appropriate. For example, if the drop target is a `TextBox` control and the data is a string, the `TextBox` control might display the string. If the same `TextBox` control receives a file name, it might read the file and display its contents.

The following sections describe drag-and-drop events in more detail and give several examples of common drag-and-drop tasks. The section "Using the Clipboard" near the end of the chapter explains how to use the clipboard. Using it is very similar to using drag and drop, although it doesn't require as much user feedback, so it is considerably simpler.

Drag-and-Drop Events

The drag source control starts a drag operation by calling its `DoDragDrop` method. It passes this method the data to be dragged and the type of drag operation that the control wants to perform. The drag type can be Copy, Link, or Move.

If you are dragging to other general applications, the data should be a standard data type such as a `String` or `Bitmap` so that the other application can understand it. If you are dragging data within a single application or between two applications that you have written, you can drag any type of data. This won't necessarily work with general objects and arbitrary applications. For example, WordPad doesn't know what an `Employee` object is, so you can't drop an `Employee` on it.

As the user drags the data around the screen, Visual Basic sends events to the controls it moves over. Those controls can indicate whether they will accept the data and how they can accept it. For example, a control might indicate that it will allow a Copy, but not a Move. The following table describes the events that a drop target receives as data is dragged over it.

Event	Purpose
DragEnter	The drag is entering the control. The control can examine the type of data available and set `e.Effect` to indicate the types of drops it can handle. These can include All, Copy, Move, Link, and None. The control can also display some sort of highlighting to indicate that the data is over it. For example, it might display a dark border or shade the area where the new data would be placed.
DragLeave	The drag has left the control. If the control displays some sort of highlighting or other indication that the drag is over it in the `DragEnter` event, it should remove that highlight now.
DragOver	The drag is over the control. This event continues to fire a few times per second until the drag is no longer over the control. The control may take action to indicate how the drop will be processed much as the `DragEnter` event handler does. For example, as the user moves the mouse over a `ListBox`, the control might highlight the list item that is under the mouse to show that this item will receive the data. The program can also check for changes to the mouse or keyboard. For example, it might allow a Copy if the Ctrl key is pressed and a Move if the Ctrl key is not pressed.
DragDrop	The user has dropped the data on the control. The control should process the data.

A drop target with simple needs can specify the drop actions it will allow in its `DragEnter` event handler and not provide a `DragOver` event handler. It knows whether it will allow a drop based solely on the type of item being dropped. For example, a graphical application might allow the user to drop a bitmap on it, but not a string.

A more complex target that must track such items as the keyboard state, mouse position, and mouse button state can provide a `DragOver` event handler and skip the `DragEnter` event handler. For example, a circuit design application might check the drag's position over its drawing surface, and highlight the location where the dragged item would be positioned. As the user moves the object around, the `DragOver` event would continue to fire so the program could update the drop highlighting.

After the drag and drop finishes, the drag source's `DoDragDrop` method returns the last type of action that was displayed when the user dropped the data. That lets the drag source know what the drop target expects the source to do with the data. For example, if the drop target accepted a Move, the drag source should remove the data from its control. If the drop target accepted a Copy, the drag source should not remove the data from its control.

The following table describes the two events that the drag source control receives to help it control the drop.

Event	Purpose
GiveFeedback	The drag has entered a valid drop target. The source can take action to indicate the type of drop allowed. For example, it might allow a Copy if the target is a Label and allow Move or Copy if the target is a TextBox.
QueryContinueDrag	The keyboard or mouse button state has changed. The drag source can decide whether to continue the drag, cancel the drag, or drop the data immediately.

The following sections describe some examples that demonstrate common drag-and-drop scenarios.

A Simple Example

The following code shows one of the simplest examples possible that contains both a drag source and a drop target. To build this example, start a new project and add two Label controls named lblDragSource and lblDropTarget.

```
Public Class Form1
    ' Start a drag.
    Private Sub lblDragSource_MouseDown() Handles lblDragSource.MouseDown
        lblDragSource.DoDragDrop("Here's the drag data!", _
            DragDropEffects.Copy)
    End Sub

    ' Make sure the drag is coming from lblDragSource.
```

```
        Private Sub lblDropTarget_DragEnter(ByVal sender As Object, _
         ByVal e As System.Windows.Forms.DragEventArgs) _
         Handles lblDropTarget.DragEnter
            e.Effect = DragDropEffects.Copy
        End Sub

        ' Display the dropped data.
        Private Sub lblDropTarget_DragDrop(ByVal sender As Object, _
         ByVal e As System.Windows.Forms.DragEventArgs) _
         Handles lblDropTarget.DragDrop
            MessageBox.Show(e.Data.GetData("Text").ToString)
        End Sub
    End Class
```

Note that the `lblDropTarget` control must have its `AllowDrop` property set to `True` either at design time or at runtime or it will not receive any drag-and-drop events. When the user presses a mouse button down over the `lblDragSource` control, the `MouseDown` event handler calls that control's `DoDragDrop` method, passing it the text "Here's the drag data!" and indicating that it wants to perform a Copy. When the user drags the data over the `lblDropTarget` control, its `DragEnter` event handler executes. The event handler sets the routine's `e.Effect` value to indicate that the control will allow a Copy operation. If the user drops the data over the `lblDropTarget` control, its `DragDrop` event handler executes. This routine uses the `e.Data.GetData` method to get a text data value and displays it in a message box.

Example program LabelDrag, which is available for download on the book's web site, uses this code to demonstrate a simple drag-and-drop operation.

As it is, this program lets you drag and drop data from the `lblDragSource` control to the `lblDropTarget` control. You can also drag data from the `lblDragSource` control into Word, WordPad, and any other application that can accept a drop of text data.

Similarly, the `lblDropTarget` control can act as a drop target for any application that provides drag sources. For example, if you open WordPad, enter some text, select it, and then click and drag it onto the `lblDropTarget` control, the application will display the text you dropped in a message box.

This example is a bit too simple to be really useful. If the drop target does nothing more, it should check the data it will receive and ensure that it is text. When you drag a file from Windows Explorer and drop it onto the `lblDropTarget` control, the `e.Data.GetData` method returns `Nothing` so the program cannot display its value. Because the program cannot display a file, it is misleading for the `lblDropTarget` control to display a Copy cursor when the user drags a file over it.

Example program LabelDrag2, which is also available for download on the book's web site, uses the following code to make drag-and-drop a bit safer. The new `lblDropTarget_DragEnter` event handler uses the `e.Data.GetDataPresent` method to see if the data being dragged has a textual format. If a text format is available, the control allows a Copy operation. If the data does not come in a textual form, the control doesn't allow a drop.

```
   ' Make sure the drag is coming from lblDragSource.
   Private Sub lblDropTarget_DragEnter(ByVal sender As Object, _
    ByVal e As System.Windows.Forms.DragEventArgs) Handles lblDropTarget.DragEnter
       ' See if the drag data includes text.
      If e.Data.GetDataPresent("Text") Then
          e.Effect = DragDropEffects.Copy
      Else
          e.Effect = DragDropEffects.None
      End If
   End Sub
```

Now, if you drag a file from Windows Explorer onto lblDropTarget, the control displays a no drop icon.

The lblDropTarget_DragDrop event handler doesn't need to change because Visual Basic doesn't raise the event if the control does not allow any drop operation. For example, if the user drags a file from Windows Explorer onto lblDropTarget, then that control's DragEnter event handler sets e.Effect to DragDropEffects.None, so Visual Basic doesn't raise the DragDrop event handler if the user drops the file there.

Example program DragBetweenListBoxes, which is also available for download, provides a more complete example than program LabelDrag2 and demonstrates many of the drag-and-drop events. It allows the user to drag items between two ListBoxes. It also allows the user to drag an item to a specific position in its new ListBox and to drag an item from one position to another within the same ListBox.

Example program DragBetweenListBoxes2, which is also available for download, adds the ability to make copies of items. If the user holds down the Ctrl key while dragging an item, the program displays a plus sign drag icon to indicate that dropping the item will make a copy. If the user drops the item while pressing the Ctrl key, the program copies the item and leaves the original item where it started.

Learning Data Types Available

When the user drags data over a drop target, the target's DragEnter event handler decides which kinds of drop to allow. The event handler can use the e.GetDataPresent method to see whether the data is available in a particular format and then decide whether it should allow a drop accordingly.

GetDataPresent takes as a parameter a string giving the desired data type. An optional second parameter indicates whether the program will accept another format if the system can derive it from the original format. For example, the system can convert Text data into System.String data so you can decide whether to allow the system to make this conversion.

The DataFormats class provides standardized string values specifying various data types. For example, DataFormats.Text returns the string Text representing the text data type.

If you use a DataFormats value, you don't need to worry about misspelling one of these formats. Some of the most commonly used DataFormats include Bitmap, Html, StringFormat, and Text. See the online help for other formats. The web page msdn2.microsoft.com/en-us/library/system. windows.forms.dataformats_members(vs.71).aspx lists the DataFormats class's supported formats.

`GetDataPresent` can also take as a parameter a data type. For example, the following code fragment uses `GetDataPresent` to allow a Copy operation if the drag data contains an `Employee` object:

```
If e.Data.GetDataPresent(GetType(Employee)) Then
    ' Allow Copy.
    e.Effect = DragDropEffects.Copy
Else
    ' Allow no other drops.
    e.Effect = DragDropEffects.None
End If
```

In addition to `GetDataPresent`, you can use the `e.Data.GetFormats` method to get an array of strings giving the names of the available formats. The following code shows how a program can list the formats available. It clears its `lstWithoutConversion` ListBox and then loops through the values returned by `e.Data.GetFormats`, adding them to the ListBox. It passes `GetFormats` the parameter `False` to indicate that it should return only data formats that are directly available, not those that can be derived from others. The program then repeats these steps, this time passing `GetFormats` the parameter `True` to include derived formats.

```
Private Sub lblDropTarget_DragEnter(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.DragEventArgs) Handles lblDropTarget.DragEnter
    lstWithoutConversion.Items.Clear()
    For Each fmt As String In e.Data.GetFormats(False)
        lstWithoutConversion.Items.Add(fmt)
    Next fmt

    lstWithConversion.Items.Clear()
    For Each fmt As String In e.Data.GetFormats(True)
        lstWithConversion.Items.Add(fmt)
    Next fmt
End Sub
```

Dragging Within an Application

Sometimes, you may want a drop target to accept only data dragged from within the same application. The following code shows one way to handle this. Before it calls `DoDragDrop`, the program sets its `m_Dragging` variable to `True`. The `lblDropTarget` control's `DragEnter` event checks `m_Dragging`. If the user drags data from a program other than this one, `m_Dragging` will be `False` and the program sets `e.Effect` to `DragDropEffects.None`, prohibiting a drop. If `m_Dragging` is `True`, that means this program started the drag, so the program allows a Copy operation. After the drag and drop finishes, the `lblDragSource` control's `MouseDown` event handler sets `m_Dragging` to `False`, so the drop target will refuse future drags from other applications.

```
Public Class Form1
    ' True while we are dragging.
    Private m_Dragging As Boolean

    ' Start a drag.
    Private Sub lblDragSource_MouseDown() _
     Handles lblDragSource.MouseDown
        m_Dragging = True
```

```
        lblDragSource.DoDragDrop("Some text", DragDropEffects.Copy)
        m_Dragging = False
    End Sub

    ' Only allow Copy if we are dragging.
    Private Sub lblDropTarget_DragEnter(ByVal sender As Object, _
     ByVal e As System.Windows.Forms.DragEventArgs) _
     Handles lblDropTarget.DragEnter
        If m_Dragging Then
            e.Effect = DragDropEffects.Copy
        Else
            e.Effect = DragDropEffects.None
        End If
    End Sub

    ' Display the dropped text.
    Private Sub lblDropTarget_DragDrop(ByVal sender As Object, _
     ByVal e As System.Windows.Forms.DragEventArgs) _
     Handles lblDropTarget.DragDrop
        MessageBox.Show(e.Data.GetData(DataFormats.Text).ToString)
    End Sub
End Class
```

Example program DragWithinApp, which is available for download on the book's web site, uses this code to provide restricted drag-and-drop.

There is no easy way to allow your program to drag data to its own controls, but not allow it to drag data to another program. The philosophy is that a drag source provides data for any application that can handle it, not just for its own use.

If you don't want other applications to read data dragged from your application, you can package the data in an object and drag the object as described in the section "Dragging Objects" later in this chapter. This will make it very difficult for most applications to understand the data, even if they try to accept it.

Accepting Dropped Files

Many applications let you drop files onto them. When you drag files over a drop target, the data object contains data of several types, including FileDrop. This data is an array of strings containing the names of the files being dragged.

Example program AcceptDroppedFiles, which is available for download on the book's web site, uses the following code to process files dragged onto it. The lblDropTarget control's DragEnter event handler uses the GetDataPresent method to see if the drag contains FileDrop data, and allows the Copy operation if it does. The control's DragDrop event handler uses GetData to get the data in FileDrop format. It converts the data from a generic object into an array of strings, and then loops through the entries, adding each to the lstFiles ListBox.

```
Public Class Form1
    ' Allow Copy if there is FileDrop data.
    Private Sub lblDropTarget_DragEnter(ByVal sender As Object, _
     ByVal e As System.Windows.Forms.DragEventArgs) _
     Handles lblDropTarget.DragEnter
        If e.Data.GetDataPresent(DataFormats.FileDrop) Then
            e.Effect = DragDropEffects.Copy
        Else
            e.Effect = DragDropEffects.None
        End If
    End Sub

    ' Display the dropped file names.
    Private Sub lblDropTarget_DragDrop(ByVal sender As Object, _
     ByVal e As System.Windows.Forms.DragEventArgs) _
     Handles lblDropTarget.DragDrop
        lstFiles.Items.Clear()
        Dim file_names As String() = _
            DirectCast(e.Data.GetData(DataFormats.FileDrop), String())
        For Each file_name As String In file_names
            lstFiles.Items.Add(file_name)
        Next file_name
    End Sub
End Class
```

A more realistic application would do something more useful than simply listing the files. For example, it might delete them, move them into the wastebasket, copy them to a backup directory, display thumbnails of image files, and so forth.

Dragging Objects

Dragging text is simple enough. Simply pass the text into the `DoDragDrop` method and you're finished.

You can drag an arbitrary object in a similar manner, as long as the drag source and drop target are within the same application. If you want to drag objects between applications, however, you must use serializable objects. A *serializable* object is one that provides methods for translating the object into and out of a stream-like format. Usually, this format is text, and lately XML is the preferred method for storing text streams.

You can use drag and drop to move a serializable object between applications. The drag source converts the object into its serialization and sends the resulting text to the drop target. The drop target uses the serialization to re-create the object.

You might think it would be hard to make an object serializable. Fortunately, Visual Basic .NET can serialize and deserialize many classes automatically. In most cases, all you need to do is add the `Serializable` attribute to the class, as shown in the following code:

```
<Serializable()> _
Public Class Employee
    ...
End Class
```

The drag source can pass objects of this type to the DoDragDrop method.

Example program DragEmployee, which is available for download on the book's web site, allows you to drag and drop Employee objects. The program's code starts by defining the constant DATA_EMPLOYEE. This value, DragEmployee.frmDragEmployee+Employee, is the name of the data format type assigned to the Employee class. This name combines the project name, the module name where the class is defined, and the class name.

```
Public Const DATA_EMPLOYEE As String = _
    "DragEmployee.frmDragEmployee+Employee"
```

The following code shows the program's serializable Employee class:

```
<Serializable()> _
Public Class Employee
    Public FirstName As String
    Public LastName As String
    Public Sub New()
    End Sub
    Public Sub New(ByVal first_name As String, ByVal last_name As String)
        FirstName = first_name
        LastName = last_name
    End Sub
End Class
```

The following code shows how an application can act as a drag source and a drop target for objects of the Employee class. It starts by defining the Employee class. It also defines the string constant DATA_ EMPLOYEE. This value, DragEmployee.frmDragEmployee+Employee, is the name of the data format type assigned to the Employee class. This name combines the project name, the module name where the class is defined, and the class name.

When the user presses the mouse down over the lblDragSource control, the following MouseDown event handler creates an Employee object, initializing it with the values contained in the txtFirstName and txtLastName text boxes. It then calls the lblDragSource control's DoDragDrop method, passing it the Employee object and allowing the Move and Copy operations. If DoDragDrop returns the value Move, the user performed a Move rather than a Copy, so the program removes the values from the text boxes.

```
' Start dragging the Employee.
Private Sub lblDragSource_MouseDown() Handles lblDragSource.MouseDown
    Dim emp As New Employee(txtFirstName.Text, txtLastName.Text)

    If lblDragSource.DoDragDrop(emp, _
        DragDropEffects.Copy Or DragDropEffects.Move) = _
            DragDropEffects.Move _
    Then
        ' A Move succeeded. Clear the TextBoxes.
        txtFirstName.Text = ""
        txtLastName.Text = ""
    End If
End Sub
```

When the user drags over the `lblDropTarget` control, the following `DragOver` event handler executes. The routine first uses the `GetDataPresent` method to verify that the dragged data contains an `Employee` object. It then checks the Ctrl key's state and allows a Copy or Move operation as appropriate.

```
    ' If an Employee object is available, allow a Move
    ' or Copy depending on whether the Ctrl key is pressed.
    Private Sub lblDropTarget_DragOver(ByVal sender As Object, _
     ByVal e As System.Windows.Forms.DragEventArgs) _
     Handles lblDropTarget.DragOver
        If e.Data.GetDataPresent(DATA_EMPLOYEE) Then
            ' Display the Move or Copy cursor.
            Const KEY_CTRL As Integer = 8
            If (e.KeyState And KEY_CTRL) <> 0 Then
                e.Effect = DragDropEffects.Copy
            Else
                e.Effect = DragDropEffects.Move
            End If
        End If
    End Sub
```

If the user drops the data on the `lblDropTarget` control, the following `DragDrop` event handler executes. It uses the `GetData` method to retrieve the `Employee` object. `GetData` returns a generic `Object`, so the program uses `DirectCast` to convert the result into an `Employee` object. The event handler finishes by displaying the object's `FirstName` and `LastName` properties in its text boxes.

```
    ' Display the dropped Employee object.
    Private Sub lblDropTarget_DragDrop(ByVal sender As Object, _
     ByVal e As System.Windows.Forms.DragEventArgs) _
     Handles lblDropTarget.DragDrop
        Dim emp As Employee = _
            DirectCast(e.Data.GetData(DATA_EMPLOYEE), Employee)
        lblFirstName.Text = emp.FirstName
        lblLastName.Text = emp.LastName
    End Sub
```

If you compile this program, you can run two copies of the executable program and drag from the drag source in one to the drop target in the other.

If you remove the `Serializable` attribute from the `Employees` class, the program still works if you drag from the drag source to the drop target within the same instance of the application. If you run two instances and drag from one to the other, however, the drop target gets the value `Nothing` from the `GetData` method, so the drag and drop fails.

Changing Format Names

The previous example dragged data with the rather unwieldy data format name `DragEmployee.frmDr agEmployee+Employee`. This name identifies the class reasonably well, so it is unlikely that another application will try to load this data if it has some other definition for the `Employee` class.

On the other hand, the name is rather awkward. It is also problematic if you want to drag objects between two different applications, because each will use its project and module name to define the data

format type. If you want to drag Employee objects between the TimeSheet program and the EmployeePayroll program, the names of the data formats generated by the two programs won't match.

The DataObject class provides more control over how the data is represented. Instead of dragging an Employee object directly, you create a DataObject, store the Employee object inside it with the data format name of your choosing, and then drag the DataObject.

Example program DragEmployee2, which is available for download on the book's web site, uses the following code fragment to demonstrate this technique. It creates an Employee object as before and then creates a DataObject. It calls the DataObject object's SetData method, passing it the Employee object and the data format name.

```
Dim emp As New Employee(txtFirstName.Text, txtLastName.Text)
Dim data_object As New DataObject()
data_object.SetData("Employee", emp)

If lblDragSource.DoDragDrop(data_object, _
    DragDropEffects.Copy Or DragDropEffects.Move) = DragDropEffects.Move _
Then
    ' A Move succeeded. Clear the TextBoxes.
    txtFirstName.Text = ""
    txtLastName.Text = ""
End If
```

In general, you should try to avoid very generic names such as Employee for data types. Using such a simple name increases the chances that another application will use the same name for a different class. Another program will not be able to convert your Employee data into a different type of Employee class.

To ensure consistency across applications, you must define a naming convention that can identify objects across projects. To ensure that different applications use exactly the same object definitions, you might also want to define the objects in a separate DLL used by all of the applications. That simplifies the naming problem, because you can use the DLL's name as part of the object's name.

For example, suppose that you build an assortment of billing database objects such as Employee, Customer, Order, OrderItem, and so forth. If the objects are defined in the module BillingObjects. dll, you could give the objects names such as BillingObjects.Employee, BillingObjects. Customer, and so forth.

Dragging Multiple Data Formats

The DataObject not only allows you to pick the data form name used by a drag; it also allows you to associate more than one piece of data with a drag. To do this, the program simply calls the object's SetData method more than once, passing it data in different formats.

Example program DragRichText, which is available for download on the book's web site, uses the following code to drag the text in a RichTextBox control in three data formats: RTF, plain text, and HTML. The lblDragSource control's MouseDown event handler makes a DataObject and calls its SetData method, passing it the rchSource control's contents in the Rtf and Text formats. It then builds an HTML string and passes that to the SetData method as well.

```
    ' Start a drag.
    Private Sub lblDragSource_MouseDown() Handles lblDragSource.MouseDown
        ' Make a DataObject.
        Dim data_object As New DataObject

        ' Add the data in various formats.
        data_object.SetData(DataFormats.Rtf, rchSource.Rtf)
        data_object.SetData(DataFormats.Text, rchSource.Text)

        ' Build the HTML version.
        Dim html_text As String
        html_text = "<HTML>" & vbCrLf
        html_text &= "  <HEAD>The Quick Brown Fox</HEAD>" & vbCrLf
        html_text &= "  <BODY>" & vbCrLf
        html_text &= rchSource.Text & vbCrLf
        html_text &= "  </BODY>" & vbCrLf & "</HTML>"
        data_object.SetData(DataFormats.Html, html_text)

        ' Start the drag.
        lblDragSource.DoDragDrop(data_object, DragDropEffects.Copy)
    End Sub
```

The following code shows the `lblDropTarget` control's `DragEnter` event handler. If the data includes the RTF, Text, or HTML data formats, the control allows a Copy operation.

```
    ' Allow drop of Rtf, Text, and HTML.
    Private Sub lblDropTarget_DragEnter(ByVal sender As Object, _
     ByVal e As System.Windows.Forms.DragEventArgs) _
     Handles lblDropTarget.DragEnter
        If e.Data.GetDataPresent(DataFormats.Rtf) Or _
            e.Data.GetDataPresent(DataFormats.Text) Or _
            e.Data.GetDataPresent(DataFormats.Html) _
        Then
            e.Effect = DragDropEffects.Copy
        End If
    End Sub
```

The following code shows how a program can read these formats. If the dropped data includes the `Rtf` format, the code displays it in the `RichTextControl rchTarget`. It also displays the RTF data in the `lblRtf Label`. This lets you see the Rich Text codes. If the data includes the `Text` format, the program displays it in the `lblTarget` label. Finally, if the data includes HTML, the program displays it in the `lblHtml` label.

```
    ' Display whatever data we can.
    Private Sub lblDropTarget_DragDrop(ByVal sender As Object, _
     ByVal e As System.Windows.Forms.DragEventArgs) Handles lblDropTarget.DragDrop
        If e.Data.GetDataPresent(DataFormats.Rtf) Then
            rchTarget.Rtf = e.Data.GetData(DataFormats.Rtf).ToString
            lblRtf.Text = e.Data.GetData(DataFormats.Rtf).ToString
        Else
            rchTarget.Text = ""
            lblRtf.Text = ""
```

```
        End If

        If e.Data.GetDataPresent(DataFormats.Text) Then
            lblTarget.Text = e.Data.GetData(DataFormats.Text).ToString
        Else
            lblTarget.Text = ""
        End If

        If e.Data.GetDataPresent(DataFormats.Html) Then
            lblHtml.Text = e.Data.GetData(DataFormats.Html).ToString
        Else
            lblHtml.Text = ""
        End If
    End Sub
```

Figure 23-1 shows the DragRichText program in action. The `RichTextBox` on the top shows the original data in `rchSource`. Below the drag source and drop target labels, other controls show the dropped results. The first control is a `RichTextBox` that shows the `Rtf` data. The second control is a label displaying the Rich Text codes. The third control is a label showing the `Text` data, and the final control is a label showing the `Html` data.

Figure 23-1: This program drags and drops data in Text, RTF, and HTML formats.

If you drag data from another application onto the drop target, this program displays only the data that is available. For example, if you drag data from WordPad, this program will display only `Rtf` and `Text` data, because those are the only compatible formats provided by WordPad.

Using the Clipboard

Using the clipboard is very similar to using drag and drop. To save a single piece of data, call the `Clipboard` object's `SetDataObject` method, passing it the data that you want to save. For example, the following code copies the text in the `txtLastName` control to the clipboard:

```
Clipboard.SetDataObject(txtLastName.Text)
```

Copying data to the clipboard in multiple formats is very similar to dragging and dropping multiple data formats. First, create a `DataObject` and use its `SetData` method to store the data exactly as before. Then call the `Clipboard` object's `SetDataObject` method, passing it the `DataObject`.

The following code adds `Rtf`, `Text`, and `Html` data to the clipboard:

```
' Copy data to the clipboard.
Private Sub btnCopy_Click() Handles btnCopy.Click
    ' Make a DataObject.
    Dim data_object As New DataObject

    ' Add the data in various formats.
    data_object.SetData(DataFormats.Rtf, rchSource.Rtf)
    data_object.SetData(DataFormats.Text, rchSource.Text)

    ' Build the HTML version.
    Dim html_text As String
    html_text = "<HTML>" & vbCrLf
    html_text &= "  <HEAD>The Quick Brown Fox</HEAD>" & vbCrLf
    html_text &= "  <BODY>" & vbCrLf
    html_text &= rchSource.Text & vbCrLf
    html_text &= "  </BODY>" & vbCrLf & "</HTML>"
    data_object.SetData(DataFormats.Html, html_text)

    ' Copy data to the clipboard.
    Clipboard.SetDataObject(data_object)
End Sub
```

To retrieve data from the clipboard, use the `GetDataObject` method to get an `IDataObject` representing the data. Use that object's `GetDataPresent` method to see if a data type is present, and use its `GetData` method to get data with a particular format.

The following code displays `Rtf`, `Text`, and `Html` data from the clipboard:

```
' Paste data from the clipboard.
Private Sub btnPaste_Click() Handles btnPaste.Click
    Dim data_object As IDataObject = Clipboard.GetDataObject()

    If data_object.GetDataPresent(DataFormats.Rtf) Then
        rchTarget.Rtf = data_object.GetData(DataFormats.Rtf).ToString
        lblRtf.Text = data_object.GetData(DataFormats.Rtf).ToString
    Else
        rchTarget.Text = ""
        lblRtf.Text = ""
    End If

    If data_object.GetDataPresent(DataFormats.Text) Then
        lblTarget.Text = data_object.GetData(DataFormats.Text).ToString
    Else
        lblTarget.Text = ""
    End If

    If data_object.GetDataPresent(DataFormats.Html) Then
        lblHtml.Text = data_object.GetData(DataFormats.Html).ToString
    Else
        lblHtml.Text = ""
    End If
End Sub
```

Example program CopyPasteRichText, which is available for download on the book's web site, uses similar code to copy and paste data in RTF, HTML, and text formats.

The `IDataObject` returned by the `GetDataObject` method also provides a `GetFormats` method that returns an array of the data formats available. This array is very similar to the one returned by the `GetFormats` method provided by the `DragEnter` event described earlier in this chapter.

You can copy and paste objects using the clipboard much as you drag and drop objects. Simply make the object's class serializable and add an instance of the class to the `DataObject`.

Example program CopyPasteEmployee, which is available for download on the book's web site, uses the following code to copy and paste an `Employee` object. The `btnCopy_Click` event handler makes an `Employee` object and a `DataObject`. It passes the `Employee` object to the `DataObject` object's `SetData` method, giving it the data format name Employee. The program then passes the `DataObject` to the `Clipboard` object's `SetDataObject` method. The `btnPaste_Click` event handler retrieves the clipboard's data object and uses its `GetDataPresent` method to see if the clipboard is holding data with the `Employee` format. If the data is present, the program uses the data object's `GetData` method to fetch the data, casts it into an `Employee` object, and displays the object's property values.

```
' Copy the Employee to the clipboard.
Private Sub btnCopy_Click() Handles btnCopy.Click
    Dim emp As New Employee(txtFirstName.Text, txtLastName.Text)
    Dim data_object As New DataObject
    data_object.SetData("Employee", emp)
    Clipboard.SetDataObject(data_object)
```

```
    End Sub

' Paste data from the clipboard.
Private Sub btnPaste_Click() Handles btnPaste.Click
    Dim data_object As IDataObject = Clipboard.GetDataObject()
    If data_object.GetDataPresent("Employee") Then
        Dim emp As Employee = _
            DirectCast(data_object.GetData("Employee"), Employee)
        txtPasteFirstName.Text = emp.FirstName
        txtPasteLastName.Text = emp.LastName
    End If
End Sub
```

The following table lists the most useful methods provided by the Clipboard object, including several that make working with common data types easier.

Method	Purpose
Clear	Removes all data from the clipboard.
ContainsAudio	Returns True if the clipboard contains audio data.
ContainsData	Returns True if the clipboard contains data in a particular format.
ContainsFileDropList	Returns True if the clipboard contains a file drop list.
ContainsImage	Returns True if the clipboard contains an image.
ContainsText	Returns True if the clipboard contains text.
GetAudioStream	Returns the audio stream contained in the clipboard.
GetData	Returns data in a specific format.
GetDataObject	Returns the clipboard's DataObject.
GetFileDropList	Returns the file drop list contained in the clipboard.
GetImage	Returns the image contained in the clipboard.
GetText	Returns the text contained in the clipboard.
SetAudio	Saves audio bytes or an audio stream in the clipboard.
SetData	Saves data in a particular format in the clipboard.
SetDataObject	Saves the data defined by a DataObject in the clipboard.
SetFileDropList	Saves a file drop list in the clipboard. The data should be a StringCollection containing the file names.
SetImage	Saves an image in the clipboard.
SetText	Saves text in the clipboard.

Example program PasteFileList, which is available for download on the book's web site, uses the following code to retrieve file drop list data from the clipboard:

```
Private Sub btnPaste_Click() Handles btnPaste.Click
    lstFiles.Items.Clear()
    If Clipboard.ContainsFileDropList() Then
        Dim file_names As StringCollection = Clipboard.GetFileDropList()
        For Each file_name As String In file_names
            lstFiles.Items.Add(file_name)
        Next file_name
    End If
End Sub
```

Summary

Drag-and-drop events and the clipboard both move data from a source to a destination. The source and destination can be in the same program or in two different applications.

The clipboard lets a program save and retrieve data in a central, shared location. Data copied to the clipboard may remain in the clipboard for a long time so that the user can paste it into the same or another application later.

Providing drag-and-drop support with appropriate feedback is more work than using the clipboard, but it provides the user with more direct control, and it doesn't replace whatever data currently sits in the clipboard.

Together, these two tools let you provide the user with more control over the application's data. They let the user move data between different parts of an application and between different applications. Although drag-and-drop support and the clipboard are usually not the main purpose of an application, they can give the user an extra dimension of hands-on control.

The chapters in the book so far focused on specific Visual Basic programming details. They explained the Visual Basic development environment, language syntax, standard controls and forms, custom controls, drag and drop, and the clipboard.

Chapter 24, "UAC Security," examines applications at a slightly higher level in the context of the operating system. It explains the new User Account Control (UAC) security system provided by the Vista operating system and tells how UAC can prevent your application from running properly. Unless you understand how UAC works and how to interact with it, the operating system may not allow your program to perform the tasks that it should.

24

UAC Security

The previous chapters have dealt with general Visual Basic programming tasks. They show how to write the Visual Basic code needed to build an application.

This chapter discusses User Account Control (UAC) security issues. UAC is a system implemented by the Windows Vista and Windows Server 2008 operating systems that allows programs to elevate their privileges only when they absolutely must.

In earlier operating systems that don't have UAC, users often logged in with administrator privileges to perform fairly routine tasks because the programs they used might need administrator privileges. Now, with UAC, users can run with normal user privileges and only elevate their privileges to perform the specific tasks that need them.

UAC Overview

In general, a program cannot perform actions that require privileges that the user doesn't have. If the user doesn't have permission to delete files in the Windows directory, a program that the user can run should not be able to delete those files either. Otherwise, the user could perform actions that are supposed to be prohibited.

Developers have long known that an application should require the fewest privileges possible to get its job done. If a program needs a lot of privileges, then only the users who have those privileges can use it.

Unfortunately, many applications occasionally perform some fairly powerful operations. They may sometimes need to create or delete a file in the Windows directory, access system-related parts of the Registry, or modify environment settings. If the program needs those privileges, then the users running the program must have those privileges. That means that many users run programs while logged in as a system administrator so that they have the necessary permissions.

Carrying around all of those permissions comes with some additional risk. If the program misbehaves, it could wreak havoc on the operating system. Even if the program itself works properly, the user might accidentally do something disastrous while logged on as an administrator. An inadvertent keystroke or mouse click could delete important files or drag them into oblivion, making it difficult to restore the system.

A better solution would be to allow a program to temporarily increase its privileges while it performs these powerful operations. If the program made a mistake while running some other part of its code, it would not have enough privileges to do serious harm. The user would not need to constantly have administrative privileges, so system-destroying accidents would be much less likely.

This chapter describes some of the new tools that you can use to minimize the user's exposure to administrator privileges. It explains how to write applications that normally run with normal user privileges, but can use more powerful administrative privileges when necessary.

In older versions of the Windows operating system, when you logged in, the system gave you an access token that later determined the kinds of operations you were allowed to perform. If you logged in as an administrator, your token would let you do just about everything.

The Windows Vista operating system's UAC system takes a slightly different approach. Now, when you log in as an administrator, the system creates two tokens. The first token has only standard user privileges, and the second has full administrative privileges. You begin running using the first token, and the second is saved in case it is needed later.

When you try to perform a task that requires extra privileges, UAC displays a dialog box asking for your approval. If you approve the action, your privileges are elevated to the full administrator token until you finish the action. Then your privileges return to the normal user-level token.

If you are a logged in as a normal user without administrative privileges, you may still be able to perform administrative tasks. When you try to execute a command that requires elevated privileges, UAC presents a dialog box warning you and allowing you to log in as an administrator. If you log in successfully, you are granted administrator privileges until you finish the action.

The difference between these two scenarios is small. If you are logged in as an administrator, UAC only asks you to confirm that you want elevated privileges. If you are logged in as another user, UAC requires you to enter an administrator's password.

Designing for UAC

UAC will not elevate an application's privileges after it is running. UAC assigns privileges when the application starts, and will not change the privileges after that. If an application needs to run with elevated privileges, it must obtain those privileges when it starts.

To avoid giving your application more privileges than necessary, you should separate your code into the pieces that require elevated privileges and those that do not. The main program should run with normal user privileges. Later, it should execute other applications that run with elevated privileges when necessary.

For example, a program that saves data into its local database or into a SQL Server database doesn't need administrator privileges. However, the Windows directory is protected, so a program that creates a summary file in that directory needs administrator privileges. You could separate this program into a piece that performs most of the work and another program that writes the summary information into the log file. Before closing, the first program would run the second to write into the file.

If possible, it's better to rewrite an application slightly to avoid requiring special privileges. For example, consider that many applications are installed in the Program Files directory. That directory is protected, so an application requires special privileges to write into it. That means if the application saves information into a file located where its executable is, it will need extra privileges. You can work around this problem by making the program write to a file located in the current user's directory hierarchy.

Other operations that require elevated privileges include writing into other protected directories, interacting directly with hardware, and modifying protected sections of the Registry such as HKEY_LOCAL_MACHINE.

Breaking an application into privileged and non-privileged parts not only lets the main program run with the fewest privileges possible, but separating the application into high- and low-privileges sections will probably help you reduce the number of places that you need extra privileges. That should simplify the riskiest parts of your code and make them easier to debug. It will also improve the separation between the two pieces, making them even easier to debug.

Example programs ShellUAC and ExecuteMe (which are available for download on the book's web site) demonstrate this handoff. Program ShellUAC uses the following code to run the ExecuteMe program, which is flagged for execution with elevated privileges. (How to flag an application in this way is described in the following sections.)

```vb
Private Sub btnRun_Click() Handles btnRun.Click
    Try
        ' Start the process.
        Dim pro As System.Diagnostics.Process
        pro = System.Diagnostics.Process.Start( _
            txtProgram.Text, txtArguments.Text)

        ' Wait for the process to exit.
        pro.WaitForExit()

        ' Display the process's exit code.
        MessageBox.Show("Exit code: " & pro.ExitCode)

    Catch ex As System.ComponentModel.Win32Exception
        ' This happens if the user fails to elevate to Administrator.
        MessageBox.Show("Operation canceled", _
            "Canceled", MessageBoxButtons.OK, _
            MessageBoxIcon.Information)
    End Try
End Sub
```

The code uses the `System.Diagnostics.Process.Start` function to execute the application. It passes the function the path to the program to execute, and the command-line parameters for the program that are entered in text boxes.

The code calls the returned object's `WaitForExit` method, so it waits until the other program has finished. It then checks the process's `ExitCode` property to see what value the `ExecuteMe` application returned.

The following code shows the `ExecuteMe` program's `Main` subroutine:

```
Function Main(ByVal cmdArgs() As String) As Integer
    Dim frm As New frmChoices
    ' Display the arguments.
    For Each str As String In cmdArgs
        frm.lstArguments.Items.Add(str)
    Next str

    ' Select the first item.
    If frm.lstArguments.Items.Count > 0 Then
        frm.lstArguments.SelectedIndex = 0
    End If

    ' Return the index of the selected item.
    If frm.ShowDialog() = DialogResult.Cancel Then
        Return -1
    Else
        Return frm.lstArguments.SelectedIndex
    End If
End Function
```

The program starts by creating a `frmChoices` form and adding its command-line arguments to the form's `lstArguments` list box. It selects the first item in the list and displays the form modally.

If the user clicks the form's Cancel button, the program returns –1. If the user clicks OK, the program returns the index of the selected list item. The `Process` object in calling program `ShellUAC` receives the return value in its `ExitCode` parameter.

> *Remember that the program that runs with elevated privileges can potentially do a lot of damage to the system. To make this program as safe as possible, you should try to restrict its capabilities as much as you can and still get the job done. If you make the program too general, a bug in the calling program or a malicious program written by a hacker might be able to use it to cause a lot of damage. For example, if the program's command-line arguments give it the names of files to delete, a bug in the caller can delete important system files.*

As part of the UAC user experience, any action that requires privilege elevation (and, therefore, a UAC dialog box) should be marked with the standard UAC shield. Figure 24-1 shows the `ShellUAC` example program displaying a button with this shield. The button displays the UAC shield to warn the user that clicking it launches an application that requires privilege elevation.

Figure 24-1: Buttons that launch actions that require privilege elevation should display the UAC shield.

Unfortunately, there currently isn't a really simple way to display the UAC shield in Visual Basic applications. However, you can use an API call to make a button display the shield. The ShellUAC program uses the AddShieldToButton subroutine shown in the following code to make a button display the shield:

```
Imports System.Runtime.InteropServices

Module UacStuff
    Declare Auto Function SendMessage Lib "user32.dll" _
        (ByVal hWnd As HandleRef, ByVal msg As Int32, _
        ByVal wParam As IntPtr, ByVal lParam As IntPtr) As Int32

    ' Make the button display the UAC shield.
    Public Sub AddShieldToButton(ByVal btn As Button)
        Const BCM_SETSHIELD As Int32 = &H160C

        btn.FlatStyle = Windows.Forms.FlatStyle.System
        SendMessage(New HandleRef(btn, btn.Handle), _
            BCM_SETSHIELD, IntPtr.Zero, CType(1, IntPtr))
    End Sub
End Module
```

The module declares the SendMessage API function. Subroutine AddShieldToButton sets the button's FlatStyle property to System, and then uses SendMessage to send the button the BCM_SHIELD message. Example programs RunStartAs and ShellUAC, which are available for download on the book's web site, demonstrate this code to add the UAC shield to their buttons.

Microsoft provides no method for adding the UAC shield to controls other than buttons. For example, if you want to add a shield to a menu item or link label, you're on your own. You could make a shield image and simply place it on your controls, but the image would not change when the system's version of the image changes. If the user changes the system's font size, the standard shield may grow smaller or larger on the system.

Example program AddShields, which is also available for download on the book's web site, works around this problem. It uses the previously described method to add a UAC shield to a button. It then makes the button draw itself onto a bitmap and extracts the shield graphic from the bitmap. Download the example to see the details.

Elevating Programs

The following sections describe three methods for running a program with elevated privileges. These methods differ in who decides that the called program should be elevated: the user, the calling program, or the called program.

User

To elevate an application by using the Run As command, the user can right-click the executable and select the "Run as administrator" command. The operating system displays the UAC dialog box and, after the user enters an administrator password, the program executes with elevated privileges.

This method is simple and requires no extra action on your part, but it does require the user to perform an extra step, so it is not always the best solution. Nevertheless, if the user runs the program only very rarely, it may make sense to require this extra step. This will discourage the user from using the program too often.

Calling Program

Just as a user can start a program with elevated privileges, another application can start a program with elevated privileges. This technique is similar to the one used by the user: the program executes the program, asking the operating system to run the program as an administrator.

The StartRunAs example program, which is available for download on the book's web site, uses the following code to execute another program. This program is intended for use with program NoPrivs, which is also available for download. Program NoPrivs does not request privilege elevation itself so the StartRunAs program uses the following code to do so:

```
Try
    ' Use the runas verb to start the process.
    Dim psi As New ProcessStartInfo
    psi.Verb = "runas"
    psi.UseShellExecute = True
    psi.FileName = txtProgram.Text
    psi.Arguments = txtArguments.Text

    Dim pro As System.Diagnostics.Process
    pro = System.Diagnostics.Process.Start(psi)

    ' Wait for the process to exit.
    pro.WaitForExit()

    ' Display the process's exit code.
    MessageBox.Show("Exit code: " & pro.ExitCode)

Catch ex As System.ComponentModel.Win32Exception
    ' This happens if the user fails to elevate to Administrator.
    MessageBox.Show("Operation canceled", _
        "Canceled", MessageBoxButtons.OK, _
        MessageBoxIcon.Information)
End Try
```

This code builds a `ProcessStartInfo` object describing the program that the code needs to start. The code sets the object's `Verb` property to "runas" to indicate that the program should run as an administrator. The code also sets the name of the program and arguments to pass to it, and then calls `Process.Start` to start the program. The code then waits for the called program to finish and displays its exit status.

Called Program

If you always know that a program must run with elevated permissions, you can make the program request its own elevation so the user and calling program don't need to do it. This technique uses a manifest embedded within the application to request elevation.

To create the manifest, open Solution Explorer and double-click My Project. On the Application tab, click the View UAC Settings button to open the file `app.manifest`. The following code shows the initial manifest (with comments slightly reformatted to fit on the page):

```xml
<?xml version="1.0" encoding="utf-8"?>
<asmv1:assembly manifestVersion="1.0" xmlns="urn:schemas-microsoft-com:asm.v1"
 xmlns:asmv1="urn:schemas-microsoft-com:asm.v1"
 xmlns:asmv2="urn:schemas-microsoft-com:asm.v2"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <assemblyIdentity version="1.0.0.0" name="MyApplication.app"/>
  <trustInfo xmlns="urn:schemas-microsoft-com:asm.v2">
    <security>
      <requestedPrivileges xmlns="urn:schemas-microsoft-com:asm.v3">
        <!-- UAC Manifest Options
            If you want to change the Windows User Account Control level
            replace the requestedExecutionLevel node with one of
            the following.

        <requestedExecutionLevel  level="asInvoker" />
        <requestedExecutionLevel  level="requireAdministrator" />
        <requestedExecutionLevel  level="highestAvailable" />

            If you want to utilize File and Registry Virtualization
            for backward compatibility then delete the
            requestedExecutionLevel node.
        -->
        <requestedExecutionLevel level="asInvoker" />
      </requestedPrivileges>
    </security>
  </trustInfo>
</asmv1:assembly>
```

To make the program request UAC elevation, change the uncommented `requestedExecutionLevel` so the level is `requireAdministrator`. Now when you compile the program, Visual Studio flags the executable as requiring administrator privilege. When the user or another program executes this program, the system automatically tries to elevate it to administrator privileges and displays the UAC elevation dialog.

Summary

The UAC programming standards require an application to use the fewest privileges that are necessary to get the job done. An application should run with normal user privileges if possible.

If the application must perform some task that requires greater privileges, it can execute a separate application that has elevated privileges.

This chapter showed three methods for running a program with elevated privileges. First, you can ask the user to right-click the executable program and select "Run as administrator." This is not the most convenient strategy, but should be acceptable for programs that the user only needs to run rarely, or that only rarely need administrator privileges.

Second, you can make the calling application start the new one with elevated privileges. This is more convenient for the user because he or she doesn't need to right-click the program and select "Run as administrator," but this still allows you to run the called program with or without privileges as needed.

Third, you can embed a manifest inside the called application that makes it always request privilege elevation. This is most appropriate when the called program should never run without elevated privileges.

The chapters in the book so far have focused on specific Visual Basic programming details that you need to understand to write Visual Basic applications. They explained the Visual Basic development environment, language syntax, standard controls and forms, custom controls, drag and drop, and the clipboard. This chapter described some UAC security issues that you need to be aware of if you want to perform tasks that require elevated user privileges.

The chapters in the next part of the book deal with higher-level object-oriented programming (OOP) issues. They explain fundamental concepts in object-oriented development and how they apply to Visual Basic. They tell how to build and use classes and objects, and they describe some of the standard classes that Visual Basic and the .NET Framework provide to perform common programming tasks.

Chapter 25 starts by explaining fundamental ideas behind object-oriented programming, such as the three main features of OOP: encapsulation, polymorphism, and inheritance. It explains the benefits of these features and tells how you can take advantage of them in Visual Basic.

Part III
Object-Oriented Programming

25

OOP Concepts

This chapter explains the fundamental ideas behind object-oriented programming (OOP). It describes the three main features of OOP languages: encapsulation, inheritance, and polymorphism. It explains the benefits of these features and describes how you can take advantage of them in Visual Basic.

This chapter also describes method overloading. In a sense, overloading provides another form of polymorphism. It lets you create more than one definition of the same class method, and Visual Basic decides which version to use based on the parameters the program passes to the method.

Many of the ideas described in this chapter will be familiar to you from your experiences with forms, controls, and other building blocks of the Visual Basic language. Those building blocks are object-oriented constructs in their own rights, so they provide you with the benefits of encapsulation, inheritance, and polymorphism whether you knew about them or not.

Classes

A *class* is a programming entity that gathers all the data and behavior that characterizes some sort of programming abstraction. It wraps the abstraction in a nice, neat package with well-defined interfaces to outside code. Those interfaces determine exactly how code outside of the class can interact with the class. A class determines which data values are visible outside of the class and which are hidden. It determines the routines that the class supports and their availability (visible or hidden).

A class defines properties, methods, and events that let the program work with the class:

❑ A *property* is some sort of data value. It may be a simple value (such as a name or number), or it may be a more complex item (such as an array, collection, or object containing its own properties, methods, and events).

❑ A *method* is a subroutine or function. It is a piece of code that makes the object defined by the class do something.

❑ An *event* is an action notification defined by the class. An event calls some other piece of code to tell it that some condition in a class object has occurred.

For a concrete example, imagine a `Job` class that represents a piece of work to be done by an employee. This class might have the properties shown in the following table.

Property	Purpose
JobDescription	A string describing the job
EstimatedHours	The number of hours initially estimated for the job
ActualHours	The actual number of hours spent on the job
Status	The job's status (`New`, `Assigned`, `In Progress`, or `Done`)
ActionTaken	A string describing the work performed, parts installed, and so forth
JobCustomer	An object of the `Customer` class that describes the customer (name, address, phone number, service contract number, and so on)
AssignedEmployee	An object of the `Employee` class that describes the employee assigned to the job (name, employee ID, Social Security number, and so on)

The `JobDescription`, `EstimatedHours`, `ActualHours`, `Status`, and `ActionTaken` properties are relatively simple string and numeric values. The `JobCustomer` and `AssignedEmployee` properties are objects themselves with their own properties, methods, and events.

This class might provide the methods shown in the following table.

Method	Purpose
AssignJob	Assign the job to an employee
BillJob	Print an invoice for the customer after the job is finished
EstimatedCost	Returns an estimated cost based on the customer's service contract type and `EstimatedHours`

The class could provide the events shown in the following table to keep the main program informed about the job's progress.

Event	Purpose
Created	Occurs when the job is first created
Assigned	Occurs when the job is assigned to an employee
Rejected	Occurs if an employee refuses to do the job, perhaps because the employee doesn't have the right skills or equipment to do the work
Canceled	Occurs if the customer cancels the job before it is worked
Finished	Occurs when the job is finished

In a nutshell, a class is an entity that encapsulates the data and behavior of some programming abstraction such as a `Job`, `Employee`, `Customer`, `LegalAction`, `TestResult`, `Report`, or just about anything else you could reasonably want to manipulate as a single entity.

After you have defined a class, you can create instances of the class. An *instance* of the class is an object of the class type. For example, if you define a `Job` class, you can then make an instance of the class that represents the specific job of installing a new computer for a particular customer. The process of creating an instance is called *instantiation*.

There are a couple of common analogies to describe instantiation. One compares the class to a blueprint. After you define the class, you can use it to create any number of instances of the class, much as you can use the blueprint to make any number of similar houses (instances).

Another analogy compares a class definition to a cookie cutter. When you define the cookie cutter, you can use it to make any number of cookies (instances).

Note that Visual Basic is jam-packed with classes. Every type of control and component (`Form`, `TextBox`, `Label`, `Timer`, `ErrorProvider`, and so forth) is a class. The parent classes `Control` and `Component` are classes. Even `Object`, from which all other classes derive, is a class. Whenever you work with any of these (getting or setting properties, calling methods, and responding to events), you are working with instances of classes.

Because all of these ultimately derive from the `Object` class, they are often simply called *objects*. If you don't know or don't care about an item's class, you can simply refer to it as an object.

> When you read the section "Polymorphism" later in this chapter, you'll see that this makes technical as well as intuitive sense. Because all classes eventually derive from the `Object` class, all instances of all classes are in fact `Object`s.

The following sections describe some of the features that OOP languages in general, and Visual Basic in particular, add to this bare-bones definition of a class.

Encapsulation

A class's *public interface* is the set of properties, methods, and events that are visible to code outside of the class. The class may also have private properties, methods, and events that it uses to do its job. For example, the `Job` class described in the previous section provides an `AssignJob` method. That method might call a private `FindQualifiedEmployee` function, which looks through an employee database to find someone who has the skills and equipment necessary to do the job. That routine is not used outside of the class, so it can be declared private.

The class may also include properties and events hidden from code outside of the class. These hidden properties, methods, and events are not part of the class's public interface.

The class *encapsulates* the programming abstraction that it represents (a `Job` in this ongoing example). Its public interface determines what is visible to the application outside of the class. It hides the ugly details of the class's implementation from the rest of the world. Because the class hides its internals in this way, encapsulation is also sometimes called *information hiding*.

By hiding its internals from the outside world, a class prevents exterior code from messing around with those internals. It reduces the dependencies between different parts of the application, allowing only those dependencies that are explicitly permitted by its public interface.

Removing dependencies between different pieces of code makes the code easier to modify and maintain. If you must change the way the `Job` class assigns a job to an employee, you can modify the `AssignJob` method appropriately. The code that calls the `AssignJob` routine doesn't need to know that the details have changed. It simply continues to call the method and leaves the details up to the `Job` class.

Removing dependencies also helps break the application into smaller, more manageable pieces. A developer who calls the `AssignJob` method can concentrate on the job at hand, rather than on how the routine works. This makes developers more productive and less likely to make mistakes while modifying the encapsulated code.

The simpler and cleaner a class's public interface is, the easier it is to use. You should try to hide as much information and behavior inside a class as possible while still allowing the rest of the program to do its job. Keep properties, methods, and events as simple and focused as possible. When you write code that the class needs to use to perform its tasks, do not expose that code to the outside program unless it is really necessary. Adding extra features complicates the class's public interface and makes the programmer's job more difficult.

This can be a troublesome concept for beginning programmers. Exposing more features for developers to use gives them more power, so you might think it would make their jobs easier. Actually, it makes development more difficult. Rather than thinking in terms of giving the developer more power, you should think about giving the developer more things to worry about and more ways to make mistakes. Ideally, you should not expose any more features than the developer will actually need.

Note that you can achieve many of the benefits of encapsulation without classes. Decades before the invention of object-oriented languages, programmers were making code libraries that encapsulated functionality. For example, a library of trigonometry functions would expose public function calls to calculate sines, cosines, tangents, arctangents, and so forth. To perform its calculations, the library might contain private lookup tables and helper functions that calculate series expansions. The tables and helper functions were hidden from the main program calling the library functions.

One big benefit of classes over this sort of library encapsulation is intuitiveness. When you make a class named `Job`, `Customer`, or `Employee`, anyone familiar with your business can make a lot of assumptions about what the class represents. Even if you don't know how the `Job` class works, you can probably guess what a new `ReassignJob` method would do. As long as everyone has a common vision of what the class does, you get an extra level of *intuitive encapsulation* that you don't necessarily get with a more procedural approach.

Inheritance

Inheritance is the process of deriving a child class from a parent class. The child class inherits all of the properties, methods, and events of the parent class. It can then modify, add to, or subtract from the parent class. Making a child class inherit from a parent class is also called *deriving* the child class from the parent, and *subclassing* the parent class to form the child class.

For example, you might define a `Person` class that includes variables named `FirstName`, `LastName`, `Street`, `City`, `State`, `Zip`, `Phone`, and `Email`. It might also include a `DialPhone` method that dials the person's phone number on the phone attached to the computer's modem.

You could then derive the `Employee` class from the `Person` class. The `Employee` class inherits the `FirstName`, `LastName`, `Street`, `City`, `State`, `Zip`, `Phone`, and `Email` variables. It then adds new `EmployeeId`, `SocialSecurityNumber`, `OfficeNumber`, `Extension`, and `Salary` variables. This class might override the `Person` class's `DialPhone` method, so it dials the employee's office extension instead of the home phone number.

You can continue deriving classes from these classes to make as many types of objects as you need. For example, you could derive the `Manager` class from the `Employee` class and add fields such as `Secretary`, which is another `Employee` object that represents the manager's secretary. Similarly, you could derive a `Secretary` class that includes a reference to a `Manager` object. You could derive `ProjectManager`, `DepartmentManager`, and `DivisionManager` from the `Manager` class, `Customer` from the `Person` class, and so on for other types of people that the application needed to use. Figure 25-1 shows these inheritance relationships.
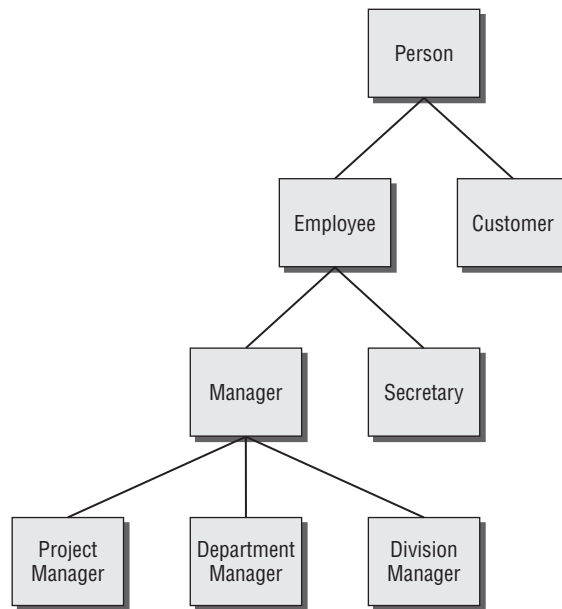
Figure 25-1: You can derive classes from other classes to form quite complex inheritance relationships.

Inheritance Hierarchies

One of the key benefits of inheritance is code reuse. When you derive a class from a parent class, the child class inherits the parent's properties, methods, and events, so the child class gets to reuse the parent's code. That means you don't need to implement separate `FirstName` and `LastName` properties for the `Person`, `Employee`, `Manager`, `Secretary`, and other classes shown in Figure 25-1. These properties are defined only in the `Person` class, and all of the other classes inherit them.

Code reuse not only saves you the trouble of writing more code but also makes maintenance of the code easier. Suppose that you build the hierarchy shown in Figure 25-1 and then decide that everyone needs a new `BirthDate` property. Instead of adding a new property to every class, you can simply add it to the `Person` class and all of the other classes inherit it.

Similarly, if you need to modify or delete a property or method, you only need to make the change in the class where it is defined, not in all of the classes that inherit it. If the `Person` class defines a `SendEmail` method and you must modify it so that it uses a particular e-mail protocol, you only need to change the routine in the `Person` class, not in all the classes that inherit it.

> *Some languages allow multiple inheritance, where one class can be derived from more than one parent class. For example, suppose that you create a* Vehicle *class that defines properties of vehicles (number of wheels, horsepower, maximum speed, acceleration, and so forth) and a* House *class that defines properties of living spaces (square feet, number of bedrooms, number of bathrooms, and so forth). Using multiple inheritance, you could derive a* MotorHome *class from both the* Vehicle *and* House *classes. This class would have the features of both* Vehicles *and* Houses.

> *Visual Basic does not allow multiple inheritance, so a class can have at most one parent class. That means relationships such as those shown in Figure 25-1 are treelike and form an inheritance hierarchy.*

> *If you think you need multiple inheritance, you can use interface inheritance. Instead of defining multiple parent classes, define parent interfaces. Then you can make the child class implement as many interfaces as you like. The class doesn't inherit any code from the interfaces, but at least its behavior is defined by the interfaces. See the section "Implements interface" in Chapter 26, "Classes and Structures," for more information on interfaces.*

Refinement and Abstraction

There are two different ways you can think about the relationship between a parent class and its child classes. First, using a top-down view of inheritance, you can think of the child classes as *refining* the parent class. They provide extra detail that differentiates among different types of the parent class.

For example, suppose that you start with a broadly defined class such as `Person`. The `Person` class would need general fields such as name, address, and phone number. It would also need more specific fields that do not apply to all types of person. For example, employees would need employee ID, Social Security number, office number, and department fields. Customers would need customer ID, company name, and discount code fields. You could dump all these fields in the `Person` class, but that would mean stretching the class to make it play two very different roles. A `Person` acting as an `Employee` would not use the `Customer` fields, and vice versa.

A better solution is to derive new `Employee` and `Customer` classes that refine the `Person` class and differentiate between the types of `Person`.

A bottom-up view of inheritance considers the parent class as *abstracting* common features out of the child classes into the parent class. Common elements in the child classes are removed and placed in the parent class. Because the parent class is more general than the child classes (it includes a larger group of objects), abstraction is sometimes called *generalization*.

Suppose that you are building a drawing application and you define classes to represent various drawing objects such as `Circle`, `Ellipse`, `Polygon`, `Rectangle`, and `DrawingGroup` (a group of objects that should be drawn together). After you work with the code for a while, you may discover that these classes share a lot of functionality. Some, such as `Ellipse`, `Circle`, and `Rectangle`, are defined by bounding rectangles. All the classes need methods for drawing the object with different pens and brushes on the screen or on a printer.

You could abstract these classes and create a new parent class named `Drawable`. That class might provide basic functionality such as a simple variable to hold a bounding rectangle. This class would also define a `DrawObject` routine for drawing the object on the screen or printer. It would declare that routine with the `MustOverride` keyword, so each child class would need to provide its own `DrawObject` implementation, but the `Drawable` class would define its parameters.

Sometimes you can pull variables and methods from the child classes into the parent class. In this example, the `Drawable` class might include `Pen` and `Brush` variables that the objects would use to draw themselves. Putting code in the parent class reduces the amount of redundant code in the child classes, making debugging and maintenance easier.

To make the classes more consistent, you could even change their names to reflect their shared ancestry. You might change their names to `DrawableEllipse`, `DrawablePolygon`, and so forth. This not only makes it easier to remember that they are all related to the `Drawable` class but also helps avoid confusion with class names such as `Rectangle` that are already used by Visual Basic.

The `Drawable` parent class also allows the program to handle the drawing objects more uniformly. It can define a collection named `AllObjects` that contains references to all the current drawing's objects. It could then loop through the collection, treating the objects as `Drawables`, and calling their `DrawObject` methods. The section "Polymorphism" later in this chapter provides more details.

Usually application architects define class hierarchies using refinement. They start with broad general classes and then refine them as necessary to differentiate among the kinds of objects that the application will need to use. These classes tend to be relatively intuitive, so you can easily imagine their relationships.

Abstraction often arises during development. As you build the application's classes, you notice that some have common features. You abstract the classes and pull the common features into a parent class to reduce redundant code and make the application more maintainable.

Refinement and abstraction are useful techniques for building inheritance hierarchies, but they have their dangers. Designers should be careful not to get carried away with *unnecessary refinement* or *overrefinement*. For example, suppose that you define a `Vehicle` class. You then refine this class by creating `Auto`, `Truck`, and `Boat` classes. You refine the `Auto` class into `Wagon` and `Sedan` classes and further refine those for different drive types (four-wheel drive, automatic, and so forth). If you really go crazy, you could define classes for specific manufacturers, body styles, and color.

The problem with this hierarchy is that it captures more detail than the application needs. If the program is a repair dispatch application, it might need to know whether a vehicle is a car or truck. It will not need to differentiate between wagons and sedans, different manufacturers, or colors. Vehicles with different colors have the same behaviors as far as this application is concerned.

Avoid unnecessary refinement by only refining a class when doing so lets you capture new information that the application actually needs to know.

Just as you can take refinement to ridiculous extremes, you can also overdo class abstraction. Because abstraction is driven by code rather than intuition, it sometimes leads to unintuitive inheritance hierarchies. For example, suppose that your application needs to mail work orders to remote employees and invoices to customers. If the `WorkOrder` and `Invoice` classes have enough code in common, you might decide to give them a common parent class named `MailableItem` that contains the code needed to mail a document to someone.

This type of unintuitive relationship can confuse developers. Because Visual Basic doesn't allow multiple inheritance, it can also cause problems if the classes are already members of other inheritance hierarchies. You can avoid some of those problems by moving the common code into a library and having the classes call the library code. In this example, the `WorkOrder` and `Invoice` classes would call a common set of routines for mailing documents and would not be derived from a common parent class.

Unnecessary refinement and overabstracted classes lead to overinflated inheritance hierarchies. Sometimes the hierarchy grows very tall and thin. Other times, it may include several root classes (with no parents) on top of only one or two small classes each. Either of these can be symptoms of poor designs that include more classes than necessary. If your inheritance hierarchy starts to take on one of these forms, you should spend some time reevaluating the classes. Ensure that each adds something meaningful to the application and that the relationships are reasonably intuitive. Too many classes with confusing relationships can drag a project to a halt as developers spend more time trying to understand the hierarchy than they spend implementing the individual classes.

If you are unsure whether to add a new class, leave it out. It's usually easier to add a new class later if you discover that it is necessary than it is to remove a class after developers start using it.

"Has-a" and "Is-a" Relationships

Refinement and abstraction are two useful techniques for generating inheritance hierarchies. The "has-a" and "is-a" relationships can help you understand whether it makes sense to make a new class using refinement or abstraction.

The "is-a" relationship means one object is a specific type of another class. For example, an `Employee` "is-a" specific type of `Person` object. The "is-a" relation maps naturally into inheritance hierarchies. Because an `Employee` "is-a" `Person`, it makes sense to derive the `Employee` class from the `Person` class.

The "has-a" relationship means that one object has some item as an attribute. For example, a `Person` object "has-a" street address, city, state, and ZIP code. The "has-a" relation maps most naturally to embedded objects. For example, you could give the `Person` class `Street`, `City`, `State`, and `Zip` properties.

Suppose that the program also works with `WorkOrder`, `Invoice`, and other classes that also have street, city, state, and ZIP code information. Using abstraction, you might make a `HasPostalAddress` class that contains those values. Then you could derive `Person`, `WorkOrder`, and `Invoice` as child classes. Unfortunately, that makes a rather unintuitive inheritance hierarchy. Deriving the `Person`, `WorkOrder`, and `Invoice` classes from `HasPostalAddress` makes those classes seem closely related when they are actually related almost coincidentally.

A better solution would be to encapsulate the postal address data in its own `PostalAddress` class and then include an instance of that class in the `Person`, `WorkOrder`, and `Invoice` classes. The following code shows how the `Person` class would include an instance of the `PostalAddress` class:

```
Public Class Person
    Public MailingAddress As PostalAddress
    ...
End Class
```

You make a parent class through abstraction in part to avoid duplication of code. The parent class contains a single copy of the common variables and code, so the child classes don't need to have their own separate versions for you to debug and maintain. Placing an instance of the `PostalAddress` class in each of the other classes provides the same benefit without confusing the inheritance hierarchy.

You can often view a particular relationship as either an "is-a" or "has-a" relationship. A `Person`"has-a" postal address. At the same time, a `Person`"is-a" thing that has a postal address. Use your intuition to decide which view makes more sense. One hint is that *postal address* is easy to describe while *thing that has a postal address* is more awkward and ill-defined. Also, think about how the relationship might affect other classes. Do you really want `Person`, `WorkOrder`, and `Invoice` to be siblings in the inheritance hierarchy? Or would it make more sense for them to just share an embedded class?

Adding and Modifying Class Features

Adding new properties, methods, and events to a child class is easy. You simply declare them as you would in any other class. The parent class knows nothing about them, so the new items are added only to the child class.

The following code shows how you could implement the `Person` and `Employee` classes in Visual Basic. The `Person` class includes variables that define the `FirstName`, `LastName`, `Street`, `City`, `State`, `Zip`, `Phone`, and `Email` values. It also defines the `DialPhone` method. The version shown here simply displays the `Person` object's `Phone` value. A real application could connect to the computer's modem and dial the number.

The `Employee` class inherits from the `Person` class. It declares its own `EmployeeId`, `SocialSecurityNumber`, `OfficeNumber`, `Extension`, and `Salary` variables. It also defines a new version of the `DialPhone` method that displays the `Employee` object's `Extension` value rather than its `Phone` value. The `DialPhone` method in the `Person` class is declared with the `Overridable` keyword to allow derived classes to override it. The version defined in the `Employee` class is declared with the `Overrides` keyword to indicate that it should replace the version defined by the parent class.

```
Public Class Person
    Public FirstName As String
    Public LastName As String
    Public Street As String
    Public City As String
    Public State As String
    Public Zip As String
    Public Phone As String
    Public Email As String

    ' Dial the phone using Phone property.
    Public Overridable Sub DialPhone()
        MessageBox.Show("Dial " & Me.Phone)
    End Sub
End Class

Public Class Employee
    Inherits Person
    Public EmployeeId As Integer
    Public SocialSecurityNumber As String
    Public OfficeNumber As String
    Public Extension As String
    Public Salary As Single

    ' Dial the phone using Extension property.
    Public Overrides Sub DialPhone()
        MessageBox.Show("Dial " & Me.Extension)
    End Sub
End Class
```

A class can also *shadow* a feature defined in a parent class. When you declare a property, method, or event with the `Shadows` keyword, it hides any item in the parent that has the same name. This is very similar to overriding, except that the parent class does not have to declare the item as overridable and the child item needs only to match the parent item's name.

For example, the parent might define a `SendMail` subroutine that takes no parameters. If the child class defines a `SendMail` method that takes some parameters and uses the `Shadows` keyword, the child's version hides the parent's version.

In fact, the child and parent items don't even need to be the same kind of item. For example, the child class could make a subroutine named `FirstName` that shadows the parent class's `FirstName` variable. This type of change can be confusing, however, so usually you should only shadow items with similar items.

The following code shows how the `Employee` class might shadow the `Person` class's `SendMail` subroutine. The `Person` class displays the mailing address where it would send a letter. A real application might print a letter on a specific printer for someone to mail. The `Employee` class shadows this routine with one of its own, which displays the employee's office number instead of a mailing address.

```
Public Class Person
    ...
    ' Send some mail to the person's address.
    Public Sub SendMail()
        MessageBox.Show("Mail " & Street & ", " & City & ", " & _
            State & " " & Zip)
    End Sub
End Class

Public Class Employee
    Inherits Person
    ...
    ' Send some mail to the person's office.
    Public Shadows Sub SendMail()
        MessageBox.Show("Mail " & OfficeNumber)
    End Sub
End Class
```

Interface Inheritance

When you derive one class from another, the child class inherits the properties, methods, and events defined by the parent class. It inherits both the definition of those items as well as the code that implements them.

Visual Basic also enables you to define an interface. An *interface* defines a class's behaviors, but does not provide an implementation. After you have defined an interface, a class can use the `Implements` keyword to indicate that it provides the behaviors specified by the interface. It's then up to you to provide the code that implements the interface.

For example, consider again the `MotorHome` class. Visual Basic does not allow a class to inherit from more than one parent class, but a class can implement as many interfaces as you like. You could define an `IVehicle` interface (by convention, interface names begin with the capital letter I) that defines properties of vehicles (number of wheels, horsepower, maximum speed, acceleration, and so forth) and an `IHouse` interface that defines properties of living spaces (square feet, number of bedrooms, number of bathrooms, and so forth). Now, you can make the `MotorHome` class implement both of those interfaces. The interfaces do not provide any code, but they do declare that the `MotorHome` class implements the interface's features.

Like true inheritance, interface inheritance provides polymorphism (see the next section, "Polymorphism," for more details on this topic). You can use a variable having the type of the interface to refer to objects that define the interface. For example, suppose that the `Employee` class implements the `IPerson` interface. Then you can use a variable of type `IPerson` to refer to an object of type `Employee`.

Suppose that the `people` collection contains `Employee` objects. The following code uses a variable of type `IPerson` to display the objects' names:

```
For Each person As IPerson In people
    Debug.WriteLine(person.FirstName & " " & person.LastName)
Next person
```

Polymorphism

Roughly speaking, *polymorphism* means treating one object as another. In OOP terms, it means that you can treat an object of one class as if it were from a parent class.

For example, suppose that `Employee` and `Customer` are both derived from the `Person` class. Then you can treat `Employee` and `Customer` objects as if they were `Person` objects because in a sense they are `Person` objects. They are specific types of `Person` objects. After all, they provide all of the properties, methods, and events of a `Person` object.

Visual Basic enables you to assign a value from a child class to a variable of the parent class. In this example, you can place an `Employee` or `Customer` object in a `Person` variable, as shown in the following code:

```
Dim emp As New Employee     ' Create an Employee.
Dim cust As New Customer     ' Create a Customer.
Dim per As Person            ' Declare a Person variable.
per = emp                    ' Okay. An Employee is a Person.
per = cust                   ' Okay. A Customer is a Person.
emp = per                    ' Not okay. A Person is not necessarily an Employee.
```

One common reason to use polymorphism is to treat a collection of objects in a uniform way that makes sense in the parent class. For example, suppose that the `Person` class defines the `FirstName` and `LastName` fields. The program could define a collection named `AllPeople` and add references to `Customer` and `Employee` objects to represent all the people that the program needs to work with. The code could then iterate through the collection, treating each object as a `Person`, as shown in the following code:

```
For Each per As Person In AllPeople
    Debug.WriteLine(per.FirstName & " " & per.LastName)
Next Per
```

You can only access the features defined for the type of variable you actually use to refer to an object. For example, if you use a `Person` variable to refer to an `Employee` object, you can only use the features defined by the `Person` class, not those added by the `Employee` class.

If you know that a particular object is of a specific subclass, you can convert the variable into a more specific variable type. The following code loops through the `AllPeople` collection and uses the `TypeOf` statement to test each object's type. If the object is an `Employee`, the code uses `DirectCast` to convert the object into an `Employee` object. It can then use the `Employee` object to perform `Employee`-specific tasks.

Similarly, the code determines whether the object is a `Customer` object. If it is, the code converts the generic `Person` variable into a `Customer` variable and uses the new variable to perform `Customer`-specific tasks, as shown here:

```
For Each per As Person In AllPeople
    If TypeOf per Is Employee Then
        Dim emp As Employee = DirectCast(per, Employee)
        ' Do something Employee-specific.
        ...
```

```
        ElseIf TypeOf per Is Customer Then
            Dim cust As Customer = DirectCast(per, Customer)
            ' Do something Customer-specific.
            ...
        End If
    Next per
```

Overloading

Visual Basic .NET enables you to give a class more than one method with the same name but with different parameters. The program decides which version of the method to use based on the parameters being passed to the method.

For example, the `Person` class shown in the following code has two constructors named `New`. The first takes no parameters and initializes the object's `FirstName` and `LastName` variables to default values. The second overloaded constructor takes two strings as parameters and uses them to initialize `FirstName` and `LastName`.

```
Public Class Person
    Public FirstName As String
    Public LastName As String

    Public Sub New()
        FirstName = "<first>"
        LastName = "<last>"
    End Sub

    Public Sub New(ByVal first_name As String, ByVal last_name As String)
        FirstName = first_name
        LastName = last_name
    End Sub
End Class
```

The following code uses these constructors. The first statement passes no parameters to the constructor, so Visual Basic uses the first version of the `New` method. The second statement passes two strings to the constructor, so Visual Basic uses the second constructor.

```
Dim person1 As New Person()
Dim person2 As New Person("Rod", "Stephens")
```

A common technique for providing constructors that take different numbers of arguments is to make the simpler constructors call those with more parameters. In the following code, the empty constructor calls a constructor that takes two parameters, passing it default values:

```
Public Class Person
    Public FirstName As String
    Public LastName As String

    Public Sub New()
        Me.New("<first>", "<last>")
```

```
        End Sub

        Public Sub New(ByVal first_name As String, ByVal last_name As String)
            FirstName = first_name
            LastName = last_name
        End Sub
    End Class
```

Two overloaded methods cannot differ only by optional parameters. For example, the `first_name` and `last_name` parameters in the previous constructor could not both be optional. If they were, then Visual Basic .NET could not tell which version of the `New` subroutine to call if the program passed it no parameters. Although you cannot make the parameters optional in the second constructor, you can get a similar result by combining the two constructors, as shown in the following code:

```
    Public Class Person
        Public FirstName As String
        Public LastName As String

        Public Sub New( _
         Optional ByVal first_name As String = "<first>", _
         Optional ByVal last_name As String = "<last>")
            FirstName = first_name
            LastName = last_name
        End Sub
    End Class
```

Overloaded functions also cannot differ only in their return types. For example, you cannot have two versions of a function with the same name and parameters but different return types.

If you have `Option Strict` set to `Off`, there are many circumstances where Visual Basic performs automatic type conversion. In that case, it might not be able to decide which of two functions to use if they differ only in return type. For example, suppose that one version of the `TotalCost` function returns an Integer and another version returns a Double. If you set a string variable equal to the result of the function, Visual Basic wouldn't know whether to use the Integer version or the Double version.

Extension Methods

Visual Basic 2008 introduces extension methods, a new method for adding new features to an existing class. Extension methods let you add new subroutines or functions to an existing class without rewriting it or deriving a new class from it even if you don't have access to the class's source code.

To make an extension method, place the `System.Runtime.CompilerServices.Extension` attribute before the method's declaration. Then make a normal subroutine or function that takes one or more parameters. The first parameter determines the class that the method extends. The method can use that parameter to learn about the item for which them method was called. The other parameters are passed into the method so it can use them to perform its chores.

For example, the following code adds a `MatchesRegexp` subroutine to the `String` class. The `Extension` attribute tells Visual Basic that this is an extension method. The method's first parameter is a `String` so this method extends the `String` class. The second parameter is a regular expression. The method returns True if the `String` matches the regular expression.

```
' Return True if a String matches a regular expression.
<Extension()> _
Public Function MatchesRegexp(ByVal the_string As String, _
 ByVal regular_expression As String) As Boolean
    Dim reg_exp As New Regex(regular_expression)
    Return reg_exp.IsMatch(the_string)
End Function
```

The program can use the extension methods just as if they were part of the `String` class. The following code uses the `MatchesRegexp` method to decide whether the `phone_number` variable contains a value that looks like a valid United States phone number:

```
If Not phone_number.MatchesRegexp("^[2-9]\d{2}-\d{4}$") Then
    MessageBox.Show("Not a valid phone number")
End If
```

If used haphazardly, extension methods can blur the purpose of a class. They can make the class do things for which it was never intended. They add behaviors that the class's original authors did not have in mind. The result may be a class that does too many poorly defined or unrelated things, and that is confusing and hard to use properly. They weaken the class's encapsulation by adding new features that are not hidden within the control's code.

If you have access to the class's source code, make changes to the class within that code. Then if there is a problem, at least all of the code is together within the class. If you really need to add new methods to a class that is outside of your control, such as adding new methods to `String` and other classes defined by Visual Basic and the .NET Framework, you can use extension methods.

Summary

Classes are programming abstractions that group data and related behavior in nicely encapsulated packages. After you define a class, you can instantiate it to create an instance of the class. You can interact with the new object by using its properties, methods, and events.

Inheritance enables you to derive one class from another. You can then add, remove, or modify the behavior that the child class inherits from the parent class. Sometimes it makes sense to think of the classes in inheritance hierarchies in a top-down manner, so child classes refine the features of their parents. At other times, it makes sense to use a bottom-up view and think of a parent class as abstracting the features of its children.

Interface inheritance lets you define some of the features of a class without using true class inheritance. This gives you another method for using polymorphism and lets you build classes that, in a sense, appear to inherit from multiple parents.

Polymorphism enables you to treat an object as if it were of an ancestor's type. For example, if the `Manager` class inherits from `Employee` and `Employee` inherits from `Person`, then you can treat a `Manager` object as if it were a `Manager`, `Employee`, or `Person`.

In addition to these features, Visual Basic .NET enables you to overload a class's subroutines, functions, and operators. It lets you create different methods with the same name but different parameters. The compiler selects the right version of the method based on the parameters you pass to it. Extension methods even let you add new subroutines and functions to existing classes when you don't have access to the class's source code.

These object-oriented concepts provide the general background you need to understand classes in Visual Basic. Chapter 26, "Classes and Structures," describes the specifics of classes and structures in Visual Basic .NET. It shows how to declare and instantiate classes and structures and explains the differences between the two.

26

Classes and Structures

A variable holds a single value. It may be a simple value such as an Integer or String, or a reference that points to a more complex entity. Two kinds of more complex entities are classes and structures.

Classes and structures are both *container types*. They group several related data values into a convenient package that you can manipulate as a group.

For example, an `EmployeeInfo` structure might contain fields that hold information about an employee (such as first name, last name, employee ID, office number, extension, and so on). If you make an `EmployeeInfo` structure and fill it with the data for a particular employee, you can then move the structure around as a single unit instead of passing around a bunch of separate variables holding the first name, last name, and the rest.

This chapter explains how to declare classes and structures, and how to create instances of them (*instantiate* them). It also explains the differences between classes and structures and provides some advice about which to use under different circumstances.

Classes

A class packages data and related behavior. For example, a `WorkOrder` class might store data describing a customer's work order in its properties. It could contain methods (subroutines and functions) for manipulating the work order. It might provide methods for scheduling the work, modifying the order's requirements, and setting the order's priority.

Here is the syntax for declaring a class:

```
[attribute_list] [Partial] [accessibility] [Shadows] [inheritance] _
Class name[(Of type_list)]
    [Inherits parent_class]
    [Implements interface]
    statements
End Class
```

The only things that all class declarations must include are the `Class` clause (including the class's name) and the `End Class` statement. Everything else is optional. The following code describes a valid (albeit not very interesting) class:

```
Class EmptyClass
End Class
```

The following sections describe the pieces of the general declaration in detail.

Attribute_list

The optional *attribute_list* is a comma-separated list of attributes that apply to the class. An attribute further refines the definition of a class to give more information to the compiler and the runtime system.

Attributes are rather specialized. They address issues that arise when you perform very specific programming tasks. For example, if your application must use drag-and-drop support to copy instances of the class from one application to another, you must mark the class as serializable, as shown in the following code:

```
<Serializable()> _
Class Employee
    Public FirstName As String
    Public LastName As String
End Class
```

Some attributes are particular to specific kinds of classes. For example, the `DefaultEvent` attribute gives the form designer extra information about component classes. If you double-click a component on a form, the code designer opens to the component's default event.

Because attributes are so specialized, they are not described in more detail here. For more information, see the sections in the online help that are related to the tasks you need to perform.

For more information on attributes, see the "Attributes" section of the *Visual Basic Language Reference* or go to `http://msdn.microsoft.com/library/en-us/vbls7/html/vblrfVBSpec4_10.asp`. For a list of attributes defined by Visual Basic, search the online help for "Attribute Hierarchy" or go to `http://msdn.microsoft.com/library/en-us/cpref/html/frlrfsystemattributeclasshierarchy.asp`.

Partial

The `Partial` keyword tells Visual Basic that the current declaration defines only part of the class. The following code shows the `Employee` class broken into two pieces:

```
Partial Public Class Employee
    Public FirstName As String
    Public LastName As String
    ...
```

```
    End Class

    ... other code, possibly unrelated to the Employee class ...

    Partial Public Class Employee
        Public Email As String
        ...
    End Class
```

The program could contain any number of other pieces of the Employee class, possibly in different code modules. At compile time, Visual Basic finds these pieces and combines them to define the class.

One of the primary benefits of classes is that they hold the code and data associated with the class together in a nice package. Scattering the pieces of a class in this way makes the package less self-contained and may lead to confusion. To prevent confusion, you should avoid splitting a class unless you have a good reason to (for example, to allow different developers to work on different pieces of the class at the same time or if one piece must have Option Strict turned off).

At least one of the pieces of the class must be declared with the Partial keyword, but in the other pieces it is optional. Explicitly providing the keyword in all of the class's partial definitions emphasizes the fact that the class is broken into pieces and may minimize confusion.

Accessibility

A class's *accessibility* clause can take one of the following values: Public, Protected, Friend, Protected Friend, or Private.

Public indicates that the class should be available to all code inside or outside of the class's module. This enables the most access to the class. Any code can create and manipulate instances of the class.

You can only use the Protected keyword if the class you are declaring is contained inside another class. For example, the following code defines an Employee class that contains a protected EmployeeAddress class:

```
    Public Class Employee
        Public FirstName As String
        Public LastName As String
        Protected Address As EmployeeAddress

        Protected Class EmployeeAddress
            Public Street As String
            Public City As String
            Public State As String
            Public Zip As String
        End Class

        ... other code ...
    End Class
```

Because the `EmployeeAddress` class is declared with the `Protected` keyword, it is only visible within the enclosing `Employee` class and any derived classes. For example, if the `Manager` class inherits from the `Employee` class, code within the `Manager` class can access the `Address` variable.

The `Friend` keyword indicates that the class should be available to all code inside or outside of the class's module *within the same project*. The difference between this and `Public` is that `Public` allows code outside of the project to access the class. This is generally only an issue for code libraries (`.dll` files) and control libraries. For example, suppose that you build a code library containing dozens of routines and then you write a program that uses the library. If the library declares a class with the `Public` keyword, the code in the library and the code in the main program can use the class. If the library declares a class with the `Friend` keyword, only the code in the library can access the class, not the code in the main program.

`Protected Friend` is the union of the `Protected` and `Friend` keywords. A class declared `Protected Friend` is accessible only to code within the enclosing class or a derived class and only within the same project.

A class declared `Private` is accessible only to code in the enclosing module, class, or structure. If the `EmployeeAddress` class were declared `Private`, only code within the `Employee` class could use that class.

If you do not specify an accessibility level, it defaults to `Friend`.

Shadows

The `Shadows` keyword indicates that the class hides the definition of some other entity in the enclosing class's base class.

The following code shows an `Employee` class that declares a public class `OfficeInfo` and defines an instance of that class named `Office`. The derived class `Manager` inherits from `Employee`. It declares a new version of the `OfficeInfo` class with the `Shadows` keyword. It defines an instance of this class named `ManagerOffice`.

```
Public Class Employee
    Public Class OfficeInfo
        Public OfficeNumber As String
        Public Extension As String
    End Class

    Public FirstName As String
    Public LastName As String
    Public Office As New OfficeInfo
End Class

Public Class Manager
    Inherits Employee

    Public Shadows Class OfficeInfo
```

```
            Public OfficeNumber As String
            Public Extension As String
            Public SecretaryOfficeNumber As String
            Public SecretaryExtension As String
        End Class

        Public ManagerOffice As New OfficeInfo
    End Class
```

The following code uses the `Employee` and `Manager` classes. It creates instances of the two classes and sets their `Office.Extension` properties. Both of those values are part of the `Employee` class's version of the `OfficeInfo` class. Next, the code sets the `Manager` object's `ManagerOffice` `.SecretaryExtensi` on value.

```
    Dim emp As New Employee
    Dim mgr As New Manager
    emp.Office.Extension = "1111"
    mgr.Office.Extension = "2222"
    mgr.ManagerOffice.SecretaryExtension = "3333"
```

Note that the `Manager` class contains two different objects of type `OfficeInfo`. Its `Office` property is the `Employee` class's flavor of `OfficeInfo` class. Its `ManagerOffice` value is the `Manager` class's version of `OfficeInfo`.

The presence of these different classes with the same name can be confusing. Usually, you are better off not using the `Shadows` keyword in the declarations and giving the classes different names. In this case, you could call the `Manager` class's included class `ManagerOfficeInfo`.

Inheritance

A class's *inheritance* clause can take the value `MustInherit` or `NotInheritable`.

`MustInherit` prohibits the program from creating instances of the class. The program should create an instance of a derived class instead. This kind of class is sometimes called an *abstract class*.

By using `MustInherit`, you can make a parent class that defines some of the behavior that should be implemented by derived classes without implementing the functionality itself. The parent class is not intended to be used itself, just to help define the derived classes.

For example, the following code defines the `Vehicle` class with the `MustInherit` keyword. This class defines features that are common to all vehicles. It defines a `NumWheels` variable and a `Drive` subroutine declared with the `MustOverride` keyword. The real world doesn't contain generic vehicles, however. Instead, it contains cars, trucks, and other specific kinds of vehicles. The code defines a `Car` class that inherits from the `Vehicle` class. When you enter the `Inherits` statement and press Enter, Visual Basic automatically adds the empty `Drive` subroutine required by the `Vehicle` class.

```
    Public MustInherit Class Vehicle
        Public NumWheels As Integer
        Public MustOverride Sub Drive()
    End Class

    Public Class Car
        Inherits Vehicle

        Public Overrides Sub Drive()

        End Sub
    End Class
```

The following code uses these classes. It declares a `Vehicle` and a `Car` variable. The first assignment statement causes an error because it tries to make a new `Vehicle` object. This is not allowed, because `Vehicle` is declared with the `MustInherit` keyword. The program sets variable `a_car` to a new `Car` variable and then sets variable `a_vehicle` to `a_car`. This works because a `Car` is a type of `Vehicle`, so the `a_vehicle` variable can refer to a `Car` object. In its last line, the code assigns `a_vehicle` directly to a new `Car` object.

```
    Dim a_vehicle As Vehicle
    Dim a_car As Car

    a_vehicle = New vehicle     ' Error. Vehicle is MustInherit.
    a_car = New Car             ' This works.
    a_vehicle = a_car           ' This works.
    a_vehicle = New Car         ' This works.
```

The `NotInheritable` keyword does the opposite of the `MustInherit` keyword. `MustInherit` says that a class must be inherited to be instantiated. `NotInheritable` says no class can inherit from this one.

You can use `NotInheritable` to stop other developers from making new versions of the classes you have built. This isn't really necessary if you design a well-defined object model before you start programming and if everyone obeys it. `NotInheritable` can prevent unnecessary proliferation of classes if developers don't pay attention, however. For example, declaring the `Car` class `NotInheritable` would prevent overeager developers from deriving `FrontWheelDriveCar`, `RedCar`, and `Subaru` classes from the `Car` class.

The extension methods introduced in Visual Basic 2008 allow developers to add new subroutines and functions to a class even if it is marked `NotInheritable`. This can ruin the class's focus of purpose, making it harder to understand and use safely. It also violates the intent of the `NotInheritable` keyword so you should avoid it if possible. For more information, see the section "Extension Methods" in Chapter 25, "OOP Concepts."

Of type_list

The `Of type_list` clause makes the class generic. It allows the program to create instances of the class that work with specific data types. For example, the following code defines a generic `Tree` class. The class includes a public variable named `RootObject` that has the data type given in the class's `Of data_type` clause.

```
Public Class Tree(Of data_type)
    Public RootObject As data_type
    ...
End Class
```

When you read this declaration, you should think "Tree of *something*," where *something* is defined later when you make an instance of the class.

The following code fragment declares the variable `my_tree` to be a "Tree of Employee." It then instantiates `my_tree` and sets its `RootObject` variable to an `Employee` object.

```
Dim my_tree As Tree(Of Employee)
my_tree = New Tree(Of Employee)
my_tree.RootObject = New Employee
...
```

Chapter 29, "Generics," discusses generic classes further.

Inherits parent_class

The `Inherits` statement indicates that the class (the child class) is derived from another class (the parent class). The child class automatically inherits the parent's properties, methods, and events.

The following code defines an `Employee` class that contains `LastName`, `FirstName`, `OfficeNumber`, and `Phone` variables. It then derives the `Manager` class from the `Employee` class. Because it inherits from the `Employee` class, the `Manager` class automatically has `LastName`, `FirstName`, `OfficeNumber`, and `Phone` variables. It also adds new `SecretaryOfficeNumber` and `SecretaryPhone` variables. These are available to instances of the `Manager` class but not to the `Employee` class.

```
Public Class Employee
    Public FirstName As String
    Public LastName As String
    Public OfficeNumber As String
    Public Phone As String
End Class

Public Class Manager
    Inherits Employee

    Public SecretaryOfficeNumber As String
    Public SecretaryPhone As String
End Class
```

If a class inherits from another class, the `Inherits` statement must be the first statement after the `Class` statement that is not blank or a comment. Also note that a class can inherit from at most one parent class, so a class definition can include at most one `Inherits` statement.

For more information on inheritance, see the section "Inheritance" in Chapter 25, "OOP Concepts."

Implements interface

The `Implements` keyword indicates that a class will implement an interface. An interface defines behaviors that the implementing class must provide, but it does not provide any implementation for the behaviors.

For example, the following code defines the `IDomicile` interface. By convention, the names of interfaces should begin with the capital letter I. This interface defines the `SquareFeet`, `NumBedrooms`, and `NumBathrooms` properties, and the `Clean` subroutine.

```
Public Interface IDomicile
    Property SquareFeet() As Integer
    Property NumBedrooms() As Integer
    Property NumBathrooms() As Integer
    ReadOnly Property NeedsFireSystem() As Boolean
    Sub Clean()
End Interface
```

The interface also defines the read-only property `NeedsFireSystem`. Usually, a read-only property calculates its return value from other property values. For example, `NeedsFireSystem` might return `True` if a house has more than a certain number of square feet.

The `House` class shown in the following code implements the `IDomicile` interface. When you type the `Implements` statement and press Enter, Visual Basic automatically generates empty routines to provide the features defined by the interface.

```
Public Class House
    Implements IDomicile

    Public Sub Clean() Implements IDomicile.Clean

    End Sub

    Public Property NumBathrooms() As Integer _
      Implements IDomicile.NumBathrooms
        Get

        End Get
        Set(ByVal Value As Integer)

        End Set
    End Property

    Public Property NumBedrooms() As Integer Implements IDomicile.NumBedrooms
        Get

        End Get
        Set(ByVal Value As Integer)

        End Set
    End Property

    Public Property SquareFeet() As Integer Implements IDomicile.SquareFeet
```

```
            Get

            End Get
            Set(ByVal Value As Integer)

            End Set
        End Property

        Public ReadOnly Property NeedsFireSystem() As Boolean _
         Implements IDomicile.NeedsFireSystem
            Get

            End Get
        End Property
    End Class
```

An interface defines behaviors but does not supply them. When you derive a class from a parent class, the derived class inherits all the code that the parent class uses to implement its features. When you implement an interface, the behavior is defined, but not supplied for you. That makes interfaces more difficult to use than inheritance, so inheritance is generally preferred whenever it is possible.

One case where the inheritance of Visual Basic is insufficient is when you need to implement multiple inheritance. In *multiple inheritance*, one child class can inherit from more than one parent class. For example, you might define a Domicile class and a Boat class, and then make the HouseBoat class inherit from both. You can do this in some languages but not in Visual Basic. However, you can make a class implement more than one interface. Simply define IDomicile and IBoat interfaces and then have the HouseBoat class implement them both.

The IDomicile interface was shown earlier. The following code defines the IBoat interface:

```
    Public Interface IBoat
        Property HasMotor() As Boolean
        Property HorsePower() As Integer
        Property Capacity() As Integer
        Sub Sail()
    End Interface
```

The following code shows parts of the HouseBoat class. It begins with two Implements statements that indicate that the class implements both the IDomicile and IBoat interfaces. It then includes implementations of the methods specified by IDomicile and IBoat.

```
    Public Class HouseBoat
        Implements IDomicile
        Implements IBoat

        Public Sub Clean() Implements IDomicile.Clean

        End Sub

        Public ReadOnly Property NeedsFireSystem() As Boolean Implements _
         IDomicile.NeedsFireSystem
```

```
        Get

        End Get
End Property

Public Property NumBathrooms() As Integer Implements _
 IDomicile.NumBathrooms
        Get

        End Get
        Set(ByVal Value As Integer)

        End Set
End Property

Public Property NumBedrooms() As Integer Implements IDomicile.NumBedrooms
        Get

        End Get
        Set(ByVal Value As Integer)

        End Set
End Property

Public Property SquareFeet() As Integer Implements IDomicile.SquareFeet
        Get

        End Get
        Set(ByVal Value As Integer)

        End Set
End Property

Public Property Capacity() As Integer Implements IBoat.Capacity
        Get

        End Get
        Set(ByVal Value As Integer)

        End Set
End Property

Public Property HasMotor() As Boolean Implements IBoat.HasMotor
        Get

        End Get
        Set(ByVal Value As Boolean)

        End Set
```

```
        End Property

    Public Property HorsePower() As Integer Implements IBoat.HorsePower
            Get

            End Get
            Set(ByVal Value As Integer)

            End Set
    End Property

    Public Sub Sail() Implements IBoat.Sail

    End Sub
End Class
```

Using an interface in place of inheritance is sometimes called *interface inheritance*. The class doesn't inherit a parent class's code, but it does inherit the definition of the features that it must provide.

Note that a class can inherit from one class and also implement one or more interfaces. To save coding, you could make one of the parent interfaces into a class. For example, if the IDomicile interface defines more behaviors than the IBoat interface, and if those behaviors are generic enough to provide help for derived classes, you can turn IDomicile into a Domicile class that provides those features. Then the HouseBoat class could inherit the Domicile class's features and implement the IBoat interface.

If a class declaration uses any Implements statements, they must come after any Inherits statement and before any other statements (other than blank lines and comments).

Structures

Structures are very similar to classes. The syntax for declaring a structure is as follows:

```
[attribute_list] [Partial] [accessibility] [Shadows] _
Structure name[(Of type_list)]
    [Implements interface]
    statements
End Structure
```

The only thing that all structure declarations must include is the Structure clause (including the structure's name) and the End Structure statement. The rest is optional.

Unlike a class, however, a structure cannot be empty. It must contain at least one variable or event declaration. The following code describes a valid structure. Its only member is a Private variable, so this structure wouldn't be of much use, but it is valid.

```
Structure EmptyStructure
    Private m_Num As Integer
End Structure
```

The structure's *attribute_list* and *accessibility* clauses, `Shadows` and `Partial` keywords, and the `Implements` statement are the same as those for classes. See the earlier sections discussing these keywords for details.

There are two main differences between a structure and a class: structures cannot inherit and structures are value types rather than reference types.

Structures Cannot Inherit

Unlike a class, a structure cannot inherit so it cannot use the `MustInherit`, `NotInheritable`, or `Inherits` keywords; however, like a class, a structure can implement any number of interfaces. You can use interfaces inheritance to define inheritance-mimicking hierarchies of structures, and you can simulate multiple inheritance by making a structure implement multiple interfaces.

Structures Are Value Types

The biggest difference between a structure and a class is in how each allocates memory for its data. Classes are *reference types*. That means an instance of a class is actually a reference to the object's storage in memory. When you create an instance of a class, Visual Basic actually creates a reference that points to the object's actual location in memory.

On the other hand, structures are *value types*. An instance of a structure contains the data inside the structure rather than simply pointing to it. Figure 26-1 illustrates the difference.
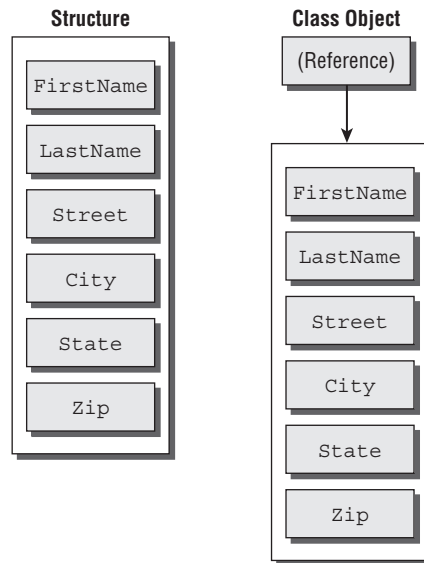
Figure 26-1: A structure contains the data, whereas a class object contains a reference that points to data.

The difference between reference and value type has several important consequences that are described in the following sections.

Memory Required

The difference in memory required by classes and structures is small when you consider only a single object. If you look at an array, however, the distinction is more important. An array of class objects contains references to data in some other part of memory. When you first declare the array, the references all have the value `Nothing`, so they don't point to any data and no memory is allocated for the data. The references take 4 bytes each, so the array uses only 4 bytes per array entry.

Actually, the size of a reference is not necessarily 4 bytes. On a 64-bit system, references are larger. In general, you should not assume a reference has a particular size. Just be aware that references take relatively little memory.

An array of structure instances, on the other hand, allocates space for the data inside the array. If each structure object takes up 1000 bytes of memory, then an array containing N items uses 1000 * N bytes of memory. Each structure object's memory is allocated, whether or not its fields contain meaningful data.

Figure 26-2 illustrates this situation. The array of class objects on the left uses very little memory when the references are `Nothing`. The array of structure objects on the right uses a lot of memory even if its elements have not been initialized.

If you must use a large array of objects where only a few at a time will have values other than `Nothing`, then using a class may save the program a considerable amount of memory. If you will need most of the objects to have values other than `Nothing` at the same time, it may be faster to allocate all the memory at once using a structure. This will also use slightly less memory, because an array of class references requires 4 extra bytes per entry to hold the references.

In theory, you may see a slight performance benefit to using an array of structures if you want them initialized to default values. The array will be allocated and later freed in a single step, and its memory will be contiguous, so for some applications, this kind of array may reduce paging. The garbage collector can also mark the array's memory as in use in a single step, while it must follow the references to class objects separately. In practice, however, the differences are so small that you should not use performance to decide which approach to use. Usually, you are best off picking the method that makes the most logical sense, and not worrying too much about the slight performance difference.
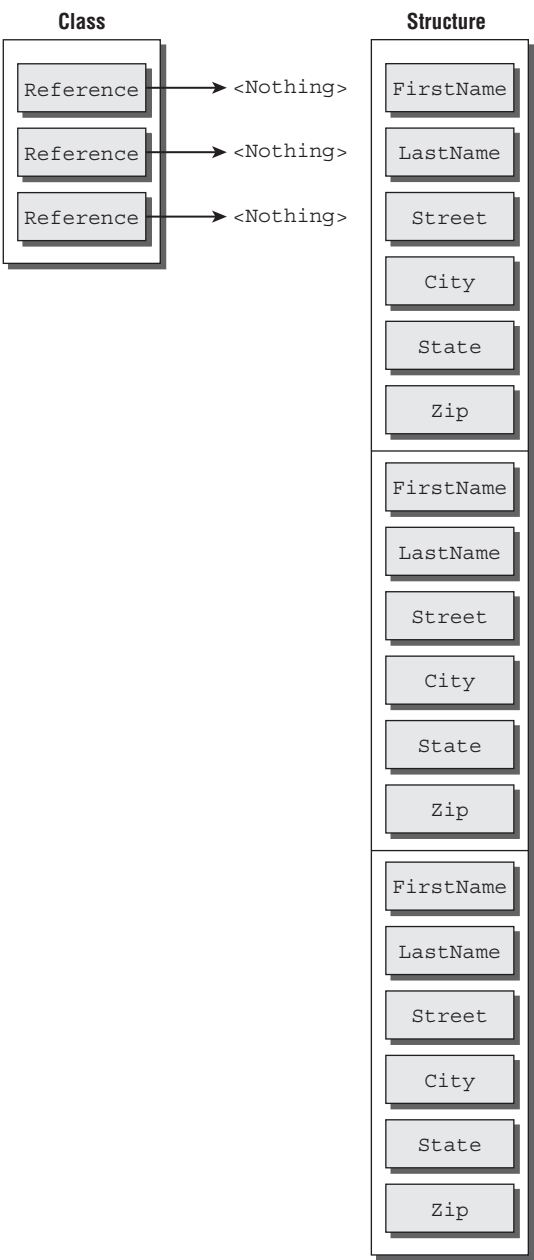
Figure 26-2: An array of class objects contains small references to data, many of which may be Nothing. An array of structures takes up a significant amount of memory.

Heap and Stack Performance

Visual Basic programs allocate variables from two pools of memory called the *stack* and the *heap*. It takes memory for value types (such as integers and dates) from the stack.

Space for reference types comes from the heap. More than one reference can point to the same chunk of memory allocated on the heap. That makes garbage collection and other heap-management issues more complex than using the stack, so using the heap is generally slower than using the stack.

Because structures are value types and classes are reference types, structures are allocated on the stack and class objects are allocated from the heap. That makes structures faster than classes. The exact difference for a particular program depends on the application.

Note that arrays are themselves reference types, so all arrays are allocated from the heap whether they contain structures or references to class objects. The memory for an array of structures is allocated all at once, however, so there is still some benefit to using structures. All the memory in an array of structures is contiguous, so the program can access its elements more quickly than it would if the memory were scattered throughout the heap.

Object Assignment

When you assign one reference type variable to another, you make a new reference to an existing object. When you are finished, the two variables point to the same object. If you change the object's fields using one variable, the fields shown by the other are also changed.

On the other hand, if you set one value type variable equal to another, Visual Basic copies the data from one to the other. If you change the fields in one object, the fields in the other remain unchanged. Figure 26-3 illustrates the difference for classes and structures.

Example program StructuresAndClasses, which is available for download on the book's web site, uses the following code to demonstrate this difference:

```
Dim cperson1 As New CPerson
Dim cperson2 As CPerson
cperson1.FirstName = "Alice"
cperson2 = cperson1
cperson2.FirstName = "Ben"
MessageBox.Show(cperson1.FirstName & vbCrLf & cperson2.FirstName)

Dim sperson1 As New SPerson
Dim sperson2 As SPerson
sperson1.FirstName = "Alice"
sperson2 = sperson1
sperson2.FirstName = "Ben"
MessageBox.Show(sperson1.FirstName & vbCrLf & sperson2.FirstName)
```

The code creates a `CPerson` object and sets its first name value. It then assigns another `CPerson` variable to the same object. Because `CPerson` is a class, the two variables refer to the same piece of memory so when the code sets the new variable's first name value it overwrites the previous variable's first name value. The message box displays the name Ben twice.

The code performs the same steps again but this time it uses structure variables instead of class variables. The code makes an SPerson structure and sets its first name value. When it sets the second SPerson variable equal to the first one, it makes a copy of the structure. Now when the code sets the second variable's first name to Ben, it does not overwrite the previous variable's first name value. The message box displays the names Alice and Ben.
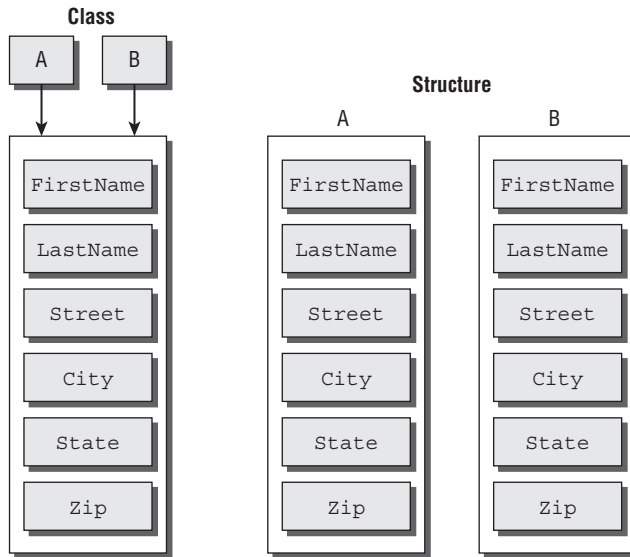
Figure 26-3: Assigning one class reference to another makes them both point to the same object. Assigning one structure variable to another makes a new copy of the data.

Parameter Passing

When you pass a parameter to a function or subroutine, you can pass it by reference using the ByRef keyword, or by value using the ByVal keyword. If you pass a parameter by reference, any changes that the routine makes are reflected in the original parameter passed into the routine.

For example, consider the following code. Subroutine TestByRef creates an integer named i and sets its value to 1. It then calls subroutine PassByVal. That routine declares its parameter with the ByVal keyword, so i is passed by value. PassByVal multiplies its parameter by 2 and ends. Because the parameter was declared ByVal, the original variable i is unchanged, so the message box displays the value 1. Next the program calls subroutine PassByRef, passing it the variable i. Subroutine PassByRef declares its parameter with the ByRef keyword, so a reference to the variable is passed into the routine. PassByRef doubles its parameter and ends. Because the parameter is declared with the ByRef keyword, the value of variable i is modified so the message box displays the value 2.

```
Public Sub TestByRef()
Dim i As Integer = 1

    PassByVal(i)
    MessageBox.Show(i.ToString)     ' i = 1.

    PassByRef(i)
    MessageBox.Show(i.ToString)     ' i = 2.
End Sub

Public Sub PassByVal(ByVal the_value As Integer)
    the_value *= 2
End Sub

Public Sub PassByRef(ByRef the_value As Integer)
    the_value *= 2
End Sub
```

When you work with class references and structures, you must think a bit harder about how ByRef and ByVal work. There are four possible combinations: reference ByVal, structure ByVal, reference ByRef, and structure ByRef.

If you pass a class reference to a routine by value, the routine receives a copy *of the reference*. If it changes the reference (perhaps making it point to a new object), the original reference passed into the routine remains unchanged. It still points to the same object it did when it was passed to the routine. However, the routine can change the values in the object to which the reference points. If the reference points to a Person object, the routine can change the object's FirstName, LastName, and other fields. It cannot change the reference itself to make it point to a different Person object, but it can change the object's data.

On the other hand, suppose that you pass a structure into a routine by value. In that case, the routine receives a *copy* of the entire structure. The routine can change the values contained in its copy of the structure, but the original structure's values remain unchanged. It cannot change the original structure's fields the way it could if the parameter were a reference type.

If you pass a class reference variable by reference, then the routine can not only modify the values in the reference's object but it can also make the reference point to a different object. For example, the routine could use the New keyword to make the variable point to a completely new object.

If you pass a structure by reference, the routine receives a pointer to the structure's data. If it changes the structure's data, the fields in the original variable passed into the routine are modified.

In addition to these differences in behavior, passing class references and structures by reference or by value can make differences in performance. When you pass a reference to data, Visual Basic only needs to send the routine a 4-byte value. If you pass a structure into a routine by value, Visual Basic must duplicate the entire structure, so the routine can use its own copy. If the structure is very large, that may take a little extra time.

Boxing and Unboxing

Visual Basic allows a program to treat any variable as an object. For example, a collection class stores objects. If you add a simple value type such as an Integer to a collection, Visual Basic wraps the Integer in an object and adds that object to the collection.

The process of wrapping the Integer in an object is called *boxing*. Later, if you need to use the Integer as a value type again, the program *unboxes* it. Because structures are value types, the program must box and unbox them whenever it treats them as objects, and that adds some extra overhead.

Some operations that require boxing and possibly unboxing include assigning a structure to an `Object` variable, passing a structure to a routine that takes an `Object` as a parameter, or adding a structure to a collection class. Note that this last operation includes adding a structure to a collection used by a control or other object. For example, adding a structure to a `ListBox` control's `Items` collection requires boxing.

Note that arrays are themselves reference types, so treating an array as an object doesn't require boxing.

Class Instantiation Details

When you declare a reference variable, Visual Basic allocates space for the reference. Initially, that reference is set to `Nothing`, so it doesn't point to anything and no memory is allocated for an actual object.

You create an object by using the `New` keyword. Creating an actual object is called *instantiating* the class.

The following code shows a simple object declaration and instantiation. The first line declares the reference variable. The second line makes the variable point to a new `Employee` object.

```
Dim emp As Employee          ' Declare a reference to an Employee object.
emp = New Employee           ' Make a new Employee object and make emp point to it.
```

Visual Basic also enables you to declare and initialize a variable in a single statement. The following code shows how to declare and initialize an object reference in one statement:

```
Dim emp As Employee = New Employee       ' Declare and instantiate an object.
```

Visual Basic lets you declare a variable to be of a new object type, as shown in the following statement. This version has the same effect as the previous one but is slightly more compact.

```
Dim emp As New Employee                   ' Declare and instantiate an object.
```

Both of these versions that define and initialize an object in a single statement ensure that the variable is initialized right away. They guarantee that the object is instantiated before you try to use it. If you place these kinds of declarations immediately before the code where the object is used, they also make it easy to see where the object is defined.

Although you can declare and instantiate a reference variable separately, value type variables are allocated when they are declared. Because structures are value types, when you declare one you also allocate space for its data, so you don't need to use the `New` keyword to initialize a structure variable.

Both classes and structures can provide special subroutines called *constructors*. A constructor is a special subroutine named `New` that Visual Basic calls when a new instance of the class or structure is created. The constructor can perform initialization tasks to get the new object ready for use.

A constructor can optionally take parameters to help in initializing the object. For example, the `Person` class shown in the following code has a constructor that takes as parameters first and last names and saves them in the control's `FirstName` and `LastName` variables.

```
Public Class Person
    Public FirstName As String
    Public LastName As String

    Public Sub New(ByVal first_name As String, ByVal last_name As String)
        FirstName = first_name
        LastName = last_name
    End Sub
End Class
```

The following code shows how a program might use this constructor to create a new `Person` object:

```
Dim author As New Person("Rod", "Stephens")
```

You can overload the `New` method just as you can overload other class methods. The different overloaded versions of the constructor must have different parameter lists so that Visual Basic can decide which one to use when it creates a new object.

The following code shows a `Person` class that provides two constructors. The first takes no parameters and sets the object's `FirstName` and `LastName` values to `<unknown>`. The second version takes two strings as parameters and copies them into the object's `FirstName` and `LastName` values.

```
Public Class Person
    Public FirstName As String
    Public LastName As String

    Public Sub New()
        Me.New("<unknown>", "<unknown>")
    End Sub

    Public Sub New(ByVal first_name As String, ByVal last_name As String)
        FirstName = first_name
        LastName = last_name
    End Sub
End Class
```

The following code uses each of these constructors:

```
Dim person1 As New Person                        ' <unknown> <unknown>.
Dim person2 As New Person("Olga", "O'Toole")     ' Olga O'Toole.
```

If you do not provide any constructors for a class, Visual Basic allows the program to use the `New` keyword with no parameters. If you create any constructor, however, Visual Basic does not allow the program to use this default empty constructor (without parameters) unless you build one explicitly. For example, if the previous version of the `Person` class did not include an empty constructor, the program could not use the first declaration in the previous code that doesn't include any parameters.

You can use this feature to ensure that the program assigns required values to an object. In this case, it would mean that the program could not create a `Person` object without assigning `FirstName` and `LastName` values.

If you want to allow an empty constructor in addition to other constructors, an alternative is to create a single constructor with optional parameters. The following code shows this approach. With this class, the program could create a new `Person` object, passing its constructor zero, one, or two parameters.

```
Public Class Person
    Public FirstName As String
    Public LastName As String

    Public Sub New( _
     Optional ByVal first_name As String = "<unknown>", _
     Optional ByVal last_name As String = "<unknown>")
        FirstName = first_name
        LastName = last_name
    End Sub
End Class
```

When you use a class's empty constructor to create an object, you can also include a `With` clause to initialize the object's properties. The following code uses the `Person` class's parameter-less constructor to make a new `Person` object. The `With` statement then sets values for the object's `FirstName` and `LastName` values.

```
Dim author As New Person() With {.FirstName = "Rod", .LastName = "Stephens"}
```

Structure Instantiation Details

Structures handle instantiation somewhat differently from object references. When you declare a reference variable, Visual Basic does not automatically allocate the object to which the variable points. In contrast, when you declare a value type such as a structure, Visual Basic automatically allocates space for the variable's data. That means you never need to use the `New` keyword to instantiate a structure.

However, the Visual Basic compiler warns you if you do not explicitly initialize a structure variable before using it. To satisfy the compiler, you can use the `New` keyword to initialize the variable when you declare it.

A structure can also provide constructors, and you can use those constructors to initialize the structure. The following code defines the `SPerson` structure and gives it a constructor that takes two parameters, the second optional:

```
Public Structure SPerson
    Public FirstName As String
    Public LastName As String

    Public Sub New( _
     ByVal first_name As String, _
     Optional ByVal last_name As String = "<unknown>")
        FirstName = first_name
        LastName = last_name
    End Sub
End Structure
```

To use a structure's constructor, you initialize the structure with the `New` keyword much as you initialize a reference variable. The following code allocates an `SPerson` structure variable using the two-parameter constructor:

```
Dim artist As New SPerson("Sergio", "Aragones")
```

You can also use structure constructors later to reinitialize a variable or set its values, as shown here:

```
' Allocate the artist variable.
Dim artist As SPerson

' Do something with artist.
...

' Reset FirstName and LastName to Nothing.
artist = New SPerson
...

' Set FirstName and LastName to Bill Amend.
artist = New SPerson("Bill", "Amend")
```

As is the case with classes, you can use a `With` clause to set structure values when you initialize a structure variable. For example, the following code creates a new `SPerson` structure and sets its `FirstName` and `LastName` values:

```
Dim artist As New SPerson() With {.FirstName = "Anna", .LastName = "Aux"}
```

> *Although you can create a structure without using the `New` keyword, you cannot include a `With` clause unless you use `New`.*

Structure and class constructors are very similar, but there are some major differences. A structure cannot declare a constructor that takes no parameters. It also cannot provide a constructor with all optional parameters, because that would allow the program to call it with no parameters. Visual Basic always allows the program to use a default empty constructor to declare a structure variable, but you cannot make it use *your* empty constructor. Unfortunately, that means you cannot guarantee that the program always initializes the structure's values as you can with a class. If you need that feature, you should use a class instead of a structure.

You also cannot provide initialization values for variables declared within a structure as you can with a class. That means you cannot use this technique to provide default values for the structure's variables.

The following code demonstrates these differences. The CPerson class defines initial values for its FirstName and LastName variables, provides an empty constructor, and provides a two-parameter constructor. The SPerson structure cannot define initial values for FirstName and LastName and cannot provide an empty constructor.

```
' Class.
Public Class CPerson
    Public FirstName As String = "<unknown>"    ' Initialization value allowed.
    Public LastName As String = "<unknown>"     ' Initialization value allowed.

    ' Empty constructor allowed.
    Public Sub New()
    End Sub

    ' Two-parameter constructor allowed.
    Public Sub New(ByVal first_name As String, ByVal last_name As String)
        FirstName = first_name
        LastName = last_name
    End Sub
End Class

' Structure.
Public Structure SPerson
    Public FirstName As String ' = "<unknown>"  ' Initialization NOT allowed.
    Public LastName As String ' = "<unknown>"    ' Initialization NOT allowed.

    '' Empty constructor NOT allowed.
    'Public Sub New()
    'End Sub

    ' Two-parameter constructor allowed.
    Public Sub New(ByVal first_name As String, ByVal last_name As String)
        FirstName = first_name
        LastName = last_name
    End Sub
End Structure
```

Garbage Collection

When a program starts, the system allocates a chunk of memory for the program called the *managed heap*. When it allocates data for reference types (class objects), Visual Basic uses memory from this heap. (For more information about the stack and heap and their relative performance, see the section "Heap and Stack Performance" earlier in this chapter.)

When the program no longer needs to use a reference object, Visual Basic does *not* mark the heap memory as free for later use. If you set a reference variable to Nothing so that no variable points to the object, the object's memory is no longer available to the program, but Visual Basic does not reuse the object's heap memory, at least not right away.

The optimizing engine of the *garbage collector* determines when it needs to clean up the heap. If the program allocates and frees many reference objects, a lot of the heap may be full of memory that is no longer used. In that case, the garbage collector will decide to clean house.

When it runs, the garbage collector examines all the program's reference variables, parameters that are object references, CPU registers, and other items that might point to heap objects. It uses those values to build a graph describing the heap memory that the program can still access. It then compacts the objects in the heap and updates the program's references so that they can find any moved items. The garbage collector then updates the heap itself so that the program can allocate memory from the unused portion.

When it destroys an object, the garbage collector frees the object's memory and any managed resources it contains. It may not free unmanaged resources, however. You can determine when and how an object frees its managed and unmanaged resources by using the `Finalize` and `Dispose` methods.

Finalize

When it destroys an object, the garbage collector frees any managed resources used by that object. For example, suppose that an unused object contains a reference to an open file stream. When the garbage collector runs, it notices that the file stream is inaccessible to the program, so it destroys the file stream as well as the object that contains its reference.

However, suppose that the object uses an *unmanaged resource* that is outside of the scope of objects that Visual Basic understands. For example, suppose the object holds an integer representing a file handle, network connection, or channel to a hardware device that Visual Basic doesn't understand. In that case, the garbage collector doesn't know how to free that resource.

You can tell the garbage collector what to do by overriding the class's `Finalize` method, which is inherited from the `Object` class. The garbage collector calls an object's `Finalize` method before permanently removing the object from the heap. Note that there are no guarantees about exactly when the garbage collector calls this method, or the order in which different objects' methods are called. Two objects'`Finalize` methods may be called in either order even if one contains a reference to the other or if one was freed long before the other. If you must guarantee a specific order, you must provide more specific clean-up methods of your own.

Example program GarbageCollection, which is available for download on the book's web site, uses the following code to demonstrate the `Finalize` method:

```
Public Class Form1
    Public Running As Boolean

    Private Class Junk
        Public MyForm As Form1

        Public Sub New(ByVal my_form As Form1)
            MyForm = my_form
        End Sub

        ' Garbage collection started.
        Protected Overrides Sub Finalize()
            ' Stop making objects.
```

```
                MyForm.Running = False
        End Sub
    End Class

    ' Make objects until garbage collection starts.
    Private Sub btnCreateObjects_Click() Handles btnCreateObjects.Click
        Running = True

        Dim new_obj As Junk
        Dim max_i As Long
        For i As Long = 1 To 100000
            new_obj = New Junk(Me)

            If Not Running Then
                max_i = i
                Exit For
            End If
        Next i
        MessageBox.Show("Allocated " & max_i.ToString & " objects")
    End Sub
End Class
```

The `Form1` class defines the public variable `Running`. It then defines the `Junk` class, which contains a variable referring to the `Form1` class. This class's constructor saves a reference to the `Form1` object that created it. Its `Finalize` method sets the `Form1` object's `Running` value to `False`.

When the user clicks the form's Create Objects button, the `btnCreateObjects_Click` event handler sets `Running` to `True` and starts creating `Junk` objects, passing the constructor this form as a parameter. The routine keeps creating new objects as long as `Running` is `True`. Note that each time it creates a new object, the old object that the variable `new_obj` used to point to becomes inaccessible to the program so it is available for garbage collection.

Eventually the program's heap runs low, so the garbage collector executes. When it destroys one of the `Junk` objects, the object's `Finalize` subroutine executes and sets the form's `Running` value to `False`. When the garbage collector finishes, the `btnCreateObjects_Click` event handler sees that `Running` is `False`, so it stops creating new `Junk` objects. It displays the number of the last `Junk` object it created and is done.

In one test, this program created 30,456 `Junk` objects before the garbage collector ran. In a second trial run immediately after the first, the program created 59,150 objects, and in a third it created 26,191. The garbage collector gives you little control over when it finalizes objects.

Visual Basic also calls every object's `Finalize` method when the program ends. Again, there are no guarantees about the exact timing or order of the calls to different objects' `Finalize` methods.

Example program FinalizeObjects, which is available for download on the book's web site, uses the following code to test the `Finalize` method when the program ends:

```
Public Class Form1
    Private Class Numbered
        Private m_Number As Integer
        Public Sub New(ByVal my_number As Integer)
            m_Number = my_number
        End Sub

        ' Garbage collection started.
        Protected Overrides Sub Finalize()
            ' Display the object's number.
            Debug.WriteLine("Finalized object " & m_Number)
        End Sub
    End Class

    ' Make objects until garbage collection starts.
    Private Sub btnGo_Click() Handles btnGo.Click
        Static i As Integer = 0
        i += 1
        Dim new_numbered As New Numbered(i)
        Debug.WriteLine("Created object " & i.ToString)
    End Sub
End Class
```

The `Numbered` class contains a variable `m_Number` and initializes that value in its constructor. Its `Finalize` method writes the object's number in the Output window.

The `btnGo_Click` event handler creates a new `Numbered` object, giving it a new number. When the event handler ends, the `new_numbered` variable referring to the `Numbered` object goes out of scope, so the object is no longer available to the program. If you look at the Output window at this time, you will probably find that the program has not bothered to finalize the object yet. If you click the button several times and then close the application, Visual Basic calls each object's `Finalize` method. If you click the button five times, you should see five messages displayed by the objects' `Finalize` methods.

If your class allocates unmanaged resources, you should give it a `Finalize` method to free them.

Dispose

Because Visual Basic doesn't keep track of whether an object is reachable at any given moment, it doesn't know when it can permanently destroy an object until the program ends or the garbage collector reclaims it. That means the object's memory and resources may remain unused for quite a while. The memory itself isn't a big issue. If the program's heap runs out of space, the garbage collector runs to reclaim some of the unused memory.

If the object contains a reference to a resource, however, that resource is not freed until the object is finalized. That can have dire consequences. You generally don't want control of a file, network connection, scanner, or other scarce system resource left to the whims of the garbage collector.

By convention, the `Dispose` subroutine frees an object's resources. Before a program frees an object that contains important resources, it can call that object's `Dispose` method to free the resources explicitly.

To handle the case where the program does not call `Dispose`, the class should also free any unmanaged resources that it holds in its `Finalize` subroutine. Because `Finalize` is executed whether or not the

program calls `Dispose`, it must also be able to execute both the `Dispose` and `Finalize` subroutines without harm. For example, if the program shuts down some piece of unusual hardware, it probably should not shut down the device twice.

To make building a `Dispose` method a little easier, Visual Basic defines the `IDisposable` interface, which declares the `Dispose` method. If you enter the statement `Implements IDisposable` and press Enter, Visual Basic creates an empty `Dispose` method for you.

Example program UseDispose, which is available for download on the book's web site, uses the following code to demonstrate the `Dispose` and `Finalize` methods:

```
Public Class Form1
    Private Class Named
        Implements IDisposable

        ' Save our name.
        Public Name As String
        Public Sub New(ByVal new_name As String)
            Name = new_name
        End Sub

        ' Free resources.
        Protected Overrides Sub Finalize()
            Dispose()
        End Sub

        ' Display our name.
        Public Sub Dispose() Implements System.IDisposable.Dispose
            Static done_before As Boolean = False
            If done_before Then Exit Sub
            done_before = True

            Debug.WriteLine(Name)
        End Sub
    End Class

    ' Make an object and dispose it.
    Private Sub btnDispose_Click() Handles btnDispose.Click
        Static i As Integer = 0
        i += 1
        Dim obj As New Named("Dispose " & i)
        obj.Dispose()
    End Sub

    ' Make an object and do not dispose it.
    Private Sub btnNoDispose_Click() Handles btnNoDispose.Click
        Static i As Integer = 0
        i += 1
        Dim obj As New Named("No Dispose " & i)
    End Sub
End Class
```

The `Named` class has a `Name` variable that contains a string identifying an object. Its `Finalize` method simply calls its `Dispose` method. `Dispose` uses a static variable named `done_before` to ensure that it performs its task only once. If it has not already run, the `Dispose` method displays the object's name. In a real application, this method would free whatever resources the object holds. Whether the program explicitly calls `Dispose`, or whether the garbage collector calls the object's `Finalize` method, this code is executed exactly once.

The main program has two buttons labeled Dispose and No Dispose. When you click the Dispose button, the `btnDispose_Click` event handler makes a `Named` object, giving it a new name, and then calls the object's `Dispose` method, which immediately displays the object's name.

When you click the `No Dispose` button, the `btnNoDispose_Click` event handler makes a new `Named` object with a new name and then ends without calling the object's `Dispose` method. Later, when the garbage collector runs or when the program ends, the object's `Finalize` method executes and calls `Dispose`, which displays the object's name.

If your class allocates managed or unmanaged resources and you don't want to wait for the garbage collector to get around to freeing them, you should implement a `Dispose` method and use it when you no longer need an object.

Constants, Properties, and Methods

Declaring constants, properties, and methods within a class is the same as declaring them outside a class. The main difference is that the context of the declaration is the class rather than a namespace. For example, a variable declared `Private` within a class is available only to code within the class.

For information on declaring variables and constants, see Chapter 15, "Data Types, Variables, and Constants." For information on declaring methods, see Chapter 17, "Subroutines and Functions," which also describes property procedures, special routines that implement a property for a class.

One issue that is sometimes confusing is that the unit scope of a class is the class's *code*, not the code within a specific instance of the class. If you declare a variable within a class `Private`, then all code within the class can access the variable, whether or not that code belongs to the instance of the object that contains the variable.

For example, consider the following `Student` class. The `m_Scores` array is `Private` to the class, so you might think that a `Student` object could only access its own scores. In fact, any `Student` object can access any other `Student` object's `m_Scores` array as well. The `CompareToStudent` subroutine calculates the total score for the current `Student` object. It then calculates the total score for another student and displays the results.

```
Public Class Student
    Public FirstName As String
    Public LastName As String
    Private m_Scores() As Integer
    ...
    Public Sub CompareToStudent(ByVal other_student As Student)
        Dim my_score As Integer = 0
```

```
                For i As Integer = 0 To m_Scores.GetUpperBound(0)
                    my_score += m_Scores(i)
                Next i

                Dim other_score As Integer = 0
                For i As Integer = 0 To other_student.m_Scores.GetUpperBound(0)
                    other_score += other_student.m_Scores(i)
                Next i

                Debug.WriteLine("My score: " & my_score)
                Debug.WriteLine("Other score: " & other_score)
            End Sub
            ...
        End Class
```

Breaking the encapsulation provided by the objects in this way can lead to unnecessary confusion. It is generally better to try to access an object's `Private` data only from within that object. You can provide access routines that make using the object's data easier.

The following version of the `Student` class includes a `TotalScore` function that returns the total of a `Student` object's scores. This function works only with its own object's scores, so it does not pry into another object's data. The `CompareToStudent` subroutine uses the `TotalScore` function to display the total score for its object and for a comparison object.

```
    Public Class Student
        Public FirstName As String
        Public LastName As String
        Private m_Scores() As Integer
        ...
        Public Sub CompareToStudent(ByVal other_student As Student)
            Debug.WriteLine("My score: " & TotalScore())
            Debug.WriteLine("Other score: " & other_student.TotalScore())
        End Sub

        ' Return the total of this student's scores.
        Private Function TotalScore() As Integer
            Dim total_score As Integer = 0
            For i As Integer = 0 To m_Scores.GetUpperBound(0)
                total_score += m_Scores(i)
            Next i

            Return total_score
        End Function
        ...
    End Class
```

Function `TotalScore` is itself declared `Private`, so only code within the class can use it. In this example, the `CompareToStudent` subroutine calls another object's `Private TotalScore` function, so the separation between the two objects is not absolute, but at least `CompareToStudent` doesn't need to look directly at the other object's data.

Events

Properties let the application view and modify an object's data. Methods let the program invoke the object's behaviors and perform actions. Together, properties and methods let the program send information (data values or commands) to the object.

In a sense, events do the reverse: They let the object send information to the program. When something noteworthy occurs in the object's code, it can raise an event to tell the main program about it. The main program can then decide what to do about the event.

The following sections describe events. They explain how a class declares events and how other parts of the program can catch events.

Declaring Events

A class object can raise events whenever it needs to notify to the program of changing circumstances. Normally, the class declares the event using the `Event` keyword. The following text shows the `Event` statement's syntax:

```
[attribute_list] [accessibility] [Shadows] _
Event event_name([parameters]) [Implements interface.event]
```

The following sections describe the pieces of this declaration. Some of these are similar to earlier sections that describe constant, variable, and class declarations. By now, you should notice some familiarity in the use of the *attribute_list* and *accessibility* clauses. For more information on constant and variable declarations, see Chapter 15, "Data Types, Variables, and Constants." For more information on class declarations, refer to the section "Classes" earlier in this chapter.

attribute_list

The *attribute_list* defines attributes that apply to the event. For example, the following declaration defines a description that the code editor should display for the `ScoreAdded` event:

```
Imports System.ComponentModel

Public Class Student
    <Description("Occurs when a score is added to the object")> _
    Public Event ScoreAdded(ByVal test_number As Integer)
    ...
End Class
```

accessibility

The *accessibility* value can take one of the following values: `Public`, `Protected`, `Friend`, `Protected Friend`, or `Private`. These values determine which pieces of code can catch the event. Following is an explanation of these keywords:

❏   `Public` — Indicates that there are no restrictions on the event. Code inside or outside the class can catch the event.

❏　Protected — Indicates that the event is accessible only to code in the same class or in a derived class.

❏　Friend — Indicates that the event is available to all code inside or outside the class module within the same project. The difference between this and Public is that Public allows code outside of the project to access the subroutine. This is generally only an issue for code libraries (.dll files) and control libraries. For example, suppose that you build a code library containing a class that raises some events. You then write a program that uses the class. On the one hand, if the class declares an event with the Public keyword, then the code in the library and the code in the main program can catch the event. On the other hand, if the class declares an event with the Friend keyword, only the code in the library can catch the event, not the code in the main program.

❏　Protected Friend — Indicates that the event has both Protected and Friend status. The event is available only within the same project and within the same class or a derived class.

❏　Private — Indicates that the event is available only within the class that contains it. An instance of the class can catch this event, but code outside of the class cannot.

Shadows

The Shadows keyword indicates that this event replaces an event in the parent class that has the same name but not necessarily the same parameters.

parameters

The *parameters* clause gives the parameters that the event will pass to event handlers. The syntax for the parameter list is the same as the syntax for declaring the parameter list for a subroutine or function.

If an event declares a parameter with the ByRef keyword, the code that catches the event can modify that parameter's value. When the event handler ends, the class code that raised the event can read the new parameter value.

Implements interface.event

If the class implements an interface and the interface defines an event, this clause identifies this event as the one defined by the interface. For example, the IStudent interface shown in the following code defines the ScoreChanged event handler. The Student class implements the IStudent interface. The declaration of the ScoreChanged event handler uses the Implements keyword to indicate that this event handler provides the event handler defined by the IStudent interface.

```
Public Interface IStudent
    Event ScoreChanged()
    ...
End Interface

Public Class Student
    Implements IStudent

    Public Event ScoreChanged() Implements IStudent.ScoreChanged
    ...
End Class
```

Raising Events

After it has declared an event, a class raises it with the `RaiseEvent` keyword. It should pass the event whatever parameters were defined in the `Event` statement.

For example, the `Student` class shown in the following code declares a `ScoreChange` event. Its `AddScore` method makes room for a new score, adds the score to the `Scores` array, and then raises the `ScoreChanged` event, passing the event handler the index of the score in the `Scores` array.

```
Public Class Student
    Private Scores() As Integer
    ...
    Public Event ScoreChanged(ByVal test_number As Integer)
    ...
    Public Sub AddScore(ByVal new_score As Integer)
        ReDim Preserve Scores(Scores.Length)
        Scores(Scores.Length - 1) = new_score
        RaiseEvent ScoreChanged(Scores.Length - 1)
    End Sub
    ...
End Class
```

Catching Events

There are two ways that you can catch an object's events. First, you can declare the object variable using the `WithEvents` keyword, as shown in the following code:

```
Private WithEvents TopStudent As Student
```

In the code editor, click the left drop-down list and select the variable's name. In the right drop-down list, select the event. This makes the code editor create an empty event handler similar to the following one. When the object raises its `ScoreChanged` event, the event handler executes.

```
Private Sub TopStudent_ScoreChanged(ByVal test_number As Integer) _
 Handles TopStudent.ScoreChanged

End Sub
```

The second method for catching events is to use the `AddHandler` statement to define an event handler for the event. First, write the event handler subroutine. This subroutine must take parameters of the proper type to match those defined by the event's declaration in the class. The following code shows a subroutine that can handle the `ScoreChanged` event. Note that the parameter's name has been changed, but its accessibility (`ByRef` or `ByVal`) and data type must match those declared for the `ScoreChanged` event.

```
Private Sub HandleScoreChanged(ByVal quiz_num As Integer)

End Sub
```

If the event handler's parameter list is long and complicated, writing an event handler can be tedious. To make this easier, you can declare an object using the `WithEvents` keyword and use the drop-down lists to give it an event handler. Then you can edit the event handler to suit your needs (change its name, remove the `Handles` clause, change parameter names, and so forth).

After you build the event handler routine, use the `AddHandler` statement to assign the routine to a particular object's event. The following statement makes the `HandleScoreChanged` event handler catch the `TopStudent` object's `ScoreChanged` event:

```
AddHandler TopStudent.ScoreChanged, AddressOf HandleScoreChanged
```

Using `AddHandler` is particularly handy when you want to use the same event handler with more than one object. For example, you might write an event handler that validates a `TextBox` control's contents to ensure that it contains a valid phone number. By repeatedly using the `AddHandler` statement, you can make the same event handler validate any number of `TextBox` controls.

`AddHandler` is also convenient if you want to work with an array of objects. The following code shows how a program might create an array of `Student` objects and then use the `HandleScoreChanged` subroutine to catch the `ScoreChanged` event for all of them:

```
' Create an array of Student objects.
Const MAX_STUDENT As Integer = 30
Dim students(MAX_STUDENT) As Student
For i As Integer = 0 To MAX_STUDENT
    students(i) = New Student
Next i

' Add ScoreChanged event handlers.
For i As Integer = 0 To MAX_STUDENT
    AddHandler students(i).ScoreChanged, AddressOf HandleScoreChanged
Next i
...
```

If you plan to use `AddHandler` in this way, you may want to ensure that the events provide enough information for the event handler to figure out which object raised the event. For example, you might modify the `ScoreChanged` event so that it passes a reference to the object raising the event into the event handler. Then the shared event handler can determine which `Student` object had a score change.

If you add an event handler with `AddHandler`, you can later remove it with the `RemoveHandler` statement. The syntax is the same as the syntax for `AddHandler`, as shown here:

```
RemoveHandler TopStudent.ScoreChanged, AddressOf HandleScoreChanged
```

Note that relaxed delegates allow an event handler to declare its parameters to have different data types from those provided by the event, as long as the new data types are compatible, or to omit the parameters entirely.

For example, suppose the `Student` class defines a `ScoreChanged` event that takes an Integer parameter. The following three subroutines could all catch this event. The first matches the event's parameters precisely. The second version declares its `quiz_num` parameter to be a Long. Long is compatible with

Integer so, when it invokes the event handler, Visual Basic can convert the Integer value into a Long parameter safely. The third version of the event handler declares no parameters so the event's Integer value is ignored.

```
Private Sub HandleScoreChanged1(ByVal quiz_num As Integer)

End Sub

Private Sub HandleScoreChanged2(ByVal quiz_num As Long)

End Sub

Private Sub HandleScoreChanged3()

End Sub
```

The second version works because you can always store an Integer value in a Long parameter. The reverse is not always true: a Long value won't necessarily fit in an Integer. If the event is declared with a Long parameter but the event handler is declared with an Integer parameter, the result depends on the Option Strict *setting. If* Option Strict *is off, Visual Basic allows the code and tries to convert the Long value into an Integer parameter, possibly crashing at runtime. If* Option Strict *is on, then Visual Basic flags this as an error.*

For more information, see the section "Relaxed Delegates" in Chapter 17, "Subroutines and Functions."

Declaring Custom Events

A second form of event declaration provides more control over the event. This version is quite a bit more complicated and at first can seem very confusing. Skim through the syntax and description that follow and then look at the example. Then if you go back and look at the syntax and description again, they should make more sense. This version is also more advanced and you may not need it often (if ever), so you can skip it for now if you get bogged down.

This version enables you to define routines that are executed when the event is bound to an event handler, removed from an event handler, and called. The syntax is as follows:

```
[attribute_list] [accessibility] [Shadows] _
Custom Event event_name As delegate_name [Implements interface.event]
    [attribute_list] AddHandler(ByVal value As delegate_name)
        ...
    End AddHandler
    [attribute_list] RemoveHandler(ByVal value As delegate_name)
        ...
    End RemoveHandler
    [attribute_list] RaiseEvent(delegate_signature)
        ...
    End RaiseEvent
End Event
```

The *attribute_list*, *accessibility*, `Shadows`, and `Implements`*interface.event* parts have the same meaning as in the previous, simpler event declaration. See the section, "Declaring Events," earlier in this chapter for information on these pieces.

The *delegate_name* tells Visual Basic the type of event handler that will catch the event. For example, the delegate might indicate a subroutine that takes as a parameter a String variable named `new_name`. The following code shows a simple delegate for this routine. The delegate's name is `NameChangedDelegate`. It takes a String parameter named `new_name`.

```
Public Delegate Sub NameChangedDelegate(ByVal new_name As String)
```

For more information on delegates, see the section "Delegates" in Chapter 15, "Data Types, Variables, and Constants."

The main body of the custom event declaration defines three routines named `AddHandler`, `RemoveHandler`, and `RaiseEvent`. You can use these three routines to keep track of the event handlers assigned to an object (remember that the event declaration is declaring an event for a class) and to call the event handlers when appropriate.

The `AddHandler` routine executes when the program adds an event handler to the object. It takes as a parameter a delegate variable named `value`. This is a reference to a routine that matches the delegate defined for the event handler. For example, if the main program uses the `AddHandler` statement to add the subroutine `Employee_NameChanged` as an event handler for this object, then the parameter to `AddHandler` is a reference to the `Employee_NameChanged` subroutine.

Normally, the `AddHandler` subroutine saves the delegate in some sort of collection so that the `RaiseEvent` subroutine described shortly can invoke it.

The `RemoveHandler` subroutine executes when the program removes an event handler from the object. It takes as a parameter a delegate variable indicating the event handler that should be removed. Normally, the `RemoveHandler` subroutine deletes the delegate from the collection that `AddHandler` used to originally store the delegate.

Finally, the `RaiseEvent` subroutine executes when the object's code uses the `RaiseEvent` statement to raise the event. For example, suppose that the `Employee` class defines the `NameChanged` event. When the class's `FirstName` or `LastName` property procedure changes an `Employee` object's name, it uses the `RaiseEvent` statement to raise the `NameChanged` event. At that point, the custom `RaiseEvent` subroutine executes.

Normally, the `RaiseEvent` subroutine calls the delegates stored by the `AddHandler` subroutine in the class's collection of event delegates.

Example program CustomEvent, which is available for download on the book's web site, uses the following code to implement a custom `NameChanged` event. It begins with the `FirstName` and `LastName` property procedures. The `Property Set` procedures both use the `RaiseEvent` statement to raise the `NameChanged` event. This is fairly straightforward and works just as it would if the class used the simpler event declaration.

```
Public Class Employee
    ' The FirstName property.
    Private m_FirstName As String
    Public Property FirstName() As String
        Get
            Return m_FirstName
        End Get
        Set(ByVal value As String)
            m_FirstName = value
            RaiseEvent NameChanged(m_FirstName & " " & m_LastName)
        End Set
    End Property

    ' The LastName property.
    Private m_LastName As String
    Public Property LastName() As String
        Get
            Return m_LastName
        End Get
        Set(ByVal value As String)
            m_LastName = value
            RaiseEvent NameChanged(m_FirstName & " " & m_LastName)
        End Set
    End Property

    ' List to hold the event handler delegates.
    Private m_EventDelegates As New ArrayList

    ' Defines the event handler signature.
    Public Delegate Sub NameChangedDelegate(ByVal new_name As String)

    ' Define the custom NameChanged event.
    Public Custom Event NameChanged As NameChangedDelegate
        AddHandler(ByVal value As NameChangedDelegate)
            Debug.WriteLine("AddHandler")
            m_EventDelegates.Add(value)
        End AddHandler

        RemoveHandler(ByVal value As NameChangedDelegate)
            Debug.WriteLine("RemoveHandler")
            m_EventDelegates.Remove(value)
        End RemoveHandler

        RaiseEvent(ByVal new_name As String)
            Debug.WriteLine("RaiseEvent (" & new_name & ")")
            For Each a_delegate As NameChangedDelegate In m_EventDelegates
                a_delegate(new_name.Replace(" ", "+"))
            Next a_delegate
        End RaiseEvent
    End Event
End Class
```

Next, the code defines an `ArrayList` named `m_EventDelegates` that it will use to store the event handler delegates. It then uses a `Delegate` statement to define the types of event handlers that this event will call. In this example, the event handler must be a subroutine that takes a String parameter passed by value.

Now, the code defines the `NameChanged` custom event. Notice that the `Custom Event` statement ends with the delegate `NameChangedDelegate`. If you type this first line and press Enter, Visual Basic creates empty `AddHandler`, `RemoveHandler`, and `RaiseEvent` subroutines for you.

Subroutine `AddHandler` displays a message and saves the delegate in the `m_EventDelegates` list. When `AddHandler` is called, the `value` parameter refers to an event handler routine that has the proper type.

The subroutine `RemoveHandler` displays a message and removes a delegate from the `m_EventDelegates` list. In a real application, this routine would need some error-handling code in case the delegate is not in `m_EventDelegates`.

When the `FirstName` and `LastName` property set procedures use the `RaiseEvent` statement, the `RaiseEvent` subroutine executes. This routine's parameter takes whatever value the class used when it used the `RaiseEvent` statement. This subroutine displays a message and then loops through all the delegates stored in the `m_EventDelegates` list, invoking each. It passes each delegate the `new_name` value it received in its parameter, with spaces replaced by plus signs.

The following code demonstrates the `NameChanged` event handler. It creates a new `Employee` object and then uses two `AddHandler` statements to assign the event `Employee_NameChanged` handler to the object's `NameChanged` event. This makes the custom `AddHandler` subroutine execute twice and save two references to the `Employee_NameChanged` subroutine in the delegate list.

Next, the program sets the `Employee` object's `FirstName`. The `FirstName` property set procedure raises the `NameChanged` event so the `RaiseEvent` subroutine executes. `RaiseEvent` loops through the delegate list and calls the delegates. In this example, that means the subroutine `Employee_NameChanged` executes twice.

The program then uses a `RemoveHandler` statement to remove an `Employee_NameChanged` event handler. The custom `RemoveHandler` subroutine executes and removes one instance of the `Employee_NameChanged` subroutine from the delegate list. Next the program sets the `Employee` object's `LastName`. The `LastName` property set procedure uses the `RaiseEvent` statement so the `RaiseEvent` subroutine executes. Now there is only one instance of the `Employee_NameChanged` subroutine in the delegate list, so it is called once. Finally, the code uses the `RemoveHandler` statement to remove the remaining instance of `Employee_NameChanged` from the delegate list. The `RemoveHandler` subroutine executes and removes the instance from the delegate list.

```
Dim emp As New Employee
AddHandler emp.NameChanged, AddressOf Employee_NameChanged
AddHandler emp.NameChanged, AddressOf Employee_NameChanged
emp.FirstName = "Rod"
RemoveHandler emp.NameChanged, AddressOf Employee_NameChanged
emp.LastName = "Stephens"
RemoveHandler emp.NameChanged, AddressOf Employee_NameChanged
```

The following text shows the result in the Debug window. It shows where the `AddHandler`, `RaiseEvent`, and `RemoveHandler` subroutines execute. You can also see where the `Employee_NameChanged` event handler executes and displays its name.

```
AddHandler
AddHandler
RaiseEvent (Rod )
Employee_NameChanged: Rod+
Employee_NameChanged: Rod+
RemoveHandler
RaiseEvent (Rod Stephens)
Employee_NameChanged: Rod+Stephens
RemoveHandler
```

Shared Variables

If you declare a variable in a class with the `Shared` keyword, all objects of the class share a single instance of that variable. You can get or set the variable's value through any instance of the class.

For example, suppose the `Student` class declares a shared `NumStudents` variable, as shown in the following code:

```
Public Class Student
    Shared NumStudents As Integer
...
End Class
```

In this case, all instances of the `Student` class share the same `NumStudents` value. The following code creates two `Student` objects. It uses one to set the shared `NumStudents` value and uses the other to display the result.

```
Dim student1 As New Student
Dim student2 As New Student
student1.NumStudents = 100
MessageBox.Show(student2.NumStudents)
```

Because all instances of the class share the same variable, any changes to the value that you make using one object are visible to all the others. Figure 26-4 illustrates this idea. Each `Student` class instance has its own `FirstName`, `LastName`, `Scores`, and other individual data values, but they all share the same `NumStudents` value.

Because a shared variable is associated with the class as a whole and not a specific instance of the class, Visual Basic lets you refer to it using the class's name in addition to using specific instance variables. In fact, if you try to access a shared variable through a specific instance rather than through the class, Visual Basic flags the code with a warning, although it will run the code.

The following code defines a new `Student` object and uses it to set `NumStudents` to 100. It then uses the class name to display the `NumStudents` value.
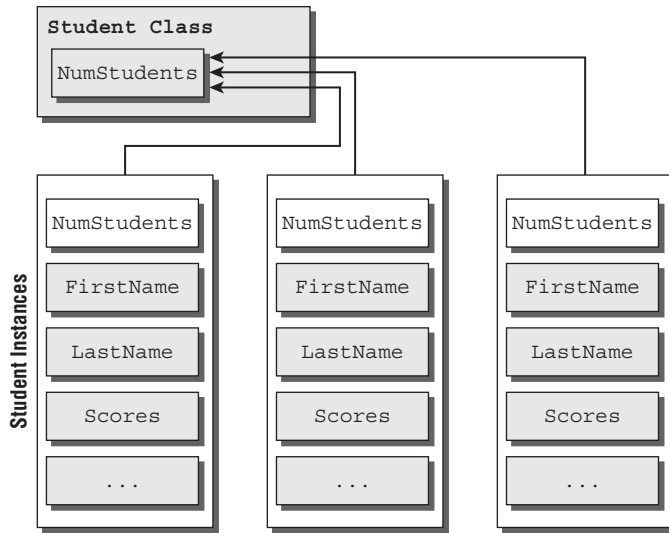
Figure 26-4: If a variable in a class is declared Shared, all instances of a class share the same value.

```
Dim student1 As New Student
student1.NumStudents = 100
MessageBox.Show(Student.NumStudents)
```

Shared Methods

Shared methods are a little less intuitive than shared variables. Like shared variables, shared methods are accessible using the class's name. For example, the NewStudent function shown in the following code is declared with the Shared keyword. This function creates a new Student object, initializes it by adding it to some sort of database, and then returns the new object.

```
Public Class Student
    ...
    ' Return a new Student.
    Public Shared Function NewStudent() As Student
        ' Instantiate the Student.
        Dim new_student As New Student

        ' Add the new student to the database.
        '...

        ' Return the new student.
        Return new_student
    End Function
    ...
End Class
```

This type of function that creates a new instance of a class is sometimes called a *factory method*. In some cases, you can use an appropriate constructor instead of a factory method. One time when a factory

method is useful is when object creation might fail. If data passed to the method is invalid, some resource (such as a database) prohibits the new object (perhaps a new `Student` has the same name as an existing `Student`), or the object may come from more than one place (for example, it may either be a new object or one taken from a pool of existing objects). In those cases, a factory method can return `Nothing`. A constructor could raise an error, but it cannot return `Nothing` if it fails.

If you want to force the program to use a factory method rather than creating an instance of the object directly, give the class a private constructor. Code that lies outside of the class cannot use the constructor because it is private. It also cannot use the default constructor associated with the `New` statement because the class has an explicit constructor. The code must create new objects by using the factory method, which can use the private constructor because it's inside the class.

As is the case with shared variables, you can access a shared method by using any instance of the class or by using the class's name. As is also the case with shared variables, if you access a shared method from an instance of the class, Visual Basic flags it with a warning.

The following code declares the `student1` variable and initializes it by calling the `NewStudent` factory method using the class's name. Next, the code declares `student2` and uses the `student1` object's `NewStudent` method to initialize it.

```
Dim student1 As Student = Student.NewStudent()
Dim student2 As Student = student1.NewStudent()
```

One oddity of shared methods is that they can use class variables and methods only if they are also shared. If you think about accessing a shared method through the class name rather than an instance of the class, this makes sense. If you don't use an instance of the class, there is no instance to give the method data.

In the following code, the `Student` class declares the variable `NumStudents` with the `Shared` keyword so shared methods can use that value. It declares the instance variables `FirstName` and `LastName` without the `Shared` keyword, so shared methods cannot use those values. The shared `NewStudent` method starts by incrementing the shared `NumStudents` value. It then creates a new `Student` object and initializes its `FirstName` and `LastName` values. It can initialize those values because it is using a specific instance of the class and that instance has `FirstName` and `LastName` values.

```
Public Class Student
    Public Shared NumStudents As Integer
    Public FirstName As String
    Public LastName As String
    ...
    ' Return a new Student.
    Public Shared Function NewStudent() As Student
        ' Increment the number of Students loaded.
        NumStudents += 1

        ' Instantiate the Student.
        Dim new_student As New Student
        new_student.FirstName = "<unknown>"
        new_student.LastName = "<unknown>"

        ' Add the new student to the database.
```

```
        ...

        ' Return the new student.
        Return new_student
    End Function
    ...
End Class
```

Figure 26-5 illustrates the situation. The shared `NewStudent` method is contained within the class itself and has access to the `NumStudents` variable. If it wanted to use a `FirstName`, `LastName`, or `Scores` value, however, it needs to use an instance of the class.
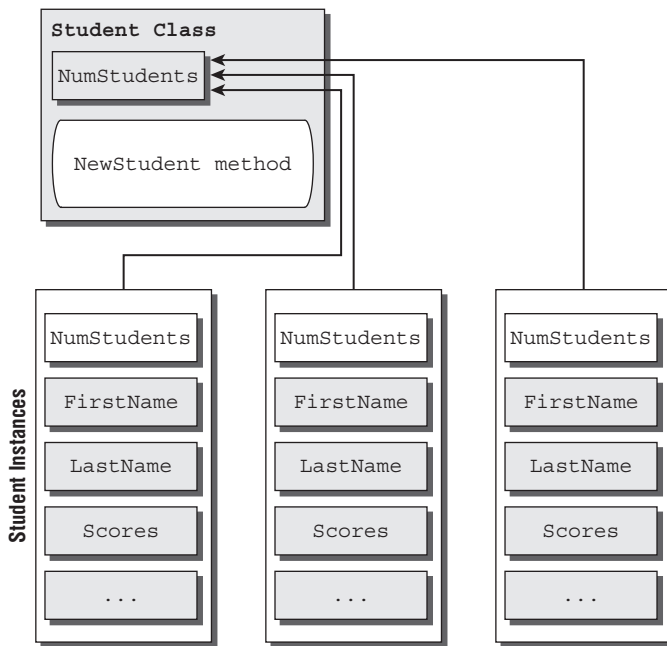
Figure 26-5: A shared method can only access other shared variables and methods.

Summary

Classes and structures are very similar. Both are container types that group related variables, methods, and events in a single entity.

Most developers use classes exclusively, primarily because structures are relatively new and developers are more familiar with classes. Structures also cannot take advantage of inheritance.

Another significant factor when picking between classes and structures, however, is their difference in type. Classes are reference types, whereas structures are value types. This gives them different behaviors when defining and initializing objects, and when passing objects to routines by value and by reference.

When you understand the differences between classes and structures, you can select the one that is more appropriate for your application.

If you build enough classes and structures, you may start to have naming collisions. It is common for developers working on different projects to define similar business classes such as `Employee`, `Customer`, `Order`, and `InventoryItem`. Although these objects may be similar, they may differ in important details. The `Customer` class defined for a billing application might include lots of account and billing address information, whereas a repair assignment application might focus on the customer's equipment and needs.

Having two `Customer` classes around can result in confusion and programs that cannot easily interact with each other. Namespaces can help categorize code and differentiate among classes. You can define separate namespaces for the billing and repair assignment applications, and use them to tell which version of the `Customer` class you need for a particular purpose.

Chapter 27, "Namespaces," describes namespaces in detail. It explains how to create namespaces and how to use them to refer to classes created in other modules.

27

Namespaces

In large applications, it is fairly common to have name collisions. One developer might create an `Employee` class, while another makes a function named `Employee` that returns the employee ID for a particular person's name. Or two developers might build different `Employee` classes that have different properties and different purposes. When multiple items have the same name, this is called a *namespace collision* or *namespace pollution*.

These sorts of name conflicts are most common when programmers are not working closely together. For example, different developers working on the payroll and human resources systems might both define `Employee` classes with slightly different purposes.

Namespaces enable you to classify and distinguish among programming entities that have the same name. For example, you might build the payroll system in the Payroll namespace and the human resources system in the HumanResources namespace. Then, the two `Employee` classes would have fully qualified names `Payroll.Employee` and `HumanResources.Employee`, so they could coexist peacefully and the program could tell them apart.

The following code shows how an application would declare these two types of `Employee` objects:

```
Dim payroll_emp As Payroll.Employee
Dim hr_emp As HumanResources.Employee
```

Namespaces can contain other namespaces, so you can build a hierarchical structure that groups different entities. You can divide the Payroll namespace into pieces to give developers working on that project some isolation from each other.

Namespaces can be confusing at first, but they are really fairly simple. They just break up the code into manageable pieces so that you can group parts of the program and tell different parts from each other.

This chapter describes namespaces. It explains how to use namespaces to categorize programming items and how to use them to select the right versions of items with the same name.

The Imports Statement

Visual Studio defines thousands of variables, classes, routines, and other entities to provide tools for your applications. It categorizes them in namespaces to prevent name collisions and to make it easier for you to find the items you need.

The Visual Studio root namespaces are named Microsoft and System. The Microsoft namespace includes namespaces that support different programming languages and tools such as CSharp, JScript, VisualBasic, Reporting, SqlServer, and Vsa. The Microsoft namespace also includes the Win32 namespace, which provides classes that handle operating system events and that manipulate the Registry.

The System namespace contains a huge number of useful programming items, including many nested namespaces. For example, the System.Drawing namespace contains classes related to drawing, System.Data contains classes related to databases, System.Threading holds classes dealing with multithreading, and System.Security includes classes for working with security and cryptography.

Note that these namespaces are not necessarily available to your program at all times. For example, by default, the Microsoft.JScript namespace is not available to Visual Basic programs. To use it, you must first add a reference to the `Microsoft.JScript.dll` library.

Visual Studio includes so many programming tools that the namespace hierarchy is truly enormous. Namespaces are refined into sub-namespaces, which may be further broken into more namespaces until they reach a manageable size. Although this makes it easier to differentiate among all of the different programming entities, it makes the fully qualified names of some classes rather cumbersome.

Example program DrawDashes, which is available for download on the book's web site, uses the following code to draw a rectangle inside its form. Fully qualified names such as `System.Drawing .Drawing2D.DashStyle.DashDotDot` are so long that they make the code hard to read.

```
Private Sub DrawDashedBox(ByVal gr As System.Drawing.Graphics)
    gr.Clear(Me.BackColor)

    Dim rect As System.Drawing.Rectangle = Me.ClientRectangle
    rect.X += 10
    rect.Y += 10
    rect.Width -= 20
    rect.Height -= 20

    Using my_pen As New System.Drawing.Pen(System.Drawing.Color.Blue, 5)
        my_pen.DashStyle = System.Drawing.Drawing2D.DashStyle.DashDotDot
        gr.DrawRectangle(my_pen, rect)
    End Using
End Sub
```

You can use the `Imports` statement at the top of the file to make using namespaces easier. After you import a namespace, your code can use the items it contains without specifying the namespace.

Example program DrawDashesWithImports, which is also available for download on the book's web site, uses the following code. It imports the System.Drawing and System.Drawing.Drawing2D namespaces so it doesn't need to mention the namespaces in its object declarations. This version is much easier to read.

```
Imports System.Drawing
Imports System.Drawing.Drawing2D
...
Private Sub DrawDashedBox(ByVal gr As Graphics)
    gr.Clear(Me.BackColor)

    Dim rect As Rectangle = Me.ClientRectangle
    rect.X += 10
    rect.Y += 10
    rect.Width -= 20
    rect.Height -= 20

    Using my_pen As New Pen(Color.Blue, 5)
        my_pen.DashStyle = DashStyle.DashDotDot
        gr.DrawRectangle(my_pen, rect)
    End Using
End Sub
```

System.Drawing is automatically imported by default in Windows Forms applications so you normally don't need to import it. See the following section for more information on automatic imports.

A file can include any number of Imports statements. The statements must appear at the beginning of the file, and they define namespace shortcuts for the entire file. If you want different pieces of code to use different sets of Imports statements, you must place the pieces of code in different files. If the pieces of code are in the same class, use the Partial keyword so you can split the class into multiple files.

If a program imports two namespaces that define classes with the same names, the code must use fully qualified names to select the right versions. For example, suppose that the Payroll and HumanResources modules both define Employee classes. Then you must use the fully qualified names Payroll .Employee and HumanResources.Employee to differentiate between the two within the same file.

The complete syntax for the Imports statement is as follows:

```
Imports [alias =] namespace[.element]
```

The following sections describe namespace aliases and elements in detail.

Automatic Imports

Visual Basic lets you quickly import a namespace for all of the modules in a project. In Solution Explorer, double-click My Project. Click the References tab to display the page shown in Figure 27-1.
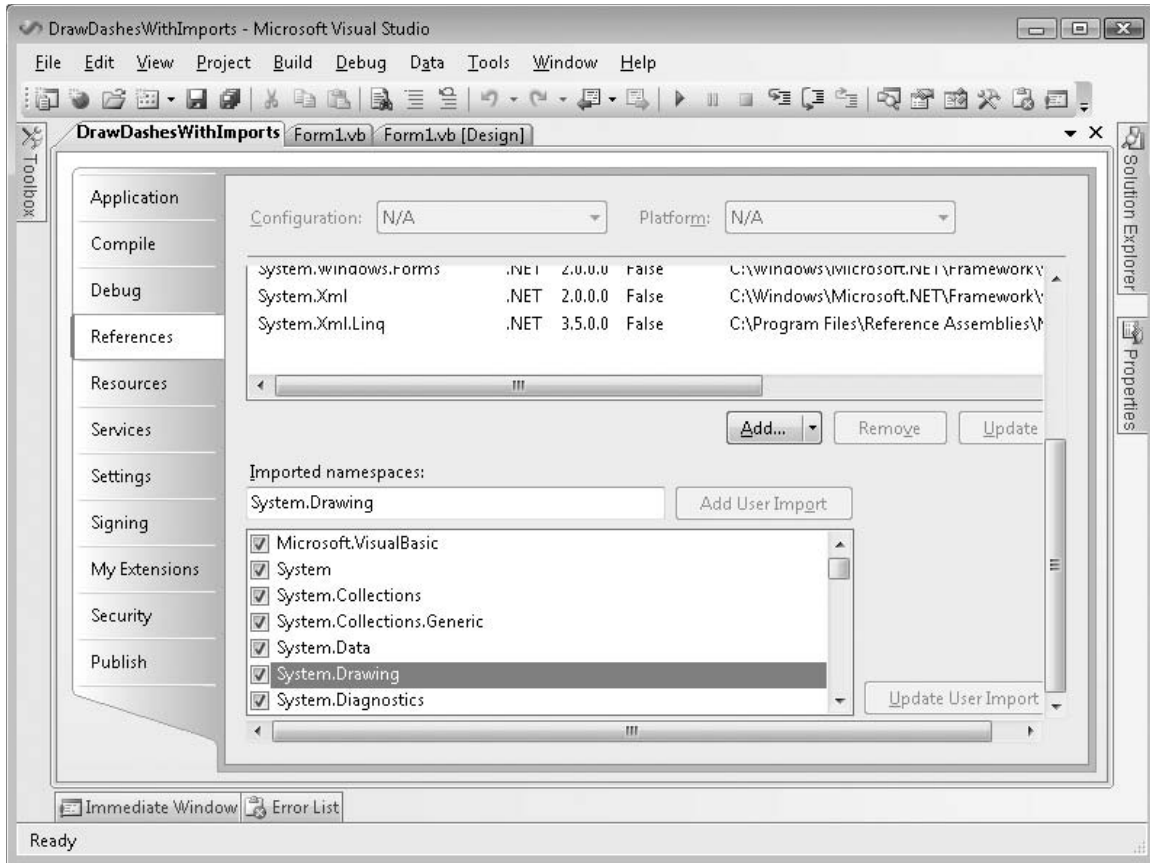
Figure 27-1: Use the My Project References tab to import namespaces for every module in a project.

In the Imported namespaces list at the bottom, select the check box next to the namespaces that you want to import. The program's files will be able to use the objects defined in these namespaces, even though they do not include Imports statements.

This is most useful when most of the program's modules need to import the same namespaces. Including the Imports statement in the files makes it easier for developers to see which namespaces are available, however, so you might want to do this instead, particularly if you use unusual namespaces.

By default, Visual Basic loads imports for the type of application you are building. For example, when you start a Windows Form application, Visual Basic imports the following namespaces:

❑   Microsoft.VisualBasic

❑   System

❑   System.Collections

❑ System.Collections.Generic

❑ System.Data

❑ System.Drawing

❑ System.Diagnostics

❑ System.Windows.Forms

You can use the upper half of the References property page to manage project references. Use the Add and Remove buttons (scrolled off to the right in Figure 27-1) to add and remove references.

Click the Unused References button (scrolled off to the right in Figure 27-1) to see a list of referenced libraries not currently used by the project. Before you distribute the program, you can remove the unused references.

Namespace Aliases

You can use the *alias* clause to define a shorthand notation for the namespace. For instance, the following code imports the System.Drawing.Drawing2D namespace and gives it the alias D2. Later, it uses D2 as shorthand for the fully qualified namespace.

```
Imports D2 = System.Drawing.Drawing2D
...
Dim dash_style As D2.DashStyle = D2.DashStyle.DashDotDot
```

This technique is handy if you need to use two namespaces that define different classes with the same name. Normally, if two namespaces define classes with the same name, you must use the fully qualified class names so that Visual Basic can tell them apart. You can use aliases to indicate the namespaces more concisely.

Suppose that the JobClasses and FinanceStuff namespaces both define an `Employee` class. If you declare a variable using the unqualified class `Employee`, Visual Basic would not know which version to use. The following code shows how you can declare fully qualified versions of the `Employee` class in the JobNamespaces application:

```
Imports JobNamespaces.JobClasses
Imports JobNamespaces.FinanceStuff
...
Dim job_emp As JobNamespaces.JobClasses.Employee
Dim finance_emp As JobNamespaces.FinanceStuff.Employee
...
```

Example program JobNamespaces, which is available for download on the book's web site, uses aliases to simplify these declarations. This program uses `Job` as an alias for MyApplication.JobClasses and `Finance` as an alias for MyApplication.FinanceStuff.

Now suppose that the JobClasses namespace also defines the `Dispatcher` class. The FinanceStuff namespace does not define a `Dispatcher` class, so there is no name conflict between the namespaces. You could use the `Job` alias to refer to the `Dispatcher` class, or you could import the JobClasses namespace again without an alias as shown in the following code:

```
Imports JobNamespaces.JobClasses
Imports Job = JobNamespaces.JobClasses
Imports Finance = JobNamespaces.FinanceStuff
...
Dim job_emp As Job.Employee
Dim finance_emp As Finance.Employee
Dim job_dispatcher As Dispatcher
...
```

Namespace Elements

In addition to importing a namespace, you can import an element within the namespace. This is particularly useful for enumerated types.

For example, the following code imports the System.Drawing.Drawing2D namespace, which defines the `DrawStyle` enumeration. It declares the variable `dash_style` to be of the `DashStyle` type and sets its value to `DashStyle.DashDotDot`.

```
Imports System.Drawing.Drawing2D
...
Dim dash_style As DashStyle = DashStyle.DashDotDot
...
```

Example program DrawDashesImportsDashStyle, which is available for download on the book's web site, uses the following code to import the System.Drawing.Drawing2D.DashStyle enumeration. That allows it to set the value of `my_pen.DashStyle` to `DashDotDot` without needing to specify the name of the enumeration (`DashStyle`).

```
Imports System.Drawing.Drawing2D
Imports System.Drawing.Drawing2D.DashStyle
...
    my_pen.DashStyle = DashDotDot
...
```

The Root Namespace

Every project has a root namespace, and every item in the project is contained directly or indirectly within that namespace. To view or change the project's root namespace, open Solution Explorer and double-click the My Projects entry. View or modify the root namespace on the Application tab's "Root namespace" text box.

Making Namespaces

You can create new namespaces nested within the root namespace to further categorize your code. The easiest way to create a namespace is by using the Namespace statement. The following code declares a namespace called SchedulingClasses. It includes the definition of the TimeSlot class and possibly other classes.

```
Namespace SchedulingClasses
    Public Class TimeSlot
        ...
    End Class
    ...
End Namespace
```

Code inside the namespace can refer to the TimeSlot class as simply TimeSlot. Code outside of the namespace can refer to the class using the namespace as shown in the following code (assuming MyApplication is the project's root namespace):

```
Dim time_slot As New MyApplication.SchedulingClasses.TimeSlot
```

You can nest namespaces within other namespaces to any depth. In fact, because all of your application's code is contained within the root namespace, any namespace you create is already contained within another namespace. There is no way to make a namespace that is not contained within the root namespace.

If you want to make a namespace that lies outside of the application's root namespace, you must create a library project. Then the code in that project lies within its own root namespace.

The following code defines the DispatchClasses namespace. That namespace contains the AppointmentClasses and JobClasses namespaces, each of which defines some classes.

```
Namespace DispatchClasses
    Namespace AppointmentClasses
        Public Class AppointmentWindow
            ...
        End Class
        ...
    End Namespace

    Namespace JobClasses
        Public Class SkilledJob
            ...
        End Class
        ...
    End Namespace
End Namespace
```

The following code shows how an application could create references to `AppointmentWindow` and `SkilledJob` objects using the class's fully qualified names:

```
Dim appt As New _
    MyApplication.DispatchClasses.AppointmentClasses.AppointmentWindow
Dim job As New MyApplication.DispatchClasses.JobClasses.SkilledJob
```

A `Namespace` statement can only appear at the namespace level. You cannot create a namespace within a module, class, structure, or method.

Inside a namespace, you can define other namespaces, classes, structures, modules, enumerated types, and interfaces. You cannot directly define variables, properties, subroutines, functions, or events. Those items must be contained within some other entity (such as a class, structure, module, or interface).

You can use more than one `Namespace` statement to define pieces of the same namespace. For example, the following code uses a `Namespace` statement to make the OrderEntryClasses namespace, and it defines the `Employee` class inside it. Later, the code uses another `Namespace` statement to add the `Customer` class to the same namespace. In this case, the single namespace contains both classes.

```
Namespace OrderEntryClasses
    Public Class Employee
        ...
    End Class
End Namespace
...
Namespace OrderEntryClasses
    Public Class Customer
        ...
    End Class
End Namespace
```

Example program NamespaceHierarchy, which is available for download on the book's web site, defines several nested namespaces.

Scattering pieces of a namespace throughout your code will probably confuse other developers. One case where it might make sense to break a namespace into pieces would be if you want to put different classes in different code files, either to prevent any one file from becoming too big or to allow different programmers to work on the files at the same time. In that case, it might make sense to place related pieces of the application in the same namespace but in different files.

Classes, Structures, and Modules

Modules, classes, and structures create their own name contexts that are similar in some ways to namespaces. For example, a class or structure can contain the definition of another class or structure, as shown in the following code:

```
Public Class Class1
    Public Class Class2
        ...
    End Class

    Public Structure Struct1
        Public Name As String

        Public Structure Struct2
            Public Name As String
        End Structure
    End Structure
End Class
```

You can access public module members and shared class or structure members using a fully qualified syntax similar to the one used by namespaces. For example, the following code creates the GlobalValues module and defines the public variable MaxJobs within it. Later, the program can set MaxJobs using its fully qualified name.

```
Module GlobalValues
    Public MaxJobs As Integer
    ...
End Module
...
MyApplication.GlobalValues.MaxJobs = 100
```

Although these cases look very similar to namespaces, they really are not. One big difference is that you cannot use a Namespace statement inside a class, structure, or module.

IntelliSense gives another clue that Visual Basic treats classes, structures, and modules differently from namespaces. The IntelliSense popup shown in Figure 27-2 displays curly braces ({}) next to the FinanceStuff and JobClasses namespaces, but it displays different icons for the classes Employer and Form1, and the module Module1. When you select a namespace, IntelliSense also displays a tooltip (on the right in Figure 27-2) giving the namespace's name.
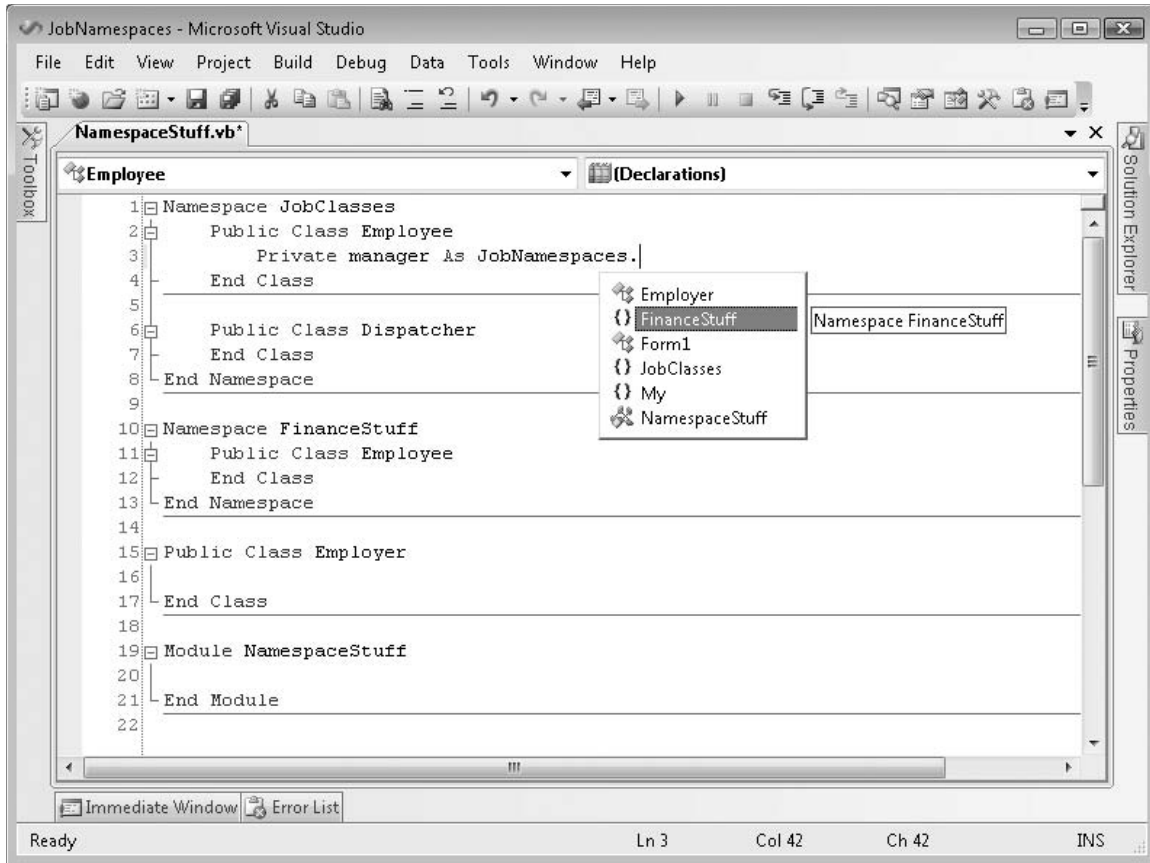
Figure 27-2: IntelliSense displays curly braces ({}) to the left of namespaces such as FinanceStuff and JobClasses.

Resolving Namespaces

Normally, Visual Basic does a pretty good job of resolving namespaces, and you don't need to worry too much about the process. If you import a namespace, you can omit the namespace in any declarations that you use. If you have not imported a namespace, you can fully qualify declarations that use the namespace and you're done. There are some in-between cases, however, that can be confusing. To understand them, it helps to know a bit more about how Visual Basic resolves namespaces.

When Visual Basic sees a reference that uses a fully qualified namespace, it looks in that namespace for the item it needs and that's that. It either succeeds or fails. For example, the following code declares a variable of type `System.Collections.Hashtable`. Visual Basic looks in the System.Collections namespace and tries to find the `Hashtable` class. If the class is not there, the declaration fails.

```
Dim hash_table As New System.Collections.Hashtable
```

When Visual Basic encounters a qualified namespace, it first assumes that it is fully qualified. If it cannot resolve the reference as described in the previous paragraph, it tries to treat the reference as partially qualified and it looks in the current namespace for a resolution. For example, suppose you declare a variable as shown in the following code:

```
Dim emp As JobClasses.Employee
```

In this case, Visual Basic searches the current namespace for a nested namespace called JobClasses. If it finds such a namespace, it looks for the Employee class in that namespace.

If Visual Basic cannot resolve a namespace using these methods, it moves up the namespace hierarchy and tries again. For example, suppose that the current code is in the MyApplication.JobStuff .EmployeeClasses.TimeSheetRoutines namespace. Now, suppose that the SalaryLevel class is defined in the MyApplication.JobStuff namespace and consider the following code:

```
Dim salary_level As New SalaryLevel
```

Visual Basic examines the current namespace MyApplication.JobStuff.EmployeeClasses.TimeSheetRoutines and doesn't find a definition for SalaryLevel. It moves up the namespace hierarchy and searches the MyApplication.JobStuff.EmployeeClasses namespace, again failing to find SalaryLevel. It moves up the hierarchy again to the MyApplication.JobStuff namespace, and there it finally finds the SalaryLevel class.

Movement up the namespace hierarchy can sometimes be a bit confusing. It may lead Visual Basic to resolve references in an ancestor of the current namespace, in some sort of "uncle/aunt" namespace, or in a "cousin" namespace.

For example, consider the namespace hierarchy shown in Figure 27-3. The root namespace MyApplication contains the namespaces BusinessClasses and AssignmentStuff. BusinessClasses defines the Employee and Customer classes. AssignmentStuff contains the AssignmentGlobals module, which defines the MakeAssignment subroutine and a different version of the Employee class.

Now, suppose that the Customer class contains the following subroutine:

```
Public Sub AssignEmployee()
    AssignmentStuff.AssignmentGlobals.MakeAssignment(Me)
    ...
End Sub
```

This code lies in the MyApplication.BusinessClasses namespace. Visual Basic cannot find a meaning for the AssignmentStuff namespace locally in that context, so it moves up the namespace hierarchy to MyApplication, where it finds the AssignmentStuff namespace. Within that namespace, it finds the AssignmentGlobals module and the MakeAssignment subroutine that it contains.
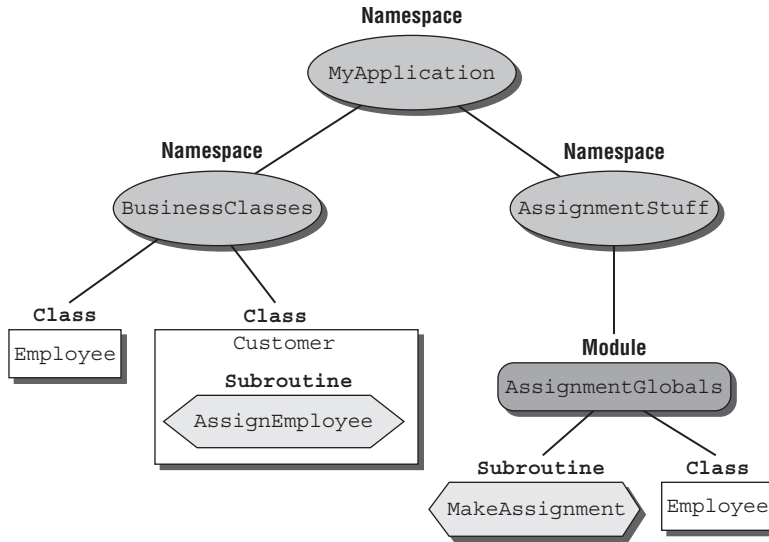
Figure 27-3: Visual Basic may search all over the namespace hierarchy to resolve a declaration.

Visual Basic can also peer into modules as if their public contents were part of the namespace itself. That means you can rewrite the previous code in the following slightly simpler version:

```
Public Sub AssignEmployee()
    AssignmentStuff.MakeAssignment(Me)
    ...
End Sub
```

In this example, there is only one MakeAssignment subroutine, so there's little doubt that Visual Basic has found the correct one. If different namespaces define items with the same names, the situation can be somewhat more confusing. Suppose that the Customer class declares an object that is from the Employee class defined in the MyApplication.AssignmentStuff namespace, as shown in the following code:

```
Dim emp As New AssignmentStuff.Employee
```

If you understand how Visual Basic performs namespace resolution, you can figure out that the object is of the Employee class defined in the MyApplication.AssignmentStuff namespace. This isn't completely obvious, however.

If you add an Imports statements to the program, the situation gets more confusing. Suppose that the program imports the AssignmentStuff namespace and then the Customer class declares a variable of type Employee. Because this code is in the BusinessClasses namespace, Visual Basic uses that namespace's version of Employee. If the code is in some other namespace (such as MyApplication), the program uses the imported AssignmentStuff version of the class.

Finally, suppose that the program imports both BusinessClasses and AssignmentStuff.AssignmentGlobals and then makes the following declaration in another namespace. In this case, Visual Basic cannot decide which version of the class to use, so it generates an error.

```
Dim emp As Employee
```

This example is so confusing, however, that you would probably be better off restructuring the namespaces and possibly renaming one of the versions of the `Employee` class rather than trying to figure out how Visual Basic is resolving the namespaces.

You can simplify these issues by avoiding duplicate names across all namespaces. When you do use duplicate namespaces, you can use fully qualified namespaces to avoid ambiguity. You can also use `Imports` statements to make namespace aliases and then use the aliases to avoid ambiguity more concisely.

Summary

Namespaces are everywhere in Visual Basic. Every piece of code you write is contained in some namespace, even if it is only the application's root namespace. Despite their pervasiveness, many developers never need to use namespaces explicitly, so they find them somewhat mystifying.

Namespaces are really quite simple, however. They merely divide programming items into a hierarchy. They enable you to categorize related items and resolve name collisions in different parts of the application.

You can use the `Imports` statement to allow the program to refer to items in a namespace without giving fully qualified names. A namespace alias lets you explicitly specify an item's namespace in an abbreviated form. This is particularly useful to resolve ambiguous names that appear in more than one namespace included in `Imports` statements.

This chapter described namespaces in general. Chapter 28, "Collection Classes," describes some of the useful classes for grouping object classes, including those in the System.Collections and System .Collections.Generic namespaces.

28

Collection Classes

Visual Basic .NET includes a large assortment of pre-built classes that store and manage groups of objects. These collection classes provide a wide variety of different features, so the right class for a particular purpose depends on your application.

For example, an array is good for storing objects in a particular fixed order. An `ArrayList` enables you to add, remove, and rearrange its objects much more easily than an array does. A `Queue` lets a program easily add items and remove them in first in, first out order. In contrast, a `Stack` lets the program remove items in last in, first out order.

This chapter describes these different kinds of collection classes and provides tips for selecting the right one for various purposes.

What Is a Collection?

The word *collection* means a group of objects that should be kept together. For example, a coin collection is a group of coins that you keep together because they are rare, valuable, or otherwise interesting.

Unfortunately, the idea of a collection is such a useful concept that Visual Basic adopted the word and made a specific class named `Collection`. The `Collection` class *does* keep a group of objects together, but it reserves for its own use the perfect word for these kinds of groups of objects.

That leads to some semantic ambiguity when you talk about collection classes. Do you mean the `Collection` class? Or do you mean some other class that groups objects? Even the Visual Basic documentation has this problem and sometimes uses *collection classes* to mean classes that group things together.

This chapter describes the `Collection` class as well as other collection classes.

One of the most basic Visual Basic entities that groups objects is an *array*. An array stores data values or references to objects in a simple block of memory with one entry directly following another. The `Array` *class* provides some special methods for manipulating arrays (such as reversing, sorting, or searching an array).

The `Collection` class provides a few specific features for working with its group of objects. It enables you to add an item to the `Collection`, optionally specifying a key for the item. You can then search for the item or remove the item using its key or its index in the `Collection`.

One of the most useful features of the `Collection` class is that it supports enumerators and `For Each` loops. That lets you easily loop over the objects in a `Collection` without worrying about the number of objects it contains.

Other classes derived from the `Collection` class provide additional features. For example, the `HashTable` class can store a large number of objects with associated keys very efficiently. The `Queue` class makes it easy to work with objects on a first in, first out (FIFO) basis, whereas the `Stack` class helps you work with objects in a last in, first out order (LIFO).

The remainder of this chapter describes these classes in detail.

Arrays

Visual Basic .NET provides two basic kinds of arrays. First, it provides the normal arrays that you get when you declare a variable by using parentheses. For example, the following code declares an array of Integers named `squares`. The array contains 11 items with indexes ranging from 0 to 10. The code loops over the items, setting each one's value. Next, it loops over the values again, adding them to a string. When it has finished building the string, the program displays the result.

```
Private Sub ShowSquares()
    Dim squares(10) As Integer

    For i As Integer = 0 To 10
        squares(i) = i * i
    Next i

    Dim txt As String = ""
    For i As Integer = 0 To 10
        txt &= squares(i).ToString & vbCrLf
    Next i
    MessageBox.Show(txt)
End Sub
```

The Visual Basic `Array` class provides another kind of array. This kind of array is actually an object that provides methods for managing the items stored in the array.

The following code shows the previous version of the code rewritten to use an `Array` object. This version creates the array by using the `Array` class's shared `CreateInstance` method, passing it the data type that the array should contain and the number of items that it should hold. The code then loops over the items using the array's `SetValue` method to set the items' values. If you have `Option Strict` turned off, the code can set the items' values exactly as before by using the statement `squares(i) = i * i`. If `Option Strict` is on, you need to use `SetValue`. Next, the program loops over the items again, using the array's `GetValue` method to add the item values to a string. If `Option Strict` is off, you can use

the same syntax as before: `txt &= squares(i).ToString & vbCrLf`. If `Option Strict` is on, you need to use the array's `GetValue` method. After building the string, the program displays it in a message box as before.

```
Private Sub ShowSquares()
    Dim squares As Array = _
        Array.CreateInstance(GetType(Integer), 11)

    For i As Integer = 0 To 10
        squares.SetValue(i * i, i)
    Next i

    Dim txt As String = ""
    For i As Integer = 0 To 10
        txt &= squares.GetValue(i).ToString & vbCrLf
    Next i
    MessageBox.Show(txt)
End Sub
```

Example program ShowSquares, which is available on the book's web site, uses similar code to build a list of squares by using a normal array and by using an `Array` object.

The following sections describe the similarities and differences between normal arrays and `Array` objects.

Array Dimensions

Both normal variable arrays and `Array` objects can support multiple dimensions. The following statement declares a three-dimensional array with 11 items in the first dimension, 11 in the second, and 21 in the third. It then sets the value for the item in position (1, 2, 3).

```
Dim values(10, 10, 20) As Integer
values(1, 2, 3) = 100
```

The following code does the same thing with an `Array` object:

```
Dim values As Array = _
    Array.CreateInstance(GetType(Integer), 11, 21, 31)
    values.SetValue(100, 1, 2, 3)
```

If `Option Strict` is off, the code can use the same syntax for getting and setting the `Array` item's value. The following code sets the (1, 2, 3) item's value to 100 and then displays its value (100):

```
Option Strict Off
...
values(1, 2, 3) = 100
Debug.WriteLine(values(1, 2, 3))
```

621

Lower Bounds

A normal array of variables always has lower bound 0 in every dimension. The following code declares an array with indexes ranging from 0 to 10:

```
Dim values(10) As Integer
```

You can fake a variable array that has nonzero lower bounds, but it requires extra work on your part. You must add or subtract an appropriate amount from each index to map the indexes you want to use to the underlying zero-based indexes.

`Array` objects can handle nonzero lower bounds for you. The following code creates a two-dimensional array with indexes ranging from 1 to 10 in the first dimension, and 101 to 120 in the second dimension:

```
Dim dimension_lengths() As Integer = {10, 20}
Dim lower_bounds() As Integer = {1, 101}
Dim values As Array = _
    Array.CreateInstance(GetType(Integer), dimension_lengths, lower_bounds)
```

The code first defines an array containing the number of elements it wants for each dimension (10 in the first dimension and 20 in the second dimension). It then creates an array containing the lower bounds it wants to use for each dimension (the first dimension starts with index 1 and the second dimension starts with index 101).

The code then calls the `Array` class's shared `CreateInstance` method, passing it the data type of the array's objects, the array of dimension lengths, and the array of lower bounds. The `CreateInstance` method uses the arrays of lower bounds and dimensions to create an `Array` object with the appropriate bounds.

The following code sets the values in this array. The last two parameters in the call to `SetValue` give the items' positions in the `Array`.

```
For i As Integer = 1 To 10
    For j As Integer = 101 To 120
        values.SetValue(i * 100 + j, i, j)
    Next j
Next i
```

If `Option Strict` is off, the program can use the following simpler syntax:

```
For i As Integer = 1 To 10
    For j As Integer = 101 To 120
        values(i, j) = i * 100 + j
    Next j
Next i
```

Resizing

You can use the `ReDim` statement to change a normal array's dimensions. Add the `Preserve` keyword if you want the array to keep its existing values, as shown here:

```
Dim values(100) As Integer
...
ReDim Preserve values(200)
```

An `Array` object cannot resize itself, but it is relatively easy to copy an `Array` object's items to another `Array` object. The following code creates a values array containing 101 items with indexes ranging from 0 to 100. Later, it creates a new `Array` object containing 201 items and uses the values array's `CopyTo` method to copy its values into the new array. The second parameter to `CopyTo` gives the index in the destination array where the copy should start placing values.

```
Dim values As Array = _
    Array.CreateInstance(GetType(Integer), 101)
...
Dim new_array As Array = _
    Array.CreateInstance(GetType(Integer), 201)
values.CopyTo(new_array, 0)
values = new_array
```

The `Array` class's shared `Copy` method allows you greater control. It lets you specify the index in the source array where the copy should start, the index in the destination array where the items should be copied, and the number of items to be copied.

Although building a new `Array` object and copying items into it is more cumbersome than using `ReDim` to resize a variable array, the process is surprisingly fast.

Speed

There's no doubt that arrays of variables are much faster than `Array` objects. In one test, setting and getting values in an `Array` object took more than 100 times as long as performing the same operations in a variable array.

If your application performs only a few hundred or a thousand array operations, the difference is unimportant. If your application must access array values many millions of times, you may need to consider using an array of variables even if the `Array` class would be more convenient for other reasons (such as nonzero lower bounds).

Microsoft has also optimized one-dimensional variable arrays, so they are faster than multidimensional arrays. The difference is much less dramatic than the difference between variable arrays and `Array` classes, however.

Example program ArraySpeeds, which is available for download on the book's web site, compares the speeds of variable arrays and `Array` objects. Enter the number of items that you want to use in the arrays and click Go. The program builds one- and two-dimensional arrays and `Array` objects holding integers. It then fills the arrays and displays the elapsed time.

Figure 28-1 shows the results. Variable arrays are much faster than array classes. One-dimensional variable arrays generally seem to be slightly faster than two-dimensional arrays.
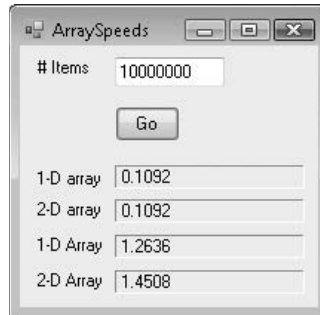
Figure 28-1: Variable arrays are faster than array classes.

Other Array Class Features

The `Array` class provides several other useful shared methods. For example, the `IndexOf` and `LastIndexOf` methods return the position of a particular item in an `Array`.

Methods such as `IndexOf` and `LastIndexOf` would be a strong argument supporting `Array` objects over normal arrays of variables if it weren't for one somewhat surprising fact: Those same methods work with regular arrays of variables, too! The following code fills an array of integers and then uses `Array` methods to display the indexes of the first item with value 6 and the last item with value 3:

```
Dim values(10) As Integer
For i As Integer = 0 To 10
    values(i) = i
Next i

MessageBox.Show(Array.IndexOf(values, 6).ToString)
MessageBox.Show(Array.LastIndexOf(values, 3).ToString)
```

The following sections describe some of the `Array` class's other useful shared methods. All of these work both for arrays of variables and `Array` objects.

Example program ArrayTests, which is available for download on the book's web site, demonstrates the `Array` class's `IndexOf`, `LastIndexOf`, `Reverse`, and `BinarySearch` methods. It also demonstrates the `Sort` method for arrays containing integers, objects that implement the `IComparable` interface, and objects that can be sorted with `IComparer` objects.

Array.Reverse

The `Array.Reverse` method reverses the order of the items in an array. There's nothing particularly confusing about this method. It can easily reverse its items even if the items are not things that you can reasonably compare. For example, it can reverse an array of integers, strings, `StockOption` objects, or `TreeView` controls.

Array.Sort

The `Array.Sort` method sorts the items in the array. To sort the items, this method must compare them to each other. That means the items must be things that can be reasonably compared, such as integers, strings, or dates. More precisely, the method can sort the items if they implement the `IComparable` interface, meaning they contain the means to compare themselves to each other.

The following code shows a `Person` class that implements the `IComparable` interface. The class defines two public strings, `FirstName` and `LastName`. For convenience, it also defines a constructor and a `ToString` function. The code then defines the `CompareTo` function that is required by the `IComparable` interface. This function should compare the value of the current object to the value of the object passed as a parameter. It should return -1 if the current object should come before the parameter, 0 if neither object must come before the other, and 1 if the parameter should come before the current object. The `String.Compare` function makes exactly that calculation for two strings, so the `CompareTo` function uses it to compare the two `Person` objects' names. You could use a more complicated `CompareTo` function to order just about anything.

```
Public Class Person
    Implements IComparable

    Public FirstName As String
    Public LastName As String

    Public Sub New(ByVal first_name As String, ByVal last_name As String)
        FirstName = first_name
        LastName = last_name
    End Sub

    Public Overrides Function ToString() As String
        Return LastName & ", " & FirstName
    End Function

    Public Function CompareTo(ByVal obj As Object) As Integer _
     Implements System.IComparable.CompareTo
        Dim other_Person As Person = DirectCast(obj, Person)
        Return String.Compare(Me.ToString, other_Person.ToString)
    End Function
End Class
```

If a program has an array of `Person` objects, the `Array.Sort` method will sort the objects by last name followed by first name.

You can sort objects that do not implement the `IComparable` interface if you pass the `Sort` method an object that can sort them. For example, suppose you define a `Manager` class that does not implement the `IComparable` interface. The following code shows a `ManagerComparer` class that implements the `IComparer` interface. Its `Compare` method compares two `Manager` objects and returns –1, 0, or 1 to indicate the one that should come first. The call to `DirectCast` converts the `Compare` method's parameters from Objects (specified by the `IComparer` interface) to Managers.

```
Public Class ManagerComparer
    Implements IComparer

    Public Function Compare(ByVal x As Object, ByVal y As Object) As Integer _
     Implements System.Collections.IComparer.Compare
        Dim mgr1 As Manager = DirectCast(x, Manager)
        Dim mgr2 As Manager = DirectCast(y, Manager)

        Return String.Compare(mgr1.ToString, mgr2.ToString)
    End Function
End Class
```

The following code uses a `ManagerComparer` object to sort an array of `Manager` objects named `dept_managers`:

```
' Sort.
Array.Sort(dept_managers, New ManagerComparer)

' Display the results.
Dim txt As String = ""
For i As Integer = 0 To dept_managers.GetUpperBound(0)
    txt &= dept_managers(i).ToString() & vbCrLf
Next i
MessageBox.Show(txt)
```

Other overloaded versions of the `Sort` method let you sort two arrays (one containing keys and the other values) in tandem or sort only parts of the array.

Array.BinarySearch

If the array contains items that are sorted, and the items implement the `IComparable` interface, then the `Array.BinarySearch` method uses a binary search algorithm to locate a specific item within the array.

For example, suppose that the array contains `Person` objects as defined in the previous section. Then you could use the following code to find the object representing Rod Stephens in the people array. The code starts by using `Array.Sort` to sort the array. Next the program makes a new `Person` object that has the name Rod Stephens to represent the target value. The program calls the `Array.BinarySearch` method to find the index of the object with the target name.

```
' Sort the array.
Array.Sort(people)

' Find Rod Stephens.
Dim target_person As New Person("Rod", "Stephens")
Dim target_index As Integer = Array.BinarySearch(people, target_person)
MessageBox.Show(people(target_index).ToString)
```

Binary search is extremely fast, so it works well if you need to find an item within a sorted array. If the items are not sorted, you should consider using a database or `Hashtable` object to store and find items. See the section "Hashtable" later in this chapter for more information.

Collections

The Visual Basic collection classes basically hold items and don't provide a lot of extra functionality. Other classes described later in this chapter provide more features.

The following sections describe the simple collection classes in Visual Basic: `ArrayList`, `StringCollection`, and `NameValueCollection`. They also describe strongly typed collections that you can build to make code that uses these classes a bit easier to debug and maintain.

ArrayList

The `ArrayList` class is a resizable array. You can add and remove items from any position in the list and it resizes itself accordingly. The following table describes some of the class's more useful properties and methods.

Property/Method	Purpose
Add	Adds an item at the end of the list.
AddRange	Adds the items in an object implementing the `ICollection` interface to the end of the list.
BinarySearch	Returns the index of an item in the list. The items must implement the `IComparable` interface, or you must provide the `Sort` method with an `IComparer` object.
Capacity	Gets or sets the number of items that the list can hold. For example, if you know that you will need to add 1000 items to the list, you may get better performance by setting `Capacity` to 1000 before starting, rather than letting the object grow incrementally as you add the items.
Clear	Removes all of the items from the list. The `Capacity` property remains unchanged, so the `ArrayList` keeps any space it has previously allocated to improve performance.
Contains	Returns `True` if a specified item is in the list.
CopyTo	Copies some or the entire list into a one-dimensional `Array` object.
Count	The number of items currently in the list. This is always less than or equal to `Capacity`.
GetRange	Returns an `ArrayList` containing the items in part of the list.
IndexOf	Returns the zero-based index of the first occurrence of a specified item in the list.
Insert	Adds an item at a particular position in the list.

(continued)

Property/Method	Purpose
InsertRange	Adds the items in an object implementing the ICollection interface to a particular position in the list.
Item	Returns the item at a particular position in the list.
LastIndexOf	Returns the zero-based index of the last occurrence of a specified item in the list.
Remove	Removes the first occurrence of a specified item from the list.
RemoveAt	Removes the item at the specified position in the list.
RemoveRange	Removes the items in the specified positions from the list.
Reverse	Reverses the order of the items in the list.
SetRange	Replaces the items in part of the list with new items taken from an ICollection object.
Sort	Sorts the items in the list. The items must implement the IComparable interface, or you must provide the Sort method with an IComparer object.
ToArray	Copies the list's items into a one-dimensional array. The array can be an array of objects, an array of a specific type, or an Array object (holding objects).
TrimToSize	Reduces the list's allocated space so that it is just big enough to hold its items. This sets Capacity = Count.

A single ArrayList object can hold objects of many different kinds. The following code creates an ArrayList and adds a string, Form object, integer, and Bitmap to it. It then loops through the items in the list and displays their types.

```
Dim array_list As New ArrayList
array_list.Add("What?")
array_list.Add(Me)
array_list.Add(1001)
array_list.Add(New Bitmap(10, 10))
For Each obj As Object In array_list
    Debug.WriteLine(obj.GetType.ToString)
Next obj
```

The following text shows the results:

```
System.String
UseArrayList.Form1
System.Int32
System.Drawing.Bitmap
```

The value displayed for the second item depends on the name of the project (in this case, `UseArrayList`).

Example program UseArrayList, which is available on the book's web site, demonstrates several `ArrayList` methods.

StringCollection

A `StringCollection` is similar to an `ArrayList`, except that it can hold only strings. Because it works only with strings, this class provides some extra type checking that the `ArrayList` does not. If your program tries to add an `Employee` object to a `StringCollection`, the collection raises an error.

To take advantage of this extra error checking, you should always use a `StringCollection` instead of an `ArrayList` if you are working with strings. Of course, if you need other features (such as the fast lookups provided by a `Hashtable`), you should use one of the classes described in the following sections.

Strongly Typed Collections

A *strongly typed collection* is a collection class built to work with a particular data type. An `ArrayList` can store objects of any data type. A `StringCollection` is strongly typed to work only with strings. That gives you extra error checking that makes finding and fixing programming mistakes easier. If the program tries to insert an `IncidentReport` object into a `StringCollection`, the collection immediately raises an error and the problem is relatively easy to find.

Similarly, you can define your own collection classes that are strongly typed. For example, you could make an `OrderCollection` class that holds `Order` items. If the program tries to add a `Manager` or `Secretary` object to it, the collection raises an error.

To build a strongly typed collection from scratch, create a new class that inherits from `System.Collections.CollectionBase`. Inheriting from this class automatically gives your class an `ArrayList` object named `List`. It also gives your class some inherited routines that do not depend on the type of object you want the collection to hold. For example, the `RemoveAt` method removes the object at a specific index in the list.

Your class can implement other methods for adding and retrieving items in the collection. For example, it can implement the `Add`, `Remove`, and `Item` methods.

Fortunately, you don't need to build these methods from scratch. You can simply delegate them to the inherited `List` object. For example, the `Add` method can simply call `List.Add`, as shown in the following code:

```
' Add an Employee.
Public Sub Add(ByVal value As Employee)
    List.Add(value)
End Sub
```

This code does nothing other than call the `List` object's methods. The only magic here is that the `EmployeeCollection` class's `Add` method takes a parameter of a particular type (`Employee`), whereas the `List` object's `Add` method takes a generic `Object` as a parameter. It is the `EmployeeCollection` class's insistence on `Employee` objects that makes the collection strongly typed.

The `Add` and `Item` methods are about the minimum useful feature set you can provide for a strongly typed collection class.

The following table lists the standard methods provided by a strongly typed collection class. The third column indicates whether the `CollectionBase` parent class automatically provides the method, or whether you must delegate the method to the `List` object.

Method	Purpose	Provided By
Add	Adds an item to the collection	List
Capacity	Returns the amount of space in the collection	CollectionBase
Clear	Removes all items from the collection	CollectionBase
Contains	Returns `True` if the collection contains a particular item	List
CopyTo	Copies items from the collection into an array	List
Count	Returns the number of items in the collection	CollectionBase
IndexOf	Returns the index of an item	List
InnerList	Returns an `ArrayList` holding the collection's objects	CollectionBase
Insert	Inserts an item at a specific position	List
Item	Returns the item at a specific position	List
List	Returns an `IList` holding the collection's objects	CollectionBase
Remove	Removes an item	List
RemoveAt	Removes the item at a specific position	CollectionBase

You can also add other more specialized methods if they would be useful in your application. For example, you could add methods for working with object field values rather than with the objects themselves. You might make an overloaded version of the `Item` method that takes as parameters a first and last name and returns the corresponding `Employee` object if it is in the list. You could also modify the simple `Add` method shown previously so that it doesn't allow duplicates. And, you could make an `Add` function that takes first and last names as parameters, creates a new `Employee` object using those names, and returns the new object.

Example program EmployeeCollection, which is available for download on the book's web site, builds a strongly typed collection of `Employee` objects that inherits from the `CollectionBase` class.

An additional benefit that comes with inheriting from the `CollectionBase` class is `For Each` support. The following code shows how a program might use an `EmployeeCollection` class named `emp_list`. It creates the collection and adds some `Employee` objects to the list. It then uses a `For Each` loop to display the `Employees`.

```
Dim emp_list As New EmployeeCollection
emp_list.Add(New Employee("Ann", "Anderson"))
emp_list.Add(New Employee("Bart", "Baskerville"))
...

For Each emp As Employee In emp_list
    Debug.WriteLine(emp.ToString)
Next emp
```

Generics provide another method for building strongly typed collections. Refer to the section "Generics" later in this chapter for more information on generic collections. For more general information on generics, see Chapter 29, "Generics."

Read-Only Strongly Typed Collections

The `CollectionBase` class enables you to build a strongly typed collection class that allows a program to store and retrieve values. In some cases, you might want a function to return a collection of objects that the calling program cannot modify. For example, suppose that your function returns a list of your company's production locations. You don't want the program to modify the list because it cannot change the locations. In this case, you can build a read-only strongly typed collection.

You can do this much as you build a strongly typed collection. Instead of deriving the new collection class from `CollectionBase`, however, derive it from the `ReadOnlyCollectionBase` class. Provide read-only `Item` methods, but do not provide any `Add` or `Remove` methods. The class itself can access its inherited `InnerList` object to add and remove items, but it must not give the program using your class access to that object.

Your program still needs a way to get objects into the collection, however. One method is to build the collection class in a separate library project and give it initialization methods declared with the `Friend` keyword. Other code in the library project could use those methods while the main program could not.

Another technique is to pass initialization data to the class's constructor. Your code creates the collection and returns it to the main program. The main program cannot change the collection's contents. It can create an instance of the collection of its own, but it cannot modify the one you built.

NameValueCollection

The NameValueCollection class is a collection that can hold more than one string value for a particular key (name). For example, you might use employee names as keys. The string values associated with a particular key could include extension, job title, employee ID, and so forth.

Of course, you could also store the same information by putting extension, job title, employee ID, and the other fields in an object or structure, and then storing the objects or structures in some sort of collection class such as an ArrayList. A NameValueCollection, however, is very useful if you don't know ahead of time how many strings will be associated with each key.

The following table describes some of the NameValueCollection's most useful properties and methods.

Property/Method	Description
Add	Adds a new name/value pair to the collection. If the collection already holds an entry for the name, it adds the new value to that name's values.
AllKeys	Returns a string array holding all of the key values.
Clear	Removes all names and values from the collection.
CopyTo	Copies items starting at a particular index into a one-dimensional Array object. This copies only the items (see the Item property) not the keys.
Count	Returns the number of key/value pairs in the collection.
Get	Gets the item for a particular index or name as a comma-separated list of values.
GetKey	Returns the key for a specific index.
GetValues	Returns a string array containing the values for a specific name or index.
HasKeys	Returns True if the collection contains any non-null keys.
Item	Gets or sets the item for a particular index or name as a comma-separated list of values.
Keys	Returns a collection containing the keys.
Remove	Removes a particular name and all of its values.
Set	Sets the item for a particular index or name as a comma-separated list of values.

Note that there is no easy way to remove a particular value from a name. For example, if a person's name is associated with extension, job title, and employee ID, it is not easy to remove only the job title.

The following statement shows one approach to removing a person's `JobTitle` entry, although you would need to modify it slightly if you didn't know whether the `JobTitle` entry was last in the list (so it might or might not be followed by a comma):

```
nvc.Item("RodStephens") = nvc.Item("RodStephens").Replace("JobTitle,", "")
```

Example program UseNameValueCollection, which is available on the book's web site, demonstrates `NameValueCollection` class features.

Dictionaries

A *dictionary* is a collection that associates keys with values. You look up a key, and the dictionary provides you with the corresponding value. This is similar to the way a `NameValueCollection` works, except that a dictionary's keys and values need not be strings, and a dictionary associates each key with a single value object.

Visual Studio provides several different kinds of dictionary classes that are optimized for different uses. Their differences come largely from the ways in which they store data internally. Though you don't need to understand the details of how the dictionaries work internally, you do need to know how they behave so that you can pick the best one for a particular purpose.

Because all of the dictionary classes provide the same service (associating keys with values), they have roughly the same properties and methods. The following table describes some of the most useful of these.

Property/Method	Description
Add	Adds a key/value pair to the dictionary.
Clear	Removes all key/value pairs from the dictionary.
Contains	Returns `True` if the dictionary contains a specific key.
CopyTo	Copies the dictionary's data starting at a particular position into a one-dimensional array of `DictionaryEntry` objects. The `DictionaryEntry` class has `Key` and `Value` properties.
Count	Returns the number of key/value pairs in the dictionary.
Item	Gets or sets the value associated with a key.
Keys	Returns a collection containing all of the dictionary's keys.
Remove	Removes the key/value pair with a specific key.
Values	Returns a collection containing all of the dictionary's values.

The following sections describe different Visual Studio dictionary classes in more detail.

ListDictionary

A `ListDictionary` stores its data in a linked list. In a linked list, each item is held in an object that contains its data plus a reference or *link* to the next item in the list. Figure 28-2 illustrates a linked list. This list contains the key/value pairs Appetizer/Salad, Entrée/Sandwich, Drink/Water, and Dessert/Cupcake. The link out of the Dessert/Cupcake item is set to `Nothing`, so the program can tell when it has reached the end of the list. A reference variable inside the `ListDictionary` class, labeled `Top` in Figure 28-2, points to the first item in the list.
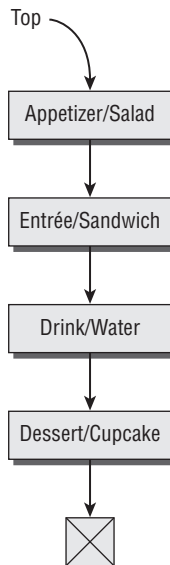
Figure 28-2: Each item in a linked list keeps a reference to the next item in the list.

The links in a linked list make adding and removing items relatively easy. The `ListDictionary` simply moves the links to point to new objects, add objects, remove objects, or insert objects between two others. For example, to add a new item at the top of the list, you create the new item, set its link to point to the item that is currently at the top, and then make the list's `Top` variable point to the new item. Other rearrangements are almost as easy. For more information on how linked lists work, see a book on algorithms and data structures such as *Data Structures and Algorithms Using Visual Basic.NET* (McMillan, Cambridge University Press, 2005).

Unfortunately, if the list grows long, finding items in it can take a long time. To find an item in the list, the program starts at the top and works its way down, following the links between items, until it finds the one it wants. If the list is short, that doesn't take very long. If the list holds 100,000 items, this means potentially a 100,000-item crawl from top to bottom. That means a `ListDictionary` object's performance degrades if it contains too many items.

If you only need to store a few hundred items in the dictionary and you don't need to access them frequently, a `ListDictionary` is fine. If you need to store 100,000 entries, or if you need to access the dictionary's entries a huge number of times, you may get better performance using a "heavier" object such as a `Hashtable`. A `Hashtable` has more overhead than a `ListDictionary` but is faster at accessing its entries.

Hashtable

A `Hashtable` looks a lot like a `ListDictionary` on the outside, but internally it stores its data in a very different way. Rather than using a linked list, this class uses a hash table to hold data.

A hash table is a data structure that allows extremely fast access to items using their keys. It works by mapping an object's key into a bucket by calculating the key's *hash value*.

For example, suppose that you want to make a dictionary associating `Employee` objects with their Social Security numbers. You could make an array holding 10 buckets and then map employees to bucket numbers using the last digit of their Social Security numbers. Employee 123-45-6789 goes in bucket 9, employee 111-22-3333 goes in bucket 3, and employee 865-29-8361 goes in bucket 1.

This kind of hash table is easy to enlarge. If you add a few dozen employees, you might use 100 buckets and map Social Security numbers using their last two digits. Then employee 123-45-6789 goes in bucket 89, employee 111-22-3333 goes in bucket 33, and employee 865-29-8361 goes in bucket 61.

More employees? Make more buckets! You can use 1000, 10,000, or more buckets if necessary.

To find an employee's data in the dictionary, you only need to calculate the hash value (last digits of Social Security number) and then look in that bucket. For a large dictionary, this is much faster than digging through a linked list. If you have 10,000 employees perfectly divided one to a bucket in a table of 10,000 buckets, you only need to look in one bucket to find the data you want. That's a lot faster than slogging through a 10,000-item linked list.

Of course, there is a catch. Actually, there are two catches.

First, if you have too many employees, you are eventually going to find two that map to the same bucket. Suppose that you have 10 buckets and two employees with Social Security numbers 732-45-7653 and 145-76-4583. These both map to bucket 3. This is called a *key collision*, and the hash table must use some sort of *collision resolution* policy to figure out what to do when two keys map to the same bucket. This policy is generally some simple method such as making a linked list in the bucket or letting the second item spill over into the following bucket. Whatever collision resolution scheme you use, it takes a little extra time to search through full buckets.

You can make the buckets less full if you use more of them. In this example, if you switched to 100 buckets, the two employees would map to buckets 53 and 83, so no collision occurs. That makes looking up these items faster.

The second catch is that you can make a hash table faster by adding more buckets, but using more buckets means using more space. When a hash table starts to fill up, collisions are common, so performance suffers. Add more space and performance improves, but there may be a lot of wasted space not occupied by any data. If the table grows too big, it may start to use up all of the system's memory and starve the application for memory. The application must then page memory to disk when it needs more room, a process that can make the program extremely slow.

Those are the advantages and disadvantages of the `Hashtable` class. A `Hashtable` gives better performance than a `ListDictionary`, but takes more space.

In addition to the usual dictionary properties and methods, the `Hashtable` has a few that help manage the internal hash table that it uses to store its items.

One overloaded version of the `Hashtable` class's constructor takes a parameter that tells how many items the table should initially be able to hold. If you know you are going to load 1000 items, you might make the table initially hold room for 1500. Then the program could add all the items without filling the table too much, so it would still give good performance. If you don't set an initial size, the hash table might start out too small and need to resize itself many times before it could hold 1000 items, and that will slow it down.

Another version of the constructor lets you specify the hash table's *load factor*. The load factor is a number between 0.1 and 1.0 that gives the largest ratio of elements to buckets that the `Hashtable` will allow before it enlarges its internal table. For example, suppose that the hash table's capacity is 100 and its load factor is 0.8. Then when it holds 80 elements, the `Hashtable` will enlarge its internal table.

For high-performance lookups, the `Hashtable` class is a great solution.

HybridDictionary

A `HybridDictionary` is a cross between a `ListDictionary` and a `Hashtable`. If the dictionary is small, the `HybridDictionary` stores its data in a `ListDictionary`. If the dictionary grows too large, `HybridDictionary` switches to a `Hashtable`.

If you know that you will only need a few items, you can use a `ListDictionary`. If you know you will need to use a very large number of items, you can use a `Hashtable`. If you are unsure whether you will have few or many items, you can hedge your bet with a `HybridDictionary`.

Strongly Typed Dictionaries

Just as you can make strongly typed collections, you can also make strongly typed dictionaries. The idea is exactly the same. You derive your strongly typed class from a class that supports basic dictionary functionality. In this case, that parent class is `DictionaryBase`, and it provides a `Dictionary` object that your class can use to implement its dictionary features.

Next, you implement dictionary methods such as Add, Item, Keys, and so forth. Your code requires specific data types and uses the parent class's Dictionary variable to do all the hard work through delegation.

The following table lists the standard methods provided by a strongly typed dictionary class. The third column indicates whether the DictionaryBase parent class automatically provides the method or whether you must delegate the method to the Dictionary object.

Method	Purpose	Provided By
Add	Adds a key/value pair to the dictionary	Dictionary
Clear	Removes all key/value pairs from the dictionary	DictionaryBase
Contains	Returns True if the dictionary contains a specific key	Dictionary
CopyTo	Copies elements from the dictionary into an array of DictionaryEntry objects	DictionaryBase
Count	Returns the number of key/value pairs in the dictionary	DictionaryBase
Dictionary	Returns a Dictionary holding the dictionary's key/value pairs	DictionaryBase
InnerHashtable	Returns a Hashtable holding the dictionary's key/value pairs	DictionaryBase
Item	Returns the value corresponding to a specific key	Dictionary
Keys	Returns an ICollection containing the dictionary's keys	Dictionary
Remove	Removes the key/value pair for a specific key	Dictionary
Values	Returns an ICollection containing the dictionary's values	Dictionary

As is the case with strongly typed collections, you can add other, more specialized methods if they would be useful in your application.

Example program MakeEmployeeDictionary, which is available for download on the book's web site, shows how to build a strongly typed dictionary of Employee objects that inherits from the DictionaryBase class.

Other Strongly Typed Derived Classes

How a class stores its data internally is generally not a developer's concern. As long as it does its job, you shouldn't care whether the `DictionaryBase` class stores its data in a linked list, hash table, or some other data structure. (Although the `DictionaryBase` class has an `InnerHashtable` method that returns its data in a `Hashtable` form, so perhaps that's a hint.)

However, if you really want a strongly typed class that you know uses a `ListDictionary` instead of a hash table (or whatever `CollectionBase` uses), you could derive a strongly typed class from the `ListDictionary` class.

The following code shows the `EmployeeListDictionary` class, which is derived from the `ListDictionary` class. It uses the `Shadows` keyword to replace the `ListDictionary` class's `Add`, `Item`, `Contains`, and `Remove` methods with new strongly typed versions. Those methods simply pass their requests along to the base class `ListDictionary`.

```
Public Class EmployeeListDictionary
    Inherits ListDictionary

    ' Add a Dictionary entry.
    Public Shadows Sub Add(ByVal new_key As String, _
     ByVal new_employee As Employee)
        MyBase.Add(new_key, new_employee)
    End Sub

    ' Return an object with the given key.
    Default Public Shadows Property Item(ByVal key As String) As Employee
        Get
            Return DirectCast(MyBase.Item(key), Employee)
        End Get
        Set(ByVal Value As Employee)
            MyBase.Item(key) = Value
        End Set
    End Property

    ' Return True if the Dictionary contains this Employee.
    Public Shadows Function Contains(ByVal key As String) As Boolean
        Return MyBase.Contains(key)
    End Function

    ' Remove this entry.
    Public Shadows Sub Remove(ByVal key As String)
        MyBase.Remove(key)
    End Sub
End Class
```

Example program MakeEmployeeListDictionary, which is available for download on the book's web site, builds a strongly typed `ListDictionary` that holds `Employee` objects.

StringDictionary

The `StringDictionary` class uses a hash table to manage keys and values that are all strings. Because it uses a hash table, it can handle very large data sets quickly.

Its methods are strongly typed to require strings, so they provide extra type checking that can make finding potential bugs easier. For that reason, you should use a `StringDictionary` instead of a generic `ListDictionary` or `Hashtable` if you want to work exclusively with strings.

SortedList

The `SortedList` class acts as a `Hashtable/Array` hybrid. When you access a value by key, it acts as a hash table. When you access a value by index, it acts as an array containing items sorted by key value. For example, suppose that you add a number of `Job` objects to a `SortedList` named `jobs` using their priorities as keys. Then `jobs(0)` always returns the job with the smallest priority value.

Example program UseSortedList, which is available for download on the book's web site, demonstrates the `SortedList` class.

A `SortedList` is more complicated than a `Hashtable` or an array, so you should only use it if you need its special properties.

CollectionsUtil

Normally `Hashtables` and `SortedLists` are case-sensitive. The `CollectionsUtil` class provides two shared methods, `CreateCaseInsensitiveHashtable` and `CreateCaseInsensitiveSortedList`, that create `Hashtables` and `SortedLists` objects that are case-insensitive.

Example program UseCaseInsensitiveSortedList, which is available for download on the book's web site, uses code similar to the following to create a normal case-sensitive `SortedList`. It then adds two items with keys that differ only in their capitalization. This works because a case-sensitive `SortedList` treats the two keys as different values. The code then creates a case-insensitive `SortedList`. When it tries to add the same two items, the list raises an exception, complaining that it already has an object with key value `Sport`.

```
Dim sorted_list As SortedList

' Use a normal, case-sensitive SortedList.
sorted_list = New SortedList
sorted_list.Add("Sport", "Volleyball")
sorted_list.Add("sport", "Golf")          ' Okay because Sport <> sport.

' Use a case-insensitive SortedList.
sorted_list = CollectionsUtil.CreateCaseInsensitiveSortedList()
sorted_list.Add("Sport", "Volleyball")
sorted_list.Add("sport", "Golf")          ' Error because Sport = sport.
```

If you can use case-insensitive `Hashtables` and `SortedLists`, you should generally do so. This prevents the program from adding two entries that are supposed to be the same but have different capitalization. For example, if one routine spells a key value "Law Suit" and another spells it "law suit," the case-insensitive `Hashtable` or `SortedList` will quickly catch the error. Neither will notice an error if part of your program spells this "LawSuit."

Stacks and Queues

Stacks and *queues* are specialized data structures that are useful in many programming applications that need to add and remove items in a particular order. The Visual Basic `Stack` and `Queue` classes implement stacks and queues.

The difference between a stack and a queue is the order in which they return the items stored in them. The following two sections describe stacks and queues and explain the ways in which they return items.

Stack

A stack returns items in last-in, first-out (LIFO, pronounced *life-o*) order. Because of the LIFO behavior, a stack is sometimes called a *LIFO list* or simply a *LIFO*.

Adding an item to the stack is called *pushing the item onto the stack* and removing an item is called *popping the item off of the stack*. These operations have the names push and pop because a stack is like a spring-loaded stack of plates in a cafeteria or buffet. You push new plates down onto the top of the stack and the plates sink into the counter. You pop the top plate off and the stack rises to give you the next plate.

Figure 28-3 illustrates this kind of stack. If you haven't seen this sort of thing before, don't worry about it. Just remember that push adds an item and pop removes the top item.
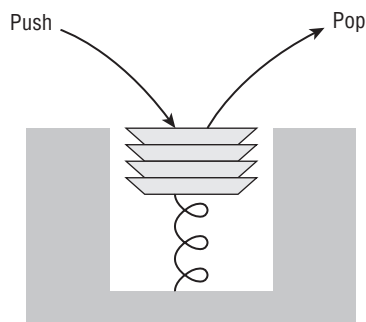
Figure 28-3: A Stack lets you remove items in last-in, first-out (LIFO) order.

Normally, you use a `Stack` object's `Push` and `Pop` methods to add and remove items, but the `Stack` class also provides some cheating methods that let you peek at the `Stack`'s top object or convert the `Stack` into an array. The following table describes the `Stack` class's most useful properties and methods.

Property/Method	Purpose
Clear	Removes all items from the `Stack`.
Contains	Returns `True` if the `Stack` contains a particular object.
CopyTo	Copies some or all of the `Stack` class's objects into a one-dimensional array.
Count	Returns the number of items in the `Stack`.
Peek	Returns a reference to the `Stack` class's top item without removing it from the `Stack`.
Pop	Returns the `Stack` class's top item and removes it from the `Stack`.
Push	Adds an item to the top of the `Stack`.
ToArray	Returns a one-dimensional array containing references to the objects in the `Stack`. The `Stack` class's top item is placed first in the array.

A `Stack` allocates memory to store its items. If you `Push` an object onto a `Stack` that is completely full, the `Stack` must resize itself to make more room and that slows down the operation.

To make memory management more efficient, the `Stack` class provides three overloaded constructors. The first takes no parameters and allocates a default initial capacity. The second takes as a parameter the number of items it should initially be able to hold. If you know that you will add 10,000 items to the `Stack`, you can avoid a lot of resizing by initially allocating room for 10,000 items.

The third version of the constructor takes as a parameter an object that implements the `ICollection` interface. The constructor allocates enough room to hold the items in the collection and copies them into the `Stack`.

Example program UseStack, which is available for download on the book's web site, uses a `Stack` to reverse the characters in a string.

Queue

A queue returns items in first-in, first-out (FIFO, pronounced *fife-o*) order. Because of the FIFO behavior, a queue is sometimes called a *FIFO list* or simply a *FIFO*.

A queue is similar to a line at a customer service desk. The first person in line is the first person to leave it when the service desk is free.

Queues are particularly useful for processing items in the order in which they were created. For example, an order-processing application might keep orders in a queue so that customers who place orders first are satisfied first (or at least their order is shipped first, whether they are satisfied or not).

Historically, the routines that add and remove items from a queue are called `Enqueue` and `Dequeue`. The following table describes these methods and the `Queue` class's other most useful properties and methods.

Property/Method	Purpose
Clear	Removes all items from the `Queue`.
Contains	Returns `True` if the `Queue` contains a particular object.
CopyTo	Copies some or all of the `Queue` class's objects into a one-dimensional array.
Count	Returns the number of items in the `Queue`.
Dequeue	Returns the item that has been in the `Queue` the longest and removes it from the `Queue`.
Enqueue	Adds an item to the back of the `Queue`.
Peek	Returns a reference to the `Queue` class's oldest item without removing it from the `Queue`.
ToArray	Returns a one-dimensional array containing references to the objects in the `Queue`. The `Queue` class's oldest item is placed first in the array.
TrimToSize	Frees empty space in the `Queue` to set its capacity equal to the number of items it actually contains.

A `Queue` allocates memory to store its items. If you `Enqueue` an object while the queue's memory is full, the `Queue` must resize itself to make more room, and that slows down the operation.

To make memory management more efficient, the `Queue` class provides four overloaded constructors. The first takes no parameters and allocates a default initial capacity. If the `Queue` is full, it enlarges itself by a default growth factor.

The second constructor takes as a parameter its initial capacity. If you know that you will add 600 items to the `Queue`, you can save some time by initially allocating room for 600 items. With this constructor, the `Queue` also uses a default growth factor.

The third constructor takes as a parameter an object that implements the `ICollection` interface. The constructor allocates enough room to hold the items in the collection and copies them into the `Queue`. It also uses a default growth factor.

The final version of the constructor takes as parameters an initial capacity and a growth factor between 1.0 and 10.0. A larger growth factor will mean that the `Queue` resizes itself less often, but it may contain a lot of unused space.

Queues are useful for scheduling items in a FIFO order. For example, a shared network computer uses a queue. Users on different computers send jobs to the printer, and they are printed in FIFO order.

Example program UseQueue, which is available for download on the book's web site, demonstrates a `Queue`.

Generics

Chapter 29, "Generics," explains how you can build and use generic classes to perform similar actions for objects of various types. For example, you could build a `Tree` class that can build a tree of any specific kind of object. Your program could then make a tree of `Employees`, a tree of `Customers`, a tree of `Punchlines`, or even a tree of trees. Visual Basic comes with a useful assortment of pre-built generic collection classes.

The System.Collections.Generic namespace provides several generic collection classes that you can use to build strongly typed collections. These collections work with a specific data type that you supply in a variable's declaration. For example, the following code makes a `List` that holds strings:

```
Imports System.Collections.Generic

...
Dim places As New List(Of String)
places.Add("Chicago")
```

The `places` object's methods are strongly typed and work only with strings, so they provide extra error protection that a less specialized collection doesn't provide. To take advantage of this extra protection, you should use generic collections or strongly typed collections derived from the `CollectionBase` class whenever possible.

When you derive a strongly typed collection from the `CollectionBase` class, you can add extra convenience functions to it. For example, an `EmployeeCollection` class could include an overloaded version of the `Add` method that accepts first and last names as parameters, makes a new `Employee` object, and adds it to the collection.

You cannot directly modify a generic collection class, but you can add extension methods to it. For example, the following code adds an `AddPerson` method to the generic `List(Of Person)` class. This method takes as parameters a first and last name, uses those values to make a `Person` object, and adds it to the list.

```
Module PersonListExtensions
    <Extension()> _
    Public Sub AddPerson(ByVal person_list As List(Of Person), _
     ByVal first_name As String, ByVal last_name As String)
        Dim per As New Person() With _
            {.FirstName = first_name, .LastName = last_name}
```

```
            person_list.Add(per)
       End Sub
  End Module
```

For more information on extension methods, see the section "Extension Methods" in Chapter 17, "Subroutines and Functions."

In addition to adding extension methods to a generic class, you can also derive an enhanced collection from a generic class. For example, the following code defines an `EmployeeCollection` class that inherits from the generic `Collection(Of Employee)`. It then adds an overloaded version of the `Add` method that takes first and last names as parameters.

```
  Imports System.Collections.Generic

  Public Class EmployeeList
      Inherits List(Of Employee)

      Public Overloads Sub Add( _
       ByVal first_name As String, ByVal last_name As String)
          Dim emp As New Employee(first_name, last_name)
          MyBase.Add(emp)
      End Sub
  End Class
```

Note that extension methods cannot overload a class's methods. If you want multiple versions of the `Add` method as in this example, you need to use a derived class.

The following table lists the some of the most useful collection classes defined by the System.Collections .Generic namespace.

Collection	Purpose
Comparer	Compares two objects of the specific type and returns –1, 0, or 1 to indicate whether the first is less than, equal to, or greater than the second
Dictionary	A strongly typed dictionary
LinkedList	A strongly typed linked list
LinkedListNode	A strongly typed node in a linked list
List	A strongly typed list
Queue	A strongly typed queue
SortedDictionary	A strongly typed sorted dictionary
SortedList	A strongly typed sorted list
Stack	A strongly typed stack

Example program GenericStringList, which is available for download on the book's web site, demonstrates a generic `List(Of String)`. Example program GenericEmployeeList, which is also available for download, derives a strongly typed `EmployeeList` class from a generic `List(Of Employee)`.

For more information on generics (including instructions for writing your own generic classes), see Chapter 29, "Generics."

Summary

This chapter described five types of objects: arrays, collections, dictionaries, stacks, and queues. It also explained how to convert any of these into strongly typed classes and how to use generic collections.

Arrays store objects sequentially. They allow fast access at any point in the array. The `Array` class lets you make arrays indexed with nonzero lower bounds, although they provide slower performance than arrays of variables, which require lower bounds of zero. The `Array` class provides several useful methods for working with `Array` objects and normal variable arrays, including `Sort`, `Reverse`, `IndexOf`, `LastIndexOf`, and `BinarySearch`.

Collections store data in ways that are different from those used by arrays. An `ArrayList` stores items in a linked list. That works well for short lists, but slows down when the list grows large. A `StringCollection` holds a collection of strings. `StringCollection` is an example of a strongly typed collection (it holds only strings). The `NameValueCollection` class is a specialized collection that can hold more than one string value for a given key value.

Dictionaries associate key values with corresponding data values. You look up the key to find the data much as you might look up a word in the dictionary to find its definition. The `ListDictionary` class stores its data in a linked list. It is fast for small data sets but slow when it contains too much data. A `Hashtable`, on the other hand, has substantial overhead, but is extremely fast for large dictionaries. A `HybridDictionary` acts as a `ListDictionary` if it doesn't contain too much data, and switches to a `Hashtable` when it gets too big. The `StringDictionary` class is basically a `Hashtable` that is strongly typed to work with strings. The `SortedList` class is a `Hashtable/Array` hybrid that lets you access values by key or in sorted order.

`Stack` classes provide access to items in last-in, first-out (LIFO) order, whereas `Queue` classes give access to their items in first-in, first-out (FIFO) order.

The generic `Dictionary`, `LinkedList`, `List`, `Queue`, `SortedDictionary`, `SortedList`, and `Stack` classes enable you to use strongly typed data structures without going to the trouble of building your own strongly typed classes.

All of these classes, plus other strongly typed collections that you can derive from the `CollectionBase`, `DictionaryBase`, and other classes, provide significant flexibility and options, so you can pick the class that best satisfies your needs. Deciding which class is best can be tricky, but making the right choice can

mean the difference between a program that processes a large data set in seconds, hours, or not at all. Spend some time reviewing the different characteristics of the class so that you can make the best choice possible.

This chapter explained how you can use the generic collection classes provided by the System .Collections.Generic namespace to build strongly typed collection classes of several useful types. Chapter 29, "Generics," explains how you can build generic classes of your own. Using generics, you can build strongly typed classes that manipulate all sorts of objects in any way you can imagine.

Generics

Classes are often described as cookie cutters for creating objects. You define a class, and then you can use it to make any number of objects that are instances of the class.

Similarly, a *generic* is like a cookie cutter for creating classes. You define a generic, and then you can use it to create any number of classes that have similar features.

For example, Visual Basic comes with a generic `List` class. You can use it to make lists of strings, lists of integers, lists of `Employee` objects, or lists of just about anything else.

This chapter explains generics. It shows how you define generics of your own and how you can use them.

Advantages of Generics

A generic class is tied to one or more specific data types. For example, you can build a list of `OrderItem` objects, a hash table containing `PurchaseOrders` identified by number, or a `Queue` that contains `Customer` objects.

Tying generics to specific data types gives them a few advantages over more traditional classes:

❑ **Strong typing** — Methods can take parameters and return values that have the class's instance type. For example, a `List(Of String)` can only hold string values, and its `Item` method returns string values. This makes it more difficult to accidentally add the wrong type of object to the collection.

❑ **IntelliSense** — By providing strong typing, a class built from a generic lets Visual Studio provide IntelliSense. If you make a `List(Of Employee)`, Visual Studio knows that the items in the collection are `Employee` objects, so it can give you appropriate IntelliSense.

❑ **No boxing** — Because the class manipulates objects with a specific data type, Visual Basic doesn't need to convert items to and from the plain `Object` data type. For example, if a program stores `TextBox` controls in a normal collection, the program must convert the `TextBox` controls to and from the `Object` class when it adds and uses items in the collection. Avoiding these steps makes the code more efficient.

❑ **Code reuse** — You can use a generic class with more than one data type. For example, if you have built a generic `PriorityQueue` class, then you can make a `PriorityQueue` holding `Employee`, `Customer`, `Order`, or `Objection` objects. Without generics, you would need to build four separate classes to build strongly typed priority queues for each of these types of objects. Reusing this code makes it easier to write, test, debug, and maintain the code.

Defining Generics

Visual Basic allows you to define generic classes, structures, interfaces, procedures, and delegates. The basic syntax is similar, so when you understand how to make generic classes, the others should be fairly easy.

To define a generic class, make a class declaration as usual. After the class name, add a parenthesis, the keyword `Of`, and a placeholder for a data type. For example, the following code shows the outline of a generic `MostRecentList` class. Its declaration takes one type that the class internally names `ItemType`. This is similar to a parameter name that you would give to a subroutine. The class's code can use the name `ItemType` to refer to the type associated with the instance of the generic class.

```
Public Class MostRecentList(Of ItemType)
    ...
End Class
```

For example, suppose that you want to make a list that can act as a most recently used (MRU) file list. It should be able to hold at most four items. New items are added at the top of the list, and the others are bumped down one position with the last item being dropped if the list contains too many items. If you add an existing item to the list, it jumps to the top of the list.

Example program GenericMruList, which is available for download from the book's web site, uses the following code to build a generic `MostRecentList` class:

```
' A list of at most MaxItems items.
Public Class MostRecentList(Of ItemType)
    ' The Item property.
    Private m_Items As New List(Of ItemType)
    Public Property Item(ByVal index As Integer) As ItemType
        Get
            Return m_Items(index)
        End Get
        Set(ByVal value As ItemType)
            m_Items(index) = value
        End Set
    End Property

    ' The MaxItems property.
    Private m_MaxItems As Integer = 4
    Public Property MaxItems() As Integer
        Get
            Return m_MaxItems
        End Get
        Set(ByVal value As Integer)
```

```
                    m_MaxItems = value

                    ' Resize appropriately.
                    Do While m_Items.Count > m_MaxItems
                        m_Items.RemoveAt(m_Items.Count - 1)
                    Loop
            End Set
        End Property

        ' The current number of items.
        Public ReadOnly Property Count() As Integer
            Get
                Return m_Items.Count
            End Get
        End Property

        ' Add an item to the top of the list.
        Public Sub Add(ByVal value As ItemType)
            ' Remove the item if it is present.
            If m_Items.Contains(value) Then m_Items.Remove(value)

            ' Add the item to the top of the list.
            m_Items.Insert(0, value)

            ' Make sure there are at most MaxItems items.
            If m_Items.Count > m_MaxItems Then m_Items.RemoveAt(m_Items.Count - 1)
        End Sub

        ' Remove an item.
        Public Sub Remove(ByVal value As ItemType)
            m_Items.Remove(value)
        End Sub

        ' Remove an item at a specific position.
        Public Sub RemoveAt(ByVal index As Integer)
            m_Items.RemoveAt(index)
        End Sub
    End Class
```

The `Of ItemType` clause indicates that the class will take a single type that it internally names `ItemType`. The class stores its items in a private list named `m_Items`. It declares this list using the generic list class defined in the System.Collections.Generic namespace, and it indicates that this is a list that will hold `ItemType` objects. This refers to the `ItemType` parameter used in the generic `MostRecentList` class's declaration. If the program makes a `MostRecentList` of strings, then `m_Items` is a list of strings.

In this code, the `Item` property procedures simply let the main program get and set the values in the `m_Items` list. The `MaxItems` property lets the program determine the number of items that the list can hold. The property `Set` routine saves the new size and then resizes the `m_Items` list appropriately if necessary. The `Count` property returns the number of items currently in the list. The subroutine `Add` first removes the new item if it is already in the list. It then adds the new item at the top of the list and removes the last item if the list now contains too many items. The `Remove` and `RemoveAt` routines simply call the `m_Items` list's `Remove` and `RemoveAt` methods.

The following code creates a new `MostRecentList` of strings and then adds some values to it:

```
Dim the_items As New MostRecentList(Of String)
the_items.Add("Apple")
the_items.Add("Banana")
the_items.Add("Cherry")
the_items.Add("Date")
the_items.Add("Banana")
the_items.Add("Fig")
```

After this code executes, the list contains the values in the following order: Fig, Banana, Date, Cherry.

Generic Constructors

Generic classes can have constructors just as any other class can. For example, the following constructor initializes the `MostRecentList` class's `MaxItem` property:

```
' Initialize MaxItems for the new list.
Public Sub New(ByVal max_items As Integer)
    MaxItems = max_items
End Sub
```

To use the constructor, the main program adds normal parameters after the type parameters in the object declaration. The following statement creates a new `MostRecentList` of strings, passing its constructor the value `4`:

```
Dim the_items As New MostRecentList(Of String)(4)
```

Multiple Types

If you want the class to work with more than one type, you can add other types to the declaration separated by commas. For example, suppose that you want to create a list of items where each key is associated with a pair of data items. Example program GenericPairDictionary, which is available for download from the book's web site, uses the following code to define the generic `PairDictionary` class. This class acts as a dictionary that associates a key value with a pair of data values. Notice how the class declaration includes three data types named `KeyType`, `DataType1`, and `DataType2`.

```
' A Dictionary that associates
' a pair of data values with each key.
Public Class PairDictionary(Of KeyType, DataType1, DataType2)
    ' A structure to hold paired data.
    Private Structure DataPair
        Public Data1 As DataType1
        Public Data2 As DataType2
        Public Sub New(ByVal data_value1 As DataType1, _
          ByVal data_value2 As DataType2)
            Data1 = data_value1
            Data2 = data_value2
        End Sub
```

```
      End Structure

      ' A Dictionary to hold the paired data.
      Private m_Dictionary As New Dictionary(Of KeyType, DataPair)

      ' Return the number of data pairs.
      Public ReadOnly Property Count() As Integer
          Get
              Return m_Dictionary.Count
          End Get
      End Property

      ' Add a key and data pair.
      Public Sub Add(ByVal key As KeyType, ByVal _
        data_value1 As DataType1, _
        ByVal data_value2 As DataType2)
          m_Dictionary.Add(key, New DataPair(data_value1, data_value2))
      End Sub

      ' Remove all data.
      Public Sub Clear()
          m_Dictionary.Clear()
      End Sub

      ' Return True if the PairDictionary contains this key.
      Public Function ContainsKey(ByVal key As KeyType) As Boolean
          Return m_Dictionary.ContainsKey(key)
      End Function

      ' Return a data pair.
      Public Sub GetItem(ByVal key As KeyType, _
        ByRef data_value1 As DataType1, _
        ByRef data_value2 As DataType2)
          Dim data_pair As DataPair = m_Dictionary.Item(key)
          data_value1 = data_pair.Data1
          data_value2 = data_pair.Data2
      End Sub

      ' Set a data pair.
      Public Sub SetItem(ByVal key As KeyType, _
        ByVal data_value1 As DataType1, _
        ByVal data_value2 As DataType2)
          m_Dictionary.Item(key) = _
              New DataPair(data_value1, data_value2)
      End Sub

      ' Return a collection containing the keys.
      Public ReadOnly Property Keys() As System.Collections.ICollection
          Get
              Return m_Dictionary.Keys()
          End Get
      End Property

      ' Remove a particular entry.
```

```
      Public Sub Remove(ByVal key As KeyType)
          m_Dictionary.Remove(key)
      End Sub
  End Class
```

The `PairDictionary` class defines its own private `DataPair` class to hold data pairs. The `DataPair` class has two public variables of types `DataType1` and `DataType2`. Its only method is a constructor that makes initializing the two variables easier.

After defining the `DataPair` class, the `PairDictionary` class declares a generic `Dictionary` object named `m_Dictionary` using the key type `KeyType` and data type `DataPair`.

`PairDictionary` provides `Count`, `Add`, `Clear`, `ContainsKey`, `GetItem`, `SetItem`, `Keys`, and `Remove` methods. Notice how it delegates these to the `m_Dictionary` object and how it uses the `DataPair` class to store values in `m_Dictionary`.

The following code creates an instance of the generic `PairDictionary` class that uses integers as keys and strings for both data values. It adds three entries to the `PairDictionary` and then retrieves and displays the entry with key value `32`.

```
  ' Create the PairDictionary and add some data.
  Dim pair_dictionary As New PairDictionary(Of Integer, String, String)
  pair_dictionary.Add(10, "Ann", "Archer")
  pair_dictionary.Add(32, "Bill", "Beach")
  pair_dictionary.Add(17, "Cynthia", "Campos")

  ' Print the values for index 32.
  Dim value1 As String = ""
  Dim value2 As String = ""
  pair_dictionary.GetItem(32, value1, value2)
  Debug.WriteLine(value1 & ", " & value2)
```

Constrained Types

To get the most out of your generic classes, you should make them as flexible as possible. Depending on what the class will do, however, you may need to constrain the types used to create instances of the generic.

For example, consider the generic `MostRecentList` class described earlier in this chapter. It stores at most a certain number of objects in a list. When you add an object to the list, the class first removes the object from the list if it is already present.

That works with simple data types such as integers and strings. However, suppose that you want the list to hold `Employee` objects. When you add a new `Employee` object, the list tries to remove the item if it is already present in its `m_Items` list. However, you are adding a *new* instance of the `Employee` class. The object may have the same values as an object that is already in the list, but the list won't know that because the values are stored in two different objects.

What the list needs is a way to compare objects in the list to see if they are equal. It can then look through the list and remove an existing item if it matches the new one.

One way to allow the list to compare items is to guarantee that the items implement the IComparable interface. Then the program can use their CompareTo methods to see if two objects match.

Example program GenericMruList2, which is available for download from the book's web site, uses the following code to make a new version of the MostRecentList class. Instead of calling the m_Items list's Remove method directly, the Add method now calls the class's Remove method. That method loops through the list using each item's CompareTo method to see if the item matches the target item. If there is a match, the program removes the item from the list.

```
Public Class MostRecentList(Of ItemType As IComparable)
    ...
    ' Add an item to the top of the list.
    Public Sub Add(ByVal value As ItemType)
        ' Remove the item if it is present.
        Remove(value)

        ' Add the item to the top of the list.
        m_Items.Insert(0, value)

        ' Make sure there are at most MaxItems items.
        If m_Items.Count > m_MaxItems Then m_Items.RemoveAt(m_Items.Count - 1)
    End Sub

    ' Remove an item.
    Public Sub Remove(ByVal value As ItemType)
        ' Find the item.
        For i As Integer = m_Items.Count - 1 To 0 Step -1
            If value.CompareTo(m_Items(i)) = 0 Then
                m_Items.RemoveAt(i)
            End If
        Next i
    End Sub
    ...
End Sub
```

A type's As clause can specify any number of interfaces and at most one class from which the type must be derived. It can also include the keyword New to indicate that the type used must provide a constructor that takes no parameters. If you include more than one constraint, the constraints should be separated by commas and enclosed in brackets.

The following code defines the StrangeGeneric class that takes three type parameters. The first type must implement the IComparable interface and must provide an empty constructor. The second type has no constraints, and the third type must be a class that inherits from Control.

```
Public Class StrangeGeneric(Of Type1 As {IComparable, New}, Type2, _
 Type3 As Control)
    ...
End Class
```

The following code declares an instance of the StrangeGeneric class:

```
Dim my_strange_generic As New StrangeGeneric(Of Integer, Employee, Button)
```

Constraining a type gives Visual Basic more information about that type, so it lets you use the properties and methods defined by the type. In the previous code, for example, if a variable is of type `Type3`, then Visual Basic knows that it inherits from the `Control` class, so you can use `Control` properties and methods such as `Anchor`, `BackColor`, `Font`, and so forth.

Using Generics

The previous sections have already shown a few examples of how to use a generic class. The program declares the class and includes whatever data types are required in parentheses. The following code shows how a program might create a generic list of strings:

```
Imports System.Collections.Generic
...
Dim names As New List(Of String)
```

To use a generic class's constructor, add a second set of parentheses and any parameters after the type specifications. The following statement creates an `IntStringList` object, passing it the types Integer, String, and Employee. It calls the class's constructor, passing it the value 100.

```
Dim the_employees As New IntStringList(Of Integer, String, Employee)(100)
```

If the program needs to use only a few generic classes (for example, a single collection of strings), this isn't too bad. If the program needs to use many instances of the class, however, the code becomes cluttered.

For example, suppose that the `TreeNode` class shown in the following code represents a node in a tree. Its `MyData` field holds some piece of data and its `Children` list holds references to child nodes.

```
Public Class TreeNode(Of DataType)
    Public MyData As DataType
    Public Children As New List(Of TreeNode(Of DataType))

    Public Sub New(ByVal new_data As DataType)
        MyData = new_data
    End Sub
End Class
```

The following code uses this class to build a small tree of `Employee` objects:

```
Dim root As New TreeNode(Of Employee)(New Employee("Annabelle", "Ant"))
Dim child1 As New TreeNode(Of Employee)(New Employee("Bert", "Bear"))
Dim child2 As New TreeNode(Of Employee)(New Employee("Candice", "Cat"))

root.Children.Add(child1)
root.Children.Add(child2)
```

Example program GenericTree, which is available for download on the book's web site, uses similar code to build a generic `Tree(Of DataType)` class.

Repeating the nodes' data types in the first three lines makes the code rather cluttered. Two techniques that you can use to make the code a bit simpler are using an imports alias and deriving a new class. Both of these let you create a simpler name for the awkward class name `TreeNode(Of Employee)`.

Imports Aliases

Normally, you use an `Imports` statement to make it easier to refer to namespaces and the symbols they contain. However, the `Imports` statement also lets you define an alias for a namespace entity. To use this to make using generics easier, create an `Imports` statement that refers to the type of generic class you want to use and give it a simple alias.

For example, the following code is in the `DataTreeTest` namespace. It uses an `Imports` statement to refer to a `TreeNode` of `Employee`. It gives this entity the alias `EmployeeNode`. Later, the program can use the name `EmployeeNode` to create a `TreeNode` of `Employee`.

```
Imports EmployeeNode = DataTreeTest.TreeNode(Of DataTreeTest.Employee)
...
Dim root As New EmployeeNode(New Employee("Annabelle", "Ant"))
Dim child1 As New EmployeeNode(New Employee("Bert", "Bear"))
Dim child2 As New EmployeeNode(New Employee("Candice", "Cat"))

root.Children.Add(child1)
root.Children.Add(child2)
...
```

Example program GenericTreeImportsAlias, which is available for download on the book's web site, demonstrates this approach.

Derived Classes

A second method that simplifies using generics is to derive a class from the generic class. The following code derives the `EmployeeNode` class from `TreeNode(Of Employee)`. Later, it creates instances of this class to build the tree.

```
Public Class EmployeeNode
    Inherits TreeNode(Of Employee)
    Public Sub New(ByVal new_data As Employee)
        MyBase.New(new_data)
    End Sub
End Class
...
Dim root As New EmployeeNode(New Employee("Annabelle", "Ant"))
Dim child1 As New EmployeeNode(New Employee("Bert", "Bear"))
Dim child2 As New EmployeeNode(New Employee("Candice", "Cat"))

root.Children.Add(child1)
root.Children.Add(child2)
...
```

Example program GenericTreeSubclass, which is available for download on the book's web site, demonstrates this approach.

If you use this technique, you can also add extra convenience functions to the derived class. For example, the following code shows a new `EmployeeNode` constructor that creates the `Employee` object that it holds:

```
Public Sub New(ByVal first_name As String, ByVal last_name As String)
    MyBase.New(New Employee(first_name, last_name))
End Sub
```

Predefined Generic Classes

The System.Collections.Generic namespace defines several generic classes. These are basically collection classes that use generics to work with the data type you specify. See the section "Generics" near the end of Chapter 28, "Collection Classes," for more information and a list of the predefined generic collection classes.

Generic Methods

Generics are usually used to build classes that are not data type–specific such as the generic collection classes. You can also give a class (generic or otherwise) a generic method. Just as a generic class is not tied to a particular data type, the parameters of a generic method are not tied to a specific data type.

The method's declaration includes an `Of` clause similar to the one used by generic classes, followed by the method's parameter list.

Example program UseSwitcher, which is available for download on the book's web site, uses the following code to define a generic `Switch` subroutine. This subroutine defines the type `T` and takes two parameters of type `T`. If this were a function, you could use the type `T` for its return value if you wanted. Subroutine `Switch` declares a variable `temp` of type `T` and uses it to switch the values of its parameters.

```
Public Class Switcher
    Public Sub Switch(Of T)(ByRef thing1 As T, ByRef thing2 As T)
        Dim temp As T = thing1
        thing1 = thing2
        thing2 = temp
    End Sub
End Class
```

The `Switcher` class is not generic but it contains a generic method. Note that a generic class can also contain generic and non-generic methods.

The following code uses a `Switcher` object to switch the values of two `Person` variables. In the call to the `Switch` method, Visual Basic uses the first parameter to infer that the type `T` is `Person` and then requires the second parameter to have the same type.

```
Dim person1 As New Person("Anna")
Dim person2 As New Person("Bill")
Dim a_switcher As New Switcher
a_switcher.Switch(person1, person2)
```

Generics and Extension Methods

Just as extension methods allow you to add new features to existing classes, they also allow you to add new features to generic classes. For example, suppose you have an application that uses a `List(Of Person)`. This `List` class is a generic collection class defined in the System.Collections.Generic namespace.

The generic class is not defined in your code so you cannot modify it, but you can add extension methods to it. The following code adds an `AddPerson` method to `List(Of Person)` that takes as parameters a first and last name, uses those values to make a `Person` object, and adds it to the list.

```
Module PersonListExtensions
    <Extension()> _
    Public Sub AddPerson(ByVal person_list As List(Of Person), _
     ByVal first_name As String, ByVal last_name As String)
        Dim per As New Person() With _
            {.FirstName = first_name, .LastName = last_name}
        person_list.Add(per)
    End Sub
End Module
```

This example adds an extension method to a specific instance of a generic class. In this example, the code adds the method to `List(Of Person)`. With a little more work, you can add a generic extension method to a generic class itself instead of adding it to an instance of the class.

Example program GenericNumDistinct, which is available for download on the book's web site, uses the following code to add a `NumDistinct` function to the generic `List(Of T)` class for any type `T`. The declaration identifies its generic type `T`. The first parameter has type `List(Of T)` so this method extends `List(Of T)`. The function has Integer return type.

```
Module ListExtensions
    <Extension()> _
    Public Function NumDistinct(Of T)(ByVal the_list As List(Of T)) As Integer
        Return the_list.Distinct().Count()
    End Function
End Module
```

The generic `List(Of T)` class provides a `Distinct` method that returns a new list containing the distinct objects in the original list. The `NumDistinct` function calls that method and returns the new list's `Count` value.

The following code shows how a program could call this function. It creates a new `List(Of String)` and gives it some data. It then calls the list's `NumDistinct` function.

```
Dim name_list As New List(Of String)
name_list.Add("Llamaar Aarchibald")
name_list.Add("Dudley Eversol")
...

MessageBox.Show("The list contains " & name_list.NumDistinct() & _
    " distinct entries")
```

657

For more information on extension methods, see the section "Extension Methods" in Chapter 17, "Subroutines and Functions."

Summary

A class abstracts the properties and behaviors of a set of objects to form a template that you can use to make objects that implement those properties and behaviors. After you define the class, you can make many instances of it, and they will all have the features defined by the class.

Generics take abstraction one level higher. A generic class abstracts the features of a set of classes defined for specific data types. It determines the properties and methods that any class in the generic group provides. After you define the generic class, you can easily make classes that work with different data types but that all provide the common set of features defined by the generic.

By defining common functionality, generic classes let you reuse code to perform similar actions for different data types. By allowing you to parameterize the class instances with a data type, they let you build strongly typed classes quickly and easily. That, in turn, lets Visual Basic provide IntelliSense to make programming faster and easier.

Together these benefits, easier code reuse, strong typing, and IntelliSense support, help you write, test, debug, and maintain code more easily.

Up to this point, the book's chapters have described fairly general Visual Basic programming topics such as building forms, using controls, using loops to repeat a series of instructions, and building classes. The chapters in the next part of the book move to a slightly more specific topic: graphics programming. They explain how to draw lines, ellipses, curves, and text. They show how to use different colors, line styles, and brush types. They also explain how to manipulate bitmapped images, print, and generate reports. Though the techniques are not needed in as many situations as are the techniques described in previous chapters, they are still useful under a wide variety of circumstances.

Chapter 30 explains the fundamentals of drawing graphics in Visual Basic. It provides the information you need to start drawing simple shapes and curves. The chapters that follow build on these techniques and use them to carry out more specific graphical tasks.

Part IV

Graphics

30

Drawing Basics

Visual Basic .NET provides a large assortment of objects for drawing and for controlling drawing attributes. The `Graphics` object provides methods that enable you to draw and fill rectangles, ellipses, polygons, curves, lines, and other shapes. `Pen` and `Brush` objects determine the appearance of lines (solid, dashed, dotted) and filled areas (solid colors, hatched, filled with a color gradient).

This chapter provides an overview of the drawing process and a survey of the most important drawing namespaces and their classes. It describes in detail the most central of these classes, the `Graphics` object, and provides examples showing how to use it. You can download example programs demonstrating most of the methods described in this chapter on the book's web site. The examples also include code to draw the figures in this chapter.

Chapter 31, "Brushes, Pens, and Paths," describes some of the other important drawing classes in greater detail.

If you are new to graphics, this chapter and those that follow may involve a lot of new concepts and unfamiliar terms. The examples available on the book's web site will help make many of the concepts more concrete. If you find some terms confusing, you can find additional details by using the advanced Microsoft search page `search.microsoft.com/search/search.aspx?st=a`. The advanced Google search page `www.google.com/advanced_search` also returns excellent results and you can enter one of the Microsoft sites `www.microsoft.com`, `msdn.microsoft.com`, or `support.microsoft.com` in the Domain field if you like. You can also consult online glossaries such as the Webopedia (`www.webopedia.com`) and Wikipedia (`www.wikipedia.org`) for basic definitions.

Drawing Overview

Whenever you draw something in Visual Basic, you must use a `Graphics` object. This object represents the surface where you are drawing, whether it is a `PictureBox`, `Form`, or `PrintDocument`. Sometimes you will have to create a `Graphics` object, and other times (as in a `Paint` event handler) one is provided for you.

The Graphics Device Interface+ (GDI+), or the .NET version of GDI drawing routines, uses two classes, `Pen` and `Brush`, to determine the appearance of lines and filled shapes.

> *Note that Windows Vista uses a slightly different underlying graphics model than previous versions of Windows. Microsoft has worked to make it compatible with GDI+, but you might encounter some small differences or glitches. For some additional information about the underlying graphics system, see the article "Graphics APIs in Windows Vista" at* `msdn2.microsoft.com/library/bb173477.aspx`.

A `Pen` object determines how lines are drawn. A `Pen` sets a line's color, thickness, dash style, end cap style, and other properties. The `Pen` applies to all lines drawn by a GDI+ routine. For example, the `DrawPolygon` subroutine draws a series of lines, and its `Pen` parameter determines how all the lines are drawn.

A `Brush` object determines how areas are filled. A `Brush` sets the area's fill color, hatch pattern, color gradient, and texture. Chapter 31 provides more advanced details of these and provides figures showing examples. The `Brush` applies to GDI+ routines that fill closed areas such as `FillRectangle`, `FillEllipse`, and `FillPolygon`.

The basic steps for drawing a simple shape are:

1. Obtain a `Graphics` object.
2. Define a `Brush` object and fill with it.
3. Define a `Pen` object and draw with it.

For example, the `Paint` event handler shown in the following code runs when the form needs to redraw itself. The `Paint` event handler's `e.Graphics` parameter gives the `Graphics` object on which the program should draw. When the event handler is finished, Visual Basic copies the contents drawn in this `Graphics` object onto the parts of the form that must be redrawn. The event handler creates an orange `SolidBrush` object. `SolidBrush` is a class derived from the `Brush` class, so it will serve as a `Brush`. The program uses the brush to fill the circle bounded by the square with upper-left corners at (10, 10) and 100 pixels wide and 100 pixels tall. The code then creates a pen representing a 10-pixel wide blue line and uses it to draw the outline of the same circle. The result is an orange filled circle with a thick blue border.

```
  Private Sub Form1_Paint(ByVal sender As Object, _
   ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
      Using circle_brush As New SolidBrush(Color.Orange)
          e.Graphics.FillEllipse(circle_brush, 10, 10, 100, 100)
      End Using

      Using circle_pen As New Pen(Color.Blue, 10)
          e.Graphics.DrawEllipse(circle_pen, 10, 10, 100, 100)
      End Using
  End Sub
```

Whenever the form is hidden and exposed, partially covered and exposed, minimized and restored or maximized, or resized to expose a new part of the form, the `Paint` event handler executes and redraws the circle.

The `Graphics` object's filling and drawing methods provide several overloaded versions. Most can take an object parameter that defines the shape to draw. For example, the `FillEllipse` and `DrawEllipse` methods can take a `Rectangle` as a parameter to define the ellipse's bounding rectangle.

This provides a convenient method for ensuring that a filled area and its outline match exactly. The following code draws the same circle as the previous example, but it uses a `Rectangle` method to define the circle. It uses the same `Rectangle` for its calls to `FillEllipse` and `DrawEllipse`, so it's easy to tell that they define exactly the same circle. If you modify this code to change the circle, you don't need to remember to change its coordinates everywhere they occur, because the circle is defined in only one place (the `Rectangle`).

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    Dim rect As New Rectangle(10, 10, 100, 100)
    Using circle_brush As New SolidBrush(Color.Orange)
        e.Graphics.FillEllipse(circle_brush, rect)
    End Using

    Using circle_pen As New Pen(Color.Blue, 10)
        e.Graphics.DrawEllipse(circle_pen, rect)
    End Using
End Sub
```

All GDI+ drawing is based on these simple steps, but there are a lot of variations. Pens and brushes can be much more complicated. For example, you can fill a polygon with a color gradient that follows a path you define and then outline it with a custom dash pattern. The `Graphics` object also provides some fairly exotic drawing routines such as `DrawBezier`, which draws a Bézier curve.

A Bézier curve is a smooth curve guided by a set of four control points. The curve starts at the first point and ends at the last. The middle two points control the curve's direction and curvature. The section "DrawBezier" later in this chapter gives more information on Bézier curves, and Figure 30-4 shows an example.

The following sections describe the namespaces containing the most useful GDI+ objects. Chapter 31 provides additional details and contains pictures of the results produced by many of these objects.

Drawing Namespaces

Before jumping into GDI+ graphics, it's worth taking a moment to learn which namespaces contain which objects. By default, the System.Drawing namespace is imported into new Windows Forms applications, so you don't need to import it explicitly to work with `Graphics`, `Pen`, `Brush`, and the other basic drawing objects. However, if you want to create custom dash patterns, linear gradient color fills, or advanced image files, you must know which namespaces to import into your application.

System.Drawing

The System.Drawing namespace contains the most important and basic GDI+ classes. These classes include `Graphics`, `Pen`, `Brush`, `Font`, `FontFamily`, `Bitmap`, `Icon`, and `Image`. The following table describes the most useful System.Drawing classes.

Class	Description
Graphics	This is without doubt the most important object you'll use when creating graphics. A `Graphics` object represents the surface you're going to draw on. That could be a `PictureBox`, form, bitmap in memory, or whatever. The `Graphics` object provides the methods for drawing lines, rectangles, ellipses, and so forth.
Pen	This class represents the drawing characteristics of a line, including the line's color, thickness, dash style, and so forth.
Pens	This class provides a large number of predefined pens with different colors and width 1. For example, you can use `Pens.Blue` as a standard blue pen.
Brush	This class represents how solid areas are filled. It determines whether the area is solidly colored, hatched, filled with a pattern, and so on.
Brushes	This class provides a large number of predefined solid brushes with different colors. For example, you can use `Brushes.Green` to fill an area with green.
SolidBrush	This class represents a solid brush. When you want to fill an object with a solid color, you use a `SolidBrush` class. This is by far the most common type of fill for most applications.
Bitmap	This class represents a bitmap image defined by pixel data rather than drawn lines.
Icon	This class represents a Windows icon similar to a bitmap.
Metafile	This class represents a graphic metafile that contains graphical operations that a program can record, save to a file, load from a file, and play back later.
Image	This is an abstract base class from which `Bitmap`, `Icon`, and `Metafile` inherit. Some routines can work with any of these kinds of objects, so they take an `Image` parameter. (In brief, a *bitmap* is a typical picture. An icon has additional transparency and possibly hot-spot information so it can act as a form or application icon or mouse pointer. A *metafile* contains drawing instructions that some applications can use to scale the picture smoothly.)
Font	This class represents a particular font. It defines the font's name, size, and style (such as italic or bold).
FontFamily	This class represents a group of typefaces with similar characteristics.
Region	This class defines a shape created from rectangles and paths. You can fill a region, use it to perform hit testing, or clip a drawing to a region.

The System.Drawing namespace also defines some structures that a program can use for drawing. The following table describes the most useful of these structures.

Structure	Description
Color	This object defines a color's red, green, and blue components as values between 0 and 255, plus an *alpha* value that indicates the color's transparency. An alpha value of 0 means the object is completely transparent, and a value of 255 means it is totally opaque.
Point	This object defines a point's X and Y coordinates.
Size	This object defines a width and height.
Rectangle	This object defines a rectangle using a Point and a Size.

GDI+ routines work in pixels on the screen, printer, or whatever object they are drawing on, so the Point, Size, and Rectangle structures hold integral coordinates and sizes. However, the System. Drawing namespace also defines PointF, SizeF, and RectangleF classes to work with floating-point values.

The Color class provides a large number of predefined color values. For example, Color.PaleGreen defines a light green color. You can use these predefined colors instead of creating a new color object.

System.Drawing.Drawing2D

The System.Drawing.Drawing2D namespace contains most of the other objects you'll need to draw more advanced two-dimensional graphics. Some of these classes refine the more basic drawing classes, or define values for those classes. For example, the HatchBrush class represents a specialized type of Brush that fills with a hatch pattern. The following table describes this namespace's most useful classes.

Class	Description
HatchBrush	This class defines a Brush that fills an area with a hatch pattern. It defines the pattern, a foreground color, and a background color.
LinearGradientBrush	This class defines a Brush that fills an area with a linear color gradient. By default the fill shades smoothly from one color to another along a line that you define, but it can also represent multicolor gradients.
Blend	This class represents a blend pattern for a LinearGradientBrush or PathGradientBrush. For example, suppose that you define a gradient running from red to yellow. Normally the gradient is smooth and linear, but you can use a Blend to change this. For example, you might want the color to change from red to yellow very quickly, so it is 80 percent yellow only 20 percent of the way across the gradient.

(continued)

Class	Description
PathGradientBrush	This class is similar to a LinearGradientBrush except its gradient follows a path rather than a line.
ColorBlend	This class defines colors and positions for LinearGradientBrush or PathGradientBrush. This lets you make the colors vary between several different colors along the brush's path.
GraphicsPath	This class represents a series of connected lines and curves. You can draw, fill, or clip to a GraphicsPath. For example, you could add text to a GraphicsPath and then draw its outline or clip a drawing so that it only shows within the text's path.
Matrix	This class represents a 3 × 3 transformation matrix. You can use matrixes to translate, scale, and rotate graphics operations. See the section "Transformation Basics" later in this chapter for more information.

Chapter 31, "Brushes, Pens and Paths," has more to say about the gradient brushes. It includes sample images.

The System.Drawing.Drawing2D namespace also defines some enumerations that are useful for more advanced drawing. The following table describes the most useful of these enumerations.

Enumeration	Description
DashCap	These values determine how the ends of a dash in a dashed line are drawn. DashCap values include Flat, Round, and Triangle. These give the same appearance as the Flat, Round, and Triangle LineCap enumerations shown in Figure 30-1.
DashStyle	These values determine how a dashed line is drawn. DashStyle values include Dash, DashDot, DashDotDot, Dot, Solid, and Custom. If you set a Pen's DashStyle property to DashStyle.Custom, then you should also set its DashPattern property to an array telling the Pen how many to pixels to draw and skip. For example, the array {10, 20, 5, 2} means draw 10, skip 2, draw 5, skip 2, and then repeat as necessary.

Enumeration	Description
LineCap	These values determine how the ends of a line are drawn. Values include ArrowAnchor, DiamondAnchor, Flat, NoAnchor, Round, RoundAnchor, Square, SquareAnchor, Triangle, and Custom. If LineCap is Custom, you should use a CustomLineCap object to define the cap. Figure 30-1 shows the standard LineCaps.
LineJoin	These values determine how lines are joined by a GDI+ method that draws connected lines. For example, the DrawPolygon and DrawLines methods use this property. Figure 30-2 shows the possible values Bevel, Miter, Round, and MiterClipped. MiterClipped produces either a mitered or beveled corner, depending on whether the miter's length exceeds a certain limit determined by the Pen class's MiterLimit property. The MiterClipped example in Figure 30-2 shows one join that exceeds this limit and one that does not.
HatchStyle	These values define the hatch style used by a HatchBrush object to fill an area. This enumeration includes 54 values, so they are not all listed here. Example program HatchStyles, which is available for download on the book's web site, lists them and shows samples.
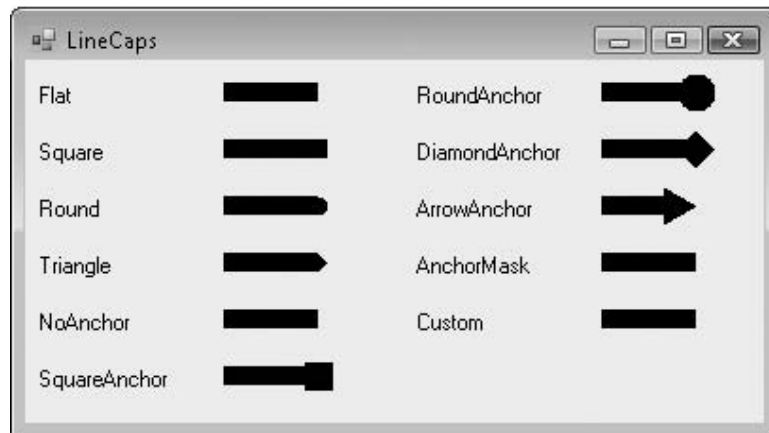
Figure 30-1: The LineCap enumeration determines how a line's end point is drawn.
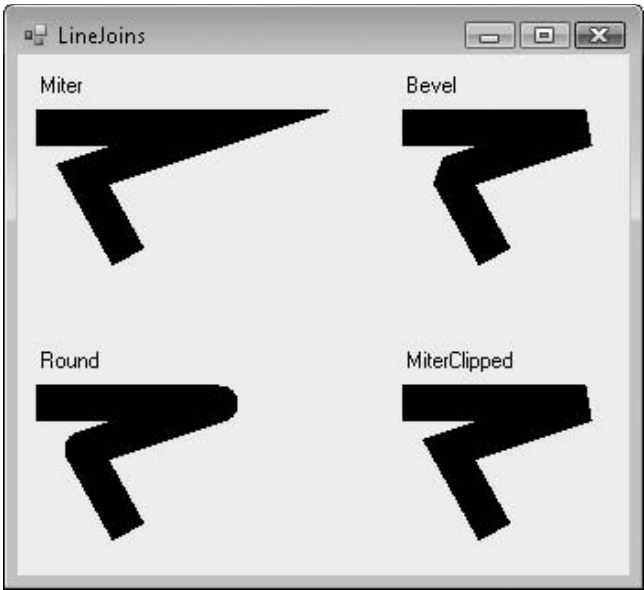
Figure 30-2: The LineJoin enumeration determines how
lines are joined.

System.Drawing.Imaging

The System.Drawing.Imaging namespace contains classes that deal with more advanced bitmap graphics.
It includes classes that define image file formats such as GIF and JPG, classes that manage color palettes,
and classes that define metafiles. The following table describes this namespace's most useful classes.

Class	Description
ImageFormat	This class specifies an image's format. This can be one of BMP, EMF, EXIF, GIF, ICON, JPEG, memory bitmap, PNG, TIFF, or WMF. For descriptions of these image format types, try searching for them at web sites such as Webopedia (www .webopedia.com). The page www.webopedia.com/ DidYouKnow/Internet/2002/JPG_GIF_PNG.asp discusses the differences between the three most common web image formats: GIF, JPEG, and PNG. The Microsoft web site has a comparison of the BMP, GIF, JPEG, Exif, PNG, and TIFF formats at msdn.microsoft.com/library/en-us/gdicpp/ GDIPlus/aboutGDIPlus/imagesbitmapsandmetafiles/ typesofbitmaps.asp.
ColorMap	This class defines a mapping from old color values to new ones. You can use the ColorMap class to change some colors in an image to others.

Class	Description
ColorPalette	This class represents a palette of color values. (A *palette* is a collection of color values that are used in a particular image. For example, 8-bit color images can contain only 256 different colors. The image's color palette lists the colors used, and an 8-bit numeric value gives each pixel's color index in the palette. Recently, higher color models such as 16-, 24-, and 32-bit color have become more common. In those color models, the bits give each pixel's red, green, and blue color components directly rather than referring to a color palette, so no palette is needed.)
Metafile	This class represents a graphic metafile that contains drawing instructions. You can create, save, reload, and play back metafile information.
MetafileHeader	This class defines the attributes of a Metafile object. (A *metafile* lets a program define a drawing in terms of lines, curves, and filled areas rather than using pixels in a bitmap. This lets the program later redraw the image scaled, rotated, or otherwise transformed smoothly without the distortion that would occur in a bitmapped image.)
MetaHeader	This class contains information about a Windows metafile (WMF)
WmfPlaceableFileHeader	This class defines how a metafile should be mapped to an output device. You can use this to ensure that the metafile is properly sized when you import it into a drawing program such as CorelDRAW.

System.Drawing.Text

The System.Drawing.Text namespace contains only three classes. These three classes provide a somewhat awkward method for learning about the fonts installed on the system or the fonts installed for an application. The following table describes these three classes.

Class	Description
FontCollection	A base class for the derived InstalledFontCollection and PrivateFontCollection classes. It provides a method that returns an array of FontFamily objects.
InstalledFontCollection	This is derived from the FontCollection class. This class's Families method returns an array containing FontFamily objects representing the fonts installed on the system.

(continued)

Class	Description
PrivateFontCollection	This is also derived from the FontCollection class. Objects from this class represent fonts installed by an application from font files. The program can use this object to install fonts just for the use of the application and not for the rest of the system. This class provides methods for installing and listing the application's fonts.

It is rather odd that this class is defined just to provide one method that returns an array of FontFamily objects. It would have made more sense to give the FontCollection class a method such as ListInstalledFonts or to give the InstalledFontCollection class a shared method that creates such a FontCollection object. That's not the way these classes work, however.

Example program ListInstalledFonts, which is available for download on the book's web site, uses the following code to list the system's installed fonts. The program creates an instance of the InstalledFontCollection and uses that object's Families method to get an array of the installed FontFamily objects. The program then loops through the array to list the fonts.

```
Private Sub Form1_Load(ByVal sender As System.Object, _
 ByVal e As System.EventArgs) Handles MyBase.Load
    ' Get the installed fonts collection.
    Dim installed_fonts As New InstalledFontCollection

    ' Get an array of the system's font families.
    Dim font_families() As FontFamily = installed_fonts.Families()

    ' Display the font families.
    For Each font_family As FontFamily In font_families
        lstFonts.Items.Add(font_family.Name)
    Next font_family
    lstFonts.SelectedIndex = 0
End Sub
```

The System.Drawing.Text namespace also defines the TextRenderingHint enumeration. *Anti-aliasing* is a process that uses pixels of different shades to make jagged edges and curves appear smoother. You can set a Graphics object's TextRenderingHint property to tell Visual Basic whether it should use anti-aliasing to smooth the text. The following table describes the TextRenderingHint enumeration values.

Enumeration Value	Description
AntiAlias	Characters are drawn anti-aliased without hinting.
AntiAliasGridFit	Characters are drawn anti-aliased with hinting to improve stems and curves.

Enumeration Value	Description
ClearTypeGridFit	Characters are drawn using ClearType glyphs with hinting. This takes advantage of ClearType font features. (In this context, a glyph is the image of a letter. Some fonts are drawn as glyphs and others such as TrueType fonts are drawn as outlines. TrueType was developed jointly by Microsoft and Apple. ClearType is a newer type of glyph font developed by Microsoft.)
SingleBitPerPixel	Characters are drawn without anti-aliasing or hinting. This is the fastest and lowest-quality setting.
SingleBitPerPixelGridFit	Characters are drawn without anti-aliasing, but with hinting.
SystemDefault	Characters are drawn using the system default setting.

The following code shows how a program can display text with and without anti-aliasing. First it creates a large font. It sets the `Graphics` object's `TextRenderingHint` property to `AntiAliasGridFit` and draws some text. Then it sets `TextRenderingHint` to `SingleBitPerPixel` and draws the text again.

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    ' Make a big font.
    Using the_font As New Font(Me.Font.FontFamily, _
        40, FontStyle.Bold, GraphicsUnit.Pixel)

        ' Draw without anti-aliasing.
        e.Graphics.TextRenderingHint = TextRenderingHint.AntiAliasGridFit
        e.Graphics.DrawString("Alias", _
            the_font, Brushes.Black, 5, 5)

        ' Draw with anti-aliasing.
        e.Graphics.TextRenderingHint = TextRenderingHint.SingleBitPerPixel
        e.Graphics.DrawString("Alias", _
            the_font, Brushes.Black, 5, 50)
    End Using
 End Sub
```

Figure 30-3 shows the result, greatly enlarged to emphasize the difference. Notice how the anti-aliased version uses different shades of gray to make the text appear smoother.

Figure 30-3: Anti-aliasing (top) makes characters appear smoother.

System.Drawing.Printing

The System.Drawing.Printing namespace contains objects for printing and managing the printer's characteristics.

Normally, to generate a printed document, you create a PrintDocument object. You set the object's properties to define printing attributes and then call its Print method. As it prints, the PrintDocument object generates PrintPage events that let you draw on the printout's pages.

Other classes in this namespace define properties for the PrintDocument object. The following table describes the most useful of these property objects.

Class	Description
PageSettings	This class defines the page settings for either an entire PrintDocument or for a particular page. This object has properties that are Margins, PaperSize, PaperSource, PrinterResolution, and PrinterSettings objects.

Class	Description
Margins	This class defines the margins for the printed page through its Top, Bottom, Left, and Right properties.
PaperSize	This class defines the paper's size. You can set the object's Kind property to a standard value such as A2, Legal, or Letter. Alternatively, you can set the object's Height and Width properties explicitly.
PaperSource	This class defines the printer's paper source. You can set this object's Kind property to such values as AutomaticFeed, Upper, Middle, Lower, Envelope, and ManualFeed.
PrinterResolution	This class defines the printer's resolution.
PrinterSettings	This class defines the printer's settings. You can use this class to get setting values such as whether the printer can print double-sided (CanDuplex), the names of the installed printers (InstalledPrinters), and the printer's supported resolutions (PrinterResolutions). You can use other properties to control the printer. For example, you can set the number of copies (Copies), set the minimum and maximum page number the user can select in a print dialog (MinimumPage and MaximumPage), and determine whether the printer collates its output (Collate).

Graphics

Whenever you draw in Visual Basic .NET, you need a Graphics object. A Graphics object represents a drawing surface, whether it is a Form, PictureBox, Bitmap in memory, metafile, or printer surface.

The Graphics class provides many methods for drawing shapes and filling areas. It also includes properties and methods that modify the graphics results. For example, its transformation methods enable you to scale, translate, and rotate the drawing output.

The following sections describe the Graphics object's properties and methods for drawing, filling, and otherwise modifying the drawing.

Drawing Methods

The Graphics object provides many methods for drawing lines, rectangles, curves, and other shapes. The following table describes these methods.

Method	Description
DrawArc	Draws an arc of an ellipse.
DrawBezier	Draws a Bézier curve. See the section "DrawBezier" later in this chapter for an example.

(continued)

Method	Description
DrawBeziers	Draws a series of Bézier curves. See the section "DrawBeziers" later in this chapter for an example.
DrawClosedCurve	Draws a closed curve that joins a series of points, connecting the final point to the first point. See the section "DrawClosedCurve" later in this chapter for an example.
DrawCurve	Draws a smooth curve that joins a series of points. This is similar to a DrawClosedCurve, except that it doesn't connect the final point to the first point.
DrawEllipse	Draws an ellipse. To draw a circle, draw an ellipse with a width equal to its height.
DrawIcon	Draws an Icon onto the Graphics object's drawing surface.
DrawIconUnstretched	Draws an Icon object onto the Graphics object's drawing surface without scaling. If you know that you will not resize the icon, this may be faster than the DrawIcon method.
DrawImage	Draws an Image object onto the Graphics object's drawing surface. Note that Bitmap is a subclass of Image, so you can use this method to draw a Bitmap on the surface.
DrawImageUnscaled	Draws an Image object onto the drawing surface without scaling. If you know that you will not resize the image, this may be faster than the DrawImage method.
DrawLine	Draws a line.
DrawLines	Draws a series of connected lines. If you need to draw a series of connected lines, this is much faster than using DrawLine repeatedly.
DrawPath	Draws a GraphicsPath object. See the section "DrawPath" later in this chapter for an example.
DrawPie	Draws a pie slice taken from an ellipse.
DrawPolygon	Draws a polygon. This is similar to DrawLines, except that it connects the last point to the first point.
DrawRectangle	Draws a rectangle.
DrawRectangles	Draws a series of rectangles. If you need to draw a series of rectangles, this is much faster than using DrawRectangle repeatedly.
DrawString	Draws text on the drawing surface.

The following sections provide examples of some of the more complicated of these drawing methods.

DrawBezier

The `DrawBezier` method draws a Bézier curve. A Bézier curve is a smooth curve defined by four control points. The curve starts at the first point and ends at the last point. The line between the first and second points gives the curve's initial direction. The line connecting the third and fourth points gives its final direction as it enters the final point.

The following code draws a Bézier curve. It starts by defining the curve's control points. It then draws dashed lines connecting the points, so you can see where the control points are in the final drawing. You would omit this step if you just wanted to draw the curve. Next the program sets the `Graphics` object's `SmoothingMode` property to `HighQuality`, so the program draws a smooth, anti-aliased curve. The `SmoothingMode` property is described in the section "SmoothingMode" later in this chapter. The program creates a black pen three pixels wide and draws the Bézier curve.

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    ' Define the Bezier curve's control points.
    Dim pts() As Point = { _
        New Point(10, 10), _
        New Point(200, 10), _
        New Point(50, 200), _
        New Point(200, 150) _
    }

    ' Connect the points with dashed lines.
    Using dashed_pen As New Pen(Color.Black, 0)
        dashed_pen.DashStyle = Drawing2D.DashStyle.Dash
        For i As Integer = 0 To 2
            e.Graphics.DrawLine(dashed_pen, pts(i), pts(i + 1))
        Next i
    End Using

    ' Draw the Bezier curve.
    e.Graphics.SmoothingMode = Drawing2D.SmoothingMode.HighQuality
    Using bez_pen As New Pen(Color.Black, 3)
        e.Graphics.DrawBezier(bez_pen, pts(0), pts(1), pts(2), pts(3))
    End Using
End Sub
```

Figure 30-4 shows the result. You can see in the picture how the control points determine the curve's end points and the direction it takes at them.
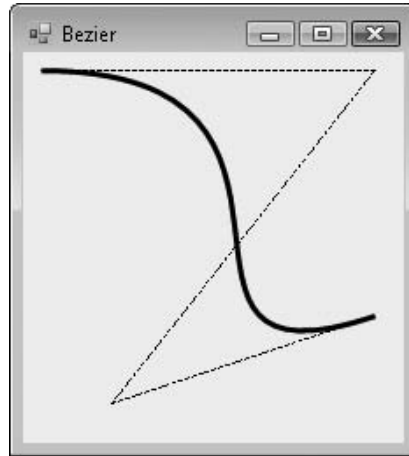
Figure 30-4: The DrawBezier method
draws a smooth curve defined by four
control points.

DrawBeziers

The `DrawBeziers` method draws a series of Bézier curves with common end points. It takes as
parameters an array of points that determine the curves' end points and interior control points. The first
four entries in the array represent the first curve's starting point, its two interior control points, and the
curve's end point. The next curve uses the first curve's end point as its starting point, provides two
interior control points, and its own end point. This pattern repeats for each of the curves. To draw N
curves, the array should contain $3 * N + 1$ points.

Figure 30-5 shows two Bézier curves drawn by the `DrawBeziers` method. Notice that the two curves
share a common end point, but they do not meet smoothly. To make them meet smoothly, you would
need to ensure that the last two points in the first curve and the first two points in the second curve (one
of which is the same as the last point in the first curve) all lie along the same line.
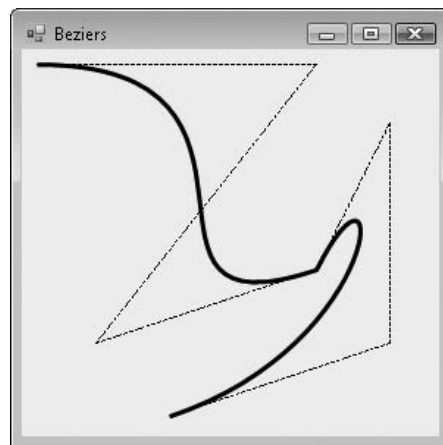
Figure 30-5: The DrawBeziers method
draws a series of Bézier curves with
common end points.

DrawClosedCurve

Using the DrawBeziers method, you can draw a series of connected curves, but joining them smoothly is difficult. The DrawClosedCurve method connects a series of points with a smooth curve.

DrawClosedCurve takes as parameters a pen and an array of points to connect. Figure 30-6 shows an example. Notice that the curve is smooth and that it passes through each of the control points exactly. If you just want to connect a series of points smoothly, it is easier to use a closed curve than Bézier curves.

The DrawCurve method is similar to DrawClosedCurve, except that it doesn't connect the last point to the first.

Overloaded versions of the DrawClosedCurve method take a tension parameter that indicates how tightly the curve bends. Usually this value is between 0 and 1. The value 0 makes the method connect the curve's points with straight lines. The value 1 draws a nicely rounded curve. Tension values greater than 1 produce some strange (but sometimes interesting) results.
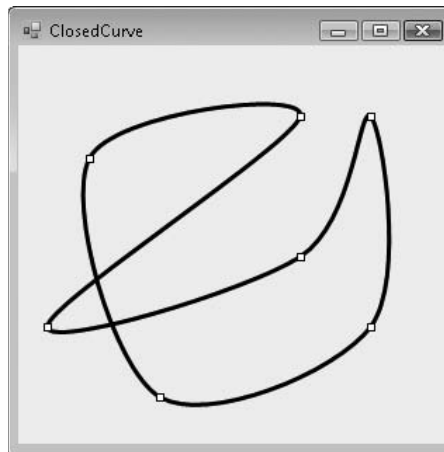
Figure 30-6: The DrawClosedCurve method draws a smooth curve connecting a series of points.

Figure 30-7 shows closed curves drawn with tension set to 0.0, 0.25, 0.5, 0.75, and 1.0. It uses progressively thicker lines so you can see which curves are which. You can see the curves growing smoother as the tension parameter increases and the pen thickens.

Overloaded versions of the DrawCurve method also take tension parameters.
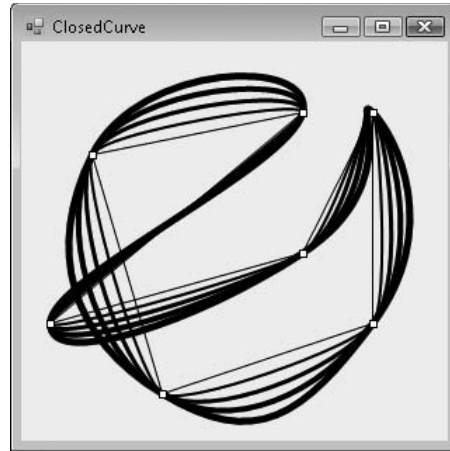
Figure 30-7: The DrawClosedCurve
method's tension parameter determines
how tightly the curve bends.

DrawPath

The `DrawPath` method draws a `GraphicsPath` object as shown in the following code. The program creates a new, empty `GraphicsPath` object and uses its `AddString` method to add a string to the path. This method takes as parameters a string, `FontFamily`, font style, font size, point where the text should start, and a string format. The code sets the `Graphics` object's `SmoothingMode` property to draw anti-aliased curves. It then calls the `FillPath` method to fill the area defined by the `GraphicsPath` object with white and uses the `DrawPath` method to draw the path's outline in black.

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    ' Create a GraphicsPath.
    Using graphics_path As New Drawing2D.GraphicsPath
        ' Add some text to the path.
        graphics_path.AddString("GraphicsPath", _
            New FontFamily("Times New Roman"), _
            CInt(FontStyle.Bold), _
            80, New Point(10, 10), _
            StringFormat.GenericTypographic)

        ' Draw the path.
        e.Graphics.SmoothingMode = SmoothingMode.AntiAlias
        e.Graphics.FillPath(Brushes.White, graphics_path)
        Using thick_pen As New Pen(Color.Black, 3)
            e.Graphics.DrawPath(thick_pen, graphics_path)
        End Using
    End Using
End Sub
```

Figure 30-8 shows the result.

You can use `GraphicsPath` objects to make all sorts of interesting effects. For example, you could fill a `GraphicsPath` with a color gradient, hatch pattern, or bitmap.

Figure 30-8: The DrawPath method draws the outline defined by a
GraphicsPath object.

Filling Methods

The `Graphics` object provides many methods for filling areas. These correspond exactly to the drawing
methods that define a closed shape. For example, `DrawRectangle` draws a rectangle and
`FillRectangle` fills one.

Corresponding draw and fill methods take exactly the same parameters, except that the filling methods
use a `Brush` object instead of a `Pen` object. For example, the following statements fill and draw a
`GraphicsPath` object. The only difference in the parameters is the `Pen` or `Brush`.

```
e.Graphics.FillPath(Brushes.White, graphics_path)
e.Graphics.DrawPath(Pens.Black, graphics_path)
```

The `Graphics` object provides the following methods for filling areas: `FillClosedCurve`,
`FillEllipse`, `FillPath`, `FillPie`, `FillPolygon`, `FillRectangle`, and `FillRectangles`. These
methods work the same way as the corresponding drawing methods (`DrawClosedCurve`, `DrawEllipse`,
`DrawPath`, `DrawPie`, `DrawPolygon`, `DrawRectangle`, and `DrawRectangles`), except they fill an area
with a brush rather than drawing it with a pen. See the section "Drawing Methods" earlier in this
chapter for descriptions of these methods.

Other Graphics Properties and Methods

The following table describes the `Graphics` object's most useful properties and methods, other than
those that draw or fill shapes.

Properties/Methods	Description
AddMetafileComment	If the `Graphics` object is attached to a metafile, this adds a comment to it. Later, if an application enumerates the metafile's records, it can view the comments.
Clear	Clears the `Graphics` object and fills it with a specific color. For example, a form's `Paint` event handler might use the statement `e.Graphics.Clear(Me.BackColor)` to clear the form using its background color.
Clip	Determines the `Region` object used to clip a drawing on the `Graphics` surface. Any drawing command that falls outside of this `Region` is clipped off and not shown in the output.

(continued)

Properties/Methods	Description
Dispose	Releases the resources held by the Graphics object. You can use this method to free the resources of an object that you no longer need sooner than they would be freed by garbage collection. For a more detailed discussion, see the section "Dispose" in Chapter 26, "Classes and Structures."
DpiX	Returns the horizontal number of dots per inch (DPI) for this Graphics object's surface.
DpiY	Returns the vertical number of DPI for this Graphics object's surface.
EnumerateMetafile	If the Graphics object is attached to a metafile, this sends the metafile's records to a specified *callback* subroutine one at a time.
ExcludeClip	Updates the Graphics object's clipping region to exclude the area defined by a Region or Rectangle.
FromHdc	Creates a new Graphics object from a handle to a device context (DC). (A *device context* is a structure that defines an object's graphic attributes: pen, color, fill, and so forth. Usually, you can use the GDI+ drawing routines and ignore DCs. They are more useful if you need to use older GDI functions.)
FromHwnd	Creates a new Graphics object from a window handle (hWnd).
FromImage	Creates a new Graphics object from an Image object. This is a very common way to make a new Graphics object to manipulate a bitmap.
InterpolationMode	Determines whether drawing routines use anti-aliasing when drawing images. See the section "InterpolationMode" later in this chapter for an example.
IntersectClip	Updates the Graphics object's clipping region to be the intersection of the current clipping region and the area defined by a Region or Rectangle. (The *clipping region* determines where GDI+ will draw output. If a line falls outside of the clipping region, GDI+ doesn't draw the part that sticks out. Normally, an image's clipping region includes its whole visible area, but you can redefine it so that, for example, parts of the visible area are not drawn.)
IsVisible	Returns True if a specified point is within the Graphics object's visible clipping region.
MeasureCharacterRanges	Returns an array of Region objects that show where each character in a string will be drawn.

Properties/Methods	Description
MeasureString	Returns a `SizeF` structure that gives the size of a string drawn on the `Graphics` object with a particular font.
MultiplyTransform	Multiplies the `Graphics` object's current transformation matrix by another transformation matrix.
PageScale	Determines the amount by which drawing commands are scaled. For example, if you set this to 2, every coordinate and measurement is scaled by a factor of 2 from the origin.
PageUnits	Determines the units of measurement. This can be `Display` (1/75 inch), `Document` (1/300 inch), `Inch`, `Millimeter`, `Pixel`, or `Point` (1/72 inch).
RenderingOrigin	Determines the point used as a reference when hatching. Normally this is (0, 0), so all `HatchBrushes` use the same `RenderingOrigin` and, if you draw two overlapping hatched areas, their hatch patterns line up. If you change this property, you can make their hatch patterns not line up.
ResetClip	Resets the object's clipping region, so the drawing is not clipped.
ResetTransformation	Resets the object's transformation matrix to the identity matrix, so the drawing is not transformed.
Restore	Restores the `Graphics` object to a state saved by the `Save` method. See the section "Saving and Restoring Graphics State" later in this chapter for an example.
RotateTransform	Adds a rotation to the object's current transformation. This rotates all drawing by a specified amount. See the section "Transformation Basics" later in this chapter for an example.
Save	Saves the object's current state in a `GraphicsState` object, so you can later restore it by calling the `Restore` method. See the section "Saving and Restoring Graphics State" later in this chapter for an example.
ScaleTransform	Adds a scaling transformation to the `Graphics` object's current transformation. This scales all drawing by a specified factor in the X and Y directions. See the section "Transformation Basics" later in this chapter for an example.
SetClip	Sets or merges the `Graphics` object's clipping area to another `Graphics` object, a `GraphicsPath` object, or a `Rectangle`. Only parts of drawing commands that lie within the clipping region are displayed.

(continued)

681

Properties/Methods	Description
SmoothingMode	Determines whether drawing routines use anti-aliasing when drawing lines and curves. See the section "SmoothingMode" later in this chapter for an example.
TextRenderingHint	Determines whether text is drawn with anti-aliasing and hinting. See the section "TextRenderingHint" later in this chapter and the section "System.Drawing.Text" earlier in this chapter for more details.
Transform	Gets or sets the Graphics object's transformation matrix. This matrix represents all scaling, translation, and rotation applied to the object.
TransformPoints	Applies the object's current transformation to an array of points.
TranslateTransform	Adds a translation transformation to the Graphics object's current transformation. This offsets all drawing a specified distance in the X and Y directions. See the section "Transformation Basics" later in this chapter for an example.

The following sections give examples of some of the more important (but confusing) Graphics properties and methods.

Anti-Aliasing

Aliasing is an effect caused when you draw lines, curves, and text that do not line up exactly with the screen's pixels. For example, if you draw a vertical line, it neatly fills in a column of pixels. If you draw a line at a 45-degree angle, it also fills a series of pixels that are nicely lined up, but the pixels are a bit farther apart and that makes the line appear lighter on the screen. If you draw a line at some other angle (for example, 30 degrees), the line does not up exactly with the pixels. The line will contain some runs of two or three pixels in a horizontal group. The result is a line that is lighter than the vertical line and that is noticeably jagged.

A similar affect occurs when you resize a bitmap or other image. If you enlarge an image by simply drawing each pixel as a larger block of the same color, the result is blocky. If you shrink an image by removing some pixels, the result may have tears and gaps.

Anti-aliasing is a process that smoothes out lines, text, and images. Instead of drawing a series of pixels that all have the same color, the drawing routines give pixels different shades of color to make the result smoother.

The Graphics object provides three properties that control anti-aliasing for lines and curves, text, and images: SmoothingMode, TextRenderingHint, and InterpolationMode.

SmoothingMode

The `SmoothingMode` property controls anti-aliasing for drawn lines and curves, and for filled shapes. This property can take the values `AntiAlias`, `Default`, `HighQuality`, `HighSpeed`, and `None`. The following code shows how a program might draw a circle's outline and a filled circle using the `HighQuality` `SmoothingMode`:

```
gr.SmoothingMode = SmoothingMode.HighQuality
gr.DrawEllipse(Pens.Black, 10, 10, 20, 20)
gr.FillEllipse(Brushes.Black, 30, 10, 20, 20)
```

It's hard to see any difference in a book, although the difference is clear on the screen. It's not clear whether there's any difference between the `Default`, `HighSpeed`, and `None` modes, or between `HighQuality` and `AntiAlias`, at least on this computer. The `HighQuality` and `AntiAlias` modes are noticeably smoother than the others, however.

TextRenderingHint

The `TextRenderingHint` property controls anti-aliasing for text. This property can take the values `AntiAlias`, `AntiAliasGridFit`, `ClearTypeGridFit`, `SingleBitPerPixel`, `SingleBitPerPixelGridFit`, and `SystemDefault`. The following code shows how a program can draw text using the `TextRenderingHint` value `AntiAliasGridFit`:

```
gr.TextRenderingHint = TextRenderingHint.AntiAliasGridFit
gr.DrawString("TextRenderingHint", Me.Font, Brushes.Black, 10, 10)
```

As is the case with `SmoothingMode` values, it's hard to see any difference in a book, but the difference is clear on the screen. The `TextRenderingHint` value `SingleBitPerPixel` produces a poor result. `SystemDefault` and `SingleBitPerPixelGridFit` give an acceptable result (the default appears to be `AntiAliasGridFit` on this computer). `AntiAlias` and `AntiAliasGridFit` give the best results.

Most of the differences are quite subtle. The "grid fit" versions use hinting about where the characters are positioned to try to improve stems and curves. If you look extremely closely (perhaps with a magnifying glass), you can see that the base of a T is a bit cleaner and more solid in the `AntiAliasGridFit` and `ClearTypeGridFit` modes than in the `AntiAlias` mode. The "grid fit" modes also provide text that is slightly more compact horizontally than the `AntiAlias` mode.

InterpolationMode

The `InterpolationMode` property controls anti-aliasing when a program shrinks or enlarges an image. This property can take the values `Bicubic`, `Bilinear`, `Default`, `High`, `HighQualityBicubic`, `HighQualityBilinear`, `Low`, and `NearestNeighbor`.

Example program InterpolationModes, which is available for download on the book's web site, draws a smiley face in a bitmap. It then draws the bitmap's image at enlarged and reduced scales using `InterpolationMode` values. The differences are hard to see in a book but are obvious on the screen.

For enlarged images, the `NearestNeighbor` interpolation mode gives a sharply blocky result. All of the other modes give a slightly fuzzier image that looks a little smoother but that is still somewhat blocky.

For reduced images, the three high quality modes (`High`, `HighQualityBilinear`, and `HighQualityBicubic`) produce very nice results. The other modes cause gaps in the lines in the reduced images.

683

All of the interpolation modes produce better results on photographic images instead of the line drawings used in this example.

Speed Considerations

The anti-aliasing settings for all three of these properties provide smoother results, but they are slower. For a few lines, strings, and images, the difference in performance won't be an issue. However, if you build a more intensive application (such as a mapping program that draws several thousand street segments on the form), you may notice a difference in speed. In that case, you may be willing to accept slightly worse appearance in exchange for better performance.

Transformation Basics

Graphical transformations modify the coordinates and sizes you use to draw graphics to produce a result that is scaled, translated, or rotated. For example, you could apply a scaling transformation that multiplies by 2 in the X direction and 3 in the Y direction. If you then drew a line between the points (10, 10) and (20, 20), the result drawn on the screen would connect the points (10 * 2, 10 * 3) = (20, 30) and (20 * 2, 20 * 3) = (40, 60). This stretches the line so it is larger overall, but it stretches its height more than its width (a factor of 3 versus a factor of 2). Notice that this also moves the line farther from the origin [from (10, 10) to (20, 30)]. In general, a scaling transformation moves an object farther from the origin unless it lies on the origin.

You don't really need to understand all the details of the mathematics of transformations to use them, but a little background is quite helpful.

Transformation Mathematics

In two dimensions, you can represent scaling, translation, and rotation with 3 × 3 matrixes. You represent a point with a vector of three entries, two for the X and Y coordinates and a final 1 that gives the vector three entries so that it matches the matrices.

When you multiply a point's coordinates by a transformation matrix, the result is the transformed point.

To multiply a point by a matrix, you multiply the point's coordinates by the corresponding entries in the matrix's columns. The first transformed coordinate is the point's coordinates times the first column, the second transformed coordinate is the point's coordinates times the second column, and the third transformed coordinate is the point's coordinates times the third column.

The following calculation shows the result when you multiply a generic vector *<A, B, C>* by a matrix. When you work with two-dimensional transformations, the value *C* is always 1.

```
                | m11 m12 m13 |
   <A, B, C> *  | m21 m22 m23 |
                | m31 m32 m33 |
 = <A * m11 + B * m21 + C * m31,
    A * m12 + B * m22 + C * m32,
    A * m13 + B * m23 + C * m33>
```

The following matrix represents scaling by a factor of *Sx* in the X direction and a factor of *Sy* in the Y direction:

```
| Sx  0  0 |
|  0 Sy  0 |
|  0  0  1 |
```

The following example shows the point (10, 20) multiplied by a matrix that represents scaling by a factor of 2 in the X direction and 3 in the Y direction. The result is the vector <20, 60, 1>, which represents the point (20, 60) as you should expect.

```
               | 2 0 0 |
  <10, 20, 1> * | 0 3 0 |
               | 0 0 1 |
  = <10 * 2 + 20 * 0 + 1 * 0,
     10 * 0 + 20 * 3 + 1 * 0,
     10 * 0 + 20 * 0 + 1 * 1>
  = <20, 60, 1>
```

The following matrix represents translation through the distance *Tx* in the X direction and *Ty* in the Y direction:

```
|  1   0  0 |
|  0   1  0 |
| Tx  Ty  1 |
```

The following matrix represents rotation through the angle *t*:

```
|  Cos(t)  Sin(t)  0 |
| -Sin(t)  Cos(t)  0 |
|    0       0     1 |
```

Finally, the following transformation, called the *identity transformation*, leaves the point unchanged. If you multiply a point by this matrix, the result is the same as the original point.

```
| 1 0 0 |
| 0 1 0 |
| 0 0 1 |
```

You can work through some examples to verify that these matrices represent translation, scaling, rotation, and the identity, or consult an advanced graphics programming book for proofs.

One of the most useful and remarkable properties of matrix/point multiplication is that it is associative. If p is a point and *T1* and *T2* are transformation matrices, p * T1 * T2= (p * T1) * T2=p * (T1 * T2).

This result means that you can multiply any number of transformation matrices together to create a single combined matrix that represents all of the transformations applied one after the other. You can then apply this single matrix to all the points that you need to draw. This can save a considerable amount of time over multiplying each point by a long series of matrices one at a time.

Transformation Code

The Graphics object maintains a current transformation matrix at all times, and it provides several methods that let you add more transformations to that matrix. The ScaleTransform, TranslateTransform, and RotateTransform methods add a new transformation to the

current transformation. These methods take parameters that specify the amount by which points should be scaled, translated, or rotated.

A final parameter indicates whether you want to prepend the new transformation on the left (`MatrixOrder.Prepend`) or append it on the right (`MatrixOrder.Append`) of the current transformation. If you prepend the new transformation on the left, that transformation is applied before any that are already part of the current transformation. If you append the new transformation on the right, that transformation is applied after any that are already part of the current transformation.

Strangely, the default if you omit this parameter is to prepend the new transformation on the left. That means transformations that you add last are applied first. That, in turn, means that you must compose a combined transformation backward. If you want to rotate, then scale, then translate, you need to prepend the translation first, the scaling second, and the rotation last. That seems very counterintuitive.

A more natural approach is to explicitly set this final parameter to `MatrixOrder.Append` so that later transformations are applied after existing ones.

The following code shows how a program can use transformations to draw a complex result with a simple drawing routine. Subroutine `DrawArrow` draws an arrow within the rectangle $0 <= X <= 4$, $0 <= Y <= 4$. If you were to call this routine without any transformations, you would see a tiny arrow four pixels long and four pixels wide drawn in the upper-left corner of the form.

```
' Draw an arrow outline.
Private Sub DrawArrow(ByVal gr As Graphics, ByVal hatch_style As HatchStyle)
    Dim pts() As Point = { _
        New Point(0, 1), _
        New Point(2, 1), _
        New Point(2, 0), _
        New Point(4, 2), _
        New Point(2, 4), _
        New Point(2, 3), _
        New Point(0, 3) _
    }
    Using hatch_brush As New HatchBrush(hatch_style, Color.Black, Color.White)
        gr.FillPolygon(hatch_brush, pts)
    End Using

    Using black_pen As New Pen(Color.Black, 0)
        gr.DrawPolygon(black_pen, pts)
    End Using
End Sub

Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    ' Scale by a factor of 30.
    e.Graphics.ScaleTransform(30, 30, MatrixOrder.Append)
    DrawArrow(e.Graphics, HatchStyle.Horizontal)

    ' Translate 150 horizontally and 60 vertically.
```

```
        e.Graphics.TranslateTransform(150, 60, MatrixOrder.Append)
        DrawArrow(e.Graphics, HatchStyle.Vertical)

        ' Rotate 30 degrees.
        e.Graphics.RotateTransform(30, MatrixOrder.Append)
        DrawArrow(e.Graphics, HatchStyle.Cross)
    End Sub
```
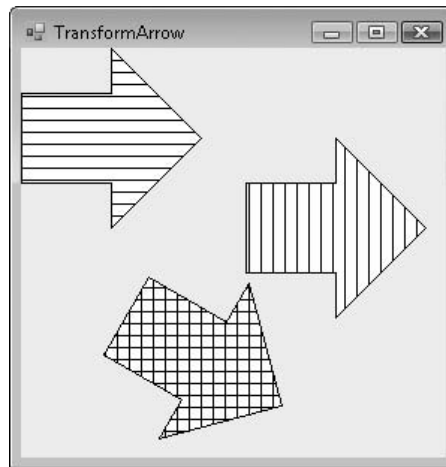
This form's `Paint` event handler uses the `ScaleTransform` method to give the `Graphics` object a transformation that scales by a factor of 30 in both the X and Y directions. It then calls the `DrawArrow` routine, passing it the parameter `HatchStyle.Horizontal`. The result is an arrow near the upper-left corner but 30 times larger than the original arrow and filled with a horizontal hatch pattern.

Next the program uses the `TranslateTransform` method to add a transformation that translates 150 pixels in the X direction and 60 pixels vertically. It appends this transformation so that the drawing is first scaled (the scaling transformation is still part of the `Graphics` object's current transformation) and then translated. It calls `DrawArrow` again, passing it the parameter `HatchStyle.Vertical`, so the result is an arrow 30 times larger than the original, moved 150 pixels to the right and 60 pixels down, and filled with a vertical hatch pattern.

Finally, the program uses the `RotateTransform` method to add a transformation that rotates the drawing by 30 degrees clockwise around the origin in the upper-left corner. It again appends the transformation so that the drawing is first scaled, then translated, and then rotated. It calls `DrawArrow`, passing it the parameter `HatchStyle.Cross`, so the result is an arrow 30 times larger than the original, moved 150 pixels to the right and 60 pixels down, rotated 30 degrees, and filled with a crosshatch pattern.

Figure 30-9 shows the result.

Figure 30-9: This program draws arrows
scaled, translated, and rotated.

The `Graphics` object's methods for working with transformations include `MultiplyTransform`, `PageScale`, `PageUnits`, `ResetTransformation`, `RotateTransform`, `ScaleTransform`, `Transform`, `TransformPoints`, and `TranslateTransform`. See the section "Other Graphics Properties and Methods, earlier in this chapter for descriptions of those methods.

Note also that the transformations apply to text as well as drawn lines and filled shapes so a program can easily draw text that is stretched, scaled, and rotated.

Advanced Transformations

You can build very complex transformations by combining simple ones. For example, you can scale around an arbitrary point by combining simple translation and scaling transformations.

A normal scaling transformation moves an object farther away from the origin. If you scale the point (10, 20) by a factor of 20 in the X and Y directions, you get the point (200, 400), which is much farther from the origin. Similarly, if you scale all the points in a shape, all the points move farther from the origin.

To scale the object around some point other than the origin, first translate it so the point of rotation is centered at the origin. Then scale it and translate it back to its original position.

The following code scales a diamond around its center. The `DrawDiamond` subroutine draws a diamond centered at the point (125, 125). The form's `Paint` event handler calls `DrawDiamond` to draw the original diamond. It then translates to move the diamond's center to the origin, scales by a factor of 2 vertically and horizontally, and then reverses the first translation to move the origin back to the diamond's original center.

```
Private Sub DrawDiamond(ByVal gr As Graphics)
    Dim pts() As Point = { _
        New Point(75, 125), _
        New Point(125, 75), _
        New Point(175, 125), _
        New Point(125, 175) _
    }
    gr.DrawPolygon(Pens.Black, pts)
End Sub

Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    ' Draw the original diamond.
    DrawDiamond(e.Graphics)

    ' Translate to center at the origin.
    e.Graphics.TranslateTransform(-125, -125, MatrixOrder.Append)

    ' Scale by a factor of 2.
```

```
        e.Graphics.ScaleTransform(2, 2, MatrixOrder.Append)

        ' Translate the center back to where it was.
        e.Graphics.TranslateTransform(125, 125, MatrixOrder.Append)

        ' Draw the diamond.
        DrawDiamond(e.Graphics)
    End Sub
```

Notice that line widths are also scaled by scaling transformations, so in this example, the enlarged diamond's borders are two pixels wide. The `Pen` object's `Width` property is a `Single`, so you can use fractional pen widths if necessary. For example, if you want to scale an object by a factor of 4 and you want the result to have a line width of 2, you can set the `Pen`'s `Width` to 0.5 and let it scale.

If you want the final result to have a line width of 1, you can also set the `Pen`'s `Width` to 0. This value tells the GDI+ routines to use a single pixel line width, no matter how the drawing is scaled.

Note also that the line width will not go below 1 if you use a scaling transformation to reduce the size of the drawing.

A particularly useful transformation maps a specific rectangle in world coordinates (the coordinates in which you draw) to a specific rectangle in device coordinates (the coordinates on the drawing surface). For example, you might graph a function in the world coordinates $-1 <= X <= 1$, $-1 <= Y <= 1$ and want to map it to the drawing surface rectangle $10 <= X <= 200$, $10 <= Y <= 200$.

To do this, you can first translate to center the world coordinate rectangle at the origin, scale to resize the rectangle to match the size of the device coordinate rectangle, and then translate to move the origin to the center of the device coordinate rectangle.

The `MapRectangles` subroutine shown in the following code maps a world coordinate rectangle into a device coordinate rectangle for a `Graphics` object. It begins by resetting the `Graphics` object's transformation to clear out anything that may already be in there. Next, the routine translates the center of the world coordinate rectangle to the origin, scales to stretch the world coordinate rectangle to the device coordinate rectangle's size, and then translates to move the origin to the center of the device-coordinate rectangle.

```
    ' Map a world coordinate rectangle to a device coordinate rectangle.
    Private Sub MapRectangles(ByVal gr As Graphics, _
     ByVal world_rect As Rectangle, ByVal device_rect As Rectangle)
        ' Reset the transformation.
        gr.ResetTransform()

        ' Translate to center the world coordinate
        ' rectangle at the origin.
        gr.TranslateTransform( _
            CSng(-(world_rect.X + world_rect.Width / 2)), _
            CSng(-(world_rect.Y + world_rect.Height / 2)), _
            MatrixOrder.Append)

        ' Scale.
        gr.ScaleTransform( _
```

```
            CSng(device_rect.Width / world_rect.Width), _
            CSng(device_rect.Height / world_rect.Height), _
            MatrixOrder.Append)

        ' Translate to move the origin to the center
        ' of the device coordinate rectangle.
        gr.TranslateTransform( _
            CSng(device_rect.X + device_rect.Width / 2), _
            CSng(device_rect.Y + device_rect.Height / 2), _
            MatrixOrder.Append)
    End Sub
```

The following code shows how a program can use this subroutine to position a drawing. The DrawSmiley subroutine draws a smiley face within the area $0 <= X <= 1, 0 <= Y <= 1$. The Paint event handler creates a Rectangle representing the device coordinates where it wants to draw the smiley face. It draws the rectangle so that you can see where the target is. The code then creates a world coordinate rectangle representing the area where the DrawSmiley subroutine draws the face. It calls subroutine MapRectangles to make the necessary transformation and calls DrawSmiley to draw the transformed face.
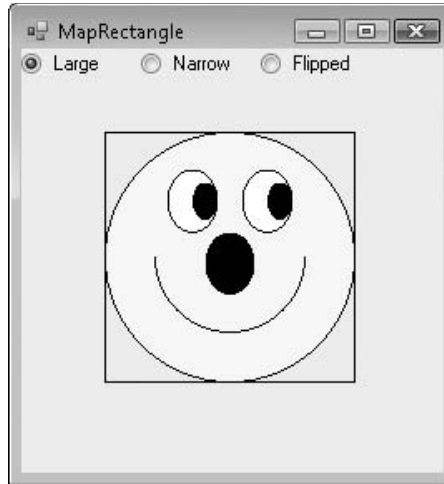
```
    ' Draw a smiley face in the rectangle
    ' 0 <= X <= 1, 0 <= Y <= 1.
    Private Sub DrawSmiley(ByVal gr As Graphics)
        Using the_pen As New Pen(Color.Black, 0)
            gr.FillEllipse(Brushes.Yellow, 0, 0, 1, 1)           ' Face.
            gr.DrawEllipse(the_pen, 0, 0, 1, 1)
            gr.DrawArc(the_pen, 0.2, 0.2, 0.6, 0.6, 0, 180)      ' Smile.
            gr.FillEllipse(Brushes.Black, 0.4, 0.4, 0.2, 0.25)   ' Nose
            gr.FillEllipse(Brushes.White, 0.25, 0.15, 0.2, 0.25) ' Left eye.
            gr.DrawEllipse(the_pen, 0.25, 0.15, 0.2, 0.25)
            gr.FillEllipse(Brushes.Black, 0.35, 0.2, 0.1, 0.15)
            gr.FillEllipse(Brushes.White, 0.55, 0.15, 0.2, 0.25) ' Right eye.
            gr.DrawEllipse(the_pen, 0.55, 0.15, 0.2, 0.25)
            gr.FillEllipse(Brushes.Black, 0.65, 0.2, 0.1, 0.15)
        End Using
    End Sub

    Private Sub Form1_Paint(ByVal sender As Object, _
     ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
        ' Draw the target rectangle.
        Dim device_rect As New Rectangle(50, 50, 150, 150)
        e.Graphics.DrawRectangle(Pens.Black, device_rect)

        ' Map between world and device coordinate rectangles.
        Dim world_rect As New Rectangle(0, 0, 1, 1)
        MapRectangles(e.Graphics, world_rect, device_rect)

        ' Draw the smiley face.
        DrawSmiley(e.Graphics)
    End Sub
```

Figure 30-10 shows the result. Note that the smiley face fits the target device coordinate rectangle nicely.

Figure 30-10: This program uses the
MapRectangles subroutine to map a
smiley face in world coordinates into a
rectangle in device coordinates.

The previous example uses subroutine MapRectangles to scale and translate a drawing, but the routine can also stretch or flip the drawing. For example, if the previous code used the following statement to define the device rectangle, the result has width 50 and height 150 so it is tall and thin:

```
Dim device_rect As New Rectangle(50, 50, 50, 150)
```

Subroutine MapRectangles can be particularly handy if you need to graph an equation. Normally, in device coordinates, the origin is in the upper-left corner and Y values increase downward. When you draw a graph, however, the origin is in the lower-left corner and Y values increase upward. You could work out how to modify the equation you are trying to draw so that it comes out in the proper orientation, but it's much easier to use subroutine MapRectangles to flip the Y coordinates.

To invert the Y coordinates, set the device coordinate Rectangle structure's Y property to the largest Y coordinate you want to use, and set its height to the negative of the height you really want to use. For example, suppose that you want the graph to fill the device coordinate rectangle 50 <= X <= 200, 50 <= Y <= 200. The rectangle has width and height 150, so you would use the following statement to map the coordinate windows:

```
Dim device_rect As New Rectangle(50, 200, 150, -150)
```

You could also use subroutine MapRectangles to flip a drawing's X coordinates, although the need for that is much less common.

Saving and Restoring Graphics State

The `Graphics` object's `Save` method takes a snapshot of the object's graphic state and stores it in a `GraphicsState` object. Later, you can pass this `GraphicsState` object to the `Graphics` object's `Restore` method to return to the saved state.

Note that you can pass a particular `GraphicsState` object to the `Restore` method only once. If you want to use the same state again, you can call the `Save` method to save it again right after you restore it. That's the approach used by the following code. The program creates transformations that scale by a factor of 90 and then translate to move the origin to the center of the form. It then starts a loop to draw a rectangle rotated by angles between 5 degrees and 90 degrees.

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    Using black_pen As New Pen(Color.Black, 0)
        ' Scale by a factor of 90.
        e.Graphics.ScaleTransform(90, 90, MatrixOrder.Append)

        ' Translate to center on the form.
        e.Graphics.TranslateTransform( _
            Me.ClientRectangle.Width \ 2, _
            Me.ClientRectangle.Height \ 2, _
            MatrixOrder.Append)

        For i As Integer = 5 To 90 Step 5
            ' Save the state.
            Dim graphics_state As GraphicsState = e.Graphics.Save()

            ' Rotate i degrees.
            e.Graphics.RotateTransform(i, MatrixOrder.Prepend)

            ' Draw a rectangle.
            e.Graphics.DrawRectangle(black_pen, -1, -1, 2, 2)

            ' Restore the saved state.
            e.Graphics.Restore(graphics_state)
        Next i
    End Using
End Sub
```

Within the loop it calls the `Save` method to record the `Graphics` object's current state. That state includes the initial scaling and translation. The loop then adds a rotation transformation to the `Graphics` object. It passes the `RotateTransform` method the value `MatrixOrder.Prepend`, so the rotation is added to the *front* of the transformation matrix. That makes the combined transformation apply the rotation before the scaling and translation. In other words, drawings are rotated, then scaled, and then translated.

The loop then draws the rectangle $-1 <= X <= 1$, $-1 <= Y <= 1$, and then calls `Restore` to restore the saved graphics state that holds just the scaling and translation.

Figure 30-11 shows the result.
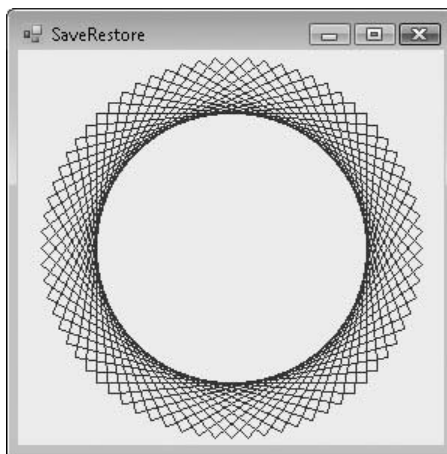
There are usually many other ways to achieve the same affect in graphics programming. Though changing the order of transformations generally does not give the same result, you can always use different sets of transformations to produce the same outcome.

The following code shows a simpler `For` loop that creates the same result as the previous version. Rather than using `Restore` to remove the `Graphics` object's current rotation and replacing it with a new one, this version simply adds another 5-degree rotation to the current rotation. For example, a single 10-degree rotation is the same as two 5-degree rotations.

```
For i As Integer = 5 To 90 Step 5
    ' Rotate 5 degrees.
    e.Graphics.RotateTransform(5, MatrixOrder.Prepend)

    ' Draw a rectangle.
    Using black_pen As New Pen(Color.Black, 0)
        e.Graphics.DrawRectangle(black_pen, -1, -1, 2, 2)
    End Using
Next i
```

Normally, you would not use `Save` and `Restore` if such a simple solution is available without them. `Save` and `Restore` are more useful when you want to perform several operations using the same transformation and other transformations are interspersed.

Figure 30-11: This program saves and restores the Graphics object's state containing a scaling and translation, adding an extra rotation as needed.

Drawing Events

When part of a control must be redrawn, it generates a `Paint` event. For example, if you minimize a form and then restore it, partially cover a form with another form, or enlarge a form, parts of the form must be redrawn.

The `Paint` event handler provides a parameter `e` of type `PaintEventArgs`. That parameter's `Graphics` property holds a reference to a `Graphics` object that the event handler should use to redraw the control. This `Graphics` object has its clipping region set to the part of the control that must be redrawn. For example, if you make a form wider, the `Graphics` object is clipped, so it only draws on the new piece of form on the right that was just exposed. Clipping the `Graphics` object makes drawing a faster because the GDI+ routines can ignore drawing commands outside of the clipping region more quickly than it can draw them.

Clipping the `Graphics` object sometimes leads to unexpected results, particularly if the `Paint` event handler draws something that depends on the form's size. The following code draws a rectangle with an X in it, filling the form whenever the form resizes:

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    e.Graphics.Clear(Me.BackColor)
    e.Graphics.DrawRectangle(Pens.Black, 0, 0, _
        Me.ClientSize.Width - 1, _
        Me.ClientSize.Height - 1)
    e.Graphics.DrawLine(Pens.Black, 0, 0, _
        Me.ClientSize.Width - 1, _
        Me.ClientSize.Height - 1)
    e.Graphics.DrawLine(Pens.Black, _
        Me.ClientSize.Width - 1, 0, _
        0, Me.ClientSize.Height - 1)
End Sub
```

Figure 30-12 shows the result after the form has been resized several times. Each time the form resizes, the `Paint` event handler draws the newly exposed region, but the existing drawing remains, giving the appearance of stacked envelopes.
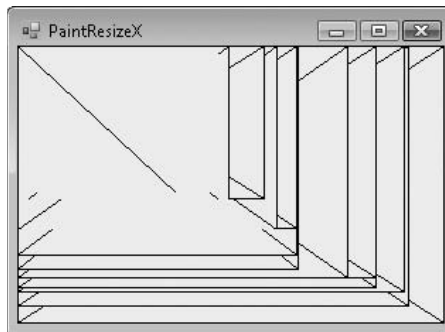
Figure 30-12: Paint event handlers that adjust their drawings based on the form's size may produce unexpected results.

Some computers generate `Paint` events every time the mouse moves during a resize, so the newly exposed areas are filled with a densely packed series of lines.

`Paint` event handlers also don't execute when the form shrinks. If the form shrinks, no new areas are exposed, so no `Paint` events fire.

`Paint` event handlers work well if the image on the control does not depend on the control's size. For example, if you want to draw an ellipse with bounds 10 <= X <= 300, 10 <= Y <= 10, then a `Paint` event handler works nicely. If a drawing depends on the control's size, you must also draw the picture in the control's `Resize` event handler.

You could implement the drawing code in the `Paint` and `Resize` event handlers, or call a drawing subroutine from those event handlers, but Visual Basic provides an easier way to deal with these issues. The following code shows how to make the form use its `Paint` event handler to draw itself whenever it is exposed or resized.

When the form loads, its `Load` event handler sets the form's `ResizeRedraw` property to `True` to indicate that the form should redraw itself when it is resized. Next the code calls the form's `SetStyle` method to set the `AllPaintingInWmPaint` style to `True`. This tells Visual Basic that the form does all of its drawing in its `Paint` event handler. Now, when the form resizes, Visual Basic raises the `Paint` event, so the program can do all of its drawing in the `Paint` event and not worry about the `Resize` event.

```
Private Sub Form1_Load() Handles MyBase.Load
    Me.ResizeRedraw = True
    Me.SetStyle(ControlStyles.AllPaintingInWmPaint, True)
End Sub

Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles Me.Paint
    e.Graphics.Clear(Me.BackColor)
    e.Graphics.DrawRectangle(Pens.Black, 0, 0, _
        Me.ClientSize.Width - 1, _
        Me.ClientSize.Height - 1)
    e.Graphics.DrawLine(Pens.Black, 0, 0, _
        Me.ClientSize.Width - 1, _
        Me.ClientSize.Height - 1)
    e.Graphics.DrawLine(Pens.Black, _
        Me.ClientSize.Width - 1, 0, _
        0, Me.ClientSize.Height - 1)
End Sub
```

Summary

Visual Basic .NET provides a huge number of graphical classes. This chapter provides an overview of these classes. It also focuses on the most important graphics class: `Graphics`. The `Graphics` class provides methods that let you draw and fill rectangles, ellipses, polygons, curves, lines, and other shapes. `Pen` and `Brush` objects determine the appearance of lines and filled areas. Other `Graphics` properties and methods let you determine the types of anti-aliasing used when drawing different kinds of objects, and how drawings are transformed.

Chapter 31, "Brushes, Pens, and Paths," describes the next two most important graphics classes: `Brush` and `Pen`. It also explains the `GraphicsPath` object that you can use to draw and fill paths consisting of lines, shapes, curves, and text.

31

Brushes, Pens, and Paths

After `Graphics`, `Pen` and `Brush` are the two most important graphics classes. Whenever you perform any drawing operation that does not manipulate an image's pixels directly, you use a `Pen` or a `Brush`.

❑   `Pen` classes control the appearance of lines. They determine a line's color, thickness, dash style, and caps.

❑   `Brush` classes control the appearance of filled areas. They can fill an area with solid colors, hatched colors, a tiled image, or different kinds of color gradients.

This chapter describes the `Pen` and `Brush` classes in detail. It shows how to use these classes to draw and fill all sorts of interesting shapes.

This chapter also describes the `GraphicsPath` class that represents a series of lines, shapes, curves, and text. You can fill a `GraphicsPath` using `Pen` and `Brush` classes.

You can download example programs demonstrating most of the methods described in this chapter on the book's web site. The examples also include code to draw the figures in this chapter.

Pen

The `Pen` object determines how lines are drawn. It determines the lines' color, thickness, dash style, join style, and end cap style.

A program can explicitly create `Pen` objects, but often it can simply use one of the more than 280 pens that are predefined by the `Pens` class. For example, the following code draws a rectangle using a hot pink line that's one pixel wide:

```
gr.DrawRectangle(Pens.HotPink, 10, 10, 50, 50)
```

`Pen` objects are scaled by transformations applied to a `Graphics` object, however, so the result is not necessarily one pixel thick. If the `Graphics` object applies a transformation that scales by a factor of 10, the resulting line will have thickness 10.

One solution to this problem is to create a new `Pen` object setting its thickness to 0.1, as shown in the following code. The thickness is scaled to 0.1 * 10 = 1.

```
gr.DrawRectangle(New Pen(Color.HotPink, 0.1), 10, 10, 50, 50)
```

Another solution is to create a pen with thickness 0. The GDI+ routines always draw lines that have 0 thickness as one pixel wide.

The `Pen` class provides several overloaded constructors, which are described in the following table.

Constructors	Description
Pen(brush)	Creates a pen of thickness 1 using the indicated `Brush`. Lines are drawn as rectangles filled with the `Brush`. This makes the most sense for relatively thick lines, so the fill is visible. It produces sometimes irregular dashed or dotted results for thin lines.
Pen(color)	Creates a pen of thickness 1 using the indicated color.
Pen(brush, thickness)	Creates a pen with the indicated thickness (a `Single`) using a `Brush`.
Pen(color, thickness)	Creates a pen with the indicated thickness (a `Single`) using the indicated color.

The following table describes some of the `Pen` class's most useful properties and methods.

Property or Method	Purpose
Alignment	Determines whether the line is drawn inside or centered on the theoretical perfectly thin line specified by the drawing routine. See the section "Alignment" later in this chapter for examples.
Brush	Determines the `Brush` used to fill lines.
Color	Determines the lines' color.
CompoundArray	Lets you draw lines that are striped lengthwise. See the section "CompoundArray" later in this chapter for examples.
CustomEndCap	Determines the line's end cap. See the section "Custom Line Caps" later in this chapter for examples.
CustomStartCap	Determines the line's start cap. See the section "Custom Line Caps" later in this chapter for examples.
DashCap	Determines the cap drawn at the ends of dashes. This can be `Flat`, `Round`, or `Triangle`.
DashOffset	Determines the distance from the start of the line to the start of the first dash.
DashPattern	An array of `Singles` that specifies a custom dash pattern. The array entries tell how many pixels to draw, skip, draw, skip, and so forth. Note that these values are scaled if the pen is not one pixel wide.

Property or Method	Purpose
DashStyle	Determines the line's dash style. This value can be Dash, DashDot, DashDotDot, Dot, Solid, or Custom. If you set the DashPattern property, this value is set to Custom. Note that the dashes and gaps between them are scaled if the pen is not one pixel wide.
EndCap	Determines the cap used at the end of the line. This value can be ArrowAnchor, DiamondAnchor, Flat, NoAnchor, Round, RoundAnchor, Square, SquareAnchor, Triangle, and Custom. If LineCap is Custom, you should use a CustomLineCap object to define the cap. Figure 30-1 shows the standard LineCap values.
LineJoin	Determines how lines are joined by a GDI+ method that draws connected lines. For example, the DrawPolygon and DrawLines methods use this property. This value can be Bevel, Miter, and Round. Figure 30-2 shows these values.
MultiplyTransform	Multiplies the Pen class's current transformation by another transformation matrix. See the section "Pen Transformations" later in this chapter for more information and examples.
ResetTransform	Resets the Pen class's transformation to the identity transformation. See the section "Pen Transformations" later in this chapter for more information and examples.
RotateTransform	Adds a rotation transformation to the Pen class's current transformation. See the section "Pen Transformations" later in this chapter for more information and examples.
ScaleTransform	Adds a scaling transformation to the Pen class's current transformation. See the section "Pen Transformations" later in this chapter for more information and examples.
SetLineCap	This method takes parameters that let you specify the Pen class's StartCap, EndCap, and LineJoin properties at the same time.
StartCap	Determines the cap used at the start of the line. See the EndCap property for details.
Transform	Determines the transformation applied to the initially circular "pen tip" used to draw lines. The transformation lets you draw with an elliptical tip. See the section "Pen Transformations" later in this chapter for more information and examples.
TranslateTransform	Adds a translation transformation to the Pen class's current transformation. Pen objects ignore any translation component in their transformations, so this method has no effect on the Pen class's final appearance and was probably added for consistency and completeness. See the section "Pen Transformations" later in this chapter for more information and examples.
Width	The width of the pen. This value is scaled if the pen is transformed either by its own transformation or by the transformation of the Graphics object that uses it.

The following sections describe some of the `Pen` class's more confusing properties and methods.

Alignment

The `Alignment` property determines whether thick lines for closed curves are drawn inside or centered on the theoretical perfectly thin line specified by the drawing routine. This property can take the values `Center` or `Inset`.

The following code draws a circle with a thick white line and its pen's `Alignment` set to `Center`. It then draws the same circle with a thin black line. Next, the code repeats these steps, drawing its thick white circle with `Alignment` set to `Inset`.

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    Using the_pen As New Pen(Color.LightGray, 20)
        the_pen.Alignment = PenAlignment.Center
        e.Graphics.DrawEllipse(the_pen, 25, 25, 100, 100)
        e.Graphics.DrawEllipse(Pens.Black, 25, 25, 100, 100)

        the_pen.Alignment = PenAlignment.Inset
        e.Graphics.DrawEllipse(the_pen, 150, 25, 100, 100)
        e.Graphics.DrawEllipse(Pens.Black, 150, 25, 100, 100)
    End Using
End Sub
```

Figure 31-1 shows a more elaborate program that draws samples of all of the `Alignment` values. Notice that all of the `Alignment` values produce the same result as `Center`, except for the value `Inset`.

The `Alignment` property applies only to closed figures such as ellipses, rectangles, and polygons. Open figures such as line segments, arcs, and unclosed curves are always drawn centered.
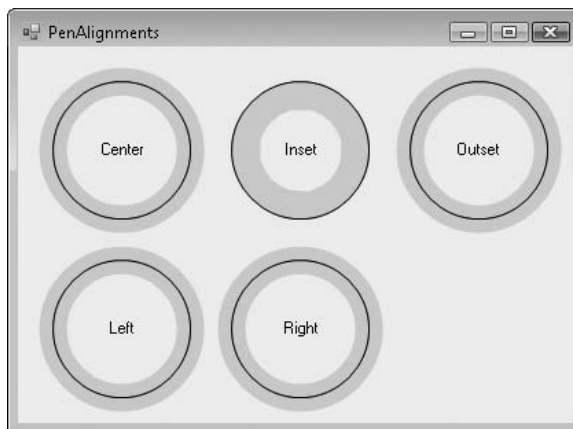
Figure 31-1: A Pen class's Alignment property determines whether the line is drawn on or inside its theoretical perfectly thin line.

CompoundArray

The CompoundArray property lets a program draw lines that are striped lengthwise. This property is an array of Single values that determine where the solid and empty parts of the line lie as a fraction of the line's width. For example, an array containing the values {0.0, 0.25, 0.75, 1.0} makes the first quarter of the line solid (0.0–0.25), the next half of the line not drawn (0.25–0.75), and the last quarter of the line solid (0.75–1.0).

The following code demonstrates the CompoundArray property. It creates a thick pen, sets its CompoundArray property to draw a line with a thin empty stripe down the middle, and draws a line. Next, the code sets the CompoundArray property to draw three equally sized and spaced stripes, and draws a rectangle and circle. Finally, the code sets the Graphics object's SmoothingMode property to AntiAlias, resets CompoundArray to draw a line with two thin empty stripes, and draws another circle.

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    e.Graphics.SmoothingMode = Drawing2D.SmoothingMode.AntiAlias

    Using the_pen As New Pen(Color.Black, 10)
        the_pen.CompoundArray = New Single() {0.0, 0.45, 0.55, 1.0}
        e.Graphics.DrawLine(the_pen, 10, 20, 400, 20)

        the_pen.CompoundArray = New Single() {0.0, 0.2, 0.4, 0.6, 0.8, 1.0}
        e.Graphics.DrawRectangle(the_pen, 20, 50, 100, 100)
        e.Graphics.DrawEllipse(the_pen, 150, 50, 100, 100)

        the_pen.CompoundArray = New Single() {0.0, 0.1, 0.2, 0.8, 0.9, 1.0}
        e.Graphics.SmoothingMode = Drawing2D.SmoothingMode.AntiAlias
        e.Graphics.DrawEllipse(the_pen, 300, 50, 100, 100)
    End Using
End Sub
```

Figure 31-2 shows the result.
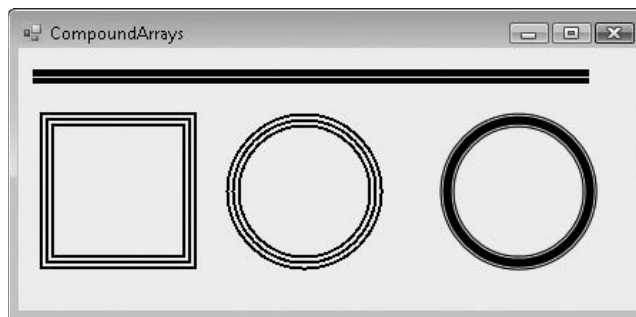
Figure 31-2: A Pen class's CompoundArray property lets you draw lines that are striped lengthwise.

Custom Line Caps

The Pen class's CustomEndCap and CustomStartCap properties let you define your own end caps for lines. To make a custom cap, make a GraphicsPath object that defines the cap's drawing commands. This object should use a coordinate system where X increases to the left of the line, and Y increases in the direction of the line, as shown in Figure 31-3.

Next, create a CustomLineCap object, passing its constructor the GraphicsPath object. Pass the GraphicsPath as the first parameter if it defines a fill for the cap. Pass it as the second parameter if it defines drawn lines for the cap. Pass Nothing for the other parameter.
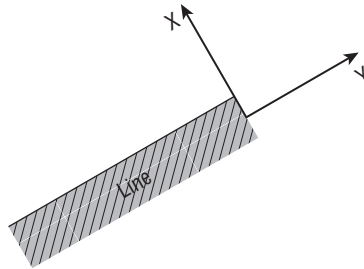
Figure 31-3: When building a custom line cap, X increases to the line's left and Y increases in the line's direction.

You can use the CustomLineCap object's properties and methods to modify its appearance. For example, its StrokeJoin property determines the style used to join the lines in the GraphicsPath, and its SetStrokeCaps method lets you specify the end caps for the lines in the GraphicsPath.

The following code shows an example. It defines an array of points that defines lines that make an X. It makes a GraphicsPath object and uses its AddLines method to add the lines to it. It then creates a CustomLineCap object, passing its constructor this GraphicsPath. The code makes a Pen and sets its CustomStartCap and CustomEndCap properties to the CustomLineCap object. It then draws four lines with different widths.

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    ' Make a GraphicsPath that draws an X.
    Dim pts() As Point = { _
        New Point(-2, -2), _
        New Point(0, 0), _
        New Point(-2, 2), _
        New Point(0, 0), _
        New Point(2, 2), _
        New Point(0, 0), _
        New Point(2, -2) _
    }

    Using cap_path As New GraphicsPath
```

```
            cap_path.AddLines(pts)

            ' Make the CustomLineCap.
            Using x_cap As New CustomLineCap(Nothing, cap_path)
                ' Draw some lines with x_cap.
                Using the_pen As New Pen(Color.Black, 1)
                    the_pen.CustomStartCap = x_cap
                    the_pen.CustomEndCap = x_cap
                    e.Graphics.DrawLine(the_pen, 50, 10, 200, 10)

                    the_pen.Width = 5
                    e.Graphics.DrawLine(the_pen, 50, 40, 200, 40)

                    the_pen.Width = 10
                    e.Graphics.DrawLine(the_pen, 50, 100, 200, 100)

                    the_pen.Width = 20
                    e.Graphics.DrawLine(the_pen, 50, 200, 200, 200)
                End Using
            End Using
        End Using
    End Sub
```

Figure 31-4 shows the result.
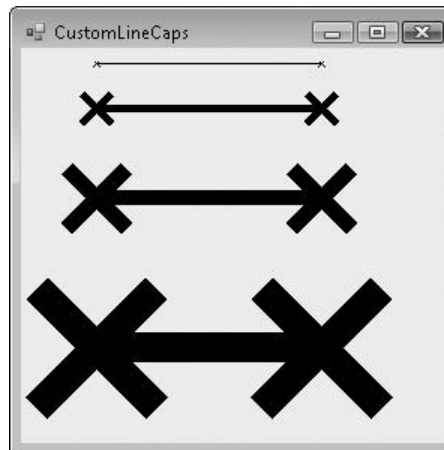
Figure 31-4: This program uses a CustomLineCap that draws an X at the end of lines.

Pen Transformations

The Pen class has properties and methods that let you define a transformation. The Pen class applies this transformation to its initially circular tip when drawing lines. The Pen class ignores any translation component in the transformation, so the result is always an ellipse. (With some thought, you can probably convince yourself that any combination of scaling and rotation applied to a circle always gives

703

an ellipse.) When the program draws with the transformed pen, its lines may have thick and thin elements similar to the ones you get when you draw with a calligraphy pen.

The following code uses a transformed `Pen` to draw a circle. It begins by defining some constants to make working with the circle easier. It defines the circle's center (`Cx`, `Cy`) and its radius `R`. It also defines a constant to represent the `Pen`'s `Width`. Next, the program creates a new `Pen` with the desired width. It applies a scaling transformation to the pen, scaling by a factor of 4 in the Y direction. For the purposes of scaling `Pens`, the X and Y directions match those on the screen. This transformation stretches the `Pen` class's tip vertically on the screen. Next, the program rotates the `Pen`'s tip by 45 degrees.

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    Const Cx As Integer = 120
    Const Cy As Integer = 120
    Const R As Integer = 100
    Const PEN_WID As Integer = 10

    ' Draw a circle with a transformed Pen.
    Using the_pen As New Pen(Color.Black, PEN_WID)
        the_pen.ScaleTransform(1, 4, MatrixOrder.Append)
        the_pen.RotateTransform(45, MatrixOrder.Append)
        e.Graphics.SmoothingMode = SmoothingMode.AntiAlias
        e.Graphics.DrawEllipse(the_pen, Cx - R, Cx - R, R * 2, R * 2)
    End Using

    ' Draw "Pen tips" on the circle.
    e.Graphics.ScaleTransform(1, 4, MatrixOrder.Append)
    e.Graphics.RotateTransform(45, MatrixOrder.Append)

    For angle As Single = 0 To 2 * PI Step PI / 8
        Dim graphics_state As GraphicsState = e.Graphics.Save
        e.Graphics.TranslateTransform( _
            CSng(Cx + R * Cos(angle)), _
            CSng(Cy + R * Sin(angle)), _
            MatrixOrder.Append)
        e.Graphics.DrawEllipse(Pens.White, _
            -PEN_WID / 2, -PEN_WID / 2, PEN_WID, PEN_WID)
        e.Graphics.Restore(graphics_state)
    Next angle
End Sub
```

The program sets the `Graphics` object's `SmoothingMode` property to `AntiAlias` and draws a circle centered at (`Cx`, `Cy`) with radius `R`.

Next, the program draws some ellipses showing where the `Pen`'s tip was while it was drawing the circle. It starts by applying the same scaling and rotation transformations to the `Graphics` object. The program will later draw a circle with a diameter equal to the line's thickness and centered at the origin. These transformations give the circle the same shape as the `Pen` class's transformed tip. The final step is to translate these ellipses so that they lie along the path of the circle drawn earlier with the transformed `Pen` class.

The program uses a loop to make an angle vary from 0 to 2 * PI radians in steps of PI / 8. For each angle, the code saves the Graphics object's state so it doesn't lose the scaling and rotation it already applied. It then applies a translation transformation to move the origin to a point on the circle drawn earlier. The center of the circle is at (Cx, Cy). The points on the circle are offset from that point by R * Cos(angle) in the X direction and R * Sin(angle) in the Y direction.

Having defined all these transformations, the program draws a white ellipse centered at the origin and with diameter matching the Pen class's width. The transformations scale, rotate, and translate the ellipse to match one of the Pen class's tip positions while it drew the large ellipse. Finally, the code restores the saved graphics state so it is ready for the next trip through the loop.

Figure 31-5 shows the result. The small white ellipses show the positions that the Pen class's tip took while drawing the large black ellipse. This picture should give you a good intuition for how transformed Pens work.
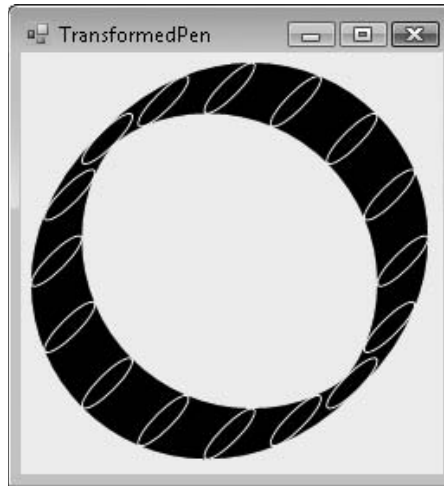
Figure 31-5: The white circles show where the Pen class's transformed tip was as it drew the large black circle.

Brush

The Brush object determines how areas are filled when you draw them using the Graphics object's methods FillClosedCurve, FillEllipse, FillPath, FillPie, FillPolygon, FillRectangle, and FillRectangles. Different types of Brushes fill areas with solid colors, hatch patterns, and color gradients.

The Brush class itself is an abstract or MustInherit class, so you cannot make instances of the Brush class itself. Instead, you can create instances of one of the derived classes SolidBrush, TextureBrush, HatchBrush, LinearGradientBrush, and PathGradientBrush. The following table briefly describes these classes.

Class	Purpose
SolidBrush	Fills areas with a single solid color
TextureBrush	Fills areas with a repeating image
HatchBrush	Fills areas with a repeating hatch pattern
LinearGradientBrush	Fills areas with a linear gradient of two or more colors
PathGradientBrush	Fills areas with a color gradient that follows a path

The following sections describe these classes in more detail and provide examples.

SolidBrush

A SolidBrush class fills areas with a single solid color. This class is extremely simple. It provides a single constructor that takes a parameter giving the brush's color. Its only commonly useful property is Color, which determines the brush's color.

A program can create a SolidBrush using its constructor, or it can use one of the 280+ predefined solid brushes defined by the Brushes class. The following code demonstrates both techniques. First, it creates a red SolidBrush and uses it to fill a rectangle. Then, it uses the Brushes class's Blue property to get a standard blue solid brush and fills another rectangle with that brush.

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    Dim red_brush As New SolidBrush(Color.Red)
    e.Graphics.FillRectangle(red_brush, 10, 10, 200, 100)

    Dim blue_brush As Brush = Brushes.Blue
    e.Graphics.FillRectangle(blue_brush, 10, 120, 200, 100)
End Sub
```

TextureBrush

A TextureBrush class fills areas with an image, usually a Bitmap. The following table describes this class's most useful properties and methods.

Property or Method	Purpose
Image	The image that the brush uses to fill areas.
MultiplyTransform	Multiplies the brush's current transformation by another transformation matrix.
ResetTransform	Resets the brush's transformation to the identity transformation.
RotateTransform	Adds a rotation transformation to the brush's current transformation.

Property or Method	Purpose
ScaleTransform	Adds a scaling transformation to the brush's current transformation.
Transform	A transformation that the brush applies to its image before using it to fill areas.
TranslateTransform	Adds a translation transformation to the brush's current transformation.
WrapMode	Determines how the brush wraps the image. This property can take the values Clamp (use a single copy that overlaps the origin of the shape's bounding rectangle), Tile (tile normally), TileFipX (tile flipping every other column of images over horizontally), TileFlipY (tile flipping every other row of images over vertically), and TileFlipXY (tile flipping every other column horizontally and every other row vertically). Figure 31-6 shows examples of these settings.

If you look closely at Figure 31-6, you'll see that the images do not always begin in the upper-left corner of the shape being filled. The brush essentially sets its tiling origin to the form's upper-left corner and then spaces its images accordingly.
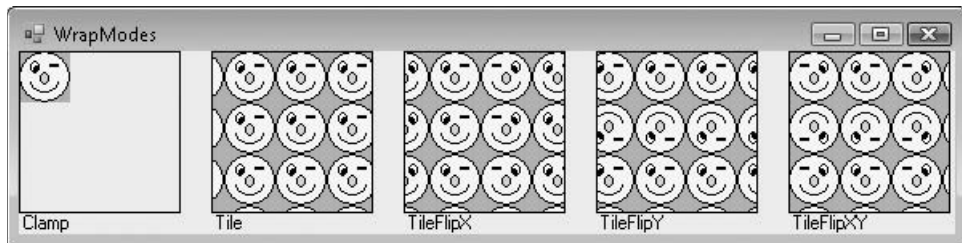
Figure 31-6: The TextureBrush class's WrapMode property determines how the brush tiles its image.

If you want to move the tiling origin, you can apply a translation transformation to the brush to move the image to the new origin. The following code creates a TextureBrush using a PictureBox's Image property to define its image and sets WrapMode to TileFlipXY. It translates the brush to the point (50, 100) and then fills a rectangle with its upper-left corner at this same point. This ensures that the first copy of the brush's image is placed exactly in the rectangle's upper-left corner. It also ensures that the first image is not flipped vertically or horizontally.

```
' Make a TextureBrush using the smiley face.
Using texture_brush As New TextureBrush(picSmiley.Image)
    texture_brush.WrapMode = System.Drawing.Drawing2D.WrapMode.TileFlipXY

    texture_brush.TranslateTransform(50, 100)
    DrawSample(e.Graphics, texture_brush, 50, 100)
End Using
```

The following code uses a transformed `TextureBrush`. First, it generates points to define a star-shaped polygon and creates a `TextureBrush` using a `PictureBox Image` property to define its image. Next, the program scales the brush by a factor of 2 in the X direction, making the smiley face wider than normal. It then rotates the brush by 30 degrees, fills the star-shaped polygon with the brush, and then outlines the polygon in black.

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    ' Generate points to draw a star shape.
    Dim cx As Integer = Me.ClientSize.Width \ 2
    Dim cy As Integer = Me.ClientSize.Height \ 2
    Dim r1 As Integer = Min(cx, cy) - 10
    Dim r2 As Integer = Min(cx, cy) \ 2
    Dim pts(9) As Point
    For i As Integer = 0 To 9 Step 2
        pts(i).X = cx + CInt(r1 * Cos(i * PI / 5 - PI / 2))
        pts(i).Y = cy + CInt(r1 * Sin(i * PI / 5 - PI / 2))
        pts(i + 1).X = cx + CInt(r2 * Cos((i + 1) * PI / 5 - PI / 2))
        pts(i + 1).Y = cy + CInt(r2 * Sin((i + 1) * PI / 5 - PI / 2))
    Next i

    ' Make a TextureBrush using the smiley face.
    Using texture_brush As New TextureBrush(picSmiley.Image)
        texture_brush.ScaleTransform(2, 1, MatrixOrder.Append)
        texture_brush.RotateTransform(30, MatrixOrder.Append)
        e.Graphics.FillPolygon(texture_brush, pts)
    End Using

    e.Graphics.DrawPolygon(Pens.Black, pts)
End Sub
```

Figure 31-7 shows the result. Note that not only is the image transformed, but the tiled rows and columns are also transformed.
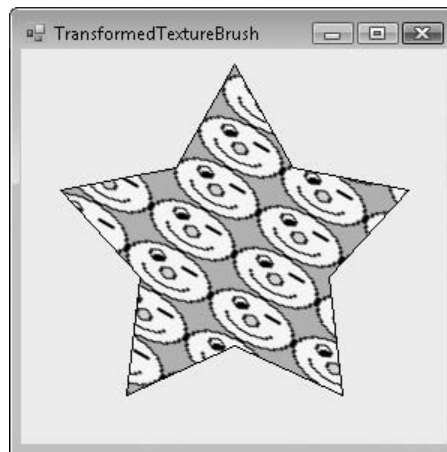
**Figure 31-7: This star is filled with a
TextureBrush that is scaled and rotated.**

HatchBrush

A `TextureBrush` class gives you complete control over every pixel in the filled area. You could build your own images to use as hatch patterns, but it's generally easier to use the `HatchBrush` class.

`HatchBrush` is a relatively simple class. Its three most useful properties are `BackgroundColor`, `ForegroundColor`, and `HatchStyle`. `ForegroundColor` and `BackgroundColor` determine the colors the brush uses. `HatchStyle` can take one of 54 values. Example program HatchStyles, which is available for download on the book's web site, lists the `HatchStyle` values and shows samples.

The following code shows how a program can fill a rectangle with a `HatchBrush`. It makes a brush using the `LargeConfetti` style with a blue foreground and light blue background. It calls a `Graphics` object's `FillRectangle` method to fill a rectangle with this brush, and then calls `DrawRectangle` to outline the rectangle in black.

```
Using the_brush As New HatchBrush(HatchStyle.LargeConfetti, _
  Color.Blue, Color.LightBlue)
    gr.FillRectangle(the_brush, 10, 10, 200, 200)
    gr.DrawRectangle(Pens.Black, 10, 10, 200, 200)
End Using
```

LinearGradientBrush

A `LinearGradientBrush` class fills areas with a linear gradient of two or more colors. The simplest of these brushes shades an area smoothly from one color to another along a specified direction. For example, a rectangle might be red at one end and shade smoothly to blue at the other.

With some extra work, you can specify exactly how the colors blend from one to the other. For example, you could make the colors blend quickly at the start and then slowly across the rest of the rectangle.

You can also specify more than two colors for the brush. You could make the colors blend from red to green to blue.

The following table describes the `LinearGradientBrush` class's most useful properties and methods.

Property or Method	Purpose
Blend	A `Blend` object that determines how quickly the colors blend across the brush. By default, this is a simple linear blending.
InterpolationColors	A `ColorBlend` object that determines the colors (possibly more than two) that the brush blends and their positions within the blend.
LinearColors	An array of two colors that determines the starting and ending colors for a simple linear blend.

(continued)

Property or Method	Purpose
MultiplyTransform	Multiplies the brush's current transformation by another transformation matrix.
ResetTransform	Resets the brush's transformation to the identity transformation.
RotateTransform	Adds a rotation transformation to the brush's current transformation.
ScaleTransform	Adds a scaling transformation to the brush's current transformation.
SetBlendTriangularShape	Makes the brush use a midpoint gradient where the color blends from the start color to the end color, and then back to the start color. You could do something similar with the Blend property, but this is easier.
SetSigmaBellShape	Makes the brush's color gradient change according to a bell curve instead of linearly.
Transform	A transformation that the brush applies to its gradient before using it to fill areas.
TranslateTransform	Adds a translation transformation to the brush's current transformation.
WrapMode	Determines how the brush wraps when it doesn't completely fill the area. This property can take the values Clamp, Tile, TileFipX, TileFlipY, and TileFlipXY. Because the brush is infinitely tall in the direction perpendicular to the line that determines its direction, not all of these values make a difference for all brushes.

The following code draws the assortment of filled rectangles shown in Figure 31-8. As you step through the code, refer to the figure to see the result.

```
Private Sub Form1_Paint(ByVal sender As Object, _
ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    Dim y As Integer = 10
    Dim x As Integer = 10
    Dim wid As Integer = 200
    Dim hgt As Integer = 50

    ' Make a rectangle that shades from black to white.
    e.Graphics.DrawString("Simple", Me.Font, Brushes.Black, x, y)
    y += 15
    Using black_white_brush As New _
```

```
            LinearGradientBrush( _
                New Point(x, y), New Point(x + wid, y), _
                Color.Black, Color.White)
        e.Graphics.FillRectangle(black_white_brush, _
            x, y, wid, hgt)
        y += hgt + 10

        ' ColorBlend.
        e.Graphics.DrawString("ColorBlend", Me.Font, Brushes.Black, x, y)
        y += 15
        Dim color_blend As New ColorBlend(3)
        color_blend.Colors = New Color() {Color.Red, Color.Green, Color.Blue}
        color_blend.Colors = New Color() _
            {Color.Black, Color.White, Color.Black}
        color_blend.Positions = New Single() {0.0, 0.2, 1.0}
        black_white_brush.InterpolationColors = color_blend
        e.Graphics.FillRectangle(black_white_brush, _
            x, y, wid, hgt)
        y += hgt + 10

        ' Make a brush that makes 50 percent of the color change
        ' in the first 20 percent of the distance, stays there
        ' until 80 percent of the distance, and then finishes
        ' in the remaining distance.
        e.Graphics.DrawString("Blend", Me.Font, Brushes.Black, x, y)
        y += 15
        Dim the_blend As New Blend(4)
        the_blend.Factors = New Single() {0.0, 0.5, 0.5, 1.0}
        the_blend.Positions = New Single() {0.0, 0.2, 0.8, 1.0}
        black_white_brush.Blend = the_blend
        e.Graphics.FillRectangle(black_white_brush, _
            x, y, wid, hgt)
        y += hgt + 10

        ' This brush's line is too short to cross the whole rectangle.
        e.Graphics.DrawString("Short", Me.Font, Brushes.Black, x, y)
        y += 15
        Using short_brush As New _
                LinearGradientBrush( _
                    New Point(x, y), New Point(x + 50, y), _
                    Color.Black, Color.White)
            e.Graphics.FillRectangle(short_brush, _
                x, y, wid, hgt)
            y += hgt + 10

            x += wid + 10
            y = 10

            ' Change the brush's WrapMode.
            e.Graphics.DrawString("WrapMode = TileFlipX", Me.Font, _
                Brushes.Black, x, y)
```

```
                y += 15
                short_brush.WrapMode = WrapMode.TileFlipX
                e.Graphics.FillRectangle(short_brush, _
                    x, y, wid, hgt)
                y += hgt + 10
            End Using ' short_brush

            ' Trangular brush.
            e.Graphics.DrawString("SetBlendTriangularShape", Me.Font, _
                Brushes.Black, x, y)
            y += 15
            black_white_brush.SetBlendTriangularShape(0.5)
            e.Graphics.FillRectangle(black_white_brush, _
                x, y, wid, hgt)
            y += hgt + 10
        End Using ' black_white_brush

        ' Sigma bell shape.
        e.Graphics.DrawString("SetSigmaBellShape", Me.Font, Brushes.Black, x, y)
        y += 15
        black_white_brush.SetSigmaBellShape(0.5, 1)
        e.Graphics.FillRectangle(black_white_brush, _
            x, y, wid, hgt)
        y += hgt + 10

        ' A diagonal brush.
        x += wid + 10
        y = 10
        wid = hgt
        e.Graphics.DrawString("Diagonal", Me.Font, Brushes.Black, x, y)
        y += 15
        Dim diag_brush As New _
            LinearGradientBrush( _
                New Point(x, y), New Point(x + wid, y + hgt), _
                Color.Black, Color.White)
        e.Graphics.FillRectangle(diag_brush, _
            x, y, wid, hgt)
        y += hgt + 10
    End Sub
```

The code begins by making a relatively straightforward `LinearGradientBrush` shading from black to white along the line starting at (9, 10) and ending at (210, 10). It then fills a rectangle with the brush. Notice that the points defining the brush determine the brush's drawing origin. The rectangle's X coordinates cover the same range as those of the brush, so the brush's origin lines up nicely with the rectangle. If the two did not line up, the brush would finish its gradient before it reached the end of the rectangle and it would need to wrap. Usually, you will want the brush to line up with the object it is filling. You can arrange that by carefully defining the brush to fit over the object or by using a transformation to make it fit.

Figure 31-8: LinearGradientBrush objects can produce all these effects and more.

Next, the code creates a `ColorBlend` object. It passes the object's constructor the value 3 to indicate that it will use three colors. The code sets the `ColorBlend` object's `Colors` property to an array containing the three colors black, white, and black. This example uses black and white, so the result will show up well in the book, but you could use any colors here such as orange, hot pink, and blue. Next, the code sets the `ColorBlend` object's `Positions` property to an array of `Singles` that define the positions within the blend where the colors should be located. In this example, the first color (black) begins 0.0 of the way through the blend, the second color (white) sits 0.2 or 20 percent of the distance through the blend, and the third color (black again) sits at the end of the blend. You can see in Figure 31-8 that the white area is to the left of the center in this rectangle.

The code then creates a `Blend` object, passing its constructor the parameter 4 to indicate that the program will set four blend points. It sets the object's `Factors` property to an array of `Singles` that determine the fraction of the blend that should occur at the four points. It then sets the object's `Positions` property to an array that sets the positions of the blend points. In this example, the point 0.0 of the distance through the blend has factor 0.0, so the blend has not begun and that point has the start color. The point 0.2 of the distance through the blend has a factor of `0.5`, so the blend should be half done at that point. The point 0.8 of the distance through the blend has a factor of `0.5`, so the blend should still be only half done at that point. Finally, the point at the end of the blend should have the end color. The result is a blend that changes quickly initially, remains fixed for a stretch in the middle, and then finishes quickly. (An optical illusion makes the area on the left of the flat region in the middle appear brighter than it really is, and the area on the right appears darker than it really is.)

Next, the program makes a `LinearGradientBrush` that is defined by points too close together to cover its whole rectangle. The brush repeats its gradient as many times as necessary to cover the rectangle.

The program then changes the previous brush's `WrapMode` property to `TileFlipX`. When the brush must repeat its gradient to fill the rectangle, it reverses the start and end colors to produce a series of gradient bands.

Next, the program calls a brush's `SetBlendTriangularShape` method. This makes the gradient shade from the start color to the end color and back. The `SetBlendTriangularShape` method's parameter gives the position in the gradient where the end color should occur. You could get a similar affect using a `Blend`, but this method is easier for this kind of fill.

The program then calls the brush's `SetSigmaBellShape` method. It uses the same position parameter `0.5` as the previous call to `SetBlendTriangularShape`, so it places the end color in the middle of the gradient. The effect is similar to the triangular brush, except that the colors vary according to a bell curve instead of linear relationship. These two rectangles are lined up vertically in Figure 31-8, so it is easy to see the difference.

The code defines the final brush with a line that is not horizontal, so its gradient moves diagonally across its rectangle.

PathGradientBrush

A `PathGradientBrush` object fills areas with a color gradient that blends colors from a center point to the points along a path. For example, you might shade from white in the middle of an ellipse to blue along its edges.

The `Blend`, `InterpolationColors`, `SetBlendTriangularShape`, `SetSigmaBellShape`, and other properties and methods that deal with the characteristics of the blend work along lines running from the center point to the points on the path. For example, you can use this object's `Blend` property to determine how quickly colors blend across the brush. In the `LinearGradientBrush` class, this property determines how the colors blend from one side of the brush to the other. In a `PathGradientBrush`, it controls how the colors blend from the center point to the path's points.

The following table describes the `PathGradientBrush` object's most useful properties and methods.

Property or Method	Purpose
Blend	A `Blend` object that determines how quickly the colors blend across the brush. By default, this is a simple linear blending.
CenterColor	Determines the color at the center point.
CenterPoint	Determines the location of the center point. By default, this point is set to the center of the path.
InterpolationColors	A `ColorBlend` object that determines the colors (possibly more than two) that the brush blends and their positions within the blend.
MultiplyTransform	Multiplies the brush's current transformation by another transformation matrix.

Property or Method	Purpose
ResetTransform	Resets the brush's transformation to the identity transformation.
RotateTransform	Adds a rotation transformation to the brush's current transformation.
ScaleTransform	Adds a scaling transformation to the brush's current transformation.
SetBlendTriangularShape	Makes the brush use a midpoint gradient where the color blends from the start color to the end color and then back to the start color. You could do something similar with the Blend property, but this is easier.
SetSigmaBellShape	Makes the brush's color gradient change according to a bell curve instead of linearly.
SurroundColors	An array of Colors that correspond to the points on the path. The color gradient blends from the CenterColor to these colors around the edge of the path. If there are more points in the path than colors, the final color is repeated as needed. Note that curves such as ellipses define a large number of colors that you do not explicitly specify, so making these colors match up with points on the curve can be difficult. This property is easier to understand for polygons.
Transform	A transformation that the brush applies to its gradient before using it to fill areas.
TranslateTransform	Adds a translation transformation to the brush's current transformation.
WrapMode	Determines how the brush wraps when it doesn't completely fill the area. This property can take the values Clamp, Tile, TileFipX, TileFlipY, and TileFlipXY. Because the brush is infinitely tall in the direction perpendicular to the line that determines its direction, not all of these values make a difference for all brushes.

Example program PathGradientBrushes, which is available for download on the book's web site, uses PathGradientBrush objects to draw the shapes shown in Figure 31-9.
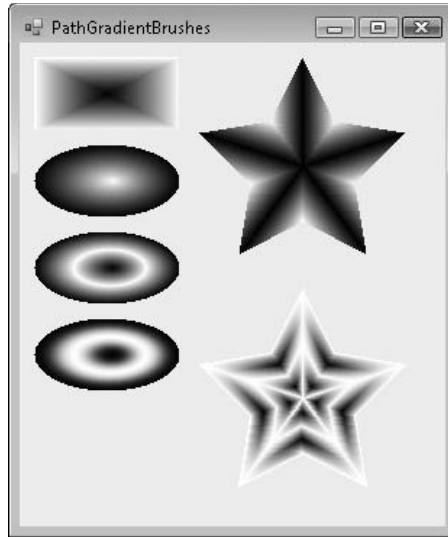
Figure 31-9: PathGradientBrush objects
can produce all these effects and more.

The following code fills the shapes shown in Figure 31-9. As you step through the code, refer to the
figure to see the result.

```vb
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    e.Graphics.SmoothingMode = SmoothingMode.AntiAlias

    Dim x As Integer = 10
    Dim y As Integer = 10
    Dim wid As Integer = 50
    Dim hgt As Integer = 100

    ' Fill a rectangle.
    Dim rect_pts() As Point = { _
        New Point(x, y), _
        New Point(x + wid, y), _
        New Point(x + wid, y + hgt), _
        New Point(x, y + hgt) _
    }
    Dim path_brush As New PathGradientBrush(rect_pts)
    e.Graphics.FillPolygon(path_brush, rect_pts)
    x += wid + 10

    ' Fill an ellipse setting CenterColor and SurroundColors.
    Dim ellipse_path As New GraphicsPath
    ellipse_path.AddEllipse(x, y, wid, hgt)
    path_brush = New PathGradientBrush(ellipse_path)
    path_brush.CenterColor = Color.White
```

```
        path_brush.SurroundColors = New Color() {Color.Black}
        e.Graphics.FillEllipse(path_brush, x, y, wid, hgt)
        x += wid + 10

        ' Fill an ellipse using SetBlendTriangularShape.
        ellipse_path = New GraphicsPath
        ellipse_path.AddEllipse(x, y, wid, hgt)
        path_brush = New PathGradientBrush(ellipse_path)
        path_brush.CenterColor = Color.White
        path_brush.SurroundColors = New Color() {Color.Black}
        path_brush.SetBlendTriangularShape(0.5)
        e.Graphics.FillEllipse(path_brush, x, y, wid, hgt)
        x += wid + 10

        ' Fill an ellipse using SetSigmaBellShape.
        ellipse_path = New GraphicsPath
        ellipse_path.AddEllipse(x, y, wid, hgt)
        path_brush = New PathGradientBrush(ellipse_path)
        path_brush.CenterColor = Color.White
        path_brush.SurroundColors = New Color() {Color.Black}
        path_brush.SetSigmaBellShape(0.5, 1)
        e.Graphics.FillEllipse(path_brush, x, y, wid, hgt)
        x += wid + 10

        ' Fill a star shape.
        wid = 150
        hgt = 150
        Dim cx As Integer = x + wid \ 2
        Dim cy As Integer = y + hgt \ 2
        Dim r1 As Integer = CInt(wid * 0.5)
        Dim r2 As Integer = CInt(hgt * 0.25)
        Dim star_pts(9) As Point
        For i As Integer = 0 To 9 Step 2
            star_pts(i).X = cx + CInt(r1 * Cos(i * PI / 5 - PI / 2))
            star_pts(i).Y = cy + CInt(r1 * Sin(i * PI / 5 - PI / 2))
            star_pts(i + 1).X = cx + CInt(r2 * Cos((i + 1) * PI / 5 - PI / 2))
            star_pts(i + 1).Y = cy + CInt(r2 * Sin((i + 1) * PI / 5 - PI / 2))
        Next i
        Dim star_path As New GraphicsPath
        star_path.AddPolygon(star_pts)
        Dim star_brush As New PathGradientBrush(star_pts)
        star_brush.CenterColor = Color.Black
        star_brush.SurroundColors = New Color() { _
            Color.Black, Color.White, _
            Color.Black, Color.White, _
            Color.Black, Color.White, _
            Color.Black, Color.White, _
            Color.Black, Color.White _
        }
        e.Graphics.FillPolygon(star_brush, star_pts)
        x += wid + 10

        ' Fill a star shape.
        cx = x + wid \ 2
```

```
        cy = y + hgt \ 2
        r1 = CInt(wid * 0.5)
        r2 = CInt(hgt * 0.25)
        For i As Integer = 0 To 9 Step 2
            star_pts(i).X = cx + CInt(r1 * Cos(i * PI / 5 - PI / 2))
            star_pts(i).Y = cy + CInt(r1 * Sin(i * PI / 5 - PI / 2))
            star_pts(i + 1).X = cx + CInt(r2 * Cos((i + 1) * PI / 5 - PI / 2))
            star_pts(i + 1).Y = cy + CInt(r2 * Sin((i + 1) * PI / 5 - PI / 2))
        Next i
        star_path = New GraphicsPath
        star_path.AddPolygon(star_pts)
        star_brush = New PathGradientBrush(star_pts)
        star_brush.CenterColor = Color.White
        star_brush.SurroundColors = New Color() { _
            Color.White, Color.Black, _
            Color.White, Color.Black, _
            Color.White, Color.Black, _
            Color.White, Color.Black, _
            Color.White, Color.Black _
        }
        Dim star_blend As New Blend
        star_blend.Positions = New Single() {0.0, 0.25, 0.5, 0.75, 1.0}
        star_blend.Factors = New Single() {0.0, 1.0, 0.0, 1.0, 0.0}
        star_brush.Blend = star_blend
        e.Graphics.FillPolygon(star_brush, star_pts)

        ' Draw the outline in white to remove some
        ' incorrectly drawn pixels.
        e.Graphics.DrawPolygon(Pens.White, star_pts)

        path_brush.Dispose()
        ellipse_path.Dispose()
        star_brush.Dispose()
        star_path.Dispose()
    End Sub
```

The code first creates an array of `Point` objects initialized to form a rectangle. It passes those points to the constructor for a `PathGradientBrush` and then uses the brush to fill that rectangle. This is about the simplest `PathGradientBrush` you can build, so it's worth studying a bit before moving on to more confusing examples. Notice that the color shades smoothly from black in the center to white on the rectangle's edges (those are the default colors).

Next, the program makes a `GraphicsPath` object and adds an ellipse to it. It passes the `GraphicsPath` to the `PathGradientBrush` object's constructor. It then sets the brush's `CenterColor` and `SurroundColors` properties. The `SurroundColors` array doesn't contain enough values for every point on the elliptical path, so the last color (black) is repeated as much as necessary. The program fills the ellipse with this brush.

The code then creates a new `GraphicsPath` object, adds a new ellipse, and uses it to make a `PathGradientBrush` as before. It also sets the brush's `CenterColor` and `SurroundColors` properties as before. The program then calls the brush's `SetBlendTriangularShape` method to make the colors

along the lines from the center point to the path's edges blend from the end color to the start color and back. The parameter `0.5` makes the start color appear halfway from the center point to the edge.

Next, the program repeats these same steps, except that it calls the brush's `SetSigmaBellShape` method instead of `SetBlendTriangularShape`. The result is similar to the previous result, except that the colors vary according to a bell curve instead of a linear relationship.

The code then generates an array of points that defines a star shape. It creates a new `GraphicsPath` object and calls its `AddPolygon` method to add the star. It passes this `GraphicsPath` object to the `PathGradientBrush` object's constructor to make the brush use the star as its path. The program then sets the brush's `SurroundPoints` property to an array containing the `Colors` it should use for each of the star's points. The code fills the star using this brush to draw a star where the tips of the star are black and the rest of the shape's points vary from white to black.

Finally, the program repeats the previous steps to define a new star-shaped brush. It creates a new `Blend` object and sets its `Position` and `Factors` properties to indicate how the gradient should progress from the center point to the shape's edges. The `Positions` values give locations along a line from the center to an edge point. The `Factors` values indicate how far the blend should have progressed for the corresponding point. For example, this code's second entries for those arrays are `0.25` and `1.0` to indicate that the point one quarter of the distance from the center point to an edge point should have blended completely to the end color. This example sets its `Factors` values so the color blends from the start color to the end color several times.

GraphicsPath Objects

A `GraphicsPath` object represents a path defined by lines, curves, text, and other drawing commands. A `GraphicsPath` can even include other `GraphicsPath` objects.

You can use a `Graphics` object's `DrawPath` and `FillPath` methods to draw or fill a `GraphicsPath`. For example, the following code creates a `GraphicsPath` object and adds a string to it. It creates a `TextureBrush` from a `PictureBox` image and uses the `FillPath` method to fill the path with the `TextureBrush`. It finishes by calling the `DrawPath` method to outline the path in black.

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    ' Make a GraphicsPath containing text.
    Dim txt As String = "Path"
    Using graphics_path As New GraphicsPath
        graphics_path.AddString(txt, _
            New FontFamily("Times New Roman"), _
            FontStyle.Bold, 150, _
            New Point(0, 0), _
            New StringFormat)

        ' Fill the path with an image.
        Using smiley_brush As New TextureBrush(picSmiley.Image)
            e.Graphics.FillPath(smiley_brush, graphics_path)
        End Using
```

```
            e.Graphics.DrawPath(Pens.Black, graphics_path)
        End Using
    End Sub
```

Figure 31-10 shows the result.

In addition to drawing and filling a `GraphicsPath`, you can also use one to define a region. The following code creates a `GraphicsPath` representing text much as the previous example does. It then sets the form's `Region` property equal to a new `Region` object created from the `GraphicsPath`. This restricts the form to the region. Any pieces of the form that lie outside of the textual path are chopped off, so they are not drawn and mouse events in those areas fall through to whatever lies below the form.
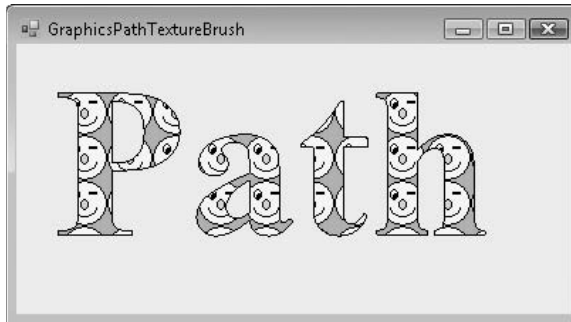
Figure 31-10: A program can use a Graphics object's FillPath and DrawPath methods to fill and draw a GraphicsPath object.

When you use a path to define a form's region, the path is taken relative to the form's origin, which is not the same as the origin of the form's client area. The form's origin is at the upper-left corner of the form, including its borders and title bar. To allow for this difference in origins, the code uses the `PointToScreen` method to get the screen coordinates of the client area's origin.

The code applies a translation transformation to the `Graphics` object so the client area origin is mapped to the form's origin. It then sets the `Graphics` object's `SmoothingMode`, fills the path with light gray, and then outlines the path with a thick black pen. Because the 5-pixel-wide line around the path is centered on the edge of the form's region, half of it is cut off.

```
    Private Sub Form1_Paint(ByVal sender As Object, _
     ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
        ' Make a GraphicsPath containing text.
        Dim txt As String = "Path"
        Using graphics_path As New GraphicsPath
            graphics_path.AddString(txt, _
                New FontFamily("Times New Roman"), _
```

```
                FontStyle.Bold, 150, _
                New Point(0, 0), _
                New StringFormat)

        ' Set the form's region to the path.
        Me.Region = New Region(graphics_path)

        ' Fill the path with white and outline it in black.
        Dim origin As Point = Me.PointToScreen(New Point(0, 0))
        e.Graphics.TranslateTransform(Me.Left - origin.X, Me.Top - origin.Y)
        e.Graphics.SmoothingMode = SmoothingMode.AntiAlias
        e.Graphics.FillPath(Brushes.LightGray, graphics_path)

        Using black_pen As New Pen(Color.Black, 5)
            e.Graphics.DrawPath(black_pen, graphics_path)
        End Using
    End Using
End Sub
```

The result is a form shaped to fit the text in the GraphicsPath. Note that the path used in this example cuts the form's borders and title bar off, so the user has no way to resize, move, or close this form. If you use this technique in an application, be sure to at least provide some method for the user to close the form such as a button or context menu.

One more use for GraphicsPath objects is to define clipping regions. The following code creates a GraphicsPath containing text much as the previous examples do. It then calls the Graphics object's SetClip method to make this path the form's clipping region. Next, the program draws 200 lines between randomly generated points on the form. Only the parts of the lines inside the clipping region are drawn.

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    ' Make a GraphicsPath containing text.
    Dim txt As String = "Path"
    Using graphics_path As New GraphicsPath
        graphics_path.AddString(txt, _
            New FontFamily("Times New Roman"), _
            FontStyle.Bold, 150, _
            New Point(0, 0), _
            New StringFormat)
        e.Graphics.SetClip(graphics_path)
    End Using

    ' Fill the ClientRectangle with white.
    e.Graphics.FillRectangle(Brushes.White, Me.ClientRectangle)

    ' Draw a bunch of random lines on the form.
    Dim rnd As New Random
    Dim x1, y1, x2, y2 As Integer
    For i As Integer = 1 To 200
        x1 = rnd.Next(0, Me.ClientSize.Width - 1)
        y1 = rnd.Next(0, Me.ClientSize.Height - 1)
```

```
            x2 = rnd.Next(0, Me.ClientSize.Width - 1)
            y2 = rnd.Next(0, Me.ClientSize.Height - 1)
            e.Graphics.DrawLine(Pens.Black, x1, y1, x2, y2)
        Next i
    End Sub
```

The `GraphicsPath` class provides many methods for adding lines, curves, text, and other shapes to the path. These methods include `AddArc`, `AddBezier`, `AddBeziers`, `AddClosedCurve`, `AddCurve`, `AddEllipse`, `AddLine`, `AddLines`, `AddPath`, `AddPie`, `AddPolygon`, `AddRectangle`, `AddRectangles`, and `AddString`. These are roughly analogous to the `Draw` and `Fill` methods provided by the `Graphics` object. For example, `DrawEllipse` draws an ellipse, `FillEllipse` fills an ellipse, and `AddEllipse` adds an ellipse to a path.

The following table describes the `GraphicsPath` object's other most useful properties and methods.

Property or Method	Purpose
CloseAllFigures	Closes all open figures by connecting their last points with their first points, and then starts a new figure.
CloseFigure	Closes the current figure by connecting its last point with its first point, and then starts a new figure. For example, if you draw a series of lines and arcs, this method closes the figure.
FillMode	Determines how the path handles overlaps when you fill it. This property can take the values `Alternate` and `Winding`. Figure 31-11 shows the difference.
Flatten	Converts any curves in the path into a sequence of lines. For example, this lets you explicitly calculate colors for every point in the path when setting a `PathGradientBrush` object's `SurroundColors` property.
GetBounds	Returns a `RectangleF` structure representing the path's bounding box.
GetLastPoint	Returns the last `PointF` structure in the `PathPoints` array.
IsOutlineVisible	Returns `True` if the indicated point lies beneath the path's outline.
IsVisible	Returns `True` if the indicated point lies within the path's interior.
PathData	Returns a `PathData` object that encapsulates the path's graphical data. It holds arrays similar to those returned by the `PathPoints` and `PathTypes` properties.
PathPoints	Returns an array of `PointF` structures giving the points in the path.

Property or Method	Purpose
PathTypes	Returns an array of Bytes representing the types of the points in the path.
PointCount	Returns the number of points in the path.
Reset	Clears the path data and resets FillMode to Alternate.
Reverse	Reverses the order of the path's data.
StartFigure	Starts a new figure so future data is added to the new figure. Later, calling CloseFigure will close this figure, but not the previous one.
Transform	Applies a transformation matrix to the path.
Warp	Applies a warping transformation to the path. The transformation is defined by mapping a parallelogram to a rectangle.
Widen	Enlarges the curves in the path to enclose a line drawn by a specific pen.
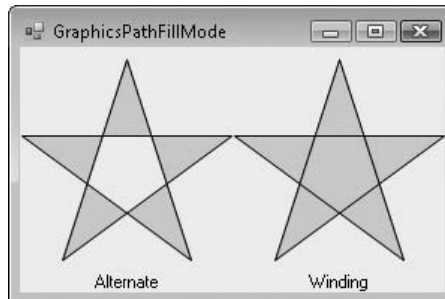
Figure 31-11: The GraphicsPath object's FillMode property determines how areas between the lines are filled.

Garbage-Collection Issues

Objects such as brushes contain references to memory and graphics resources. If you allocate a lot of brushes and then let them go out of scope, they become candidates for garbage collection. Later, when the system decides it needs to free some memory, it walks through all of the objects that you have previously allocated and determines which ones are not reachable by your code. It frees those objects and makes their memory available for future use.

Unfortunately, if those objects contain references to other objects, the garbage collector may think those second-hand objects are still referenced by the original object, so it will not collect them until it runs a second time.

For example, suppose that your program allocates a brush, uses it, and lets it fall out of scope. When the garbage collector runs, it sees that the brush refers to some resources, so it doesn't reclaim them. It sees that your program is no longer using the brush, however, so it frees that memory. The next time the garbage collector runs, the brush is gone, so nothing refers to the brush's secondary resources and the garbage collector can free those, too.

Although the garbage collector eventually frees all of the memory, it takes longer than necessary. It ties up memory longer and that may force more frequent garbage collection.

You can speed up the process greatly by explicitly calling the brush object's `Dispose` method. `Dispose` makes the brush free its internal resources and prepare for garbage collection. Now, when the garbage collector runs, it frees both the brush and its secondary resources in a single pass.

The following code shows how to use the `Dispose` method. When the form loads, this code makes a new `Bitmap` object to fit the form. It attaches a `Graphics` object to the `Bitmap`, makes a `HatchBrush` and `Pen`, and uses them to draw a filled ellipse on the `Bitmap`. The program then sets the form's `BackgroundImage` property to the `Bitmap`. Finally, the code calls the `Dispose` method for the `HatchBrush`, `Pen`, and `Graphics` objects.

```
Private Sub Form1_Load() Handles MyBase.Load
    ' Make a new bitmap to fit the form.
    Dim bm As New Bitmap(Me.ClientRectangle.Width, Me.ClientRectangle.Height)
    Dim gr As Graphics = Graphics.FromImage(bm)
    gr.Clear(Me.BackColor)

    ' Fill an ellipse.
    Dim hatch_brush As New HatchBrush(HatchStyle.LargeConfetti, _
        Color.Blue, Color.Yellow)
    Dim rect As New Rectangle(10, 10, _
        Me.ClientRectangle.Width - 20, _
        Me.ClientRectangle.Height - 20)
    gr.FillEllipse(hatch_brush, rect)

    ' Outline the ellipse.
    Dim thick_pen As New Pen(Color.Black, 5)
    gr.DrawEllipse(thick_pen, rect)

    ' Set the result as the form's BackgroundImage.
    Me.BackgroundImage = bm

    ' Free resources.
    hatch_brush.Dispose()
    thick_pen.Dispose()
    gr.Dispose()
End Sub
```

Whenever you can call an object's `Dispose` method, you should do so. This lets the garbage collector reclaim memory more efficiently.

You cannot always call `Dispose`, however. If you call `Dispose` on an object that is still needed by some other object, the program will crash. For example, the previous code uses a `Bitmap` object. It's not obvious from the code, but the form's `BackgroundImage` property continues to reference that object after this subroutine exits. If the program calls the `Bitmap` object's `Dispose` method, the form will later be unable to redraw itself. If you are using the .NET Framework 2.0 in Windows XP, the program crashes. If you are using the .NET Framework 3.0 in Windows Vista, the form displays a standard error image that shows a red box with an X in it.

Instead of calling `Dispose` explicitly, you can use the `Using` statement. Declare the variable that you must dispose of with a `Using` statement. When you have finished with the variable, end the `Using` block with an `End Using` statement. When Visual Basic reaches the `End Using` statement, it automatically calls the variable's `Dispose` method.

The following code is similar to the previous version, except that it uses `Using` statements instead of calling the `Dispose` method explicitly:

```
Private Sub Form1_Load() Handles MyBase.Load
    ' Make a new bitmap to fit the form.
    Dim bm As New Bitmap(Me.ClientRectangle.Width, Me.ClientRectangle.Height)
    Using gr As Graphics = Graphics.FromImage(bm)
        gr.Clear(Me.BackColor)
        Dim rect As New Rectangle(10, 10, _
            Me.ClientRectangle.Width - 20, _
            Me.ClientRectangle.Height - 20)

        ' Fill an ellipse.
        Using hatch_brush As New HatchBrush(HatchStyle.LargeConfetti, _
            Color.Blue, Color.Yellow)
            gr.FillEllipse(hatch_brush, rect)
        End Using

        ' Outline the ellipse.
        Using thick_pen As New Pen(Color.Black, 5)
            gr.DrawEllipse(thick_pen, rect)
        End Using

        ' Set the result as the form's BackgroundImage.
        Me.BackgroundImage = bm
    End Using ' gr
End Sub
```

The `Using` statement increases the nesting depth of the code. In this example, the `FillEllipse` and `DrawEllipse` calls are contained in two nested `Using` blocks, so they are indented twice. That makes the code a little harder to read, but it makes it less likely that you will forget to call the objects' `Dispose` methods. In most cases, the increase is a small price to pay, particularly for graphics programs that may use hundreds or thousands of pens and brushes very quickly.

Summary

Visual Basic .NET provides a huge variety of objects for drawing graphics. The three most important drawing classes are `Graphics`, `Pen`, and `Brush`.

The `Graphics` object represents the canvas on which you will draw. It provides methods that let you draw and fill all sorts of shapes including lines, rectangles, ellipses, polygons, text, and curves. It also provides methods for transforming those commands to translate, scale, and rotate the results.

The `Pen` object determines the appearance of lines. It sets the lines' color, thickness, dash style, fill pattern, and caps.

Various kinds of brush objects determine the appearance of filled areas. They can fill areas with solid colors, tiled images, hatch patterns, linear color gradients, and color gradients that follow a path.

These classes and the others described in this chapter give you powerful tools for drawing graphics of practically unlimited complexity and sophistication.

This chapter discussed the brushes, pens, and paths that you use to draw lines, curves, and other shapes. Chapter 32, "Text," explains how to draw text. Although you can display simple text in a `Label`, `TextBox`, or other control, when you draw text using GDI+ routines you have greater control over exactly how the text appears.

Text

Text is different from the lines, rectangles, ellipses, and other kinds of shapes that a program typically draws. A program normally draws and fills a rectangle in separate steps. On the other hand, a program typically draws text in a single step, usually with a solid color.

Text also differs in the way it is drawn by the GDI+ routines. To draw a line, rectangle, or ellipse, the program specifies the shape's location, and the GDI+ routines draw it accordingly. Text is not specified by simple location data. A program can specify the text's general location but has only limited control over its size. Different characters may have different widths in a particular font, so strings containing the same number of characters may have different sizes when displayed.

Even if you know every character's nominal size, you may not be able to add them up to calculate the size of a string. Fonts sometimes use special algorithms that adjust the spacing between certain pairs of letters to make the result look better. For example, a font might decrease the spacing between the characters A and W when they appear next to each other (as in AW) to allow the W to lean over the A.

This chapter describes some of the tools that Visual Basic provides for controlling text. It explains how to draw text aligned and formatted in various ways, and how to measure text so that you can figure out more exactly where it will appear.

Note that several examples use the `Graphics` object's `TextRenderingHint` property to make text appear smoother. For more information on this property, see the section "System.Drawing.Text" in Chapter 30, "Drawing Basics."

> Note that Windows Vista uses a slightly different underlying graphics model than previous versions of Windows. In particular, Vista has made some changes to produce better-looking, smoother text. Microsoft has worked to make the Vista graphics system compatible with GDI+, but you might encounter some small differences or glitches. For some additional information about the underlying graphics system, see the article "Graphics APIs in Windows Vista" at `msdn2.microsoft.com/library/bb173477.aspx`.
>
> You can download example programs that demonstrate many of these features and that produce the figures in this chapter on the book's web site.

Drawing Text

The `Graphics` object's `DrawString` method draws text. It provides several overloaded versions that let you specify the string, font, positioning, and alignment information.

One of the simplest versions of `DrawString` takes only four parameters: the text to draw, the font to use, the brush to use when filling the text, and the position where the text should start. The following code draws some text starting at the point (10, 10) on the form. It then draws a circle around this point.

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    Dim txt As String = "The quick brown fox jumps over the lazy dog."
    Using big_font As New Font("Times New Roman", 30, FontStyle.Bold)
        e.Graphics.TextRenderingHint = _
            System.Drawing.Text.TextRenderingHint.AntiAliasGridFit
        e.Graphics.DrawString(txt, big_font, Brushes.Black, 10, 10)
        e.Graphics.DrawEllipse(Pens.Black, 8, 8, 4, 4)
    End Using
End Sub
```

Figure 32-1 shows the result. Note that the text doesn't begin exactly at the point (10, 10). The text contains some leading space on the top and bottom that moves it slightly right and downward from the starting point.

Figure 32-1: Text doesn't begin exactly at the starting point passed to the DrawString method.

Note also that the text runs blithely off the edge of the form. The following section describes ways you can format text so it automatically provides alignment and wrapping as necessary.

`DrawString` automatically starts a new line when it encounters a Carriage Return/Line Feed pair in the text. It also advances to the next tab stop when it encounters a Tab character, making it slightly easier to align text in rows and columns.

Text Formatting

Some of the overloaded versions of the `Graphics` object's `DrawString` method take additional parameters that help format the text. The first of these parameters is a layout rectangle. This is a `RectangleF` structure that indicates the area where the text should be drawn. The second parameter is a `StringFormat` object that determines how the text is formatted.

The following code draws text inside a rectangle. It begins by defining the layout rectangle, text, and font. It then creates a StringFormat object. It sets the object's Alignment property to Center so is centered horizontally in the layout rectangle. It sets the object's LineAlignment property to Near so text is aligned vertically at the top of the rectangle. The program calls DrawString to draw the text and then uses DrawRectangle to display the layout rectangle.

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    Dim layout_rect As New RectangleF(10, 10, _
        Me.ClientSize.Width - 20, Me.ClientSize.Height - 20)
    Dim txt As String = "The quick brown fox jumps over the lazy dog."
    Using big_font As New Font("Times New Roman", 30, FontStyle.Bold)
        Using string_format As New StringFormat
            string_format.Alignment = StringAlignment.Center
            string_format.LineAlignment = StringAlignment.Near

            e.Graphics.DrawString(txt, big_font, Brushes.Black, _
                layout_rect, string_format)

            e.Graphics.DrawRectangle(Pens.Black, Rectangle.Round(layout_rect))
        End Using ' string_format
    End Using ' big_font
End Sub
```

Figure 32-2 shows the result. Notice that the text is centered horizontally and aligned to the top of the layout rectangle.

Figure 32-2: The DrawString method can use a layout rectangle and a StringFormat object to format text.

The `StringFormat` object provides several other properties and methods that you can use to position text. The following table describes the most useful of these.

Property or Method	Purpose
`Alignment`	Determines the text's horizontal alignment. This can be `Near` (left), `Center` (middle), or `Far` (right).
`FormatFlags`	Gets or sets flags that modify the `StringFormat` object's behavior. See the section "FormatFlags" later in this chapter for more information.
`GetTabStops`	Returns an array of `Singles`, giving the positions of tab stops. See the section "Tab Stops" later in this chapter for more information.
`HotkeyPrefix`	Determines how the hotkey prefix character is displayed. (In a menu caption or label, the *hotkey* is underlined to show that pressing Alt+<hotkey> performs some special action. For example, in most applications Alt+F opens the File menu. A program specifies a control's hotkey character by placing an ampersand in front of it. For example, "&File" is displayed as "File.") If `HotkeyPrefix` is `Show`, any character that follows an ampersand is drawn as an underlined hotkey (a double ampersand is drawn as a single ampersand). If this is `None`, any ampersands are drawn as ampersands. If this is `Hide`, hotkey ampersands are hidden.
`LineAlignment`	Determines the text's vertical alignment. This can be `Near` (top), `Center` (middle), or `Far` (bottom).
`SetMeasureableCharacterRanges`	Sets an array of `CharacterRange` structures representing ranges of characters that will later be measured by the `Graphics` object's `MeasureCharacterRanges` method.
`SetTabStops`	Sets an array of `Singles` giving the positions of tab stops. See the section "Tab Stops" later in this chapter for more information.
`Trimming`	Determines how the text is trimmed if it cannot fit in the layout rectangle. See the section "Trimming" later in this chapter for more information.

The following sections describe some of the more complex formatting issues in greater detail.

FormatFlags

The `StringFormat` object's `FormatFlags` property determines the object's behavior. This property can take a bitwise combination of the values described in the following table.

FormatFlags Value	Purpose
`DirectionRightToLeft`	Indicates that the text is drawn from right to left.
`DirectionVertical`	Indicates that the text is drawn vertically.
`FitBlackBox`	Indicates that no character should extend beyond the layout rectangle. If this is not set, some characters in certain fonts may stick out a bit.
`LineLimit`	If the last line displayed in the layout rectangle is too tall to fit, this flag indicates that it should be omitted. By default, that line is clipped to show whatever parts will fit.
`MeasureTrailingSpaces`	Indicates that the `Graphics` object's `MeasureString` method should include spaces at the ends of lines. By default, it does not.
`NoClip`	Indicates that parts of characters that hang over the layout rectangle are not clipped.
`NoFontFallback`	If a character is missing from the selected font, the GDI+ normally looks for an equivalent character in another font. This flag prevents that and forces the character to be displayed as the font's missing character glyph (usually an open square).
`NoWrap`	Indicates that text should not be wrapped.

Figure 32-3 shows the difference between the default, `NoClip`, and `LineLimit` flags. If the last visible line won't fit within the layout rectangle, the default behavior is to clip the line to show whatever fits. If `FormatFlags` is `NoClip`, that line is displayed entirely. If `FormatFlags` is `LineLimit`, the line is omitted entirely.

Figure 32-3: The NoClip and LineLimit flags change how a StringFormat object handles the text's last displayed line.

The following code fragment sets a `StringFormat` object's `DirectionVertical` flag and then draws some text. Example program DirectionVertical, which is available for download on the book's web site, uses this code to produce the picture shown in Figure 32-4.

```
string_format.FormatFlags = _
    StringFormatFlags.DirectionVertical Or _
    StringFormatFlags.DirectionRightToLeft

e.Graphics.DrawString(txt, the_font, Brushes.Black, _
    layout_rect, string_format)
```


Figure 32-4: Setting the StringFormat object's FormatFlags property to DirectionVertical produces vertical text.

This code fragment sets the `FormatFlags` property to `DirectionVertical` plus `DirectionRightToLeft`. If you omit the second flag, the lines of text are drawn left to right. That means the line "The quick" appears on the left and the subsequent lines appear moving to the right, so the lines are drawn in the reverse of the order that you might expect.

Note that you can also draw vertical text by applying a transformation to the `Graphics` object that translates the text to the origin, rotates it, and translates the text back to where it belongs.

The following code demonstrates this technique. It defines its layout rectangle, text, and font. It uses the form's width to define the rectangle's height and the form's height to define the rectangle's width, so

the rectangle will fit the form after it is rotated. The code creates a StringFormat object to center the text and applies the transformations to the Graphics object. Finally, the code draws the text. The result is similar to the text produced by the previous example.

```
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    ' Define the layout rectangle. It's slightly smaller
    ' than the form rotated 90 degrees so the rotated
    ' text will fit the form nicely.
    Dim rect_wid As Integer = Me.ClientSize.Height - 20
    Dim rect_hgt As Integer = Me.ClientSize.Width - 20
    Dim layout_rect As New RectangleF( _
        (Me.ClientSize.Width - rect_wid) \ 2, _
        (Me.ClientSize.Height - rect_hgt) \ 2, _
        rect_wid, rect_hgt)

    ' Define the text and font.
    Dim txt As String = "The quick brown fox jumps over the lazy dog."
    Using the_font As New Font("Times New Roman", 30, _
        FontStyle.Bold, GraphicsUnit.Pixel)

        ' Set the StringFormat to center the text.
        Using string_format As New StringFormat
            string_format.Alignment = StringAlignment.Center
            string_format.LineAlignment = StringAlignment.Center

            ' Translate to the origin, rotate, and translate back.
            e.Graphics.TranslateTransform( _
                -Me.ClientSize.Width \ 2, _
                -Me.ClientSize.Height \ 2, _
                MatrixOrder.Append)
            e.Graphics.RotateTransform(90, MatrixOrder.Append)
            e.Graphics.TranslateTransform( _
                Me.ClientSize.Width \ 2, _
                Me.ClientSize.Height \ 2, _
                MatrixOrder.Append)

            ' Draw the text and layout rectangle.
            e.Graphics.TextRenderingHint = _
                System.Drawing.Text.TextRenderingHint.AntiAliasGridFit
            e.Graphics.DrawString(txt, the_font, Brushes.Black, _
                layout_rect, string_format)
            e.Graphics.DrawRectangle(Pens.Black, Rectangle.Round(layout_rect))
        End Using ' string_format
    End Using ' the_font
End Sub
```

This approach is a bit more complicated than the previous method of setting the StringFormat object's FormatFlags property to DirectionVertical, but it gives you more flexibility. Simply by changing the rotation transformation, you can draw text at any angle, not just rotated 90 degrees. Figure 32-5 shows this program with the angle of rotation changed from 90 to 60 degrees.
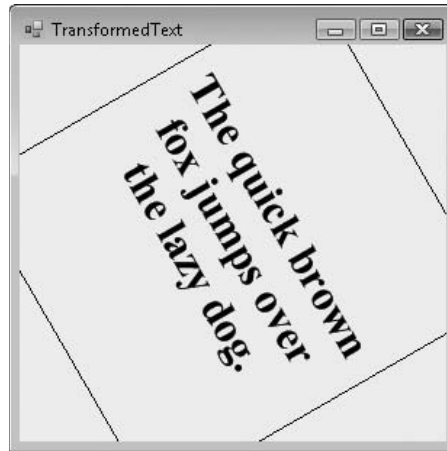
Figure 32-5: Transformations can produce text rotated at any angle.
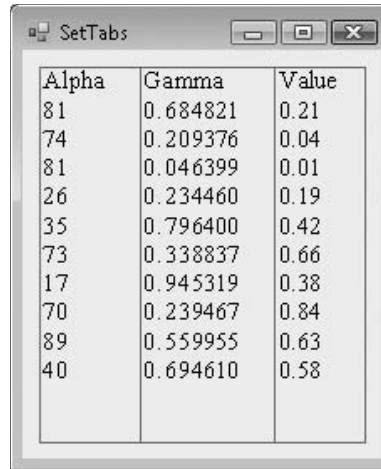
Tab Stops

The StringFormat object's GetTabStops and SetTabStops methods let you get and set an array of Singles that determine the position of the layout rectangle's tab stops. Each entry in the array gives the distance between two tab stops. For example, the values {50, 50, 50} specify tab stops 50, 100, and 150 pixels from the left edge of the layout rectangle.

The following code fragment sets two tab stops for a StringFormat object named string_format. It sets two tab stops 60 and 140 (60 + 80) pixels from the left edge of the layout rectangle.

```
Dim tab_stops() As Single = {60, 80}
string_format.SetTabStops(0, tab_stops)
```

Example program SetTabs, which is available for download on the book's web site, uses this code to display some randomly generated data aligned in columns. The code simply builds a string that uses vbTab to move characters horizontally to the next tab stop and that uses vbCrLf to start a new line. Figure 32-6 shows the result.

Figure 32-6: The SetTabStops
method lets you easily align text.

Trimming

Normally, a string is wrapped as necessary until its layout rectangle is full. If there is still text that has not been displayed, the `Trimming` property determines how that text is handled. The following table describes the values this property can take.

Trimming Value	Purpose
Character	The text is trimmed to the nearest character.
EllipsisCharacter	The text is trimmed to the nearest character and an ellipsis is displayed at the end of the line.
EllipsisPath	The center of the line is removed and replaced with an ellipsis. This is sometimes a good choice when displaying file paths because it shows the beginning of the path and the file name. This method keeps as much of the last backslash (\) delimited part of the text as possible (it assumes that this is a file name).
EllipsisWord	The text is trimmed to the nearest word and an ellipsis is displayed at the end of the line.
None	The text is not trimmed. Instead, it is wrapped to the next line, which is hidden because it is below the bottom of the layout rectangle. If the last visible line contains a word break, the line will wrap after the last word that fits. That makes this seem similar to the `Word` setting.
Word	The text is trimmed to the nearest word.

Example program Trimming, available for download on the book's web site, draws samples of each of the Trimming values. Figure 32-7 shows the program in action. Each sample contains the letters A through Z in groups of three separated by backslashes (left column) or spaces (right column).
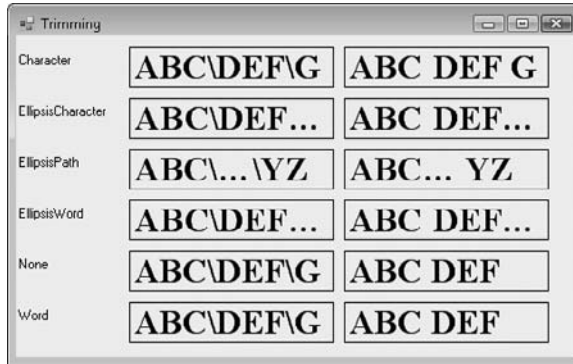
Figure 32-7: The StringFormat object's Trimming property determines how text is trimmed.

MeasureString

The Graphics object's MeasureString method returns a SizeF structure holding the string's width and height drawn in a particular font. You can use that information to arrange the text and other drawn objects on the form.

The following code shows how a program might center text on its form. It starts by defining the text it will draw and the font it will use (in this case, a bold, 40-pixel-tall, Times New Roman font). Next, the program uses the Graphics object's MeasureString method to get the string's size in that font. It uses the size to determine where it needs to draw the text to center it, and then draws the text. The code then makes a Rectangle object using the text's position and the size it got from MeasureString. It finishes by drawing the rectangle around the string.

```
Private Sub Form1_Paint(ByVal sender As Object, _
ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    Dim the_string As String = "MeasureString"

    ' Define the font and text we will use.
    Using the_font As New Font("Times New Roman", 40, _
        FontStyle.Bold, GraphicsUnit.Pixel)

        ' Get the text's size.
        Dim string_size As SizeF = _
            e.Graphics.MeasureString("MeasureString", the_font)

        ' Draw the text centered on the form.
        Dim x As Integer = (Me.ClientSize.Width - CInt(string_size.Width)) \ 2
        Dim y As Integer = _
```

```
              (Me.ClientSize.Height - CInt(string_size.Height)) \ 2
          e.Graphics.DrawString(the_string, the_font, Brushes.Black, x, y)

          ' Draw a rectangle around the text.
          Dim string_rect As New Rectangle(x, y, _
              CInt(string_size.Width), CInt(string_size.Height))
          e.Graphics.DrawRectangle(Pens.Black, string_rect)
      End Using
  End Sub
```

Figure 32-8 shows the result. Notice that the rectangle includes some extra space above, below, and to the sides of the string. The section "Font Metrics" later in this chapter has more to say about this extra space.

Figure 32-8: You can use the Graphics object's MeasureString method to see how big a string will be when drawn in a particular font.

An easier way to center text on a form is to use a StringFormat *object with* Alignment *and* LineAlignment *properties set to* Center. *Then use the form's client area for the formatting rectangle.*

Occasionally, it is useful to know where parts of a string will be drawn. For example, you might want to draw a box around certain words or know when the user has clicked a particular letter.

The Graphics object provides a MeasureCharacterRanges method that returns an array of Regions representing the positions of ranges of characters within a string. To use MeasureCharacterRanges, the program must first create an array of CharacterRange objects defining the ranges of interest. It calls a StringFormat object's SetMeasurableCharacterRanges method, passing it this array. Finally, it calls MeasureCharacterRanges.

The following code uses MeasureCharacterRanges to show the positions of all of the characters in a short string. It begins by defining its text, layout rectangle, font, and StringFormat object as usual. It then creates an array of CharacterRange objects, one for each character in the string. It loops through this array, filling it with new CharacterRange objects, each of which represents a single character. When it has filled the array, the code passes it to the StringFormat object's SetMeasurableCharacterRanges method. The program then calls the Graphics object's MeasureCharacterRanges method to get Region objects representing the characters' positions. It loops through this array, calling each Region object's GetBounds method to convert the region into a

RectangleF structure. It transforms the RectangleF into a Rectangle and draws it. Finally, the program draws the string.

```vb
Private Sub Form1_Paint(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.PaintEventArgs) Handles MyBase.Paint
    Dim txt As String = "Great Galloping Giraffes"
    Dim layout_rect As New RectangleF(0, 0, _
        Me.ClientSize.Width, Me.ClientSize.Height)
    e.Graphics.TextRenderingHint = _
        System.Drawing.Text.TextRenderingHint.AntiAliasGridFit

    Using the_font As New Font("Times New Roman", 50, _
        FontStyle.Bold Or FontStyle.Italic, GraphicsUnit.Pixel)
        Using string_format As New StringFormat
            string_format.LineAlignment = StringAlignment.Center
            string_format.Alignment = StringAlignment.Center

            ' Define an array of CharacterRange objects,
            ' one for each character.
            Dim character_ranges(txt.Length - 1) As CharacterRange
            For i As Integer = 0 To txt.Length - 1
                character_ranges(i) = New CharacterRange(i, 1)
            Next i

            ' Set the ranges in the StringFormat object.
            string_format.SetMeasurableCharacterRanges(character_ranges)

            ' Get the character range regions.
            Dim character_regions() As Region = _
                e.Graphics.MeasureCharacterRanges(txt, _
                the_font, layout_rect, string_format)

            ' Draw each region's bounds.
            For Each rgn As Region In character_regions
                ' Convert the region into a Rectangle.
                Dim character_bounds As RectangleF = rgn.GetBounds(e.Graphics)
                Dim character_rect As Rectangle = _
                    Rectangle.Round(character_bounds)

                ' Draw the bounds.
                e.Graphics.DrawRectangle(Pens.White, character_rect)
            Next rgn

            ' Draw the text.
            e.Graphics.DrawString(txt, the_font, Brushes.Black, _
                layout_rect, string_format)
        End Using ' string_format
    End Using ' the_font
End Sub
```
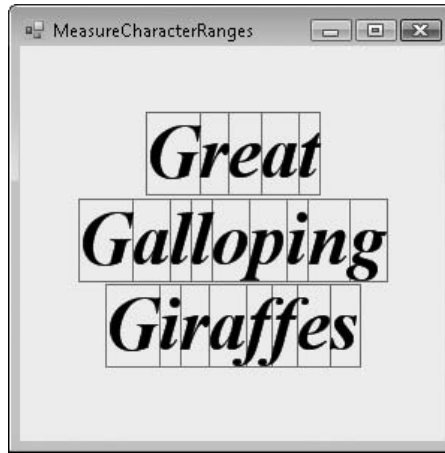
Figure 32-9: The Graphics object's
MeasureCharacterRanges method shows
where ranges of characters will be drawn
in a string.

Figure 32-9 shows the result.

> *For some reason, the array of* CharacterRange *objects you pass to the*
> SetMeasurableCharacterRanges *method can hold at most 32 items. If the array is*
> *larger,* SetMeasurableCharacterRanges *throws an overflow error. Microsoft says this behavior*
> *is by design and they don't plan to change it. If you need to measure the positions of individual*
> *characters in a longer string, you should break the string into pieces smaller than 32 characters,*
> *probably at word boundaries, and arrange the pieces yourself.*
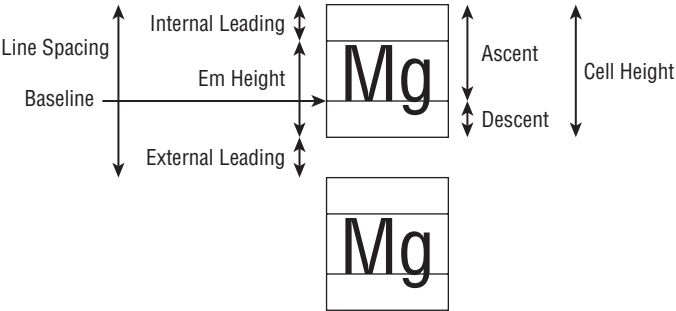
Note that characters do not necessarily actually stay within their assigned regions. Depending on the
font, they may stick out slightly. In Figure 32-9, the ff pair is particularly shameless in its trespassing,
overlapping both the previous and following characters.

Font Metrics

The Graphics object's MeasureString method tells you approximately how big a string will be when
drawn on that object. Its MeasureCharacterRanges method enables you to get more information about
the positioning of ranges within a string.

The FontFamily class provides some additional methods that a program can use to get even more
information about how characters are drawn. Before you can use these values, you must understand a
bit of extra character anatomy.

Figure 32-10 shows how a font's internal leading, ascent, descent, and external leading values help
determine a character's position.

Figure 32-10: How text is positioned depends on many font metrics, including internal leading, ascent, descent, and external leading.

The following table describes these font metrics.

Value	Meaning
Internal Leading	Extra space left above the characters but considered part of the string
Em Height	The height within which the characters are drawn
Ascent	The part of the character cell above the baseline
Descent	The part of the character cell below the baseline
Cell Height	The height of the character area including internal leading
External Leading	Extra space left below one line and above the next
Line Spacing	The distance between one line and the next

From the figure, you can verify the following relationships:

```
Cell Height = Ascent + Descent = Internal Leading + Em Height
Line Spacing = Cell Height + External Leading
```

The `FontFamily` object provides several methods for determining font metric values. These methods include `GetCellAscent`, `GetCellDescent`, `GetEmHeight`, and `GetLineSpacing`.

All of these methods return values in *font design units.* The key to converting them into some other unit is to realize that the `Font` object's `Size` property returns the font's em size in whatever units the font is currently using. For example, if you specify the font's size in pixels, then `Font.Size` returns the em size in pixels.

Using `Font.Size` and the value returned by the `FontFamily` class's `GetEmHeight` method, you can convert the other values into pixels. For example, the following equation shows how to calculate a font family's ascent in pixels:

```
Ascent Pixels = FontFamily.GetCellAscent * Font.Size / FontFamily.GetEmHeight
```

Example program FontMetrics, available for download on the book's web site, calls the `MeasureCharacters` subroutine shown in the following code to display the font metrics for text in three different fonts. `MeasureCharacters` defines an array of `CharacterRange` objects and initializes them so that they each refer to a single character in the string. It calls `SetMeasurableCharacterRanges` and then `MeasureCharacterRanges`, as described in the section "MeasureString" earlier in this chapter. Next, the code calculates the font's em height, ascent, descent, cell height, internal leading, line spacing, and external leading. The subroutine then loops through the `Regions` returned by `MeasureCharacterRanges` converting each `Region` into a `Rectangle` and drawing it. It then draws lines showing the internal leading, ascent, and descent values and fills an area representing the external leading space. The subroutine finishes by drawing the text.

```
Public Sub MeasureCharacters(ByVal gr As Graphics, ByVal the_font As Font, _
 ByVal txt As String, ByVal layout_rect As RectangleF, _
 ByVal string_format As StringFormat)
    ' Define an array of CharacterRange objects,
    ' one for each character.
    Dim character_ranges(txt.Length - 1) As CharacterRange
    For i As Integer = 0 To txt.Length - 1
        character_ranges(i) = New CharacterRange(i, 1)
    Next i

    ' Set the ranges in the StringFormat object.
    string_format.SetMeasurableCharacterRanges(character_ranges)

    ' Get the character range regions.
    Dim character_regions() As Region = _
        gr.MeasureCharacterRanges(txt, _
        the_font, layout_rect, string_format)

    ' Get the font's ascent.
    Dim em_height As Integer = the_font.FontFamily.GetEmHeight(FontStyle.Bold)
    Dim em_height_pix As Single = the_font.Size
    Dim design_to_pixels As Single = the_font.Size / em_height
    Dim ascent As Integer = the_font.FontFamily.GetCellAscent(FontStyle.Bold)
    Dim ascent_pix As Single = ascent * design_to_pixels
    Dim descent As Integer = _
        the_font.FontFamily.GetCellDescent(FontStyle.Bold)
    Dim descent_pix As Single = descent * design_to_pixels
    Dim cell_height_pix As Single = ascent_pix + descent_pix
    Dim internal_leading_pix As Single = cell_height_pix - em_height_pix
    Dim line_spacing As Integer = _
        the_font.FontFamily.GetLineSpacing(FontStyle.Bold)
    Dim line_spacing_pix As Single = line_spacing * design_to_pixels
    Dim external_leading_pix As Single = line_spacing_pix - cell_height_pix

    ' Draw each region's bounds.
    For Each rgn As Region In character_regions
```

```
            ' Convert the region into a Rectangle.
            Dim character_bounds As RectangleF = rgn.GetBounds(gr)
            Dim character_rect As Rectangle = _
                Rectangle.Round(character_bounds)

            ' Draw the bounds.
            gr.DrawRectangle(Pens.Black, character_rect)

            ' Draw the internal leading.
            gr.DrawLine(Pens.White, _
                character_rect.X, _
                character_rect.Y + internal_leading_pix, _
                character_rect.Right, _
                character_rect.Y + internal_leading_pix)

            ' Draw the ascent.
            gr.DrawLine(Pens.Yellow, _
                character_rect.X, _
                character_rect.Y + ascent_pix, _
                character_rect.Right, _
                character_rect.Y + ascent_pix)

            ' Draw the descent.
            gr.DrawLine(Pens.Orange, _
                character_rect.X, _
                character_rect.Y + ascent_pix + descent_pix, _
                character_rect.Right, _
                character_rect.Y + ascent_pix + descent_pix)

            ' Draw the external leading.
            gr.FillRectangle(Brushes.Red, _
                character_rect.X, _
                character_rect.Y + ascent_pix + descent_pix, _
                character_rect.Width, _
                external_leading_pix)
        Next rgn

        ' Draw the text.
        gr.DrawString(txt, the_font, Brushes.Black, _
            layout_rect, string_format)
    End Sub
```

Figure 32-11 shows the result.

Note that the font metrics are not always rigidly followed. For example, sometimes a character may extend into the external leading space.
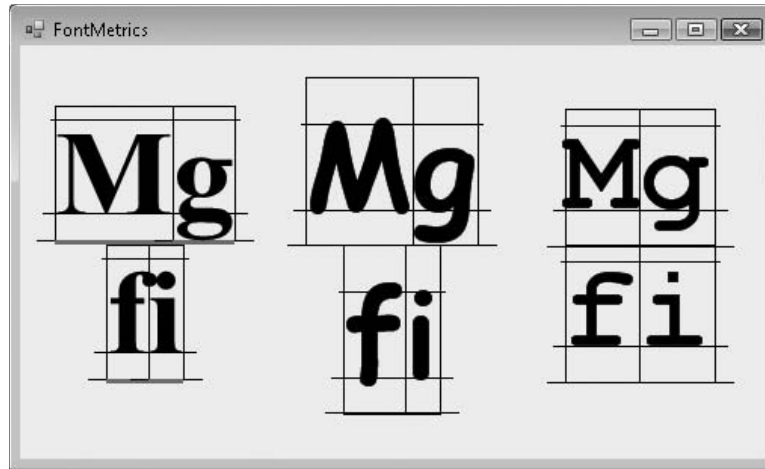
Figure 32-11: The FontFamily and Font classes provide the methods you need to calculate font metrics.

Summary

When you draw lines, rectangles, and other shapes, you can completely define the shape by giving its size and position. Text is different. Different fonts may produce very different results, even for the same text. A single font sometimes even produces different results for a character, depending on the characters that surround it and the area in which it is drawn.

This chapter describes some of the methods you can use to position and measure text in Visual Basic. Layout rectangles and `StringFormat` objects let you easily draw text that is centered or aligned vertically and horizontally. The `DrawString` method automatically wraps text if necessary and can understand Tabs and Carriage Return/Line Feed characters contained in the text.

The `StringFormat` object's flags let you determine how text is aligned, wrapped, and trimmed. The `StringFormat` object's methods let you read and define tab stops.

The `Graphics` object's `MeasureString` method lets you determine roughly how big a string will be when drawn on the object. Its `MeasureCharacterRanges` method lets you determine the placement of regions of text within a string.

With all of these methods at your disposal, you can position text almost exactly where you want it.

Chapters 30 through 32 explained how to draw objects such as lines, ellipses, and text at a relatively high level. When you draw a line from one point to another, you don't need to specify exactly how the pixels on the screen should be colored. You set values for higher-level properties such as the pen color and dash style, brush color and style, and so forth. Then Visual Basic figures out the details.

Chapter 33, "Image Processing," explains how you can read and manipulate images on a pixel-by-pixel basis. It tells how to load and save image files in different formats (such as BMP, GIF, JPEG, and PNG) and how to get and set the colors of individual pixels.

Image Processing

The `Graphics` class represents a drawing surface at a logical level. Below that level, a `Graphics` object is attached to a `Bitmap` or `Metafile` object. Those objects understand the slightly lower-level needs of managing more physical data structures. For example, a `Bitmap` object maps abstract drawing commands such as `DrawLine` and `DrawEllipse` to colored pixels that can be displayed on a `PictureBox` or saved into a file. Similarly, a `Metafile` maps the `Graphics` object's abstract commands into metafile records that you can play back on a drawing surface, or save in a graphical metafile.

This chapter describes the more down-to-earth `Bitmap` and `Metafile` classes. It explains methods for building, modifying, and manipulating these objects. It shows how to load and save them from graphics files and, in the case of `Bitmap` classes, how to work with files saved in a variety of graphic formats such as BMP, GIF, JPEG, TIFF, and PNG.

Image

An `Image` object represents some sort of picture that you can draw on, copy, transform, and display. `Image` is an abstract (`MustInherit`) class, so you cannot create instances of this class directly. Instead you must make instances of its derived classes `Bitmap` and `Metafile`.

You can also derive your own class from `Image` if you want, although that's a fairly advanced technique, so it isn't covered here.

The `Image` class provides useful graphical methods that the `Bitmap` and `Metafile` classes inherit. Many other objects can work with any type of `Image` object, so you can pass them either a `Bitmap` or a `Metafile`. For example, the `Graphics` object's `FromImage` method takes an `Image` object as a parameter and returns a `Graphics` object attached to that `Image`. This parameter can be either a `Bitmap` or a `Metafile`. The following code creates a new `Bitmap` object, attaches a `Graphics` object to it, and then uses the `Graphics` object to draw a rectangle on the `Bitmap`:

```
Dim bm As New Bitmap(100, 100)
Using gr As Graphics = Graphics.FromImage(bm)
    gr.DrawRectangle(Pens.Black, 10, 10, 80, 80)
End Using
```

The `Image` class itself provides several useful methods, particularly `Load` and `Save`. The following table describes these and some of the class's other useful properties and methods.

Property or Method	Purpose
Dispose	Frees the resources associated with this image. See the sections "Loading Bitmaps" and "Saving Bitmaps" later in this chapter for more information.
Flags	Returns attribute flags for the image. These provide information such as whether the pixel data contains alpha values and whether the image is a gray scale. For more information, look in the online help for the `ImageFlags` enumeration.
FromFile	This shared function loads an image from a file as in `bm = Bitmap.FromFile(file-name)`.
FromHbitmap	This shared function loads a `Bitmap` image from a Windows bitmap handle. (A *bitmap handle* is a 32-bit integer that gives a value associated with the bitmap in the GDI environment. Windows uses the handle to refer to the bitmap when it needs to manipulate it. In the .NET environment, you generally work with `Bitmap` and `Image` objects and don't need to worry about bitmap handles. It's useful to know about this method, however, in case you need to manipulate a bitmap loaded using older GDI routines.)
FromStream	This shared function loads an image from a data stream.
GetBounds	Returns a `RectangleF` structure representing the rectangle's bounds.
GetPixelFormatSize	Returns the color resolution (bits per pixel) for a specified `PixelFormat`.
GetThumbnailImage	Returns a thumbnail representation of the image.
Height	Returns the image's height.
HorizontalResolution	Returns the horizontal resolution of the image in pixels per inch.
IsAlphaPixelFormat	Returns `True` if the specified `PixelFormat` contains alpha information.
Palette	Determines the `ColorPalette` object used by the image.
PhysicalDimension	Returns a `SizeF` structure giving the image's dimensions in pixels for `Bitmaps` and 0.01 millimeter units for `Metafiles`.

Property or Method	Purpose
PixelFormat	Returns the image's pixel format. This property can take such values as `Format24bppRgb` (24-bit red/green/blue data), `Format32bppArgb` (32-bit alpha/red/green/blue data), and `Format8bppIndexed` (8-bit index into a 256-color table). For more information, see the online help for the `PixelFormat` property and the `PixelFormat` enumeration.
RawFormat	Returns an `ImageFormat` object representing the image's raw format. The `ImageFormat` class has shared members for each of the standard image types. For example, the following code checks whether the `Bitmap bm` was loaded from a JPEG file: `If bm.RawFormat.Equals(ImageFormat.Jpeg) Then ...`
RotateFlip	Rotates, flips, or rotates and flips the image. The parameter indicates which combination of flips (vertical, horizontal, or both) and rotation (0, 90, 180, or 270 degrees) to use.
Save	Saves the image in a file or stream with a given data format (BMP, GIF, JPEG, and so on). See the sections "Loading Bitmaps" and "Saving Bitmaps" later in this chapter for more information.
Size	Returns a `Size` structure containing the image's width and height in pixels.
VerticalResolution	Returns the vertical resolution of the image in pixels per inch.
Width	Returns the image's width.

Bitmap

The `Bitmap` class represents an image defined by pixel data. You can use a `Bitmap` to create, load, modify, and save image data to sources that display pixel data such as screen objects (`PictureBoxes`, `Forms`, `UserControls`, and so on) and image files (BMP, GIF, JPEG, PNG, TIFF, and so on).

Many of the `Bitmap` class's most useful properties and methods are inherited from the `Image` class. These include `Height`, `HorizontalResolution`, `Palette`, `RawFormat`, `Size`, `Width`, `GetThumbnailImage`, `RotateFlip`, and `Save`. See the section "Image" earlier in this chapter for information about those and other inherited properties and methods.

The following table describes some of the most useful methods that the `Bitmap` class adds to those inherited from the `Image` class.

Method	Purpose
FromHicon	This shared function loads a `Bitmap` image from a Windows icon handle. (An *icon handle* is a 32-bit integer that gives a value associated with the icon in the GDI environment. Windows uses the handle to refer to the icon when it needs to manipulate it. In the .NET environment, you generally work with `Icon` objects and don't need to worry about icon handles. It's useful to know about this method, however, in case you need to manipulate an icon loaded using older GDI routines.)
FromResource	This shared function loads a `Bitmap` image from a Windows resource.
GetPixel	Returns a specified pixel's `Color`.
LockBits	Locks the `Bitmap` class's data in memory, so it cannot move until the program calls `UnlockBits`.
MakeTransparent	Makes all pixels with a specified color transparent by setting their alpha components to 0.
SetPixel	Sets a specified pixel's `Color` value.
SetResolution	Sets the `Bitmap` class's horizontal and vertical resolution in dots per inch (DPI).
UnlockBits	Unlocks the `Bitmap` class's data in memory so the system can relocate it if necessary.

For most applications, the `GetPixel` and `SetPixel` methods provide adequate performance when manipulating pixels, but there is some overhead in moving through the different layers between the program's code and the actual pixel data. For applications that work with very large images or that need to process pixel data on many images very quickly, performance may be an issue.

In cases where speed is an issue, you can access the pixel data more directly using so-called unsafe access. The program locks the `Bitmap` class's data, reads and updates the pixel values, and then unlocks the data. See the section "Pixel-by-Pixel Operations" later in this chapter for more information and examples.

Loading Bitmaps

Loading a `Bitmap` from a file is simple. Simply pass the file's name into the `Bitmap` class's constructor. The following code loads the bitmap file whose name is stored in the variable `file_name`, and then displays it in the `PictureBox` control named `picImage`:

```
Dim bm As New Bitmap(file_name)
picImage.Image = bm
```

After you have loaded a `Bitmap`, you can attach a `Graphics` object to it, draw on it, display it, and save the results in a new bitmap file. The following code loads the bitmap file, attaches a `Graphics` object to it, uses that object to draw an ellipse, and displays the result in the `picImage` control:

```
Dim bm As New Bitmap(file_name)
Using gr As Graphics = Graphics.FromImage(bm)
    gr.DrawEllipse(Pens.White, 0, 0, bm.Width - 1, bm.Height - 1)
End Using
picImage.Image = bm
```

Unfortunately, the `Bitmap` object holds some sort of attachment to the bitmap file. If you try to delete the file while the program is running and still using the `Bitmap`, the operating system complains that the file is locked by another process. Similarly, if you open the file in a program such as Microsoft Paint, make some changes, and try to save the file, the operating system complains about a sharing violation.

To release the file for other programs to use, you must dispose of the `Bitmap` object that opened it. However, if you assign the `Bitmap` to a property (such as `Image` property of a `PictureBox`), the property keeps a reference to the `Bitmap` and will later generate an error when it tries to use the `Bitmap` that you have disposed.

One solution to this dilemma is to create a second `Bitmap` that is a copy of the first `Bitmap`, as shown in the following code. Then you can safely dispose of the first `Bitmap`. Because the second `Bitmap` was never associated with the bitmap file, the file is not locked.

```
' Load the bitmap file.
Dim bm As New Bitmap(file_name)

' Make a copy.
Dim new_bm As New Bitmap(bm)

' Dispose of the original Bitmap.
bm.Dispose

' Draw on the new Bitmap and display the result.
Using gr As Graphics = Graphics.FromImage(new_bm)
    gr.DrawEllipse(Pens.White, 0, 0, new_bm.Width - 1, new_bm.Height - 1)
End Using
picImage.Image = new_bm
```

Saving Bitmaps

You can use a `Bitmap` object's `Save` method to save the bitmap into a file or data stream. By default the image is saved in PNG format, so if you want to use the PNG format you only need to pass `Save` the name of the file. To save the image in some other format, pass the format as the `Save` method's second parameter.

The `Save` method uses its second parameter, not the file name's extension, to determine the file format. For example, if you pass the `Save` method only the string "Test.bmp." you'll get a PNG file with a .bmp extension. To avoid confusion, explicitly specify the data type that matches the file name's extension.

The following code generates a 256 × 256 pixel bitmap from scratch and saves it in a JPEG file. Because the program doesn't specify a path for the file, it is created in the program's current directory.

```
' Make a 256x256 pixel Bitmap.
Dim bm As New Bitmap(256, 256)

' Draw on it.
Using gr As Graphics = Graphics.FromImage(bm)
    gr.Clear(Color.White)
    gr.DrawEllipse(Pens.Red, 0, 0, bm.Width - 1, bm.Height - 1)
    gr.DrawLine(Pens.Green, 0, 0, bm.Width - 1, bm.Height - 1)
    gr.DrawLine(Pens.Blue, bm.Width - 1, 0, 0, bm.Height - 1)
End Using

' Save the result as a JPEG file.
bm.Save("test.jpg", ImageFormat.Jpeg)
```

The `ImageFormat` enumeration defines the values `Bmp`, `Emf`, `Exif`, `Icon`, `Jpeg`, `MemoryBmp`, `Png`, `Tiff`, and `Wmf`.

You can find information about the different file formats on the Web. For example, you can find some general descriptions of various formats at `en.wikipedia.org/wiki/Graphics_file_format`. Also see Microsoft's article "Guidelines for selecting the appropriate picture format" at `support.microsoft.com/kb/272399`.

If you save a `Bitmap` image in the `Wmf` (Windows metafile) or `Emf` (Enhanced metafile) format, the `Save` method creates a metafile that contains a bitmapped image. If you create a metafile by using a `Metafile` object, on the other hand, the result is a metafile that contains records that draw lines, curves, text, and so forth. The difference can have a couple of important consequences.

First, if the image is large, the bitmapped version may take up a lot more space than the version that records only drawing commands. It may also take a lot longer to draw a large bitmap than it would to draw a few circles and lines.

Second, you can transform a metafile that contains commands more readily than you can transform a metafile that contains a bitmap. If you enlarge a metafile containing commands, the result contains enlarged lines, curves, and other output. If you enlarge a metafile containing a bitmap, the result is a relatively blocky enlarged bitmap. Anti-aliasing may help a little, but the metafile containing drawing commands will produce a much better result.

On the other hand, not all programs understand all metafile commands. You may load a metafile containing drawing commands into another application and find that your ellipses and text don't work. Although a metafile containing a bitmap won't resize nicely, at least it should look similar to what you created.

See the section "Metafile Objects" later in this chapter for more information on metafiles.

Implementing AutoRedraw

In Visual Basic 6 and earlier versions, the `Form` and `PictureBox` objects had an `AutoRedraw` property. If you set this property to `True`, anything you drew on the object was automatically saved. If the object was later obscured and redrawn, the drawing was automatically restored.

This method required Visual Basic to allocate a chunk of internal memory to store the image, so it was not free. However, it could be a lot easier and faster than redrawing a complex image from scratch every time the drawing is exposed. For example, drawing a Mandelbrot set or other complex fractal may take 10 or 20 seconds even on a relatively fast computer. Some of the complex images used in modern computer animated movies take hours or days to build. Redrawing these images from scratch every time a form was exposed would be impractical.

The bad news is that Visual Basic .NET has no `AutoRedraw` property. If you want similar functionality, you must implement it yourself. The good news is that Visual Basic .NET has a couple of controls that can display a persistent image, and they can do a lot of the work for you.

The `Form` object's `BackgroundImage` property holds an image that covers the form's background. If the image is too big to fit, it is cropped. If the image is too small to cover the whole form, it is repeated to tile the form.

The `PictureBox` object's `Image` property also displays a persistent image. The control's `SizeMode` property determines how Visual Basic uses the image to cover the control. This property can take the values `Normal` (the image is drawn at full scale in the upper-left corner of the `PictureBox` and is cropped if it is too big), `StretchImage` (the image is stretched or squashed to fit the control, possibly changing its shape), `AutoSize` (the `PictureBox` resizes to fit the image), and `CenterImage` (the image is drawn at full scale in the center of the `PictureBox` and is cropped if it is too big).

One relatively easy method for implementing `AutoRedraw` is to make a `Bitmap` and assign it to a `PictureBox` object's `Image` property. Then the `PictureBox` automatically redisplays the image whenever it is exposed.

Some programs don't need to redraw their images when the form resizes. For example, a mapping application might display its map at a specific size. In that case, you don't need to redraw the map in the form's `Resize` event handler. Instead, you would probably add menus and buttons to let the user zoom in and out, and scroll to different parts of the map. In an application such as that one, the code would need to draw images only when the content changed. The rest is automatic.

Other applications draw in several routines and not just in the form's `Load` and `Resize` event handlers. For example, a drawing program might let the user draw various shapes (such as lines, rectangles, ellipses, and free-form curves). The program would add these shapes to a `Bitmap` as they were drawn and then display the result.

In programs such as this, you can create `Bitmap` and `Graphics` objects at a module or application level and then use them whenever the user modifies the image.

The Scribble example program, which is available for download on the book's web site, uses this approach to allow the user to draw free-form curves. When it starts and when the user selects the File menu's Clear command, the program makes `Bitmap` and `Graphics` objects at the module level. It displays the `Bitmap` in a `PictureBox` control's `Image` property.

The program's `MouseDown`, `MouseMove`, and `MouseUp` event handlers allow the user to draw lines on the `Bitmap`. Each time the program makes a change it re-displays the `Bitmap` in the `PictureBox`.

Figure 33-1 shows program Scribble in action.
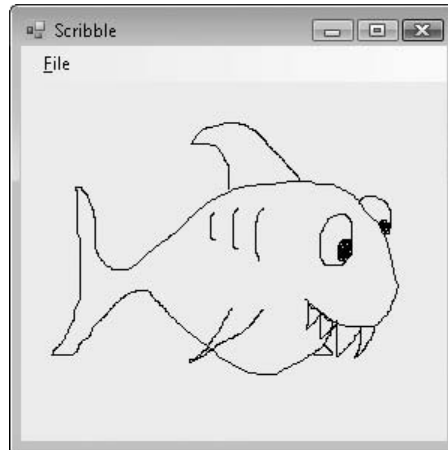
Figure 33-1: Program Scribble automatically redisplays its image when the form is hidden and exposed.

A final issue related to auto-redraw is resizing. If the user makes the form larger or smaller, you need to figure out what to do about the auto-redraw image. There are several approaches you can take, depending on your application.

The simplest approach is to not allow the user to resize the form or at least not to resize the `PictureBox` that displays the auto-redraw image. Then you can ignore the whole issue.

A second approach is to create a new `Bitmap` of the new correct size. Use a `Graphics` object's `Clear` method to erase the new `Bitmap`. Then use the object's `DrawImage` method to copy the contents of the old `Bitmap` into the new one.

In this approach, if the new `Bitmap` is larger than the old one, all of its data is saved. If the new `Bitmap` is smaller, then some of the old drawing is lost. You can preserve that information if you only allow the `Bitmap` to grow and never shrink. When the user resizes the form, you make the new `Bitmap` object's width and height the larger of the old `Bitmap` object's size and the form's new size.

Finally, if you think the program will often run maximized, you could just allocate a really big `Bitmap` when the program begins and forget the whole resizing issue.

Pixel-by-Pixel Operations

The `Bitmap` object provides two methods, `GetPixel` and `SetPixel`, that let a program easily read and write pixel values in the image. The following discussion describes an example that uses these methods to invert an image.

`GetPixel` and `SetPixel` are easy to use and fast enough for many applications. For high-performance graphics, however, they are relatively slow. The section "Unsafe Pixel Manipulation" later in this chapter explains how you can use unsafe methods to access pixel data more directly. This is a bit more difficult, but it is much faster for large images.

GetPixel and SetPixel

The `Bitmap` object's `GetPixel` method returns a `Color` structure for a pixel in a specific X and Y location. `SetPixel` sets the `Color` of a pixel at a particular position. These two methods are quite easy to use and provide good enough performance for many applications.

Example program InvertImageGetSetPixels, which is available for download on the book's web site, uses the `InvertImage` subroutine shown in the following code to invert the pixel colors in a `Bitmap`:

```
Private Sub InvertImage(ByVal bm As Bitmap)
    ' Process the image's pixels.
    For y As Integer = 0 To bm.Height - 1
        For x As Integer = 0 To bm.Width - 1
            ' Get this pixel's color.
            Dim clr As Color = bm.GetPixel(x, y)

            ' Invert the color's components.
            clr = Color.FromArgb(255, _
                255 - clr.R, _
                255 - clr.G, _
                255 - clr.B)

            ' Set the result pixel's color.
            bm.SetPixel(x, y, clr)
        Next x
    Next y
End Sub
```

Subroutine `InvertImage` loops over all of the pixels in the image. It uses the bitmap's `GetPixel` function to get the color of each pixel. It inverts the red, green, and blue components of the pixel's color by subtracting them from the maximum allowed value 255. It then calls the destination `Bitmap`'s `SetPixel` method to set the result pixel's value.

The first argument to the `SetPixel` method is the new color's "Alpha" value and gives the color's opacity. Subroutine `InvertImage` sets Alpha to 255 for each pixel so the result is completely opaque.

Figure 33-2 shows the program in action. The output image on the right is essentially the photographic negative of the original image on the left.
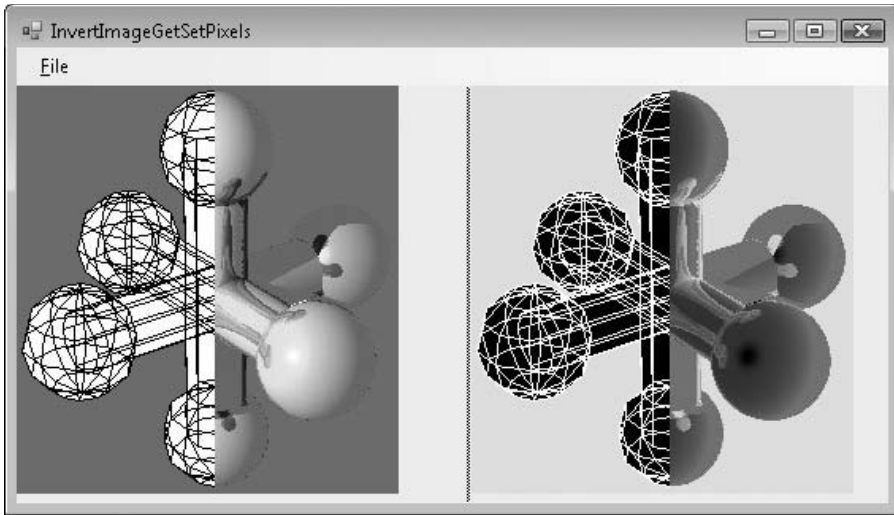
Figure 33-2: This program uses GetPixel and SetPixel to invert an image's pixel values.

Unsafe Pixel Manipulation

The GetPixel and SetPixel methods are very easy to use, and they are fast enough for many applications. For example, a program that generates fractals such as the Mandelbrot set spends a considerable amount of time calculating colors for each individual pixel. If it takes the program 5 seconds to generate the image and a tenth of a second of that time is spent by the SetPixel method, then SetPixel is probably fast enough. Using unsafe array methods may shave a few hundredths of a second off the total time, but the program's time is dominated by the code that calculates the pixels' colors, so it's hardly worth the extra complication.

However, suppose that you need to transform a series of images very quickly to display an animated sequence. In that case, the time spent by GetPixel and SetPixel may be significant. In that case, you may get much better performance using unsafe methods.

The basic idea is to directly access the array of bytes containing the red, green, and blue component values for the image's pixels. The Bitmap object's LockBits method copies the pixel data for a rectangular part of the image into a temporary buffer where you can manipulate it. Later, you call the UnlockBits method to copy any changes you made back into the bitmap.

Unfortunately the LockBits method returns the buffer of data as a pointer to memory and Visual Basic cannot work directly with that kind of pointer. To resolve this problem, you can use the Marshal class's Copy method to move the data into a Visual Basic array. You can then modify the data and, when you are finished, use Marshal.Copy to move the results back into the buffer.

The following code shows the BitmapBytesRGB24 class that makes this somewhat simpler for the main program. This class works with 24-bit image representations. Your call to LockBits can specify other formats, but this one is particularly easy to work with because it uses one byte for each of the pixels' red, green, and blue components.

```
Imports System.Drawing.Imaging
Imports System.Runtime.InteropServices

Public Class BitmapBytesRGB24
    ' Provide public access to the picture's byte data.
    Public ImageBytes() As Byte
    Public RowSizeBytes As Integer
    Public Const PixelDataSize As Integer = 24

    ' A reference to the Bitmap.
    Private m_Bitmap As Bitmap

    ' Save a reference to the bitmap.
    Public Sub New(ByVal bm As Bitmap)
        m_Bitmap = bm
    End Sub

    ' Bitmap data.
    Private m_BitmapData As BitmapData

    ' Lock the bitmap's data.
    Public Sub LockBitmap()
        ' Lock the bitmap data.
        Dim bounds As Rectangle = New Rectangle( _
            0, 0, m_Bitmap.Width, m_Bitmap.Height)
        m_BitmapData = m_Bitmap.LockBits(bounds, _
            Imaging.ImageLockMode.ReadWrite, _
            Imaging.PixelFormat.Format24bppRgb)
        RowSizeBytes = m_BitmapData.Stride

        ' Allocate room for the data.
        Dim total_size As Integer = m_BitmapData.Stride * m_BitmapData.Height
        ReDim ImageBytes(total_size)

        ' Copy the data into the ImageBytes array.
        Marshal.Copy(m_BitmapData.Scan0, ImageBytes, _
            0, total_size)
    End Sub

    ' Copy the data back into the Bitmap
    ' and release resources.
    Public Sub UnlockBitmap()
        ' Copy the data back into the bitmap.
        Dim total_size As Integer = m_BitmapData.Stride * m_BitmapData.Height
        Marshal.Copy(ImageBytes, 0, _
            m_BitmapData.Scan0, total_size)

        ' Unlock the bitmap.
        m_Bitmap.UnlockBits(m_BitmapData)

        ' Release resources.
```

```
            ImageBytes = Nothing
            m_BitmapData = Nothing
        End Sub
    End Class
```

The class's `ImageBytes` array will contain the pixel data stored as a one-dimensional array. Each pixel is represented by a byte for its blue component, a byte for its green component, and a byte for its red component, in that order.

The `RowSizeBytes` property tells how many bytes are stored in the array per row of pixels. The system may pad the array, so the number of bytes in each row is a multiple of four or some other number that is convenient for the operating system. Thus, `RowSizeBytes` may not always be three times the number of pixels in each row.

The constant `PixelDataSize` is 24 for this class because it works with 24-bit (3-byte) pixel data.

The class's constructor takes as a parameter a reference to a `Bitmap` and saves that reference for later use.

The class next declares a `BitmapData` object named `m_BitmapData`. This object will contain data describing the bitmap.

The `LockBitmap` method creates a `Rectangle` bounding the bitmap. This is the area in the bitmap that the routine will lock. This class doesn't mess around with pieces of the image so it simply locks the entire bitmap.

`LockBitmap` calls the `Bitmap` object's `LockBits` method, passing it the bounding `Rectangle`, a flag indicating that it wants to lock the data for reading and writing, and a flag indicating that we want to work with 24-bit pixel data. `LockBits` returns information about the bitmap in a `BitmapData` object, which the routine saves in `m_BitmapData`. The routine sets the `RowSizeBytes` value so that it is easy for the main program to use.

`LockBitmap` then calculates the total number of bytes needed to hold the pixel data, makes the `ImageBytes` array big enough, and calls `Marshal.Copy` to copy the pixel data into the array.

The class's `UnlockBitmap` method copies the modified pixel data back into the bitmap. It recalculates the size of the array and uses `Marshal.Copy` to copy the data from the `ImageBytes` array back into the buffer allocated by `LockBits`. Finally, it calls the `Bitmap` object's `UnlockBits` method.

The following code shows how a main program can use the `BitmapBytesRGB24` class to invert an image's pixels. The code creates a new `BitmapBytesRGB24` object, passing the constructor the `Bitmap` that it wants to modify. It then calls the object's `LockBitmap` method to copy the pixel data into the object's `ImageBytes` array. Next, the program loops over the rows in the image. For each row, the code calculates the position in the pixel data that holds the row's first pixel's information. It then loops over the pixels in the row, modifying each pixel's blue, green, and red components. Remember that the components are in stored in the order blue, green, red. When it has finished modifying the pixel data, the program calls the `BitmapBytesRGB24` object's `UnlockBitmap` method to copy the results back into the bitmap.

```
' Invert the pixel values in this Bitmap.
Private Sub InvertImage(ByVal bm As Bitmap)
    ' Make a BitmapBytesRGB24 object.
    Dim bm_bytes As New BitmapBytesRGB24(bm)

    ' Lock the bitmap.
    bm_bytes.LockBitmap()

    Dim pix As Integer
    For y As Integer = 0 To bm.Height - 1
        pix = y * bm_bytes.RowSizeBytes
        For x As Integer = 0 To bm.Width - 1
            ' Blue component.
            bm_bytes.ImageBytes(pix) = CByte(255) - bm_bytes.ImageBytes(pix)
            pix += 1
            ' Green component.
            bm_bytes.ImageBytes(pix) = CByte(255) - bm_bytes.ImageBytes(pix)
            pix += 1
            ' Red component.
            bm_bytes.ImageBytes(pix) = CByte(255) - bm_bytes.ImageBytes(pix)
            pix += 1
        Next x
    Next y

    ' Unlock the bitmap.
    bm_bytes.UnlockBitmap()
End Sub
```

This is quite a bit more complicated than the previous program that uses `GetPixel` and `SetPixel`, so it's not the best method for simple applications. For high-performance image processing, however, the extra complication is sometimes worth it. In one set of tests on a 798-MHz Athlon 64 processor, the previous version using `GetPixel` and `SetPixel` took roughly 1.109 seconds to invert an 800 × 600 pixel image, while the version using the `BitmapBytesRGB24` class took only 0.047 seconds.

Metafile Objects

The `Metafile` class represents image data defined by metafile records. These records encapsulate typical graphics commands that scale, rotate, draw lines, display text, and so forth. Using a `Metafile` object, you can build the metafile records and save them into a metafile, load a metafile, and play the metafile records on a display surface such as a `Bitmap`.

Many of the `Metafile`'s most useful properties and methods are inherited from the `Image` class. These include `Height`, `HorizontalResolution`, `Palette`, `RawFormat`, `Size`, `Width`, `GetThumbnailImage`, `RotateFlip`, and `Save`. See the section "Image" earlier in this chapter for information about those and other inherited properties and methods.

The following table describes some of the most useful methods that the `Metafile` class adds to those inherited from the `Image` class.

Method	Purpose
GetMetafileHeader	Returns the `MetafileHeader` object associated with this `Metafile`. See the following text for more information on the `MetafileHeader` class.
PlayRecord	Plays a metafile record. To play the whole metafile, you can use a `Graphics` object's `DrawImage` method to copy the metafile's image onto a `Bitmap` and then display the `Bitmap`. `PlayRecord` lets you selectively play metafile records.

To build a `Metafile`, you create a `Metafile` object, attach a `Graphics` object to it, and then use drawing methods to draw into the metafile. In that respect, the `Metafile` behaves just like a `Bitmap` does.

The `Graphics` object also provides two special methods for working with its `Metafile` `.AddMetafileComment` adds a comment to the metafile. `EnumerateMetafile` sends the metafile's records to a callback subroutine one at a time. You can use that routine if you want to play back only some of the `Metafile`'s records.

Example program MakeMetafile, which is available for download on the book's web site, uses the following code to make and use a metafile. It starts by building a file name for the metafile. If the file already exists, the program deletes it. Next the program makes a `Graphics` object to get a handle to its device context. It uses that handle as a parameter to the `Metafile` object's constructor. It also passes the constructor the name of the file, a `RectangleF` that defines the metafile's bounds, and the units used by the bounds.

```
Private Sub Form1_Load() Handles MyBase.Load
    ' Make a bitmap.
    Const WID As Integer = 200
    Dim bm As New Bitmap(WID, WID)

    ' Find the WMF file's path and delete the file if it exists.
    Dim path_name As String = Application.StartupPath
    If path_name.EndsWith("\bin") Then _
        path_name = path_name.Substring(0, path_name.Length - 4)
    Dim file_name As String = path_name & "\test.wmf"
    If Len(Dir$(file_name)) > 0 Then Kill(file_name)

    ' Make a Graphics object so we can use its hDC as a reference.
    Using me_gr As Graphics = Me.CreateGraphics
        Dim me_hdc As IntPtr = me_gr.GetHdc

        ' Make the Metafile, using the reference hDC.
        Dim bounds As New RectangleF(0, 0, WID, WID)
        Using mf As New Metafile(file_name, me_hdc, _
          bounds, MetafileFrameUnit.Pixel)
```

```
                me_gr.ReleaseHdc(me_hdc)

            ' Make a Graphics object and draw.
            Using gr As Graphics = Graphics.FromImage(mf)
                gr.PageUnit = GraphicsUnit.Pixel
                gr.Clear(Color.White)
                gr.SmoothingMode = Drawing2D.SmoothingMode.AntiAlias
                Using thick_pen As New Pen(Color.Red, 5)
                    gr.DrawEllipse(thick_pen, bounds)
                    thick_pen.Color = Color.Green
                    gr.DrawLine(thick_pen, 0, 0, WID, WID)
                    thick_pen.Color = Color.Blue
                    gr.DrawLine(thick_pen, WID, 0, 0, WID)
                End Using
            End Using ' gr
        End Using ' mf

        ' Reload the metafile and copy it into a Bitmap.
        Using mf As New Metafile(file_name)
            Using gr As Graphics = Graphics.FromImage(bm)
                Dim dest_bounds As New RectangleF(0, 0, WID, WID)
                Dim source_bounds As New RectangleF(0, 0, WID + 1, WID + 1)
                gr.DrawImage(mf, bounds, source_bounds, GraphicsUnit.Pixel)
                picOrig.SizeMode = PictureBoxSizeMode.AutoSize
                picOrig.Image = bm
            End Using ' gr
        End Using ' mf

        ' Redisplay the result shrunk by 50%.
        Using mf As New Metafile(file_name)
            picSmall.SetBounds( _
                picOrig.Right + 10, picOrig.Top, _
                picOrig.Width \ 2, picOrig.Height \ 2)
            bm = New Bitmap( _
                picSmall.ClientSize.Width, _
                picSmall.ClientSize.Height)
            Using gr As Graphics = Graphics.FromImage(bm)
                Dim source_bounds As New RectangleF(0, 0, WID + 1, WID + 1)
                gr.ScaleTransform(0.5, 0.5)
                gr.DrawImage(mf, bounds, source_bounds, GraphicsUnit.Pixel)
                picSmall.Image = bm
                gr.Dispose()
            End Using ' gr
        End Using ' mf
    End Using ' me_gr
End Sub
```

After creating the `Metafile` object, the program attaches a `Graphics` object to it. It uses the `Graphics` object to clear the metafile in white and to draw a circle and two lines.

The program then disposes of the `Graphics` and `Metafile` objects. That closes the metafile.

The program then calls the `Metafile` constructor again, passing it the file's name. It makes a `Bitmap` and associated `Graphics` object, and defines source and destination `RectangleF` structures to use when

copying the image. It enlarges the source rectangle slightly so the metafile doesn't crop off the circle's right and bottom pixels.

Next, the code uses the `Graphics` object's `DrawImage` method to copy the metafile onto the `Bitmap`. It then sets the `picOrig` control's `Image` property to the `Bitmap` to display the result.

The program then repeats these steps to display the metafile on the `picSmall` control. This time it makes the control half as large as the full-scale image and uses a scaling transformation to shrink the metafile data when it calls `DrawImage`.

Figure 33-3 shows program MakeMetafile in action.
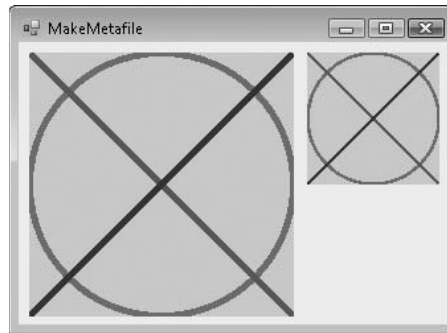
Figure 33-3: Program MakeMetafile creates a metafile and then draws two copies of it.

Summary

The `Image` class represents a generic image. Its two child classes, `Bitmap` and `Metafile`, represent specific file types.

The `Bitmap` class lets you manipulate pixel-oriented image data. Its `GetPixel` and `SetPixel` methods let you get and set a pixel's color. Those methods are fast enough for most applications, but when performance is really critical, you can use unsafe methods to access the pixel data more directly and manipulate pixels much faster. When you are finished, you can use the `Bitmap` object's `Save` method to save the result in many different kinds of graphics files including `Bmp`, `Emf`, `Exif`, `Icon`, `Jpeg`, `MemoryBmp`, `Png`, `Tiff`, and `Wmf`.

The `Metafile` class represents a collection of drawing commands. Metafiles are reasonably standardized, so you can use them to import and export graphic data between your application and external programs (such as Microsoft Word and CorelDRAW).

Chapters 30 through 33 explained how to draw shapes, text, and images on the screen. Chapter 34, "Printing," shows how to generate similar output on a printer. The basic approach you use for printing shapes, text, and images is the same as it is for displaying those objects on the screen, but when and where you generate printed output requires some new techniques.

Printing

Visual Basic .NET provides several good tools for printing. String formatting objects enable you to determine how text is wrapped and truncated if it won't fit in a printing area. Methods provided by `Graphics` objects enable you to easily scale, rotate, and translate drawing commands.

The basic process, however, seems somewhat backward to many programmers. Rather than issuing commands to a printer object, a program responds to requests to draw pages generated by a `PrintDocument` object. Instead of telling the printer what to do, the program responds to the `PrintDocument` object's requests for data.

In some cases, generating a printout using only Visual Basic commands can be difficult. The following section explains alternative methods for generating a printout and tells when you might want to use those methods. If you just want to print several pages of text, it's often easier to pull the text into Microsoft Word or some other application that specializes in formatting text rather than writing your own.

Another option used by many developers is to purchase a third-party printing application. Some of these tools help with certain kinds of printing such as report generation. Chapter 35, "Reporting," provides an introduction to Crystal Reports, a report generation and printing tool that is available with some versions of Visual Basic and that you can purchase separately.

In some cases, however, you cannot take an easy way out. If the program generates very complex images and graphs, or produces text that is positioned and formatted in a complex manner, you probably need to work through the Visual Basic printing system. The rest of this chapter explains the techniques that you use to generate printouts in Visual Basic. It shows how to draw graphics and text on the printer and how to scale and center the results.

How Not to Print

Although Visual Basic provides many tools for arranging graphics on a printout, it does not always provide the best approach to printing. The general method for printing in Visual Basic requires you to generate each page of output in turn. For simple documents (such as a line drawing containing a few lines and circles on a single page), this is easy.

On the other hand, suppose that you want to print several dozen pages of text interspersed with tables and pictures. Figuring out where to put line breaks, page breaks, tables, and figures could be a huge undertaking. To do the job right, you might need to consider orphan lines (when the first line of a paragraph sits at the bottom of a page), widow lines (the last line of a paragraph sits at the top of a page), orphan and widow words (when the first or last word in a sentence sits on a separate line), inserting extra space between words to make a line look nicer, page numbers, headers and footers, hyphenation, different left and right margins, mirrored margins, page gutters, bulleted and numbered lists, indentation and justification, different font sizes and styles, and a host of other issues.

Word processing and text-formatting applications such as Microsoft Word spend a great deal of effort on these issues — effort that you probably don't want to duplicate. In fact, Word is so good at handling these issues that you should consider using it to print your output instead of writing an elaborate Visual Basic program to do it.

If your output is simple text, your program can write it into a text file so you can use Word to open, format, and print it. For printouts that you don't need to generate too frequently, and for printouts where the user may want to edit the results before printing anyway, this is a simple, flexible solution that doesn't require you to write, debug, and maintain a lot of complicated formatting code.

For more elaborate printouts, programs such as Word may still be useful. Using Visual Studio Tools for Office (VSTO), you can open a Microsoft Word application and control it from your Visual Basic program. Your program can use the Word object model to add text, insert pictures, build tables, set page printing options, and even print the result. You can then save the document for later use or discard it.

Using VSTO, not only can you control Microsoft Word, but you can also use the other Microsoft Office applications. For example, you can load information into Excel so that you can use its tools to analyze and graph the data, copy information into Access for analysis by other database applications, or compose e-mail messages in Outlook.

VSTO is relatively complicated and outside of the scope of this book, so it isn't described here. For more information, see the VTSO web site at `msdn2.microsoft.com/office/aa905533.aspx`. You can also learn more in a book about VSTO such as *Professional VSTO 2005: Visual Studio 2005 Tools for Office* by Alvin Bruney (Wiley, 2006).

Basic Printing

The `PrintDocument` class sits at the heart of the printing process in Visual Basic. The program creates an instance of this class and installs event handlers to catch its events. When the object must perform printing-related tasks, it raises events to ask the program for help.

The `PrintDocument` object raises four key events:

❑   `BeginPrint` — The `PrintDocument` raises its `BeginPrint` event when it is about to start printing. The program can initialize data structures, load data, connect to databases, and perform any other chores it must do to get ready to print.

❑ QueryPageSettings — Before it prints a page, the PrintDocument object raises its QueryPageSettings event. A program can catch this event and modify the document's margins for the page that it is about to print.

❑ PrintPage — The PrintDocument object raises its PrintPage event to generate a page. The program must catch this event and use the Graphics object provided by the event handler's parameters to generate output. When it is finished, the event handler should set the value e.HasMorePages to True or False to tell the PrintDocument whether there are more pages to generate.

❑ EndPrint — Finally, when it has finished printing, the PrintDocument object raises its EndPrint event. The program can catch this event to clean up any resources it used while printing. It can free data structures, close data files and database connections, and perform any other necessary cleanup chores.

Having created a PrintDocument object and its event handlers, you can do three things with it. First you can call the object's Print method to immediately send a printout to the currently selected printer. The PrintDocument object raises its events as necessary as it generates the printout.

Second, you can set a PrintPreviewDialog control's Document property to the PrintDocument object and then call the dialog's ShowDialog method. The PrintPreviewDialog displays the print preview window shown in Figure 34-1, using the PrintDocument object to generate the output it displays.

The preview dialog box's printer button on the left sends the printout to the printer. Note that this makes the PrintDocument object regenerate the printout using its events, this time sending the results to the printer instead of to the print preview dialog box. The magnifying glass button displays a drop-down list where the user can select various scales for viewing the printout. The next five buttons let the user display one, two, three, four, or six of the printout's pages at the same time. The Close button closes the dialog box and the Page up/down arrows let the user move through the printout's pages.
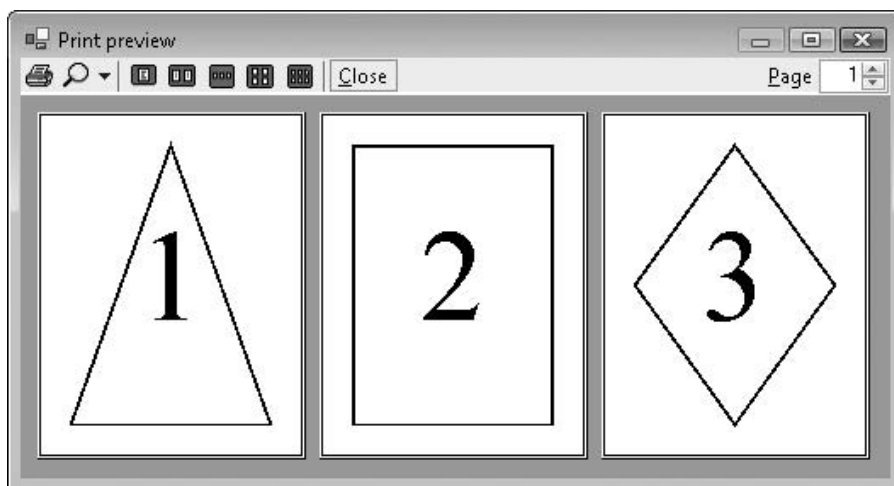
Figure 34-1: The PrintPreviewDialog control lets the user zoom in and out, and view the printout's various pages.

The `PrintPreviewControl` displays a print preview much as the `PrintPreviewDialog` control does, except that it sits on your form. It does not provide all the buttons that the dialog box does, but it does provide methods that let you implement similar features. For example, it lets your program set the zoom level, number of columns in the display, and so forth.

The third task you can do with a `PrintDocument` is assign it to a `PrintDialog` object's `Document` property and then call the dialog box's `ShowDialog` method to display the dialog box shown in Figure 34-2. The user can select the printer and set its properties (for example, selecting landscape or portrait orientation). When the user clicks Print, the dialog box uses the `PrintDocument` object to send the printout to the printer.

Your results could look different from those shown here. The print preview adjusts its appearance based on such factors as the type of printer you are using, its settings, the size of the paper you are using, and the paper's orientation.

Example program UsePrintPreviewDialog, which is available for download on the book's web site, uses the following code to preview and print a page showing the page's bounds and margin bounds. This is just about the smallest program that demonstrates all three uses for a `PrintDocument` object: printing immediately, displaying a print preview dialog box, and displaying a print dialog box.

```
Imports System.Drawing.Printing

Public Class Form1
    Private WithEvents m_PrintDocument As PrintDocument

    ' Print now.
    Private Sub btnPrintNow_Click() Handles btnPrintNow.Click
        m_PrintDocument = New PrintDocument
        m_PrintDocument.Print()
    End Sub

    ' Display a print preview dialog.
    Private Sub btnPrintPreview_Click() Handles btnPrintPreview.Click
        m_PrintDocument = New PrintDocument
        dlgPrintPreview.Text = "UsePrintPreviewDialog"
        dlgPrintPreview.Document = m_PrintDocument
        dlgPrintPreview.ShowDialog()
    End Sub

    ' Display a print dialog.
    Private Sub btnPrintDialog_Click() Handles btnPrintDialog.Click
        m_PrintDocument = New PrintDocument
        dlgPrint.Document = m_PrintDocument
        dlgPrint.ShowDialog()
    End Sub

    ' Print a page with a diamond on it.
    Private Sub m_PrintDocument_PrintPage(ByVal sender As Object, _
     ByVal e As System.Drawing.Printing.PrintPageEventArgs) _
     Handles m_PrintDocument.PrintPage
        Using the_pen As New Pen(Color.Black, 20)
```

```
            e.Graphics.DrawRectangle(the_pen, e.MarginBounds)

            the_pen.DashStyle = Drawing2D.DashStyle.Dash
            the_pen.Alignment = Drawing2D.PenAlignment.Inset
            e.Graphics.DrawRectangle(the_pen, e.PageBounds)
        End Using

        e.HasMorePages = False
    End Sub
End Class
```

The code declares a `PrintDocument` object named `m_PrintDocument`. It uses the `WithEvents` keyword, so it can easily catch the object's events.

When the user clicks the Print Now button, the `btnPrintNow_Click` event handler assigns `m_PrintDocument` to a new `PrintDocument` object and calls its `Print` method.

If the user clicks the Print Preview button, the `btnPrintPreview_Click` event handler assigns `m_PrintDocument` to a new `PrintDocument` object, sets the `PrintPreviewDialog` object's `Document` property equal to the new object, and invokes the dialog box's `ShowDialog` method.
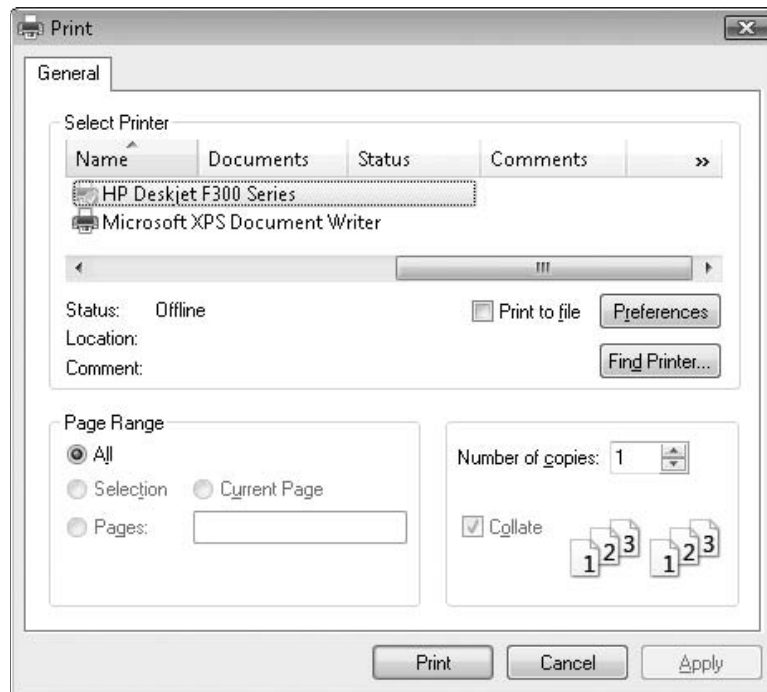
Figure 34-2: The PrintDialog control lets the user send a printout to a printer.

When the user clicks the Print Dialog button, the `btnPrintDialog_Click` event handler assigns `m_PrintDocument` to a new `PrintDocument` object, sets the `PrintDialog` object's `Document` property equal to the new object, and calls the dialog box's `ShowDialog` method.

In all three cases, the `PrintDocument` object raises its `PrintPage` event when it is ready to print a page. The program's event handler creates a 20-pixel-wide pen and uses it to draw a rectangle around the page's margin bounds. It changes the pen so that it is dashed and inset (so it draws inside the borders of a rectangle), and then draws a rectangle around the page's bounds. It finishes by setting `e.HasMorePages` to `False` to tell the `PrintDocument` that the printout is complete.

The `PrintDocument` object's `PrintPage` event handler provides a parameter of type `PrintPageEventArgs` to let the program control the printout and to give information about the printer. This object's `PageBounds` and `MarginBounds` properties give the location of the printer's printable surface and the page's margins, respectively. Typically, the printable area might be a quarter inch smaller than the paper's physical size, and the margins might be an inch or more inside the paper's physical size.

Figure 34-3 shows these rectangles in a print preview. The `MarginBounds` are drawn with a thick line, and the `PageBounds` are shown with a thick dashed line.
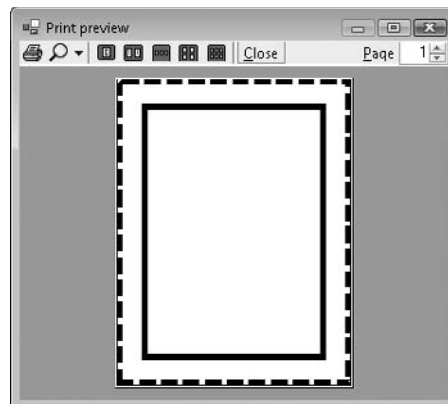
Figure 34-3: The e.PageBounds and e.MarginBounds parameters give the paper's printable area and margins.

Printing Text

The printing application described in the previous section is extremely simple. It prints a very straightforward shape on a single page. You know the positions of the diamond before starting, so the program needs to perform little arranging and formatting. The only formatting it does is to make its diamond fit the page's margins.

This section describes a more useful example that prints a long series of paragraphs using different font sizes. The PrintBooklet example program, which is available for download on the book's web site, must

figure out how to break the text into pages. It also assumes that you will print the pages double-sided and then later bind the results into a booklet. To allow extra room for the binding, the program adds a *gutter* to the margin of edge on each page on the side where the binding will be. The program assumes that you will place the first page on the outside of the booklet, so it adds the gutter to the left margin on odd-numbered pages and to the right margin on even-numbered pages. Finally, the program displays a page number in the upper corner opposite the gutter.

Figure 34-4 shows the PrintBooklet program's print preview dialog box, so you can understand the goals. If you look closely, you can see that the left margins on the first and third pages and the right margin on the second page are enlarged to allow room for the gutter. You can also see that the page numbers are in the upper corner on the side that doesn't have the gutter. Imagine the second page printed on the back of the first, so their gutters lie on the same edge of the paper.
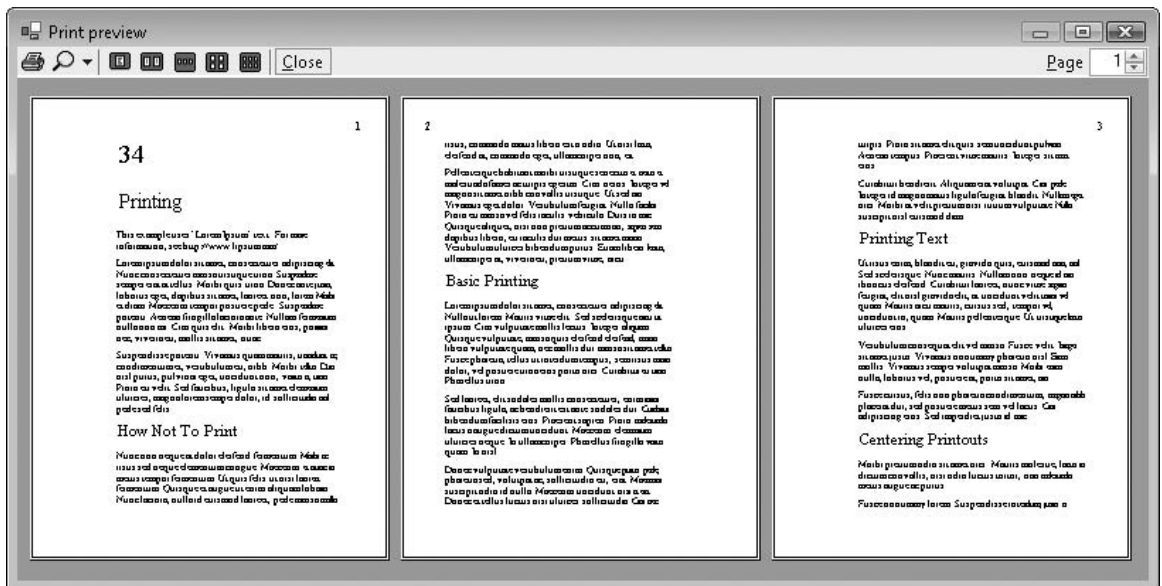
Figure 34-4: This preview shows text broken across pages with a gutter and displaying page numbers along the outside edges.

The program's Print Preview, Print Dialog, and Print Now buttons work much as the previous program's does, displaying the appropriate dialog boxes or calling the `PrintDocument` object's `Print` method. The most interesting differences between this program and the previous one is in how it stores its text to print and how it generates pages of printout.

The program uses the following `ParagraphInfo` structure to store information about the text it will print:

```
' Information about the paragraphs to print.
Private Structure ParagraphInfo
    Public FontSize As Integer
    Public Text As String
    Public Sub New(ByVal font_size As Integer, ByVal txt As String)
        FontSize = font_size
        Text = txt
    End Sub
End Structure
```

In the following code, the program declares its `PrintDocument` object. It uses the `WithEvents` keyword so it will be easy to catch the object's events. The code also declares collections to hold all of the `ParagraphInfo` structures that it will print and those that have not yet been printed. When the program's form loads, the code initializes these variables and adds a series of `ParagraphInfo` structures containing the text it will print to the `m_Paragraphs` collection.

```
' The PrintDocument.
Private WithEvents m_PrintDocument As New PrintDocument

' The paragraphs.
Private m_Paragraphs As Collection
Private m_ParagraphsToPrint As Collection
Private m_PagesPrinted As Integer

' Load the paragraph info.
Private Sub Form1_Load() Handles MyBase.Load
    ' Attach the PrintDocument to the
    ' PrintDialog and PrintPreviewDialog.
    dlgPrint.Document = m_PrintDocument
    dlgPrintPreview.Document = m_PrintDocument

    ' Make the text to print.
    m_Paragraphs = New Collection
    m_Paragraphs.Add(New ParagraphInfo(45, "23"))
    m_Paragraphs.Add(New ParagraphInfo(27, "Printing"))
    ... Code omitted...
End Sub
```

When the `PrintDocument` object starts drawing a printout, the `BeginPrint` event handler shown in the following code executes. This code resets the page number variable `m_PagesPrinted`. It then copies the `ParagraphInfo` structures from the `m_Paragraphs` collection (which holds all of the data) into the `m_ParagraphsToPrint` collection (which holds those that have not yet been printed).

```
' Get ready to print pages.
Private Sub m_PrintDocument_BeginPrint() _
 Handles m_PrintDocument.BeginPrint
    ' We have not yet printed any pages.
    m_PagesPrinted = 0

    ' Make a copy of the text to print.
```

```
        m_ParagraphsToPrint = New Collection
        For Each para_info As ParagraphInfo In m_Paragraphs
            m_ParagraphsToPrint.Add(_
                New ParagraphInfo(para_info.FontSize, para_info.Text))
        Next para_info
End Sub
```

After the `BeginPrint` event handler finishes, the `PrintDocument` object starts printing pages. Before it prints each page, the object raises its `QueryPageSettings` event. The program uses the following code to catch this event and prepare the next page for printing. This code determines whether the next page will be odd or even numbered and adjusts the page's margin appropriately to create the gutter.

```
' Set the margins for the following page.
Private Sub m_PrintDocument_QueryPageSettings(ByVal sender As Object, _
  ByVal e As System.Drawing.Printing.QueryPageSettingsEventArgs) _
  Handles m_PrintDocument.QueryPageSettings
    ' Use a 1 inch gutter (printer units are 100 per inch).
    Const gutter As Integer = 100

    ' See if the next page will be the first, odd, or even.
    If m_PagesPrinted = 0 Then
        ' The next page is the first.
        ' Increase the left margin.
        e.PageSettings.Margins.Left += gutter
    ElseIf (m_PagesPrinted Mod 2) = 0 Then
        ' The next page will be odd.
        ' Shift the margins right.
        e.PageSettings.Margins.Left += gutter
        e.PageSettings.Margins.Right -= gutter
    Else
        ' The next page will be even.
        ' Shift the margins left.
        e.PageSettings.Margins.Left -= gutter
        e.PageSettings.Margins.Right += gutter
    End If
End Sub
```

After each `QueryPageSettings` event, the `PrintDocument` object raises its `PrintPage` event to generate the corresponding page. The following code shows the most complicated part of the program, the `PrintPage` event handler:

```
' Print the next page.
Private Sub m_PrintDocument_PrintPage(ByVal sender As Object, _
  ByVal e As System.Drawing.Printing.PrintPageEventArgs) _
  Handles m_PrintDocument.PrintPage
    ' Increment the page number.
    m_PagesPrinted += 1

    ' Draw the margins (for debugging).
    'e.Graphics.DrawRectangle(Pens.Red, e.MarginBounds)

    ' Print the page number right justified
```

```vb
    ' in the upper corner opposite the gutter
    ' and outside of the margin.
    Dim x As Integer
    Using string_format As New StringFormat
        ' See if this is an odd or even page.
        If (m_PagesPrinted Mod 2) = 0 Then
            ' This is an even page.
            ' The gutter is on the right and
            ' the page number is on the left.
            x = (e.MarginBounds.Left + e.PageBounds.Left) \ 2
            string_format.Alignment = StringAlignment.Near
        Else
            ' This is an odd page.
            ' The gutter is on the left and
            ' the page number is on the right.
            x = (e.MarginBounds.Right + e.PageBounds.Right) \ 2
            string_format.Alignment = StringAlignment.Far
        End If

        ' Print the page number.
        Using the_font As New Font("Times New Roman", 20, _
          FontStyle.Regular, GraphicsUnit.Point)
            e.Graphics.DrawString(m_PagesPrinted.ToString, _
                the_font, Brushes.Black, x, _
                (e.MarginBounds.Top + e.PageBounds.Top) \ 2, _
                string_format)
        End Using ' the_font

        ' Draw the rest of the text left justified,
        ' wrap at words, and don't draw partial lines.
        string_format.Alignment = StringAlignment.Near
        string_format.FormatFlags = StringFormatFlags.LineLimit
        string_format.Trimming = StringTrimming.Word

        ' Draw some text.
        Dim paragraph_info As ParagraphInfo
        Dim ymin As Integer = e.MarginBounds.Top
        Dim layout_rect As RectangleF
        Dim text_size As SizeF
        Dim characters_fitted As Integer
        Dim lines_filled As Integer
        Do While m_ParagraphsToPrint.Count > 0
            ' Print the next paragraph.
            paragraph_info = DirectCast(m_ParagraphsToPrint(1), ParagraphInfo)
            m_ParagraphsToPrint.Remove(1)

            ' Get the area available for this paragraph.
            layout_rect = New RectangleF( _
                e.MarginBounds.Left, ymin, _
                e.MarginBounds.Width, _
                e.MarginBounds.Bottom - ymin)

            ' See how big the text will be and
```

```
                ' how many characters will fit.
                ' Get the font.
                Using the_font As New Font("Times New Roman", _
                  paragraph_info.FontSize, FontStyle.Regular, GraphicsUnit.Point)
                    text_size = e.Graphics.MeasureString( _
                        paragraph_info.Text, the_font, _
                        New SizeF(layout_rect.Width, layout_rect.Height), _
                        string_format, characters_fitted, lines_filled)

                    ' See if any characters will fit.
                    If characters_fitted > 0 Then
                        ' Draw the text.
                        e.Graphics.DrawString(paragraph_info.Text, _
                            the_font, Brushes.Black, _
                            layout_rect, string_format)

                        ' Debugging: Draw a rectangle around the text.
                        'e.Graphics.DrawRectangle(Pens.Green, _
                        '    layout_rect.Left, _
                        '    layout_rect.Top, _
                        '    text_size.Width, _
                        '    text_size.Height)

                        ' Increase the location where we can start.
                        ' Add a little interparagraph spacing.
                        ymin += CInt(text_size.Height + _
                            e.Graphics.MeasureString("M", the_font).Height / 2)
                    End If
                End Using ' the_font

                ' See if some of the paragraph didn't fit on the page.
                If characters_fitted < Len(paragraph_info.Text) Then
                    ' Some of the paragraph didn't fit.
                    ' Prepare to print the rest on the next page.
                    paragraph_info.Text = paragraph_info.Text. _
                        Substring(characters_fitted)
                    m_ParagraphsToPrint.Add(paragraph_info, Before:=1)

                    ' That's all that will fit on this page.
                    Exit Do
                End If
            Loop
        End Using ' string_format

        ' If we have more paragraphs, we have more pages.
        e.HasMorePages = (m_ParagraphsToPrint.Count > 0)
    End Sub
```

The `PrintPage` event handler starts by incrementing the number of pages printed. It then includes commented code to draw a rectangle around the page's margins. When you are debugging a printing routine, drawing this rectangle can help you see where your drawing is in relation to the page's margins.

Next, the routine creates a font for the page number. Depending on whether this page is odd or even numbered, it calculates an X coordinate halfway between the non-gutter margin and the edge of the

printable page. It sets a `StringFormat` object's `Alignment` property to make numbers in the left margin left-justified and to make numbers in the right margin right-justified. It then draws the page number at the calculated X position, halfway between the top margin and the paper's top printable boundary.

The program then prepares to draw the text for this page. It sets the `StringFormat` object's properties so that the text is left-justified and lines wrap at word boundaries instead of in the middle of words. It sets the `FormatFlags` property to `LineLimit`. If only part of a line of text would fit vertically on the page, this makes Visual Basic not draw the line rather than drawing just the top halves of its letters.

After this preparation, the program sets variable `ymin` to the minimum Y coordinate where the routine can draw text. Initially, this is the top margin. It then enters a `Do` loop to process as much text as will fit on the page.

Inside the loop, the program takes the first `ParagraphInfo` structure from the `m_ParagraphsToPrint` collection and makes a font that has the right size for that paragraph. It creates a `RectangleF` representing the remaining area on the page. This includes the area between the left and right margins horizontally, and between `ymin` and the bottom margin vertically.

The program then uses the `e.Graphics` object's `MeasureString` method to see how much space the next piece of text will need. It passes `MeasureString` the layout rectangle's size and the `StringFormat` object so that Visual Basic can decide how it will need to wrap the paragraph's text when it prints it. The code also passes in the variables `characters_fitted` and `lines_filled`. These parameters are passed by reference, so `MeasureString` can fill in the number of characters and lines it could draw within the allowed size.

The routine then checks `characters_fitted` to see if any characters will fit in the available area. If any characters can fit, the program draws the paragraph. Commented code draws a rectangle around the text to help with debugging. The program increases `ymin` by the paragraph's printed height plus half of the font's height to provide a break between paragraphs.

Next, the program determines whether the entire paragraph fits in the allowed area. If some of the paragraph did not fit, the program stores the remaining text in the `ParagraphInfo` structure and puts the structure back at the beginning of the `m_ParagraphsToPrint` collection so that it can be printed on the next page. It then exits the `Do` loop because the current page is full.

When the page is full or the `m_ParagraphsToPrint` collection is empty, the `PrintPage` event handler is finished. It sets `e.HasMorePages` to `True` if `m_ParagraphsToPrint` is not empty.

Finally, when the `PrintDocument` has finished printing the whole document, the following `EndPrint` event handler executes. This routine cleans up by setting the `m_ParagraphsToPrint` variable to `Nothing`, freeing up the collection object's memory. In this program, freeing the collection is a small matter. In a program that allocated more elaborate data structures, cleaning up in this event handler would be more important.

```
' Clean up.
Private Sub m_PrintDocument_EndPrint() Handles m_PrintDocument.EndPrint
    m_ParagraphsToPrint = Nothing
End Sub
```

Centering Printouts

The previous section explained how to handle a common scenario: printing large amounts of text. Another common scenario is printing a picture centered on the printed page. To do that, you must move the drawing vertically and horizontally to put it at the correct position. You can do this by using the `Graphics` object's `TranslateTransform` method. That method defines a translation transformation for all the graphics drawn by the object. After you set the transformation, you can draw any graphics as usual, and the `Graphics` object automatically moves them to the correct position.

The `CenterPictureInMargins` subroutine shown in the following code defines a translation transformation that centers an area within some specified bounds. The routine begins by calling the `Graphics` object's `ResetTransform` method to remove any transformations that may already be defined. Next, the routine calculates the horizontal and vertical offsets by which it must translate the rectangle `picture_bounds` so that it will be centered within the rectangle `margin_bounds`. It calls the `Graphics` object's `TranslateTransform` method to make the translation.

```
' Transform the Graphics object to center the rectangle
' picture_bounds within margin_bounds.
Private Sub CenterPictureInMargins(ByVal gr As Graphics, _
 ByVal picture_bounds As RectangleF, ByVal margin_bounds As RectangleF)
    ' Remove any existing transformation.
    gr.ResetTransform()

    ' Apply the transformation.
    Dim dx As Single = _
        margin_bounds.Left - picture_bounds.Left + _
        (margin_bounds.Width - picture_bounds.Width) / 2
    Dim dy As Single = _
        margin_bounds.Top - picture_bounds.Top + _
        (margin_bounds.Height - picture_bounds.Height) / 2
    gr.TranslateTransform(dx, dy)
End Sub
```

You can use subroutine `CenterPictureInMargins` to prepare the `e.Graphics` object provided by the `PrintPage` event handler to center a drawing on a printout. For example, the CenterPicture example program, which is available for download on the book's web site, uses the following `PrintPage` event handler code to draw a bar chart in the coordinate space 100 <= X <= 600, 100 <= Y <= 400. It begins with commented code that draws the page's margins for debugging purposes.

```
' Print the page.
Private Sub Print_PrintPage(ByVal sender As Object, _
 ByVal e As System.Drawing.Printing.PrintPageEventArgs)
    ' Draw the margins (for debugging). Be sure
    ' to do this before transforming the Graphics object.
    e.Graphics.DrawRectangle(Pens.Red, e.MarginBounds)

    ' This routine draws a bar chart for 5 values
    ' in printer coordinates between
    ' (100, 100) - (600, 400).
    ' Transform the Graphics object to center the results.
    Dim picture_rect As New RectangleF(100, 100, 600, 400)
```

```
      Dim margin_rect As New RectangleF( _
          e.MarginBounds.X, _
          e.MarginBounds.Y, _
          e.MarginBounds.Width, _
          e.MarginBounds.Height)
      CenterPictureInMargins(e.Graphics, picture_rect, margin_rect)

      ' Draw a rectangle around the chart.
      e.Graphics.FillRectangle(Brushes.LightGray, picture_rect)
      e.Graphics.DrawRectangle(Pens.Black, Rectangle.Round(picture_rect))

      ' Draw the values.
      Dim x As Integer = 100
      DrawBar(e.Graphics, x, 200, HatchStyle.BackwardDiagonal)
      DrawBar(e.Graphics, x, 280, HatchStyle.Vertical)
      DrawBar(e.Graphics, x, 240, HatchStyle.ForwardDiagonal)
      DrawBar(e.Graphics, x, 170, HatchStyle.Horizontal)
      DrawBar(e.Graphics, x, 290, HatchStyle.DiagonalCross)

      ' There are no more pages.
      e.HasMorePages = False
   End Sub

   ' Draw a bar in (x, 400)-(x + 100, 400 - hgt).
   Private Sub DrawBar(ByVal gr As Graphics, ByRef x As Integer, _
    ByVal hgt As Integer, ByVal hatch_style As HatchStyle)
      Dim rect As New Rectangle(x, 400 - hgt, 100, hgt)
      Using hatch_brush As New HatchBrush(hatch_style, Color.Black, Color.White)
          gr.FillRectangle(hatch_brush, rect)
      End Using
      gr.DrawRectangle(Pens.Black, rect)
      x += 100
   End Sub
```

The code defines rectangles representing the area in which it will draw and the printed page's margin bounds. It passes those rectangles to the `CenterPictureInMargins` subroutine to prepare the `Graphics` object for centering.

Next, the program fills the picture area's rectangle with light gray and outlines it in black. It then calls subroutine `DrawBar` several times to draw five values for the bar chart. The event handler sets `e.HasMorePages` to `False` and ends.

Subroutine `DrawBar` draws a rectangle for the bar chart. It draws its rectangle at the X coordinate passed as a parameter, making it 100 units wide and `hgt` units tall. It fills the rectangle with a hatch pattern and then outlines it in black. The subroutine finishes by adding 100 to `x`, so the next call to `DrawBar` draws a rectangle to the right.

Figure 34-5 shows program CenterPicture in action. You can see in the picture that the bar chart is centered within the margins.
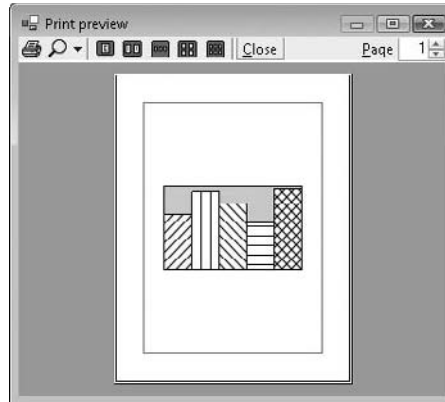
Figure 34-5: Subroutine CenterPictureInMargins makes it easy to center a picture within a printed page.

Fitting Pictures to the Page

Another common scenario is drawing a picture as large as possible on the page without distorting it. You can use the same approach to this problem that was described in the previous section: Apply a transformation to the `PrintPage` event handler's `Graphics` object to make the picture fit the printed page.

The subroutine `FitPictureToMargins` shown in the following code makes this transformation. It begins by calling the `Graphics` object's `ResetTransform` method to remove any existing transformation. Next the subroutine translates to center the `picture_bounds` rectangle at the origin. Scaling an object centered at the origin is relatively simple because the object's center remains at the origin, so the program starts by centering `picture_bounds`.

```
' Transform the Graphics object to fit the rectangle
' picture_bounds to margin_bounds and center it.
Private Sub FitPictureToMargins(ByVal gr As Graphics, _
 ByVal picture_bounds As RectangleF, ByVal margin_bounds As RectangleF)
    ' Remove any existing transformation.
    gr.ResetTransform()

    ' Translate to center picture_bounds at the origin.
    gr.TranslateTransform( _
        -(picture_bounds.Left + picture_bounds.Width / 2), _
        -(picture_bounds.Top + picture_bounds.Height / 2))

    ' Scale to make picture_bounds fit margin_bounds.
    ' Compare the aspect ratios.
    Dim margin_aspect As Single = margin_bounds.Height / margin_bounds.Width
```

```
    Dim picture_aspect As Single = _
        picture_bounds.Height / picture_bounds.Width
    Dim scale As Single
    If picture_aspect > margin_aspect Then
        ' picture_bounds is relatively tall and thin.
        ' Make it as tall as possible.
        scale = margin_bounds.Height / picture_bounds.Height
    Else
        ' picture_bounds is relatively short and wide.
        ' Make it as wide as possible.
        scale = margin_bounds.Width / picture_bounds.Width
    End If
    ' Scale.
    gr.ScaleTransform(scale, scale, MatrixOrder.Append)

    ' Translate to move the origin to the center of margin_bounds.
    gr.TranslateTransform( _
        margin_bounds.Left + margin_bounds.Width / 2, _
        margin_bounds.Top + margin_bounds.Height / 2, _
        MatrixOrder.Append)
End Sub
```

The program compares aspect ratios (ratios of height/width) of the `picture_bounds` and `margin_bounds` rectangles. If `picture_bounds` has the greater aspect ratio, then it is relatively taller and thinner than `margin_bounds`. In that case, the program scales to make `picture_bounds` the same height as `margin_bounds` and sets its width appropriately.

If `picture_bounds` has the smaller aspect ratio, it is relatively wider and shorter than `margin_bounds`. In that case, the program scales to make `picture_bounds` the same width as `margin_bounds` and sets its height accordingly.

After calculating the scale factor it needs, the program calls the `Graphics` object's `ScaleTransform` method to add it to the `Graphics` object's transformation. It uses the `MatrixOrder.Append` parameter to make the object apply the scaling transformation after its first translation.

Finally, the subroutine applies another translation to move the center of the scaled `picture_bounds` rectangle from the origin to the center of `margin_bounds`. It again uses the `MatrixOrder.Append` parameter, so the new transformation is applied after the previous ones.

A program can use subroutine `FitPictureToMargins` exactly as it can use subroutine `CenterPictureInMargins`. Example program FitToMargins, which is available for download on the book's web site, uses this subroutine to draw the bar chart shown in Figure 34-6. This routine works whether the drawing's area is relatively short and wide (as in this case) or tall and thin. It will also shrink a picture that is bigger than the page.
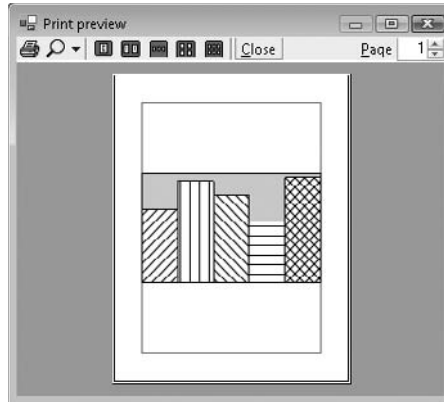
Figure 34-6: Subroutine FitPictureToMargins makes it easy to center a picture within a printed page, making it as large as possible without distortion.

Simplifying Drawing and Printing

Many applications draw some graphics, possibly with some user interaction, and then later print the same graphics, perhaps centered and scaled to fit the page.

You can make this process easier if you move all of the program's drawing code into subroutines that are independent of the drawing or printing surface. These drawing routines should take as a parameter a Graphics object on which to draw. Then it doesn't matter whether the program passes these routines the Graphics object provided by a PrintPage event handler or a control's Paint event handler. They can even use a Graphics object generated by the control's CreateGraphics method.

The DrawGraphics subroutine shown in the following code encapsulates the drawing code used in the previous sections. It takes a Graphics object as a parameter, draws a background on it, and calls DrawBar to draw five hatched rectangles to form a bar chart.

```
' Draw the bar chart with world coordinate bounds (100, 100)-(600, 400).
Private Sub DrawGraphics(ByVal gr As Graphics)
    ' Draw a rectangle around the chart.
    Dim picture_rect As New Rectangle(100, 100, 500, 300)
    gr.FillRectangle(Brushes.LightGray, picture_rect)
    gr.DrawRectangle(Pens.Black, picture_rect)

    ' Draw the values.
    Dim x As Integer = 100
```

```
        DrawBar(gr, x, 200, HatchStyle.BackwardDiagonal)
        DrawBar(gr, x, 280, HatchStyle.Vertical)
        DrawBar(gr, x, 240, HatchStyle.ForwardDiagonal)
        DrawBar(gr, x, 170, HatchStyle.Horizontal)
        DrawBar(gr, x, 290, HatchStyle.DiagonalCross)
    End Sub
```

Now the `PrintPage` event handler and other code can call this subroutine to draw the program's graphics. The following code shows how a program can use this routine to draw the bar chart on a `PictureBox` named `picCanvas`. The control's `Resize` event handler invalidates the control, so the `Paint` event handler can redraw the entire surface. The control's `Paint` event handler clears the `PictureBox`, calls `FitPictureToMargins` to fit the bar chart to the `PictureBox`'s surface (minus a 3-pixel margin), and calls `DrawGraphics` to draw the bar chart.

```
    Private Sub picCanvas_Resize() Handles picCanvas.Resize
        picCanvas.Invalidate()
    End Sub
    Private Sub picCanvas_Paint(ByVal sender As Object, _
     ByVal e As System.Windows.Forms.PaintEventArgs) Handles picCanvas.Paint
        ' Clear the picture.
        e.Graphics.Clear(picCanvas.BackColor)

        ' This routine draws a bar chart for 5 values
        ' in printer coordinates between
        ' (100, 100) - (600, 400).
        ' Transform the Graphics object to center the results.
        Dim picture_rect As New RectangleF(100, 100, 500, 300)
        Dim margin_rect As New RectangleF( _
            picCanvas.ClientRectangle.X + 3, _
            picCanvas.ClientRectangle.Y + 3, _
            picCanvas.ClientRectangle.Width - 6, _
            picCanvas.ClientRectangle.Height - 6)
        FitPictureToMargins(e.Graphics, picture_rect, margin_rect)

        ' Draw the bar chart.
        DrawGraphics(e.Graphics)
    End Sub
```

Example program PictureBoxPrint, shown in Figure 34-7 and available for download on the book's web site, uses this code to draw a bar chart in a `PictureBox` and in a print preview dialog.

This technique minimizes the amount of drawing code. It lets the program share the same code for drawing, printing, and print previewing. That means less code to debug and maintain. It also means that you need only to modify the code in one place if you need to change it later.
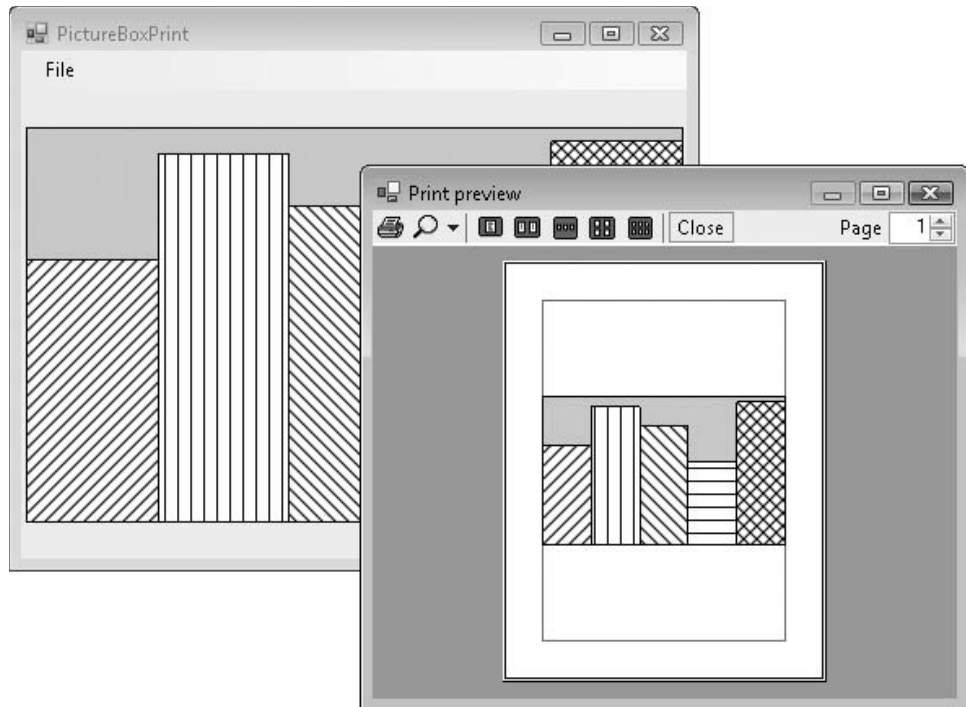
Figure 34-7: A program can use subroutine FitPictureToMargins to make a picture fit a PictureBox as well as a printed page.

By calling `FitPictureToMargins`, the program makes the bar chart fill the `PictureBox` as much as possible without distorting it. If the control is anchored or docked so that it resizes when the form does, the bar chart also resizes so that it is as big as possible, a fairly impressive feat at the cost of a single subroutine call.

Although very useful, the technique of using a common routine to draw and print graphics is not appropriate for every application. Sometimes a program must take advantage of the particular characteristics of a printer or screen object, and the results may not make sense for other types of devices.

For example, suppose that a program draws fractals by performing time-consuming calculations for each pixel. It may make sense to show the results as the pixels are calculated on the screen. That would take advantage of the fact that the user can immediately see the results of pixels drawn on the screen. On the printer, however, the results aren't visible until the complete page is printed, so sending pixels to the printer one at a time doesn't particularly help the user and may slow printing. It would make more sense to draw the complete image on a `Bitmap` in memory and then send the result to the printer all at once by using the `Graphics` object's `DrawImage` method.

Similarly, the text-printing example described earlier in this chapter prints a long series of paragraphs broken across several pages. It takes advantage of the printed page's exact size and margins. You might be able to display the same page data in a scrolling window on the screen, but that probably wouldn't make much sense. In that application, trying to force screen drawing and page printing routines to

produce exactly the same result would probably be a waste of time. It would be much easier and just as effective to display the text on the screen in a print preview control or dialog.

Summary

The `PrintDocument` object sits at the heart of the standard Visual Basic printing process. A program makes a `PrintDocument` object and then responds to its `BeginPrint`, `QueryPageSettings`, `PrintPage`, and `EndPrint` events to generate a printout.

The `PrintDocument` object's `Print` method immediately generates a printout. You can also attach the `PrintDocument` to a `PrintDialog`, `PrintPreviewDialog`, or `PrintPreviewControl` and use those objects to display previews and generate printouts.

This chapter described printing in general. Using the `Graphics` object provided by the `PrintDocument` object's `PrintPage` event, you can print lines, curves, text, images, and anything else you can draw to the screen.

Appendix I, "Visual Basic Power Packs," describes some additional tools that you can download for free. The Printer Compatibility Library and the PrintForm component give you new options for printing. See Appendix I for more information.

My book *Expert One-on-One Visual Basic Design and Development* (Stephens, Wrox, 2005) includes a chapter on printing that explains how to print images of forms much as the PrintForm Power Pack component does. It also shows how to wrap text so it flows around images on a printed page and how to use metafiles to let a program print procedurally rather than by responding to events. For more information, see the book's web site at `www.wrox.com` or `www.vb-helper.com/one_on_one.htm`.

One particular kind of printing is very common in business applications: reporting. Although you can use the general printing techniques described in this chapter to draw your own reports, Visual Studio 2008 Professional Edition comes with a tool that simplifies many reporting tasks: Crystal Reports.

Crystal Reports can help you build, format, display, and print reports. It can automatically load data from a database and display it in tabular form complete with headers, sections, totals, subtotals, and graphs. Chapter 35, "Reporting," introduces Crystal Reports.

Reporting

Visual Studio 2008 Professional Edition and the higher editions come with Crystal Reports for Visual Studio 2008. Crystal Reports is a product that helps you build, display, and print reports in Visual Basic applications.

Crystal Reports is a large and complex application that provides a huge number of wizards, formats, charts, and other tools for building reports, so there isn't enough room here to do it justice. This chapter provides a quick introduction to using Crystal Reports to build a few simple examples. For more detailed information about particular topics, consult the online help at `msdn2 .microsoft.com/en-us/library/aa287920(VS.71).aspx`. The help includes several examples that show how to make reports with certain common formats.

You may also want to visit the web site of Business Objects (the makers of Crystal Reports) at `www.businessobjects.com` and their web page for Crystal Reports `www.businessobjects .com/products/reporting/crystalreports/default.asp`.

For more in-depth information, read a book that covers only Crystal Reports. Quite a few books about Crystal Reports are available for developers with all levels of experience, including *Professional Crystal Reports for Visual Studio .NET* (Wiley Publishing, Inc., 2004).

Report Objects

Normally, when you think of a report, you probably think of some sort of physical output, either on a computer screen or on paper. In Crystal Reports, a `Report` object represents the information needed to generate a report. It determines which fields are selected from what data source, how the fields are arranged and summarized, and any text that is displayed on the result.

A report is stored in a file with an `.rpt` extension. This file can be either included inside the application or loaded from a separate file. Each of these approaches has its advantages. Embedding a report in an application makes using and distributing the application somewhat easier. On the other hand, if an application loads a report from an external file, you can modify or replace the report file without recompiling the application.

At runtime, a program can attach a report (either internal or external) to a data source and then use a `CrystalReportViewer` control to display the result. This control provides tools that enable the

user to move between the report's different pages, zoom in and out, navigate through report groups using a tree view, view sub-reports, print or export the report, and so forth.

Building a Report

This section describes a simple example that uses an internal report to display student test scores. The report's data is taken from an Access database containing two tables.

The Students table contains the fields LastName, FirstName, and StudentId. The Scores table contains the fields StudentId, TestNumber, and Score. The StudentId field provides the link between the two tables.

Figure 35-1 shows the desired result. Each student's scores are grouped in a separate section that ends with the student's average score. The report as a whole ends by displaying the class average.

To build the example program, start a new Windows Forms application project. First you must define the report. Open the Project menu and select the Add New Item command. Select the Crystal Report template, enter a meaningful name for the report file such as `StudentTestScores.rpt`, and click Add.
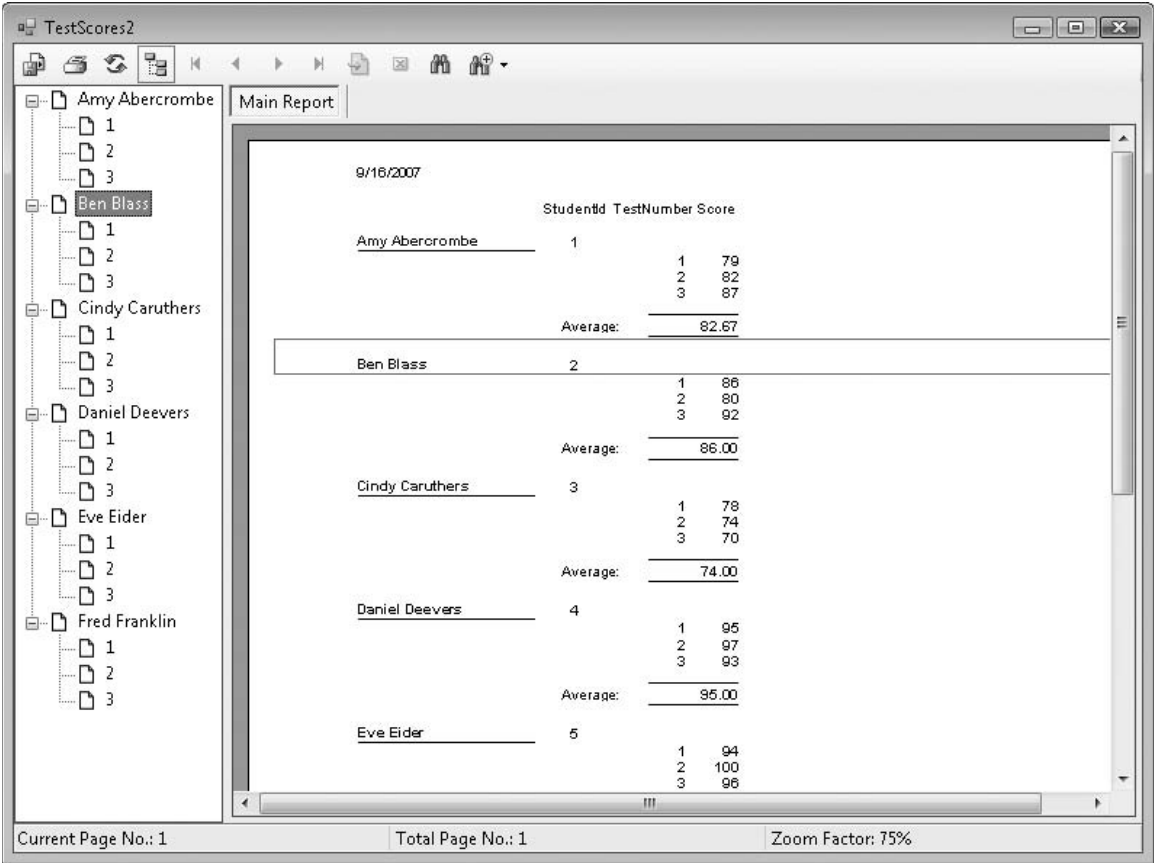
Figure 35-1: This report displays students' test scores.

When you click Add, the Crystal Reports Gallery shown in Figure 35-2 appears. You can use the gallery to build a blank report, a report based on an existing report, or a report built by a wizard. For this example, select the Using the Report Wizard option and the Standard expert, and click OK.
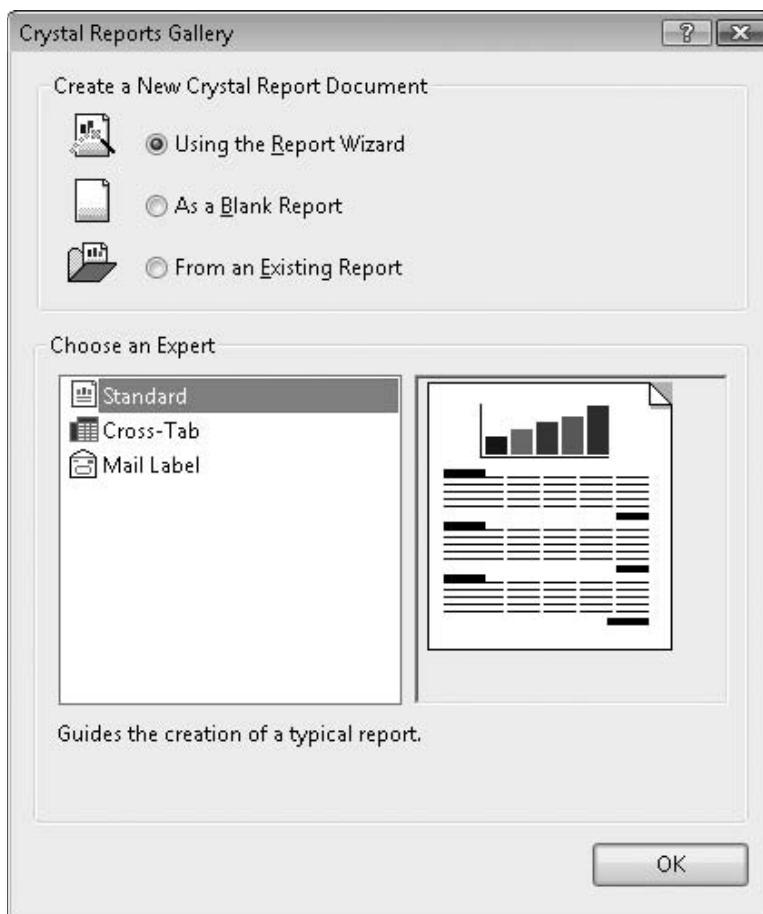
Figure 35-2: Select the report type from the Crystal Reports Gallery.

The Standard Report Creation Wizard, shown in Figure 35-3, starts by letting you define the report's data source. Use the Available Data Sources display on the left to select the data source. To create a new data source, open the Create New Connection item. Then expand the appropriate connection type.

For this example, which uses an Access database, you would click the Database Files item. If that item does not already contain any references to databases, clicking it displays a file selection dialog box that lets you select a database file. If the Database Files entry contains databases, select one or double-click the Find Database File item to look for a database.
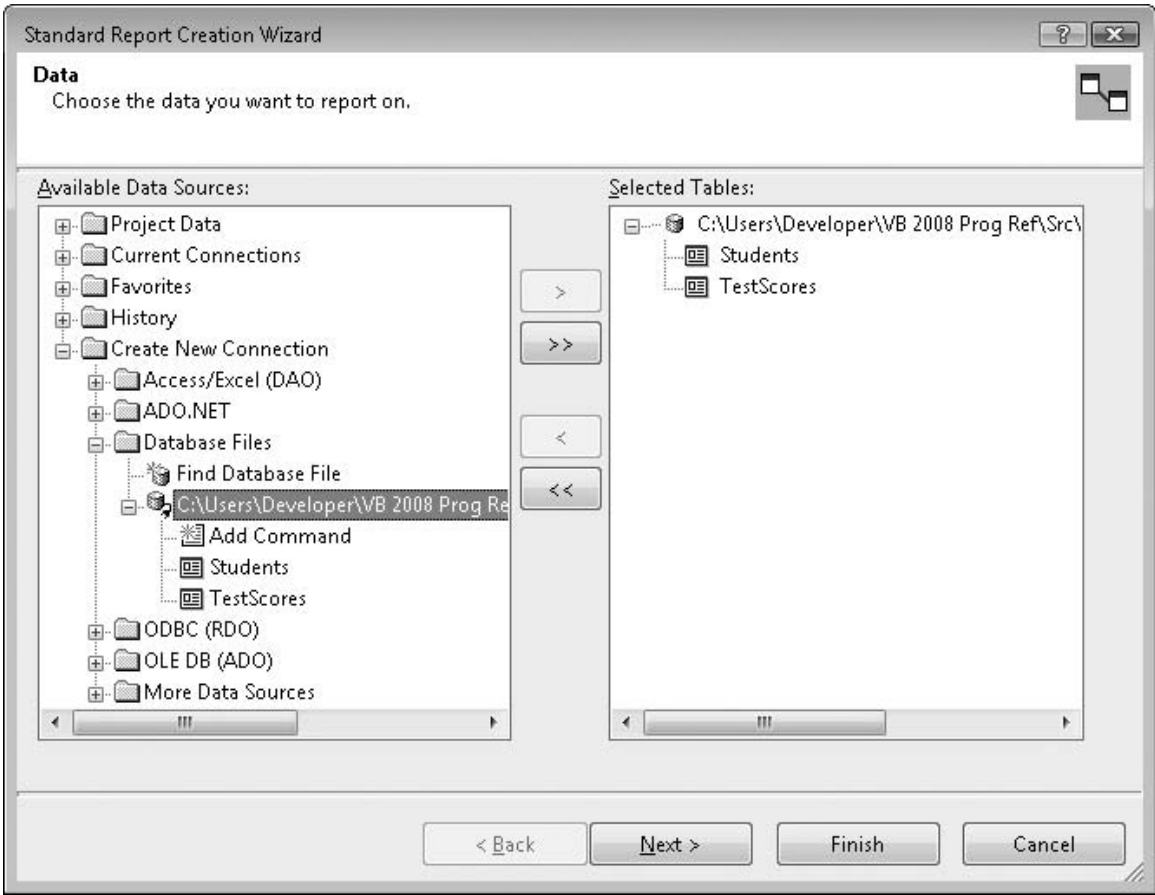
Figure 35-3: The Standard Report Creation Wizard's Data step lets you define the report's data source.

Expand the data source that you want to use for the report. Select the tables that you want to use and click the right-pointing arrow buttons to select the tables. In Figure 35-3, I selected the highlighted database file and then clicked the double right arrow button to move all of its tables into the selected list.

After you finish selecting tables, click the Next button to see the link diagram shown in Figure 35-4. Drag the tables into convenient positions. Then click and drag the StudentId field from the Students table onto the StudentId field in the TestScores table. This defines the relationship between the two tables. If you click Auto-Arrange, the wizard will rearrange the tables to make the diagram look nice.

Click Next to see the Fields page shown in Figure 35-5. Select the fields that you want to display and click the > button to move them to the Fields to Display list. In Figure 35-5, the Students table's FirstName, LastName, and StudentId fields are selected, together with the TestScores table's TestNumber and Score fields. The TestScores table's StudentId field is not selected because it duplicates the value in the Students table's StudentId field.
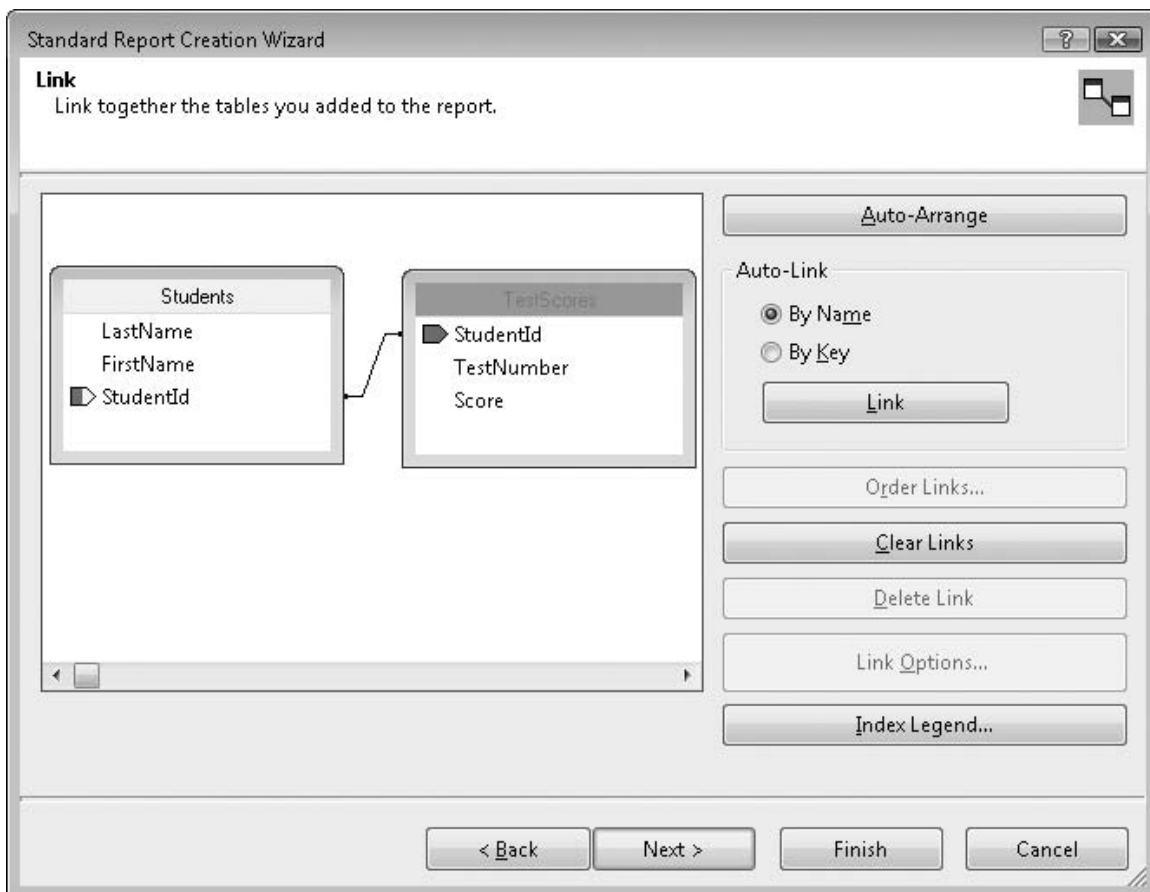
Figure 35-4: Use the Link page to define links between tables.
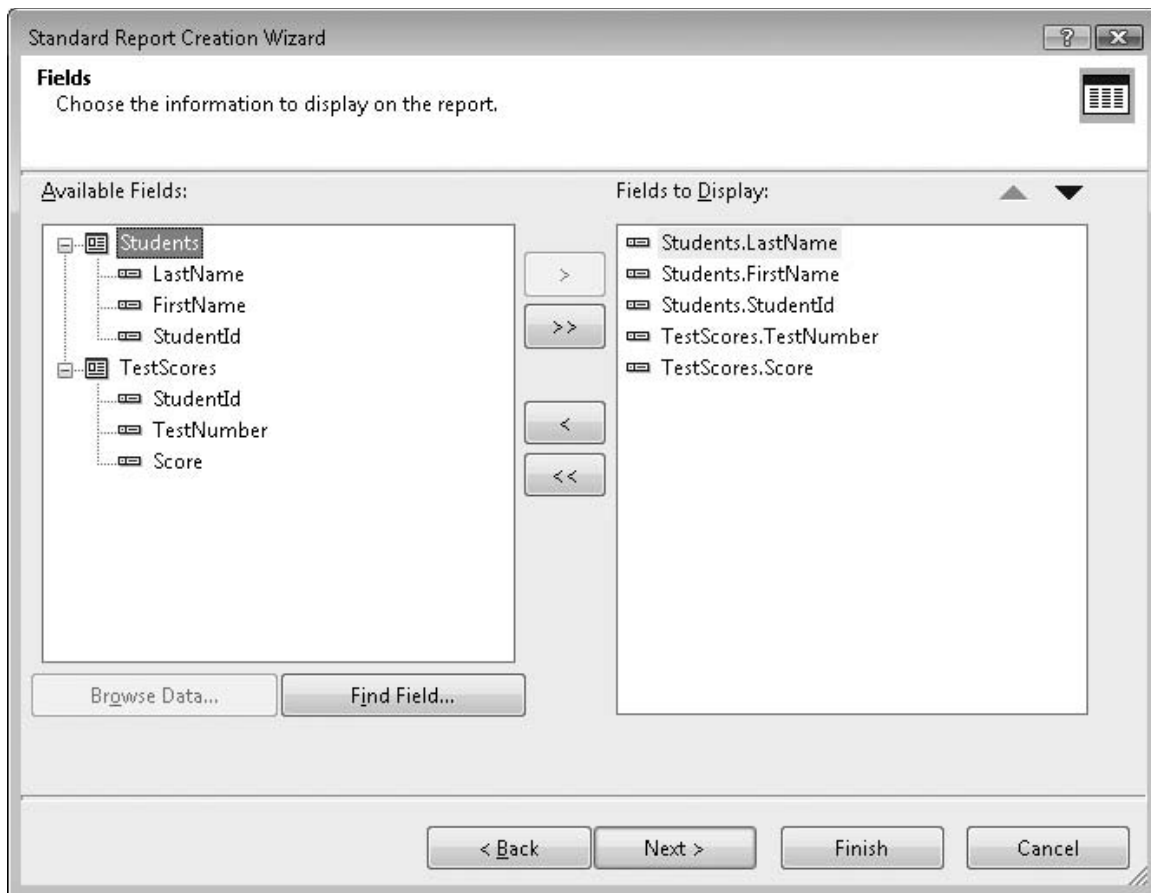
Figure 35-5: Use the Fields page to select the fields displayed by the report.

When you click Next, the wizard displays the Grouping page shown in Figure 35-6. Here, you can select fields that should be used to group results. In Figure 35-6, the Students.StudentId field has been selected as the primary group. When the report runs, it will group together all of the records for each student. The figure also selects the TestScores.TestNumber field. This ensures that the values in this field will be sorted so each student's test results are sorted by test number.

Click Next to display the Summaries page shown in Figure 35-7. This page lets you add summary information to the report. Initially, the page displays some rather odd selections including the sums of the StudentId, TestScore, and TestNumber values. It's hard to imagine wanting to add up all of the student IDs or test numbers.
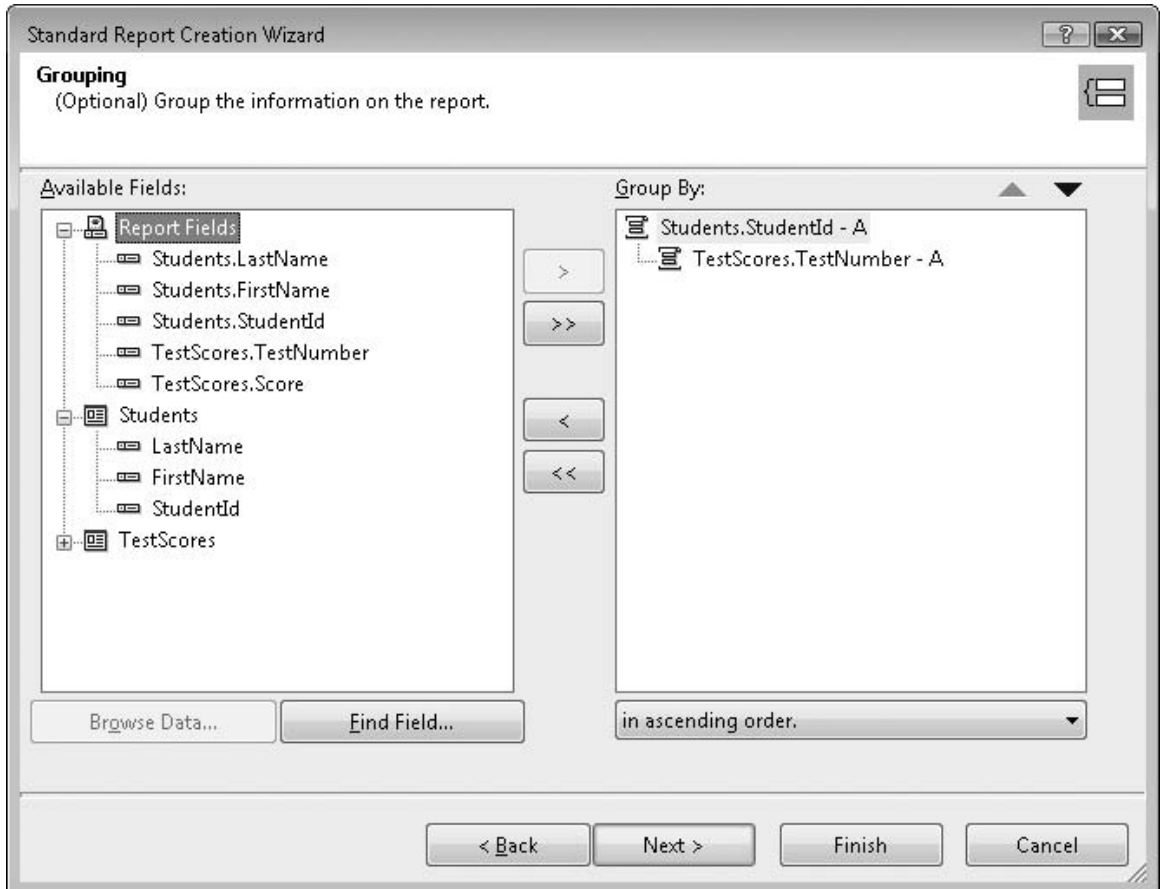
Figure 35-6: Use the Grouping page to determine how the report groups records.
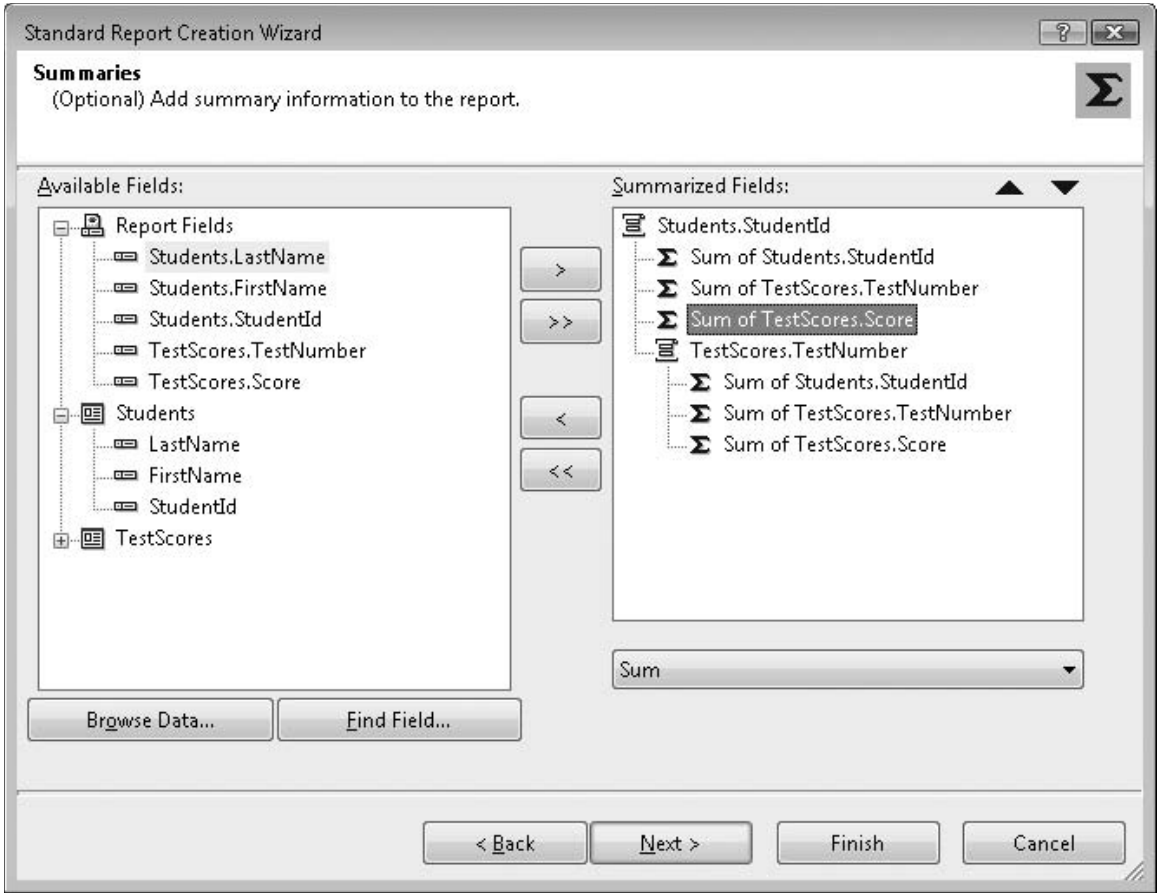
Figure 35-7: The Summaries page lets you add summary information to the report.

In the upper group, select the sum of TestScores.Score and use the dropdown on the lower right to select Average instead of Sum. Remove the other summary fields.

Click Next to display the Group Sorting page shown in Figure 35-8. You can use this page to sort groups based on their summary data. For example, you could sort students based on their average test scores. This example doesn't sort the groups by summary data, so they will appear sorted by the group field StudentId. (Go back to Figure 35-6 and note that the dropdown on the lower right says that the group will be sorted in ascending order.)
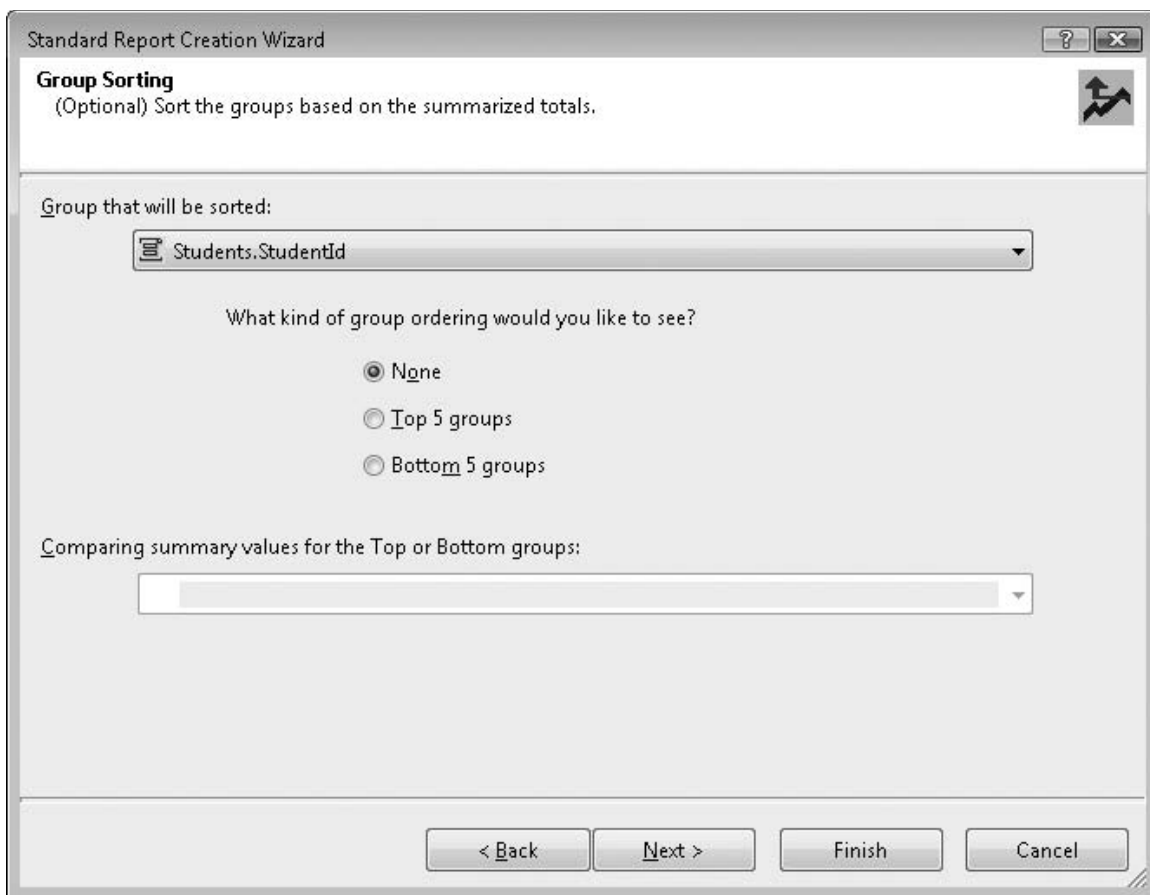
Figure 35-8: Use the Group Sorting page to sort the items in groups.

When you click Next, the wizard displays the Chart page shown in Figure 35-9. Select the type of chart you want to add to the report. Figure 35-9 is shown selecting a bar chart, but this example assumes that you don't want any chart, so select the No Chart option before continuing.

After you select a chart type, click Next to display the Record Selection page shown in Figure 35-10. This page lets you filter the records that are selected for the report. Move the fields you want to use to select records to the list on the right. Pick the selection operator you want to use in the dropdown below the list. If the operator requires extra data, additional fields appear below the dropdown.

For example, in Figure 35-10 the selection operator is "is less than or equal to." When you select this operator, another drop-down list appears to let you enter a value to compare to the Students.LastName field. The wizard populates the drop-down list with Students.LastName values taken from the database.

Figure 35-10 shows a record selection field selected, but this example assumes that you want all of the records, so remove this field before you continue.

When you click Next, the wizard displays its final page, the Report Style page shown in Figure 35-11. Select a style and click Finish.
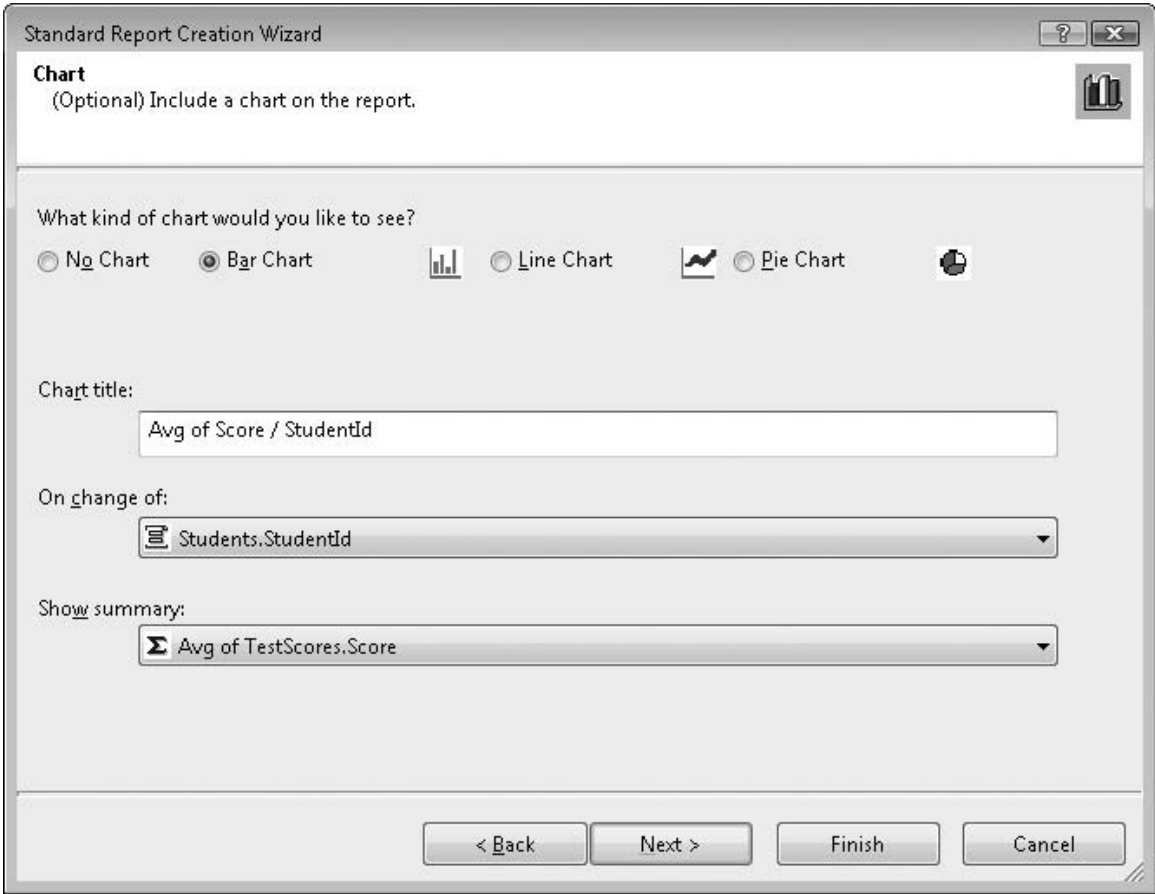
Figure 35-9: Indicate the kind of chart you want to add to the report, if any.
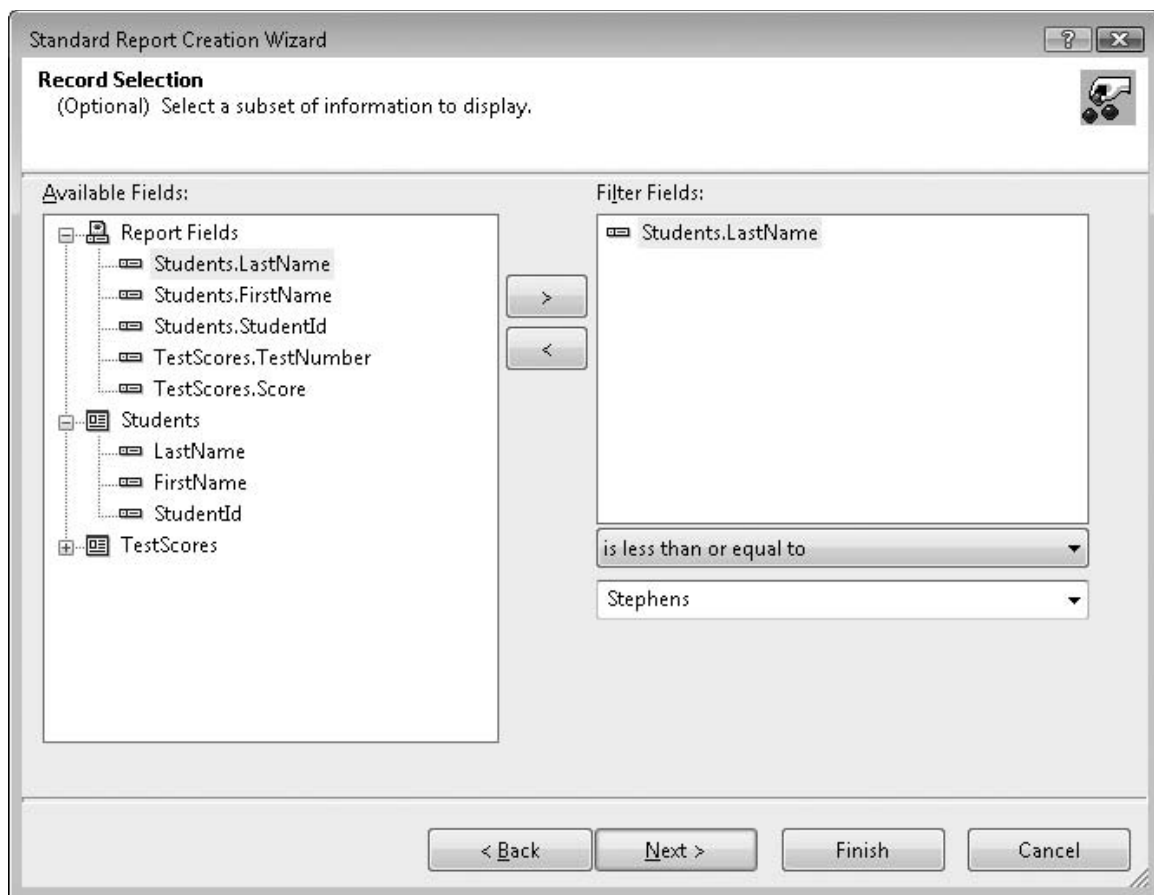
Figure 35-10: Use the Record Selection page to filter the records included in the report.

Figure 35-12 shows the resulting report in the development environment. The horizontal gray bars indicate the report's different sections. These include report headers and footers, page headers and footers, group headers and footers, and a details section inside the innermost group.
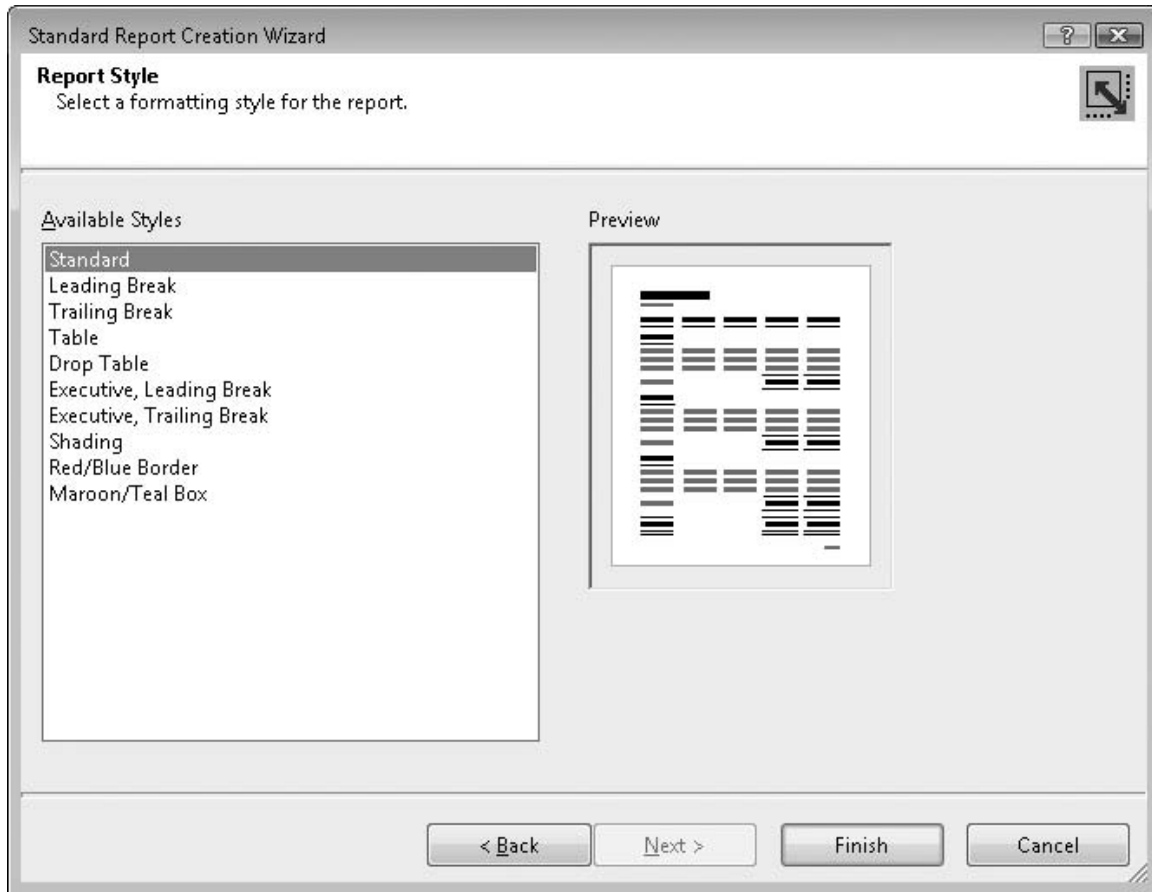
Figure 35-11: The Report Style page lets you pick report formatting options.

Within each section, text surrounded by brackets indicates labels and text fields on the report. When the report executes, it will fill these in with values taken from the database.

Later you may need to change the data source for a report. For example, if you install this book's source code that is available for download on the book's web site, you may want to place the code in a location other than the one I used when I wrote the example programs. In that case, you'll need to tell the report where to find the database.
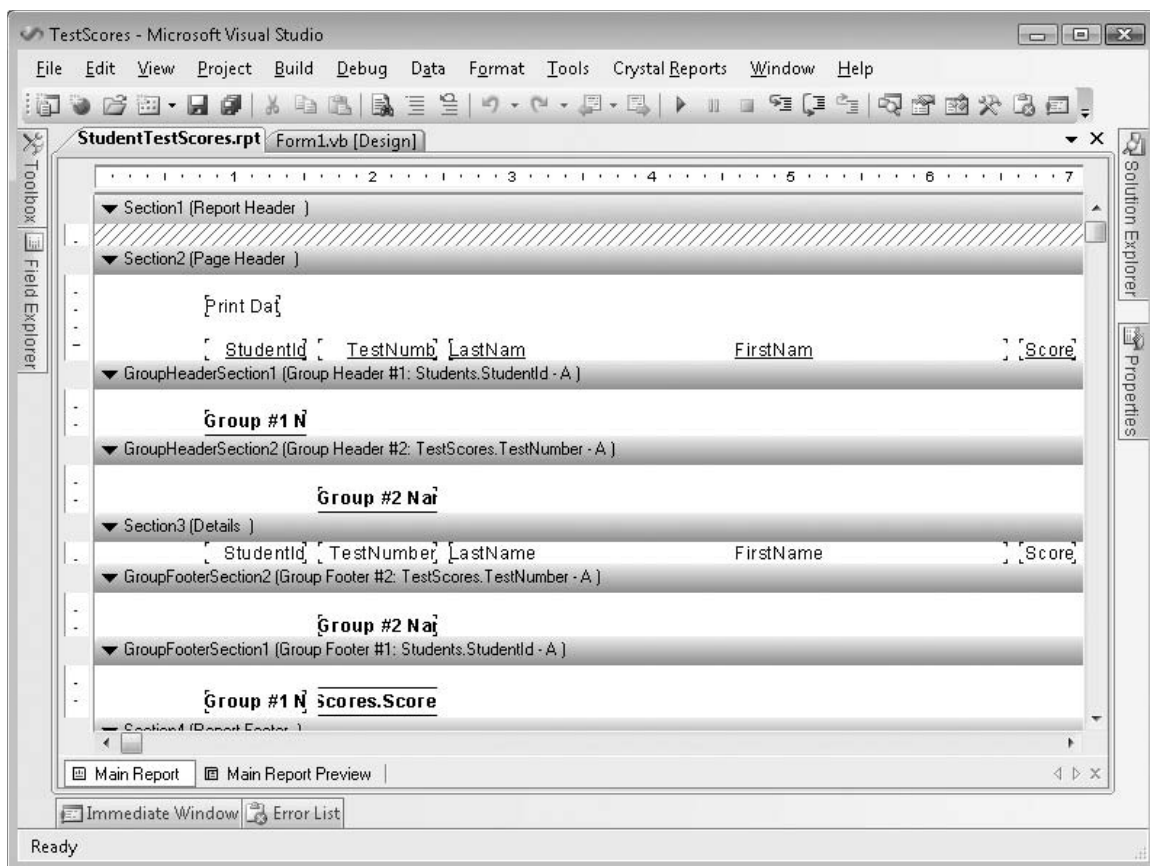
Figure 35-12: You can modify the report in the development environment.

To do that, double-click the report in Solution Explorer to open it. Right-click the report, open the Database submenu, and select the Set Datasource Location command to open the dialog box shown in Figure 35-13. The bottom area lets you select the new data source much as you initially selected it in Figure 35-3. Select the new data source and click the Update button.
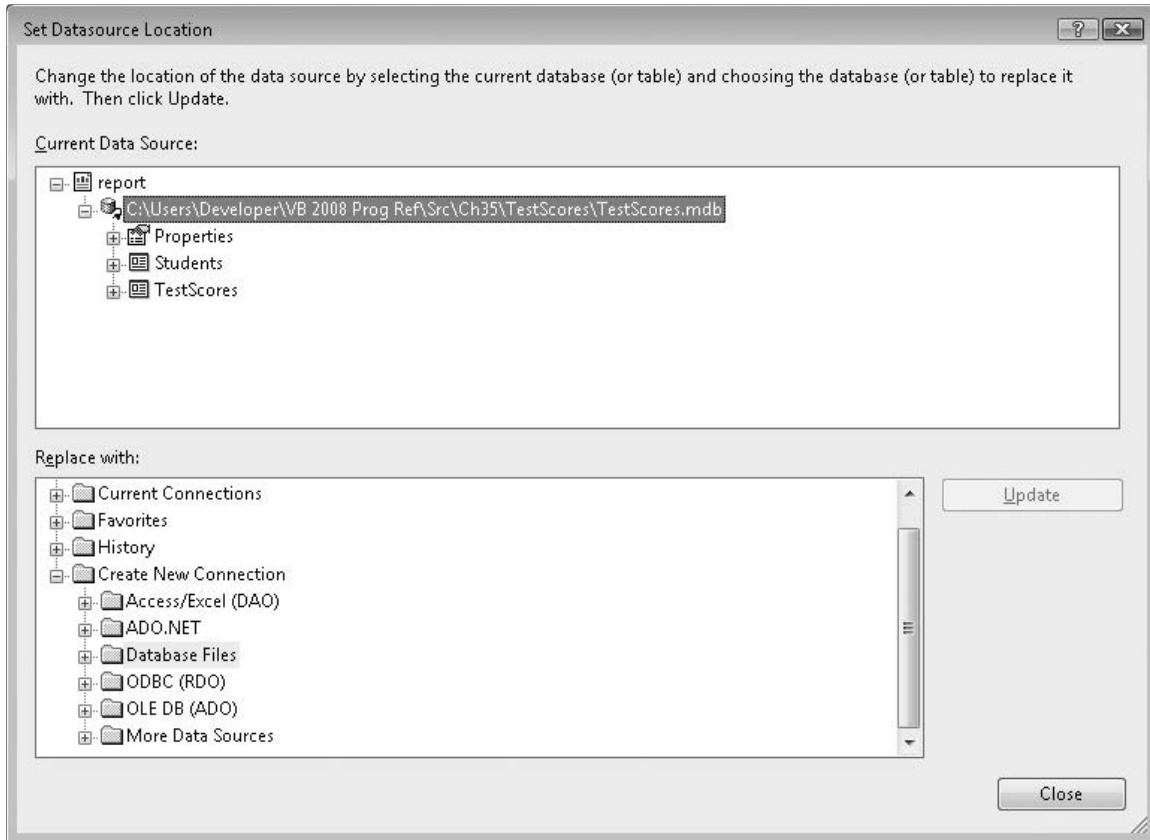
Figure 35-13: This dialog box lets you change a report's data source.

CrystalReportViewer

At this point, the report is ready to generate output, but you still need to display the result somehow. One way to view the report is using a `CrystalReportViewer` control.

Open a form, select the Toolbox's Crystal Reports section, and add a `CrystalReportViewer` control to the form. Select the control, open the Properties window, click the control's `ReportSource` property, and click the drop-down arrow on the right. Select the entry labeled TestScores.StudentTestScores. Here TestScores is the project's namespace and StudentTestScores is the name of the report you created in the previous section. (You can download the TestScores example program on the book's web site.)

When you select this entry, Visual Basic creates an instance of the report, adds it to the form's component area, and attaches the `CrystalReportViewer` control to the new instance so the `CrystalReportViewer` displays the report. If you run the program now, you will see a result similar to the one shown in Figure 35-14.
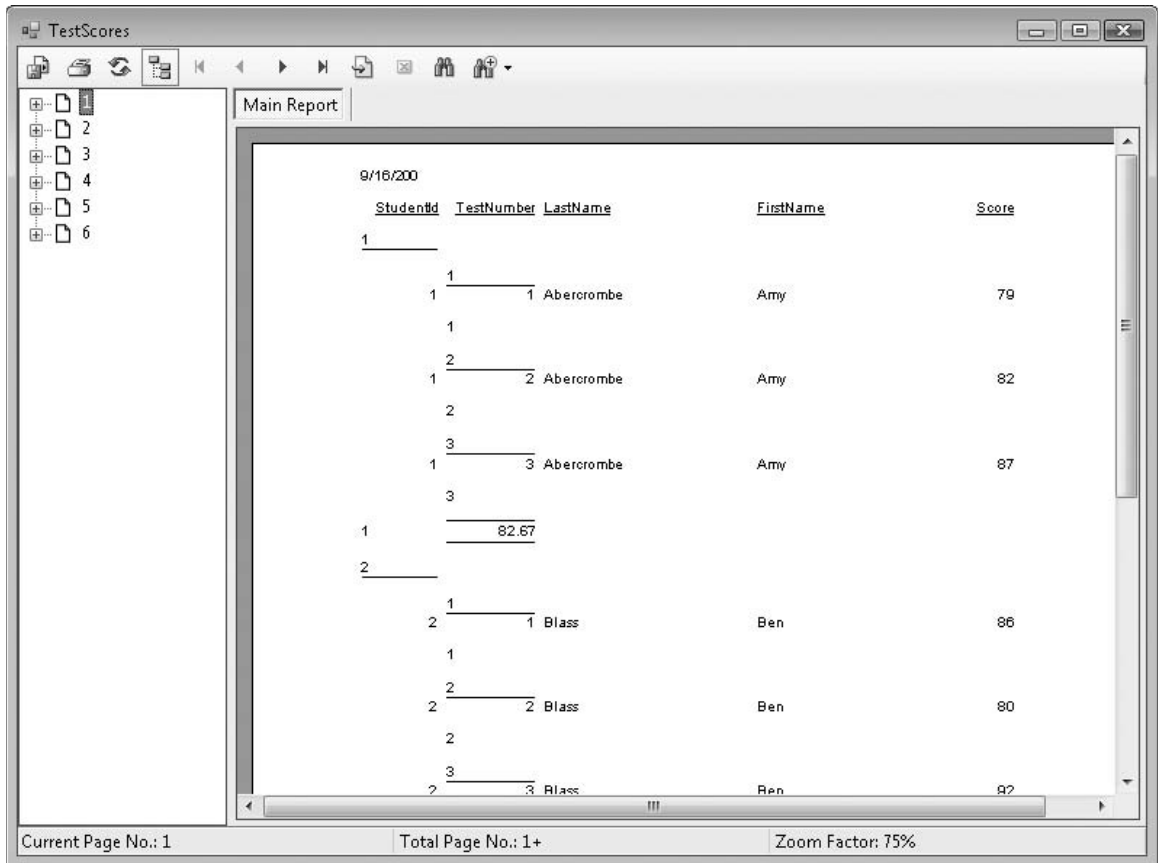
Figure 35-14: The initial report may need some formatting changes.

Customizing a Report

If you look closely at Figure 35-14, you can probably think of several ideas for improving the report. Although the StudentId field groups records, it is probably not the value that you would use to locate a student's records. It would be more convenient to display the students' names instead.

The StudentId, LastName, and FirstName fields are repeated for every detail row, even though they are the same for each StudentId group.

The report also has some basic arrangement problems. The date field in the upper-left corner is too small to show the entire date. Each student's average test score is shown, but the label to the left is the

student's ID, not something meaningful. The average would also look better aligned below the students' scores. Finally, the columns are a lot wider than they probably need to be, making it hard to read the whole report.

Fortunately, it's relatively easy to customize the report. The basic idea is similar to using the Visual Studio development environment to customize a Windows Form. The Toolbox provides tools that you can place on the report just as you place controls on a form. When you select an object on the report, you can view and modify the object's properties in the Properties window.

Although the basic idea is the same, some of the details are different. For example, you cannot change a Text Object's text in the Properties window. Instead you need to right-click the object, select the Edit Text Object command, and type the new text directly on the report.

Other properties have names that differ from those used by Visual Basic. For example, the `HorAlignment` property determines the object's horizontal alignment instead of the Visual Basic `Alignment` property, the `TextColor` property determines the field's color instead of the Visual Basic `ForeColor` property, the `Width` and `Height` properties determine the object's size instead of the Visual Basic `Size` property, and the `Width` and `Height` properties measure distances in twips (1440th of an inch) instead of pixels.

The details are different, but the ideas should be familiar to you, and you should be able to achieve the effects you want with a little experimentation.

To make this example report easier to read, start by opening the report in the development environment. Click the Print Date field in the page header and use its drag handles to make the field wide enough to display the full date.

To change the text displayed by the first group from StudentId to the students' names, right-click the Group Header #1 bar at the top of the first group and select the Group Expert command to display the Group Expert dialog box shown in Figure 35-15.

Select the Students.StudentId field in the list on the right and click the Options button to see the dialog shown in Figure 35-16.

Select the Options tab and select the Customize Group Name Field check box. Select the Use a Formula as Group Name option. Next click the X+2 button to the option button's right to display the Formula Workshop shown in Figure 35-17.

From the Formula Workshop's field tree (the second tree from the left with the LastName field highlighted), drag the Students.FirstName and Students.LastName fields into the text box at the bottom. Add text to concatenate a space between the two fields as shown in Figure 35-17.
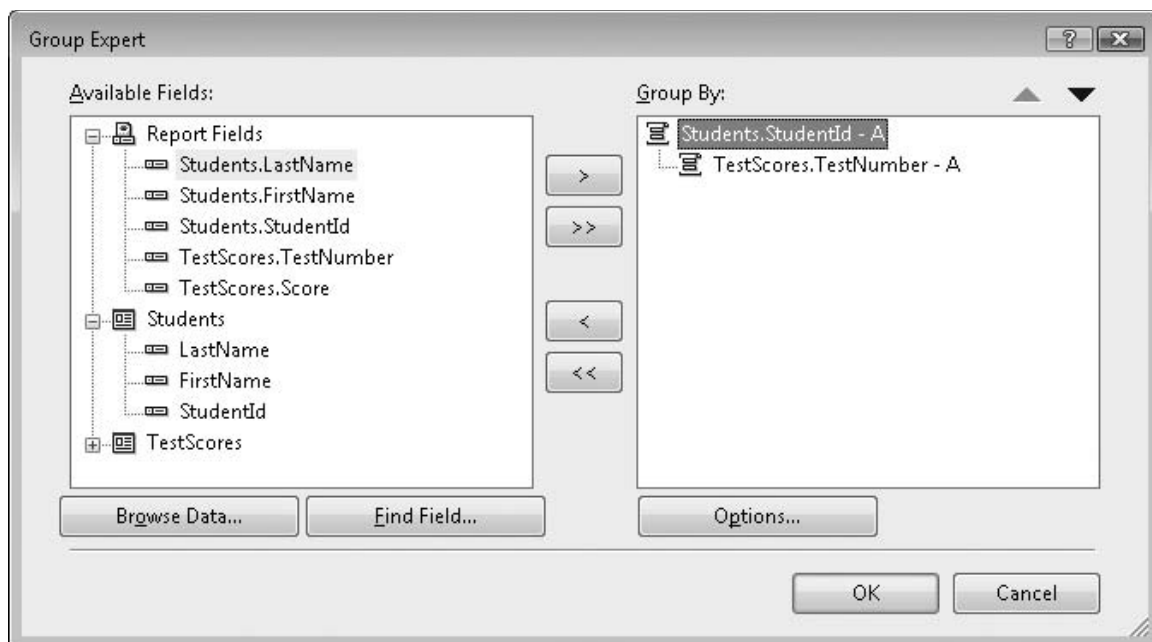
Figure 35-15: Use the Group Expert to add, remove, and rearrange groups.
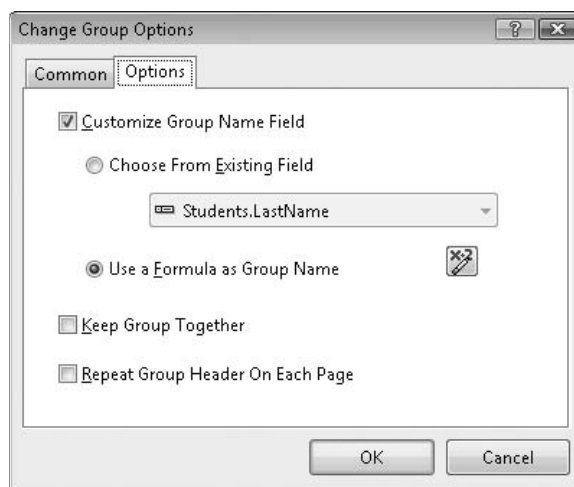
Figure 35-16: Use the Change Group Options
command to modify a group's properties.

When you are finished, click the "Save and close" button at the upper left. Then close the Change Group Options dialog box and the Group Expert. Now, when you run the report, this group's name includes the students' names. This value is displayed both in the group's header for each student and in the group tree display on the left of the `CrystalReportViewer` control.

Select the Group #1 Name field in the group's header, and use its grab handles to make it wide enough to display a reasonably long name.
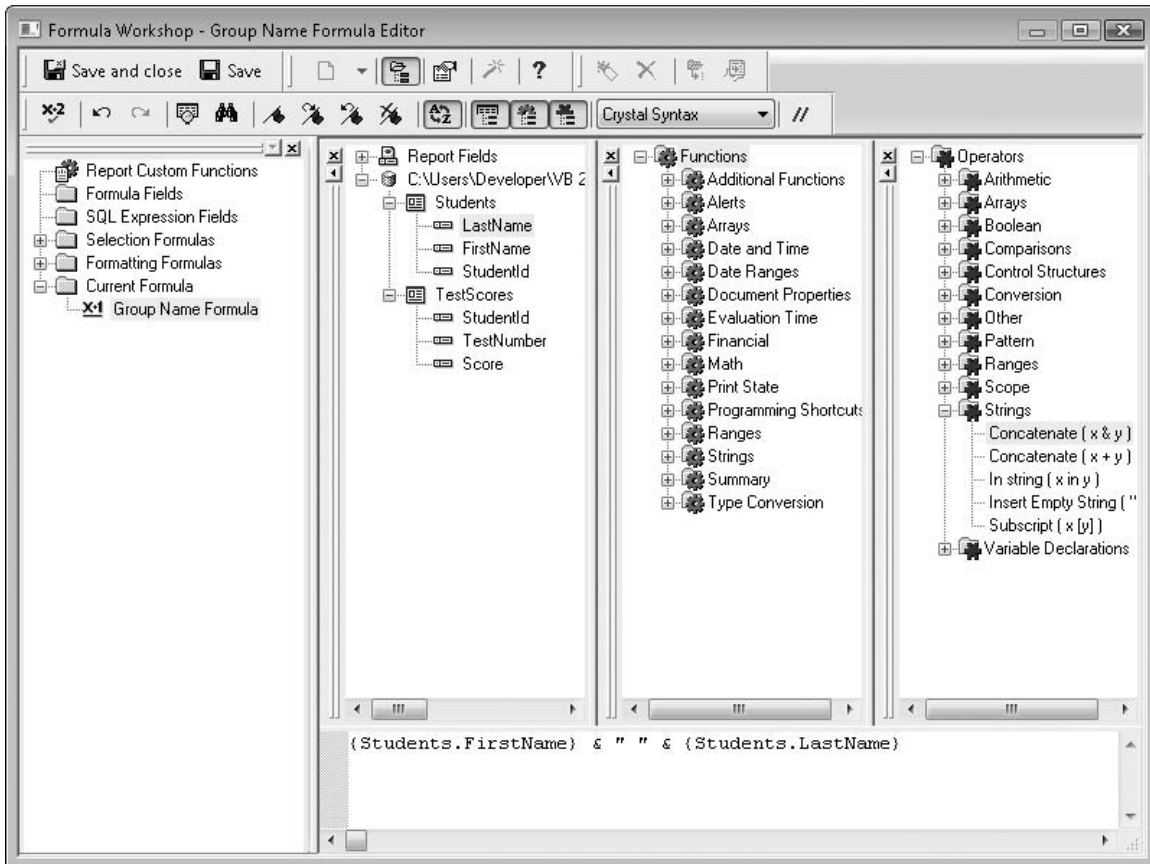
Figure 35-17: The Formula Workshop helps you define formulas for the report.

Because the group header displays the students' first and last names, the report doesn't need them in the details section. Select those fields and delete them.

To prevent each student's test scores from appearing in a separate visible group, right-click the Group Header #2 and select the Suppress (No Drill-Down) command. Then delete the Group #2 Name field from this section and resize the section to make it as short as possible. Similarly, remove the Group #2 Name field from the Group Footer #2 section and make that section as short as possible.

Next, remove the Group #1 Name field from the Group Footer #1 section. Then use the Toolbox to add a new Text Object to that section and set its text to Average. Place it to the left of the existing Scores.Score control.

In the Report Footer section, right-click the Grand Total field, select Edit Text Object, and change the control's text to Class Average. Finally, drag the StudentId field from the Details section to the Group Header #1 section and drag all of the fields into more pleasing locations.

Example program TestScores2, which is available for download on the book's web site, includes these changes and is shown in Figure 35-1.

External Reports

The previous example uses a report that is embedded in the application. Using an external report is just as easy.

First, you must prevent Visual Basic from embedding the report in the project. In Solution Explorer, select the report. Then in the Properties window, set the report's Build Action property to `None` and set its `Copy to Output Directory` property to `Copy if newer`. Now, when you build the application, Visual Studio will copy the report file into the directory where it places the compiled application.

Example program TestScores3, which is available for download on the book's web site, uses the following code to load the report at runtime:

```
' Attach the report to the CrystalReportViewer.
Private Sub Form1_Load() Handles MyBase.Load
    crvTestScores.ReportSource = Application.StartupPath & _
        "\StudentTestScores.rpt"
End Sub
```

That's all there is to it. Now, if you must modify the report, you can distribute the new report file and the application will load the new version. You can also build a library of report files and let the application load whichever reports the user wants to see.

ReportDocument

The `CrystalReportViewer` control provides properties and methods for manipulating report output programmatically. For example, you can set the control's `DisplayGroupTree` and `ShowGroupTreeButton` properties to `False` to prevent the user from displaying the group tree on the control's left.

The `CrystalReportViewer` does not provide properties and methods that work with the report itself, however. For example, it cannot export the report into a file.

The `ReportDocument` object serves as an intermediate layer between a report and the `CrystalReportViewer` control to give your program more control over the report. `ReportDocument`

provides access to a much larger object model that lets you interact with the report's sections, fields, data source, and other underlying entities.

When you create a `CrystalReportViewer` and attach it to a report as described earlier in this chapter, Visual Basic makes a typed `ReportDocument` object and adds it to the form. If you followed the earlier instructions carefully, you should see an object named StudentTestScores1 in the component tray below the form. The `CrystalReportViewer` control's `ReportSource` property is attached to this object.

Your code can access this object to manipulate the report. For example, the following code gets an object representing the report's field named TestNumber1. It displays the object's name and formula name.

```
' Manipulate the ReportDocument.
Dim field_object As FieldObject
field_object = DirectCast( _
    StudentTestScores1.ReportDefinition.ReportObjects("TestNumber1"), _
    FieldObject)
Debug.WriteLine("The " & field_object.Name & _
    " field has data source " & field_object.DataSource.FormulaName)
```

The following text shows the result:

```
The TestNumber1 field has data source {TestScores.TestNumber}
```

The following code exports a report into an Excel file:

```
' Export the report.
Dim output_file As String
output_file = Application.StartupPath & "\scores.xls"
StudentTestScores1.ExportToDisk( _
    CrystalDecisions.Shared.ExportFormatType.Excel, output_file)
```

The following example makes the GroupFooterSection1 section tall and gives it an aqua background. It then makes the AvgofScore1 field red and surrounded by a double line box with a drop shadow.

```
' Make GroupFooterSection1 tall and aqua.
Using section1 As Section = DirectCast( _
  StudentTestScores1.ReportDefinition.Sections("GroupFooterSection1"), _
  Section)
    section1.Height = 600
    section1.SectionFormat.BackgroundColor = Color.Aqua

    ' Make the average score field red and surrounded by a box.
    Using avg_field_object As FieldObject = DirectCast( _
      StudentTestScores1.ReportDefinition.ReportObjects("AvgofScore1"), _
      FieldObject)
        avg_field_object.Color = Color.Red
        avg_field_object.Top = (section1.Height - avg_field_object.Height) \ 2
        With avg_field_object.Border
            .TopLineStyle = CrystalDecisions.Shared.LineStyle.DoubleLine
            .BottomLineStyle = CrystalDecisions.Shared.LineStyle.DoubleLine
```

```
                .LeftLineStyle = CrystalDecisions.Shared.LineStyle.DoubleLine
                .RightLineStyle = CrystalDecisions.Shared.LineStyle.DoubleLine
                .HasDropShadow = True
            End With
        End Using ' avg_field_object
    End Using ' section1
```

Usually you can make formatting changes at design time but, as these examples show, you can manipulate the report's objects at runtime if necessary. Example program TestScores4, which is available for download on the book's web site, includes these three pieces of code.

Summary

Crystal Reports is a powerful tool for generating reports. It is so powerful, in fact, that it provides far too many features to describe in any detail here. This chapter only gave a glimpse into Crystal Reports. It showed how to build a relatively simple report and explained how to customize it a little.

See the online help at `msdn2.microsoft.com/en-us/library/aa287920(VS.71).aspx` for more detailed information about Crystal Reports. You can follow the links on that page or search the help for more information about the `CrystalReportViewer` control and the `ReportDocument` object.

For more in-depth information, read a book that covers only Crystal Reports such as *Professional Crystal Reports for Visual Studio .NET, 2nd Edition* (McAmis, Wrox, 2004).

A few chapters up to this point have shown how to interact with the operating system. For example, Chapter 23, "Drag and Drop, and the Clipboard," explained how a Visual Basic program could interact with other programs through drag and drop and the clipboard. Chapter 34, "Printing," showed how a program could use the system's printer.

The chapters in the next part of the book explain more ways a program can interact with the system. Chapter 36, "Configuration and Resources," describes some of the ways that a Visual Basic program can store configuration and resource values for use at runtime. Some of the most useful of these methods include environment variables, the Registry, configuration files, and resource files.

Part V

Interacting with the Environment

Configuration and Resources

A very simple application performs a well-defined task that changes minimally over time. You may not need to configure such an application for different circumstances.

Many more complex applications, however, must be configured differently to meet different conditions. For example, the application might display different data for different kinds of users (such as data-entry clerks, supervisors, managers, and developers). Similarly, you might configure an application for various levels of support. You might have different configurations for trial, basic, professional, and enterprise versions.

The application may also need to save state information between sessions. It might remember the types of forms that were last running, their positions, and their contents. The next time the program runs, it can restore those forms so that the user can get back to work as quickly as possible.

Visual Studio provides many ways to store and use application configuration and resource information. This chapter describes some of these tools. It starts by describing the My namespace that was invented to make these tools easier to find. It then tells how an application can use environment variables, the Registry, configuration files, resource files, and the `Application` object.

This chapter does not explain how to work with disk files more directly. Databases, XML files, text files, and other disk files are generally intended for storage of larger amounts of data, rather than simple configuration and resource information. Those topics are described more thoroughly in Chapters 20, "Database Controls and Objects," and 29, "File-System Objects."

My

In older versions of Visual Basic .NET, programmers discovered that many common tasks were difficult to perform. For example, many programs get the name of the user logged on to the computer, read a text file into a string, get the program's version number, or examine all of

the application's currently loaded forms. Although you can accomplish all of these tasks in previous versions of Visual Basic .NET, doing so is awkward.

To make these common tasks easier, the My namespace was introduced to provide shortcuts for basic chores such as these. For example, to read the text in a file in Visual Basic .NET 2003, you must create some sort of object that can work with a file such as a `StreamReader`, use the object to read the file (the `ReadToEnd` method for a `StreamReader`), and then dispose of the object. The following code shows how you might do this in Visual Basic .NET 2003:

```
Dim stream_reader As New IO.StreamReader(file_name)
Dim file_contents As String = stream_reader.ReadToEnd()
stream_reader.Close()
```

This isn't too difficult, but it does seem more complicated than such a simple everyday task should be.

The My namespace provides a simpler method for reading a file's contents. The `Computer .FileSystem.ReadAllText` method reads a text file in a single statement. The following statement reads the text in the file `C:\Temp\Test.txt` and displays it in a message box:

```
Dim file_contents As String = _
    My.Computer.FileSystem.ReadAllText("C:\Temp\Test.txt")
```

There is nothing new in the My namespace. All the tasks it performs you can already handle using existing methods. The My namespace just makes some things easier.

This chapter describes the My namespace and the shortcuts it provides.

Me and My

Some programmers confuse the `Me` object and the My namespace. `Me` is a reference to the object that is currently executing code. If a piece of code is inside a particular class, `Me` is a reference to the class object that is running.

For example, if the class is a form, then within the form's code, `Me` returns a reference to the running form. If the form's code must change the form's `BackColor` property, it can use the `Me` object to explicitly refer to its own form. It can also omit the keyword to refer to its form implicitly. That means the following two statements are equivalent:

```
Me.BackColor = SystemColors.Control
BackColor = SystemColors.Control
```

If you build several instances of a class, the code in each instance gets a different value for `Me`. Each instance's `Me` object returns a reference to that instance.

On the other hand, My isn't an object at all. It is a namespace that contains objects, values, routines, and other namespaces that implement common functions. The My namespace is a single unique entity shared by all of the code throughout the application.

It may help if you try not to think of the My namespace as a thing in and of itself. The My namespace doesn't do anything all alone. It needs to be paired with something within the namespace. Think of

My.Application, My.User, My.Computer, and so forth. It makes sense to think of My.Computer as representing the computer.

My Sections

The following table briefly outlines the major sections within the My namespace. Other sections of this chapter and Appendix S, "The My Namespace," describe these sections in greater detail.

Section	Purpose
My.Application	Provides information about the current application: current directory, culture, and assembly information (such as program version number, log, splash screen, and forms)
My.Computer	Controls the computer hardware and system software: audio, clock, keyboard, clipboard, mouse, network, printers, Registry, and file system
My.Forms	Provides access to an instance of each type of Windows Form defined in the application
My.Resources	Provides access to the application's resources: strings, images, audio, and so forth
My.Settings	Provides access to the application's settings
My.User	Provides access to information about the current user
My.WebServices	Provides access to an instance of each XML web service referenced by the application

Environment

Environment variables are values that a program can use to learn information about the system. There are three types of environment variables that apply at the system, user, and process levels. As you may guess from their names, system-level variables apply to all processes started on the system, user-level variables apply to processes started by a particular user, and process-level variables apply to a particular process and any other processes that it starts.

Environment variables may indicate such things as the name of the operating system, the location of temporary directories, the user's name, and the number of processors the system has. You can also store configuration in environment variables for your programs to use.

Environment variables are loaded when a process starts, and they are inherited by any process launched by the initial process. For Visual Basic development, that means the variables are loaded when you start Visual Studio and they are inherited by the program you are working on when you start it. If you make changes to the system's environment variables, you need to close and reopen Visual Studio before your program will see the changes.

A program can also create temporary process-level variables that are inherited by launched processes and that disappear when the original process ends.

Visual Basic provides a couple of tools for working with the application's environment. The following sections describe two: the `Environ` function and the `System.Environment` object. Before you can read environment variables, however, you should know how to set their values.

Setting Environment Variables

Environment variables are normally set on a system-wide basis before the program begins. In older operating systems, batch files such as `autoexec.bat` set these values. More recent systems provide Control Panel tools to set environment variables.

Newer systems also use an `autoexec.nt` file to set environment variables that apply only to command-line (console) applications so they don't affect GUI applications. Sometimes you can use this fact to your advantage by giving different kinds of applications different environment settings.

To set environment variables in Windows XP, open the Control Panel, run the System applet, and select the Advanced tab. Alternatively, you can right-click My Computer and select Properties from the context menu. Click the Environment Variables button to display the Environment Variables dialog box. Use the dialog's Add, Edit, and Delete buttons to add, modify, or remove environment variables.

To set environment variables in Windows Vista, open the Control Panel, open the System and Maintenance applet, and then open its System applet. On the left, click the "Advanced system settings" link. That link requires administrator privileges so Vista displays a UAC privilege elevation dialog. Enter an administrator's password and click OK to get to the System Properties dialog. Select the Advanced tab and click the Environment Variables button to display the Environment Variables dialog box. Use the dialog's Add, Edit, and Delete buttons to add, modify, or remove environment variables.

Be careful to use the variables properly. Use system variables when a value should apply to all processes started by all users, user variables when a value should apply to all processes started by a particular user, and process variables when a value should apply to a process and any processes that it starts.

Remember that Visual Studio won't see environment variable changes that you make after it is running. You need to close and reopen Visual Studio before your program will see the changes.

Using Environ

At runtime, a Visual Basic application can use the `Environ` function to retrieve environment variable values. If you pass this function a number, it returns a string giving the statement that assigns the corresponding environment variable. For example, `Environ(1)` might return the following string:

```
ALLUSERSPROFILE=C:\ProgramData
```

You should pass the function a number between 1 and 255. `Environ` returns a zero-length string if the number does not correspond to an environment variable. The following code uses this fact to list all the application's environment variables. When it finds a variable that has zero length, it knows it has read all of the variables with values.

```
For i As Integer = 1 To 255
    If Environ(i).Length = 0 Then Exit For
    Debug.WriteLine(Environ(i))
Next i
```

Example program ListEnviron, which is available for download on the book's web site, uses similar code to display all of the environment variables' assignment statements. Example program ListEnvironValues, which is also available for download, uses the `String` class's `Split` method to separate the environment variables' names and values and displays them in separate columns in a `ListView` control.

If you pass the `Environ` function the name of an environment variable, the function returns the variable's value or `Nothing` if the variable does not exist. The following code displays the value assigned to the `USERNAME` variable:

```
MessageBox.Show(Environ("USERNAME"))
```

Using System.Environment

The `Environ` function is easy to use, but it's not very flexible; it cannot create or modify variable values.

The `System.Environment` object provides methods for getting and setting process-level environment variables. It also provides properties and methods for working with many other items in the application's environment. The following table describes the `Environment` object's most useful properties.

Property	Purpose
CommandLine	Returns the process's command line.
CurrentDirectory	Gets or sets the fully qualified path to the current directory.
ExitCode	Gets or sets the process's exit code. If the program starts from a `Main` function, that function's return value also sets the exit code.
HasShutdownStarted	Returns `True` if the common language runtime is shutting down.
MachineName	Returns the computer's NetBIOS name.
NewLine	Returns the environment's defined new line string. For example, this might be a carriage return followed by a line feed.
OSVersion	Returns an `OperatingSystem` object containing information about the operating system. This object provides the properties `ServicePack` (name of the most recent service pack installed), `Version` (includes `Major`, `Minor`, `Build`, and `Revision`; `ToString` combines them all), `VersionString` (combines the operating system name, version, and most recent service pack), and `Platform`, which can be Unix, Win32NT (Windows NT or later), Win32S (runs on 16-bit Windows to provide access to 32-bit applications), Win32Windows (Windows 95 or later), or WinCE.

(continued)

Property	Purpose
ProcessorCount	Returns the number of processors on the computer.
StackTrace	Returns a string describing the current stack trace.
SystemDirectory	Returns the system directory's fully qualified path.
TickCount	Returns the number of milliseconds that have elapsed since the system started.
UserDomainName	Returns the current user's network domain name.
UserInteractive	Returns `True` if the process is interactive. This only returns `False` if the application is a service process or web service.
UserName	Returns the name of the user who started the process.
Version	Returns a `Version` object describing the Common Language Runtime. This object provides the properties `Major`, `Minor`, `Build`, and `Revision`. Its `ToString` method combines them all.
WorkingSet	Returns the amount of physical memory mapped to this process in bytes.

Example program SystemEnvironment, which is available for download on the book's web site, displays the values of many of the `Environment` object's properties.

The following table describes the `Environment` object's most useful methods.

Method	Purpose
Exit	Ends the process immediately. Form `Closing` and `Closed` event handlers do not execute.
ExpandEnvironmentVariables	Replaces environment variable names in a string with their values. For example, the following code displays the current user's name: `MessageBox.Show("I am %username%.")`
GetCommandLineArgs	Returns an array of strings containing the application's command-line arguments. The first entry (with index 0) is the name of the program's executable file.
GetEnvironmentVariable	Returns an environment variable's value.
GetEnvironmentVariables	Returns an `IDictionary` object containing the names and values of all environment variables.

Chapter 36: Configuration and Resources

Method	Purpose
GetFolderPath	Returns the path to a system folder. This method's parameter is a SpecialFolder enumeration value such as Cookies, Desktop, SendTo, or Recent. See the online help for a complete list of available folders.
GetLogicalDrives	Returns an array of strings containing the names of the logical drives on the current computer.
SetEnvironmentVariable	Creates, modifies, or deletes an environment variable.

The SetEnvironmentVariable method lets you set environment variables at the system, user, and process level. If you set a variable's value to Nothing, this method deletes the variable. For system and user values, it updates the Registry appropriately to set the values. Example program EnvironmentVariableLevels, which is available for download on the book's web site, uses SetEnvironmentVariable to get and set variable values. For more information on the SetEnvironmentVariable method, see msdn2.microsoft.com/library/96xafkes.aspx.

Note that a program needs privilege to write to the Registry to set a system-level environment variable.

Registry

The System Registry is a hierarchical database that stores values for applications on the system. The hierarchy's root is named MyComputer and is divided into the six subtrees (also called *hives*) described in the following table.

Registry Branch	Contains
HKEY_CLASSES_ROOT	Definitions of types or classes, and properties associated with those types.
HKEY_CURRENT_CONFIG	Information about the system's current hardware configuration.
HKEY_CURRENT_USER	The current user's preferences (such as environment variable settings, program group information, desktop settings, colors, printers, network connections, and preferences specific to applications). Each user has separate HKEY_CURRENT_USER values. This is usually the subtree where a Visual Basic application stores and retrieves its settings.
HKEY_DYN_DATA	Performance data for Windows 95, 98, and Me.
HKEY_LOCAL_MACHINE	Information about the computer's physical state, including bus type, system memory, installed hardware and software, and network logon and security information.
HKEY_USERS	Default configuration information for new users and the current user's configuration.

Depending on your operating system, the Registry may also contain the unsupported keys HKEY_ PERFORMANCE_DATA, HKEY_PERFORMANCE_NLSTEXT, and HKEY_PERFORMANCE_TEXT.

Many applications store information in the Registry. The HKEY_CURRENT_USER subtree is particularly useful for storing individual users' preferences and other configuration information.

Lately, the Registry has gone out of style for saving configuration information. Microsoft now recommends that you store this kind of data locally within a user's data storage area. This makes sense because it makes it easier to copy the settings (they're just files) and helps reduce clutter in the Registry. You can use the configuration files settings (see the section "Configuration Files" later in this chapter) or you can store data in XML files.

Visual Basic provides two main ways to access the Registry. First, you can use the Visual Basic native Registry methods: `SaveSetting`, `GetSetting`, `GetAllSettings`, and `DeleteSetting`. Second, you can use the tools in the My.Computer.Registry namespace. These two methods are described in the following sections.

You can also use API functions to manipulate the Registry. These are more complicated and not generally necessary (the My.Computer.Registry namespace contains some very powerful tools), so they are not described here.

Native Visual Basic Registry Methods

Visual Basic provides four methods for saving and reading Registry values for a particular application: `SaveSetting`, `GetSetting`, `GetAllSettings`, and `DeleteSetting`.

The `SaveSetting` method saves a value into a Registry key. This routine takes as parameters the name of the application, a section name, the setting's name, and the setting's value. For example, the following code saves the value stored in the `m_CurrentDirectory` variable in the RegistrySettings application's `Config` section with the name `CurrentDirectory`:

```
SaveSetting("RegistrySettings", "Config", "CurrentDirectory", _
    m_CurrentDirectory)
```

`SaveSetting` automatically creates the application and section areas in the Registry if they don't already exist.

This value is saved at the following Registry location. This is all one name; it just doesn't fit on one line here:

```
HKEY_CURRENT_USER\Software\VB and VBA Program Settings\
    RegistrySettings\Config\CurrentDirectory
```

If you use the Visual Basic `SaveSetting`, `GetSetting`, `GetAllSettings`, and `DeleteSetting` methods, you don't need to worry about the first part of this Registry path. You need only to remember the application name, section name, and setting name.

Windows Vista protects the Registry so that you cannot inadvertently damage critical values. If you mess up some values, you can wreak havoc on the operating system, and even make the system un-bootable. To prevent possible chaos, Vista doesn't allow you to edit some parts of the Registry without elevated privileges. Fortunately, the part of the Registry used by SaveSetting *is accessible to normal users, so you don't need elevated privileges to use* SaveSetting, GetSetting, *or* DeleteSetting.

The GetSetting function retrieves a Registry value. It takes as parameters the application name, section name, and setting name you used to save the value. It can optionally take a default value to return if the setting doesn't exist in the Registry. The following code displays the value saved by the previous call to SaveSetting. If no value is saved in the Registry, it displays the string <none>.

```
MessageBox.Show( _
    GetSetting("RegistrySettings", "Config", "CurrentDirectory", "<none>")
```

The GetAllSettings function returns a two-dimensional array of name and value pairs for a Registry section. The following code uses GetAllSettings to fetch the values stored in the RegistrySettings application's Config section. It loops through the results, displaying the setting names and values.

```
Dim settings As String(,) = GetAllSettings("RegistrySettings", "Config")
For i As Integer = 0 To settings.GetUpperBound(0)
    Debug.WriteLine(settings(i, 0) & " = " & settings(i, 1))
Next i
```

If an application needs to use all of the settings in a section, GetAllSettings may be faster than using GetSetting repeatedly.

The DeleteSetting method removes a setting, section, or an entire application's setting area from the Registry. The following code shows how to remove each of those kinds of items:

```
' Remove the RegistrySettingsRegistrySettings/Config/CurrentDirectory setting.
DeleteSetting("RegistrySettings", "Config", "CurrentDirectory")

' Remove the RegistrySettings/Config section.
DeleteSetting("RegistrySettings", "Config")

' Remove all of the RegistrySettings application's settings.
DeleteSetting("RegistrySettings")
```

As part of its uninstallation procedure, a program should remove any Registry entries it has made. All too often, programs leave the Registry cluttered with garbage. This not only makes it harder to figure out what real values the Registry contains, but it can also slow the system down.

In an attempt to combat this problem, Microsoft is promoting XCopy compatibility, where applications store values in configuration files instead of the Registry. Then you can easily copy and remove these files rather than modifying the Registry.

Example program RegistrySettings, which is available for download on the book's web site, demonstrates each of Visual Basic's Registry commands.

My.Computer.Registry

The My.Computer.Registry namespace provides objects that manipulate the Registry. My.Computer.Registry has seven properties that refer to objects of type `RegistryKey`. The following table lists these objects and the corresponding Registry subtrees.

My.Computer.Registry Property	Registry Subtree
ClassesRoot	HKEY_CLASSES_ROOT
CurrentConfig	HKEY_CURRENT_CONFIG
CurrentUser	HKEY_CURRENT_USER
DynData	HKEY_DYNAMIC_DATA
LocalMachine	HKEY_LOCAL_MACHINE
PerformanceData	HKEY_PERFORMANCE_DATA
Users	HKEY_CURRENT_CONFIG

Note that some parts of the Registry are off limits to programs running as normal users in Windows Vista. Normal users can modify values in HKEY_CURRENT_USER, but to do more than look in other areas, a program would probably need to run with elevated privileges.

The program can use these `RegistryKey` objects to work with the corresponding Registry subtree. The following table describes the most useful properties and methods provided by the `RegistryKey` class.

Property or Method	Purpose
Name	Returns the key's Registry path.
Close	Closes the key and writes it to disk if it has been modified.
CreateSubKey	Creates a new subkey or opens an existing subkey within this key.
DeleteSubKey	Deletes the specified subkey. This method will delete the subkey if it contains values, but not if it contains other subkeys. The subkey to be deleted need not be a direct child of this key. For example, the following code uses the `CurrentUser RegistryKey` object to delete the descendant key Software\VB and VBA Program Settings\MyComputerRegistry\Config: `My.Computer.Registry.CurrentUser.DeleteSubKey( _"Software\VB and VBA Program Settings\RegistrySettings\Config")`

Property or Method	Purpose
DeleteSubKeyTree	Recursively deletes a subkey and any child subkeys it contains. The subkey to be deleted need not be a direct child of this key. For example, the following code uses the CurrentUser RegistryKey object to delete all of the settings for the RegistrySettings application: My.Computer.Registry.CurrentUser .DeleteSubKeyTree(_"Software\VB and VBA Program Settings\RegistrySettings")
DeleteValue	Deletes a value from the key.
Flush	Writes any changes to the key into the Registry.
GetSubKeyNames	Returns an array of strings giving subkey names.
GetValue	Returns the value of a specified value within this key.
GetValueKind	Returns the type of a specified value within this key. This can be Binary, DWord, ExpandString, MultiString, QWord, String, or Unknown.
GetValueNames	Returns an array of strings giving the names of all of the values contained within the key.
OpenSubKey	Returns a RegistryKey object representing a descendant key. Parameters give the subkey name, and indicate whether the returned RegistryKey should allow you to modify the subkey.
SetValue	Sets a value within the key.
SubKeyCount	Returns the number of subkeys that are this key's direct children.
ToString	Returns the key's name.
ValueCount	Returns the number of values stored in this key.

The following example opens the HKEY_CURRENT_USER\Software\VB and VBA Program Settings\ RegistrySettings\Config key. It reads the CurrentDirectory value from that key using the default value "C:\" and saves the result in the variable current_directory. It closes the key and then uses the DeleteSubKey method to delete the RegistrySettings application's Config section.

```
' Open the application's Config subkey.
Dim config_section As Microsoft.Win32.RegistryKey = _
    My.Computer.Registry.CurrentUser.OpenSubKey( _
        "Software\VB and VBA Program Settings\RegistrySettings\Config\")

' Get the CurrentDirectory value.
Dim current_directory As String = _
    CType(config_section.GetValue("CurrentDirectory", "C:\"), String)

' Close the subkey.
```

```
    config_section.Close()

    ' Delete the application's whole Config section.
    My.Computer.Registry.CurrentUser. DeleteSubKey DeleteSubKey ( _
        "Software\VB and VBA Program Settings\RegistrySettings\Config")
```

The following code shows the equivalent operations using the native Registry methods of Visual Basic:

```
    ' Get the CurrentDirectory value.
    Dim current_directory As String = _
        GetSetting("RegistrySettings", "Config", "CurrentDirectory", "C:\")

    ' Delete the application's whole Config section.
    DeleteSetting("RegistrySettings", "Config")
```

It is generally easier to use the native Registry methods of Visual Basic. Those methods work only with values in the HKEY_CURRENT_USER\Software\VB and VBA Program Settings Registry subtree, however. If you need to access keys and values outside of this subtree, you must use the My.Computer.Registry objects.

Example program MyComputerRegistry, which is available for download on the book's web site, demonstrates many useful My.Computer.Registry operations. It does the same things as program RegistrySettings mentioned in the previous section except it uses My.Computer.Registry instead of Visual Basic's native Registry methods.

Configuration Files

Configuration files let you store information for a program to use at runtime in a standardized external file. You can change the values in the configuration file, and the program will use the new value the next time it starts. That enables you to change some of the application's behavior without needing to recompile the executable program.

One way to use configuration files is through dynamic properties. Dynamic properties are automatically loaded from the configuration file at runtime by Visual Basic.

Start by defining the settings you will bind to the dynamic properties. In Solution Explorer, double-click My Project and select the Settings tab to see the property page shown in Figure 36-1. Use this page to define the settings that you will load at runtime.

A setting's scope can be Application or User. A setting with Application scope is shared by all of the program's users. Settings with User scope are stored separately for each user so different users can use and modify their own values.

Next, add a control to a form and select it. In the Properties window, open the ApplicationSettings entry, click the PropertyBinding subitem, and click the ellipsis to the right to display a list of the control's properties.

Select the property that you want to load dynamically and click the drop-down arrow on the right to see a list of defined settings that you might assign to the property. Figure 36-2 shows the Application Setting dialog box with this drop-down list displayed for a control's Text property. From the list, select the setting that you want to assign to the property.

Visual Studio adds the setting to the program's configuration file. If you open Solution Explorer and double-click the app.config entry, you'll see the new dynamic property.
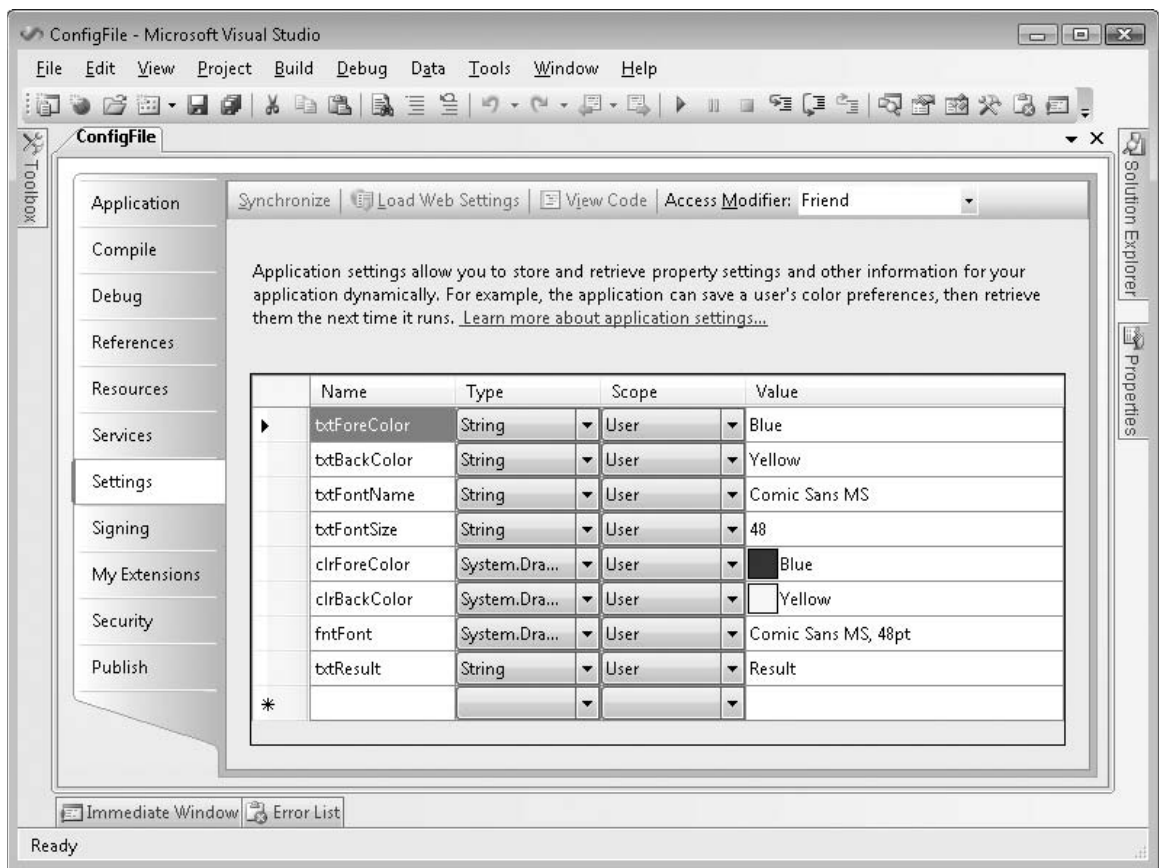
Figure 36-1: Use this page to define application settings.
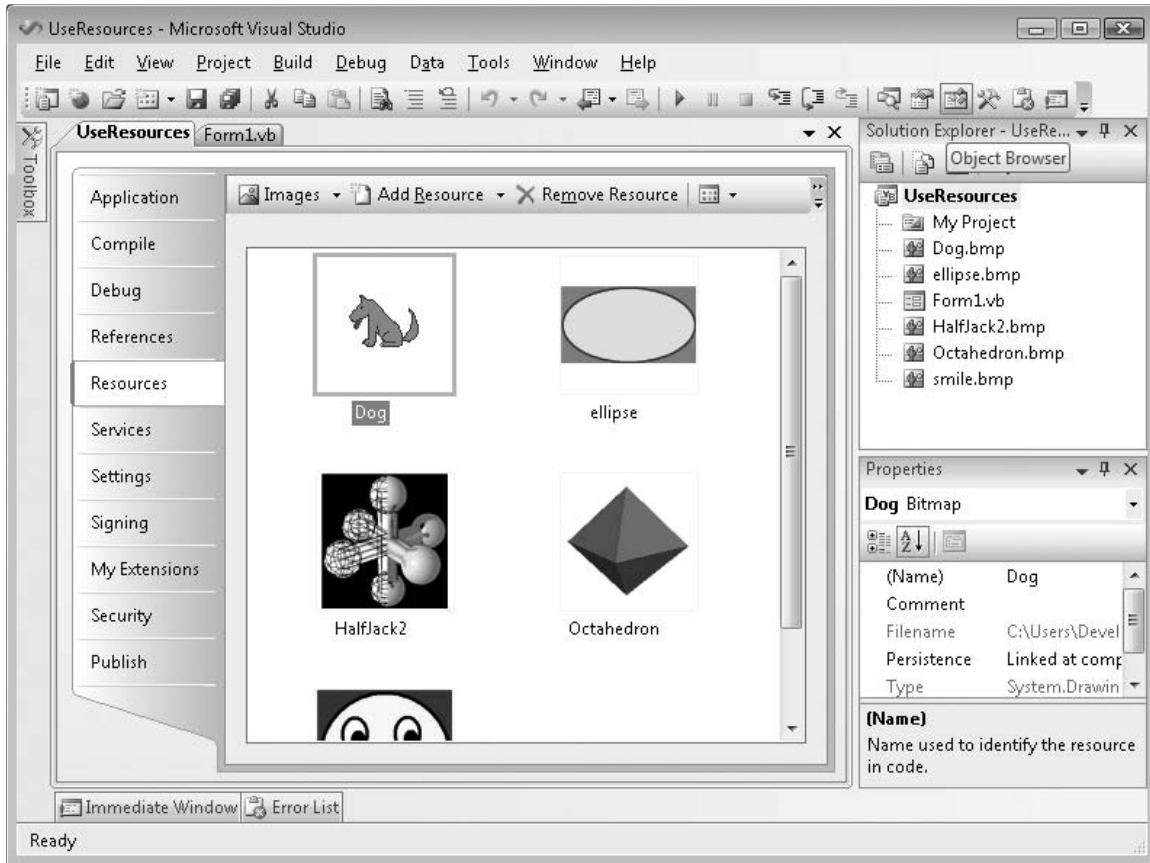
Figure 36-2: Use the drop-down list to assign a setting to the dynamic property.

The following text shows the configuration setting sections of an `app.config` file. The `applicationSettings` section defines the settings shown in Figure 36-1.

```xml
<?xml version="1.0" encoding="utf-8" ?>
<configuration>
    ...
    <userSettings>
        <ConfigFile.My.MySettings>
            <setting name="txtBackColor" serializeAs="String">
                <value>Yellow</value>
            </setting>
            <setting name="txtForeColor" serializeAs="String">
                <value>Blue</value>
            </setting>
```

```
            <setting name="txtFontName" serializeAs="String">
                <value>Comic Sans MS</value>
            </setting>
            <setting name="txtFontSize" serializeAs="String">
                <value>50</value>
            </setting>
            <setting name="clrForeColor" serializeAs="String">
                <value>Blue</value>
            </setting>
            <setting name="clrBackColor" serializeAs="String">
                <value>Yellow</value>
            </setting>
            <setting name="fntFont" serializeAs="String">
                <value>Comic Sans MS, 48pt</value>
            </setting>
        </ConfigFile.My.MySettings>
    </userSettings>
</configuration>
```

When the application starts, Visual Basic loads the `app.config` file, reads the settings, and assigns their values to any properties bound to them.

So far, this is just a very roundabout way to set the control's property value. The real benefit of this method comes later when you want to change this setting. If you look in the compiled application's directory (normally the `bin\Debug` directory when you're developing the program), you'll find a file with the same name as the application but with a `.config` extension. If the application is called `ConfigFile.exe`, then this file is called `ConfigFile.exe.config`.

If you open this file with any text editor and change the value of a setting, the program uses the new value the next time it runs. For example, if you change the value of `clrBackColor` from Yellow to Orange, then the next time the program runs, any controls that use that color for their backgrounds will now be orange. Instead of recompiling the whole application, you only need to change this simple text file. If you have distributed the application to a large number of users, you need only to give them the revised configuration file and not a whole new executable.

When you make a new setting, Visual Basic automatically generates code that adds the setting to the My.Settings namespace, so the program can easily get their values. The following code displays the values of the txtFontSize and txtFontName settings:

```
    MessageBox.Show(My.Settings.txtFontSize & "pt " & My.Settings.txtFontName)
```

The My.Settings namespace provides several other properties and methods that make working with settings easy. The following table summarizes the most useful My.Settings properties and methods.

Property or Method	Purpose
Item	A name-indexed collection of the values for the settings.
Properties	A name-indexed collection of `SettingsProperty` objects that contain information about the settings, including their names and default values.
Reload	Reloads the settings from the configuration file.
Save	Saves any modified settings into the configuration file. The program can modify settings with user scope. Settings with application scope are read-only.

Example program ShowSettings, which is available for download on the book's web site, uses the following code to display the settings listed in the `My.Settings.Properties` collection:

```
Imports System.Configuration

Public Class Form1
    Private Sub Form1_Load() Handles MyBase.Load
        For Each settings_property As SettingsProperty In _
         My.Settings.Properties
            Dim new_item As New ListViewItem(settings_property.Name)
            new_item.SubItems.Add(settings_property.DefaultValue.ToString)

            lvSettings.Items.Add(new_item)
        Next settings_property

        lvSettings.Columns(0).Width = -2
        lvSettings.Columns(1).Width = -2
    End Sub
End Class
```

The new security features in Windows Vista make saving configuration information more difficult to manage. If an application is installed in a protected part of the file system, a normal user won't be able to save configuration settings there. If the program saves settings on a per-user basis in the user's own directories, the changes won't affect other users. Similarly, the SaveSettings command saves values into the Registry separately for each user, so changes made with SaveSettings don't affect other users. One solution is to save user-specific settings in the user's directories, and save application-wide settings in a file stored in a common directory that all users can access.

When a program closes, it automatically saves any changes to User scope settings. However, if the program crashes, it does not have a chance to save any changes. If you want to be sure changes are saved, call My.Settings.Save after the user changes settings.

Example program SaveSettings, which is also available for download, uses two settings: a User scope color named clrForm that determines the form's background color and an Application scope color named clrButton that determines the background colors of the program's two buttons. The program provides Form Color and Button Color buttons to let you change the two color settings. If you change

the colors, close the program, and restart it, you'll see that the User scope form color is saved but the Application scope button color is not.

Resource Files

Resource files contain text, images, and other data for the application to load at runtime. The intent of resource files is to let you easily replace one set of resources with another.

One of the most common reasons for using resource files is to provide different resources for different languages. To create installation packages for different languages, you simply ship the executable and a resource file that uses the right language. Alternatively, you can ship resource files for all of the languages you support and then let the application pick the appropriate file at runtime based on the user's computer settings.

Resource files are not intended to store application configuration information and settings. They are intended to hold values that you might want to change, but only infrequently. Configurations and settings, on the other hand, may change relatively often. You should store frequently changing data in configuration files or the System Registry rather than in resource files.

The distinction is small and frankly somewhat artificial. Both configuration files and resource files store data that you can swap without recompiling the application. Rebuilding resource files can be a little more complex, however, so perhaps the distinction that configuration and setting data changes more frequently makes some sense.

Resource files can also be embedded within a compiled application. In that case, you cannot swap the resource file without recompiling the application. Although this makes embedded resource files less useful for storing frequently changing information, they still give you a convenient place to group resource data within the application. This is particularly useful if several parts of the application must use the same pieces of data. For example, if every form should display the same background image, it makes sense to store the image in a common resource file that they can all use.

The following sections describe the four most common types of resources: application, embedded, satellite, and localization.

Application Resources

To create application resources in Visual Basic, open Solution Explorer, double-click the My Project entry, and select the Resources tab. Use the dropdown on the left to select one of the resource categories: Strings, Images, Icons, Audio, Files, or Other. Figure 36-3 shows the application's Resources tab displaying the application's images.

If you double-click an item, Visual Studio opens an appropriate editor. For example, if you double-click a bitmap resource, Visual Studio opens the image in an integrated bitmap editor.
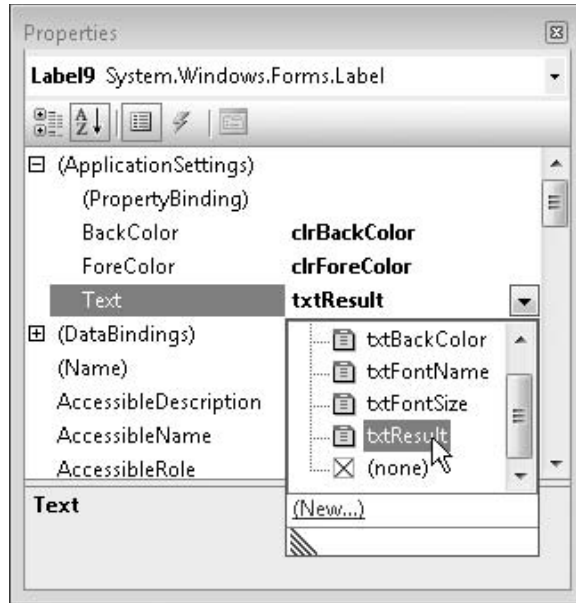
Figure 36-3: The Resources tab contains image and other resources used by the application.

Click the Add Resource drop-down list and select Add Existing File to add a file from the disk to the program's resources. Use the dropdown's Add New String, Add New Icon, or Add New Text File commands to add new items to the resource file. The dropdown's New Image item opens a cascading submenu that lets you create new PNG, bitmap, GIF, JPEG, and TIFF images.

Using Application Resources

When you create application resources, Visual Studio automatically generates code that adds strongly typed resource properties to the My.Resources namespace. If you open Solution Explorer and click the Show All Files button, you can see the `Resources.Designer.vb` file that contains this code. The Solution Explorer path to this file is `My Project/Resources.resx/ Resources.Designer.vb`.

For example, the following code shows the property that `Resources.Designer.vb` contains to retrieve the Octahedron image resource:

```
Friend ReadOnly Property Octahedron() As System.Drawing.Bitmap
    Get
        Dim obj As Object = ResourceManager.GetObject("Octahedron", _
            resourceCulture)
        Return CType(obj,System.Drawing.Bitmap)
    End Get
End Property
```

The following code shows how a program can use these `My.Resources` properties. It sets the `lblGreeting` control's `Text` property to the string returned by the `My.Resources.Greeting` property. Then it sets the form's `BackgroundImage` property to the image resource named Dog.

```
Private Sub Form1_Load() Handles MyBase.Load
    lblGreeting.Text = My.Resources.Greeting
    Me.BackgroundImage = My.Resources.Dog
End Sub
```

Because these property procedures are strongly typed, IntelliSense can offer support for them. If you type `My.Resources`, IntelliSense lists the values defined in the application's resource file.

The strongly typed resource properties use a `ResourceManager` object to fetch the application's resources. The My.Resources namespace exposes that object through its `ResourceManager` property, so you can use that object directly to retrieve the application's resources. The following code does the same things as the previous version, except it uses the `ResourceManager` directly. Note that the `ResourceManager` property's `GetObject` method returns a generic `Object`, so the code uses `CType` to convert the result into an `Image` before assigning it to the form's `BackgroundImage` property.

```
Private Sub Form1_Load() Handles MyBase.Load
    lblGreeting.Text = My.Resources.ResourceManager.GetString("Greeting")
    Me.BackgroundImage = CType( _
        My.Resources.ResourceManager.GetObject("Dog"), _
        Image)
End Sub
```

Example program UseResources, which is available for download on the book's web site, uses similar code to set a label's text and to display an image. Commented out code does the same thing by using the strongly typed resource properties.

Generally, you should use the automatically generated resource properties in the My.Resources namespace because they are easier to use and they are strongly typed. The `ResourceManager` class is much more useful when you use other embedded resource files as described in the following section.

Embedded Resources

In addition to storing resources in the application's resource file `Resources.resx`, you can add other resources files to the application. Open the Project menu and select the Add New item command. Pick the Resources File template, give the file a meaningful name, and click OK.

After you add a resource file to the project, you can double-click it in Solution Explorer to open it in the resource editor. Then you can add resources to the file exactly as you do for the application's resource file.

At runtime, you can use a `ResourceManager` object to fetch the resources from the embedded file. The following code loads the Dog image from the file `Images.resx` and the string `Greeting` from the file `Strings.resx`.

It starts by declaring a `ResourceManager` variable. It then initializes the variable, passing its constructor the resource file's path and the assembly containing the file. The file's path consists of the application's root namespace `EmbeddedResources` followed by the file's name `Images`.

The program then uses the `ResourceManager` object's `GetObject` method to fetch the Dog image, converts the generic `Object` returned into an `Image`, and assigns the result to the form's `BackgroundImage` property.

Next, the code reinitializes the `ResourceManager` object so it represents the `Strings` resource file. It calls the manager's `GetString` method to get the value of the `Greeting` resource and saves the result in the `lblGreeting` control's `Text` property.

```
Private Sub Form1_Load() Handles MyBase.Load
    Dim resource_manager As ResourceManager

    ' Get the Dog image from Images.resx.
    resource_manager = New ResourceManager( _
        "EmbeddedResources.Images", _
        Me.GetType.Assembly)
    Me.BackgroundImage = CType( _
        resource_manager.GetObject("Dog"), _
        Image)

    ' Get the Greeting from StringResources.resx.
    resource_manager = New ResourceManager( _
        "EmbeddedResources.Strings", _
        Me.GetType.Assembly)
    lblGreeting.Text = resource_manager.GetString("Greeting")
End Sub
```

Just as it generates strongly typed properties for application resources, Visual Studio generates similar code for other embedded resource files. You can access these properties by adding the resource file's name after `My.Settings` and before the resource name. For example, to get the image resource named Dog from the `Images` resource file, the program would use `My.Settings.Images.Dog`.

Example program EmbeddedResources, which is available for download on the book's web site, contains code to load embedded resources both with a resource manager and by using the strongly typed resource properties.

Satellite Resources

Embedded resource files enable you to organize data in central locations. For example, you can keep all the images used by the application in a single resource file, and all of the program's forms can fetch the images from that file.

Rather than embedding a resource file in the application, you can load it at runtime. Then if you must make changes to the resources, you can replace the resource file and the program will load the new resources the next time it runs.

To make switching resources easy, you can place them in a resource-only assembly. This *satellite assembly* contains data for the application but doesn't contain any program logic.

To make a resource-only satellite assembly, start a new Visual Basic project, selecting the Class Library template. Delete the project's initial class. Then, add resources to the project as you would add them to any other project. You can add resources to the project's application resources or to embedded resource files. When you are finished adding resources, compile the project to build a .dll file.

You can then build an executable Windows application that loads resources from the assembly as shown in the following code:

```
Private Sub Form1_Load() Handles MyBase.Load
    ' Get the resource Assembly.
    Dim satellite_assembly As Assembly
    satellite_assembly = Assembly.LoadFrom("SatelliteResourcesDll.dll")

    ' Create a ResourceManager for the satellite's
    ' main resource file.
    Dim resource_manager As ResourceManager
    resource_manager = New ResourceManager( _
        "SatelliteResourcesDll.Resources", _
        satellite_assembly)

    ' Get the string resource from the satellite's
    ' main resource file.
    lblGreeting.Text = resource_manager.GetString("Greeting")

    ' Create a ResourceManager for the satellite's
    ' Images resource file.
    resource_manager = New ResourceManager( _
        "SatelliteResourcesDll.Images", _
        satellite_assembly)

    ' Get the form's background image from the satellite's
    ' Images resource file.
    Me.BackgroundImage = CType( _
        resource_manager.GetObject("Dog"), Image)
End Sub
```

The program declares an Assembly object and uses the shared Assembly.LoadForm method to load information about the resource-only assembly SatelliteResourcesDll.dll. In this example, the file was copied into the executable program's startup directory so the program does not need to pass a complete path to the LoadFrom method.

Next, the program uses the Assembly object to create a ResourceManager. For the resource file's name, it passes the ResourceManager object's constructor to the assembly's root namespace SatelliteResourcesDll, followed by the name of the resource file within the satellite project. In this case, the first resource is stored in the project's resources, so the file is MyResources.resx. Now the program uses the ResourceManager object's GetString method to fetch the Greeting resource.

The program then creates a new ResourceManager using the same Assembly object, this time using the resource file named ImageResources.resx. It uses the GetObject method to fetch the image named Dog, converts the result into an Image, and saves the result in the form's BackgroundImage property.

Later, if you must change the value of the `Greeting` string or the Dog image, you can update the satellite project, build a new DLL file, and copy the DLL file into the executable program's startup directory. The next time you run the program, it will load the new resources.

Example projects SatelliteResourcesDll and SatelliteMain, which are both available for download on the book's web site, contain the satellite resource DLL and an executable program that uses it, respectively.

Localization Resources

One of the most important reasons for inventing resource files was to allow localization: supporting different text, images, and other items for different languages and cultures. In Visual Studio .NET, localization is easy.

First, create a form using whatever language you typically use from day to day. For me, that's English as spoken in the United States. Open the form in the form designer and give it whatever controls you need. Set the form's and controls' properties as usual.

Next, set the form's `Localizable` property to `True`. Then set the form's `Language` property to the first language you want to support other than the default language that you have been working with so far. Modify the controls' properties for the new language.

As you modify a form, Visual Studio saves the changes you make to a new resource file attached to the form. If you open Solution Explorer and click the Show All Files button, you can see these resource files below the form's file.

Example program Localized, which is available for download on the book's web site, uses default settings for United States English. It also includes localizations for generic German (as opposed to German as spoken in Switzerland, Germany, Liechtenstein, or some other country). If you expand the form's entry in Solution Explorer, you'll find the files `Form1.resx` holding the default settings and `Form1.de.resx` holding the German settings.

At runtime, the application automatically checks the user's computer and selects the best resource file based on the system's regional settings.

Normally, you should let the application pick the appropriate resource file automatically, but you can explicitly select a resource file for testing purposes. To do that, open the Solution Explorer and click the Show All Files button. Find the form's design file (for example, `Form1.Designer.vb`) and open it.

Give the form an empty constructor that sets the current thread's `CurrentCulture` and `CurrentUICulture` properties to the culture that you want to use. See the online help for the `CultureInfo` class to get a list of possible cultures such as en-US (United States English) or de-DE (German in Germany, as opposed to in Austria, Switzerland, or some other locale). The result should look something like the following code:

```
Imports System.Threading
Imports System.Globalization

Public Class Form1
    Public Sub New()
```

```
        MyBase.New()

        ' Set the culture and UI culture to German.
        Thread.CurrentThread.CurrentCulture = New CultureInfo("de-DE")
        Thread.CurrentThread.CurrentUICulture = New CultureInfo("de-DE")

        'This call is required by the Windows Form Designer.
        InitializeComponent()
    End Sub
End Class
```

> *Note that the program must set the culture and user interface culture before it calls*
> `InitializeComponent` *because* `InitializeComponent` *is where the program sets the*
> *form and control properties.*

The rest is automatic. When the form's `InitializeComponent` method executes, it loads the resources it needs for the culture you selected.

Example program LocalizedUseGerman, which is available for download on the book's web site, uses this code to open the form localized for German even if your system would not normally select that version.

ComponentResourceManager

Like the `ResourceManager` class, the `ComponentResourceManager` class provides `GetString` and `GetObject` methods for loading resources from a resource file one at a time.

`ComponentResourceManager` also provides the `ApplyResources` method, which makes applying resources to an object easier. `ApplyResources` searches a resource file for items with a particular object name. It then applies any resources it finds to an object's properties.

For example, you could use `ApplyResources` to search for resources with the object name `ExitButton` and apply them to the `btnExit` control. If the resource file contained an item named `ExitButton.Text`, `ApplyResources` would apply it to the `btnExit` control's `Text` property. If the method found other resources (such as `ExitButton.Location` and `ExitButton.Size`), it would apply those properties to the control, too.

When you localize a form, Visual Studio automatically creates entries in the appropriate resource files for the form's controls. If you set the form's `Language` to German and set the `btnYes` button's `Text` property to `Ja`, then Visual Studio adds a string entry named `btnYes.Text` with value `Ja` to the form's German resource file.

Visual Studio uses the special name `$this` to represent the form's properties. For example, if you set the form's `Text` property, the IDE adds a string resource named `$this.Text` to the appropriate resource file.

Example program LocalizedPickLanguage, which is available for download on the book's web site, uses `ComponentResourceManager` objects in the following code to load different localized resources while it is running:

```
' Select English.
Private Sub radEnglish_CheckedChanged() Handles radEnglish.CheckedChanged
    If Not radEnglish.Checked Then Exit Sub
    LoadAllResources(New CultureInfo("en-US"))
End Sub

' Select German.
Private Sub radGerman_CheckedChanged() Handles radGerman.CheckedChanged
    If Not radGerman.Checked Then Exit Sub
    LoadAllResources(New CultureInfo("de-DE"))
End Sub

' Load resources for the form and all controls.
Private Sub LoadAllResources(ByVal culture_info As CultureInfo)
    ' Make a ComponentResourceManager.
    Dim component_resource_manager As New ComponentResourceManager(Me.GetType)

    ' Load the form's resources.
    LoadResources(Me, "$this", component_resource_manager, culture_info)
End Sub

' Load appropriate resources for an object and its contained controls.
Private Sub LoadResources(ByVal parent As Control, _
 ByVal parent_name As String, _
 ByVal component_resource_manager As ComponentResourceManager, _
 ByVal culture_info As CultureInfo)
    ' Load the parent's resources.
    component_resource_manager.ApplyResources( _
        parent, parent_name, culture_info)
    ToolTip1.SetToolTip(parent, component_resource_manager.GetString( _
        parent_name & ".ToolTip", culture_info))

    ' Load each contained control's resources.
    For Each ctl As Control In parent.Controls
        LoadResources(ctl, ctl.Name, component_resource_manager, culture_info)
    Next ctl
End Sub
```

When the user clicks the `radEnglish` radio button, the code calls subroutine `LoadAllResources`, passing it a new `CultureInfo` object representing United States English. Similarly when the user clicks the `radGerman` radio button, the code calls `LoadAllResources` passing it a `CultureInfo` object representing German.

Subroutine `LoadAllResources` creates a `ComponentResourceManager` for the form's type and calls subroutine `LoadResources`, passing it the form, the special form resource named `$this`, the component resource manager, and the `CultureInfo` object.

Subroutine `LoadResources` loads the resources for an object and all of the controls it contains. First, it uses the component resource manager's `ApplyResources` to load the object's resources.

Next, it sets the object's tooltip if it has one. Recall that a control's tooltip is actually not a property of the control. Instead it is an extender provider property provided by a `ToolTip` control. To load the form's tooltip, the code explicitly calls the `Tooltip1` control's `SetToolTip` method, passing to it the object being loaded and the object's name with ".ToolTip" appended.

Finally, the code loops through the object's contained controls and performs calls `LoadResources` for each. This makes the code recursively call subroutine `LoadResources` for every control in the application.

Example program LocalizedPickLanguage2, which is also available for download, uses the following slightly modified code to accomplish the same tasks. Instead of passing a `CultureInfo` object into the `ApplyResources` method, the program sets the current thread's `CurrentCulture` and `CurrentUICulture` properties. It then lets the calls to `ApplyResources` figure out which resource file to use.

```
' Load resources for the form and all controls.
Private Sub LoadAllResources(ByVal culture_info As CultureInfo)
    ' Set the current culture and UI culture.
    Thread.CurrentThread.CurrentCulture = culture_info
    Thread.CurrentThread.CurrentUICulture = culture_info

    ' Make a ComponentResourceManager.
    Dim component_resource_manager As New ComponentResourceManager(Me.GetType)

    ' Load the form's resources.
    LoadResources(Me, "$this", component_resource_manager)
End Sub

' Load appropriate resources for an object and its contained controls.
Private Sub LoadResources(ByVal parent As Control, _
 ByVal parent_name As String, _
 ByVal component_resource_manager As ComponentResourceManager)
    ' Load the parent's resources.
    component_resource_manager.ApplyResources(parent, parent_name)
    ToolTip1.SetToolTip(parent, _
        component_resource_manager.GetString(parent_name & ".ToolTip"))

    ' Load each contained control's resources.
    For Each ctl As Control In parent.Controls
        LoadResources(ctl, ctl.Name, component_resource_manager)
    Next ctl
End Sub
```

The program can later check the `CurrentCulture` and `CurrentUICulture` properties if it needs to remember which culture it is currently using.

Application

The `Application` object represents the running application at a very high level. It provides properties and methods for starting an event loop to process Windows messages, possibly for a form. It also provides methods for controlling and stopping the event loop.

Don't confuse the `Application` object with the My.Application namespace. The two have somewhat similar purposes but very different features.

The following sections describe the `Application` object's most useful properties, methods, and events.

Application Properties

The following table describes the `Application` object's most useful properties.

Property	Purpose
CommonAppDataPath	Returns the path where the program should store application data shared by all users. By default, this path has the form base_path\company_name\product_name\product_version. The base_ path is typically `C:\Documents and Settings\All Users\Application Data`.
CommonAppDataRegistry	Returns the Registry key where the program should store application data shared by all users. By default, this path has the form `HKEY_LOCAL_MACHINE\Software\company_name\product_name\product_version`.
CompanyName	Returns the application's company name.
CurrentCulture	Gets or sets the `CultureInfo` object for this thread.
CurrentInputLanguage	Gets or sets the `InputLanguage` for this thread.
ExecutablePath	Returns the fully qualified path to the file that started the execution, including the file name.
LocalUserAppDataPath	Returns the path where the program should store data for this local, nonroaming user. By default, this path has the form base_path\company_name\product_name\product_version. The base_path is typically `C:\Documents and Settings\user_name\Local Settings\Application Data`.
MessageLoop	Returns `True` if the thread has a message loop. If the program begins with a startup form, this loop is created automatically. If it starts with a custom `Sub Main`, the loop doesn't initially exist and the program must start it by calling `Application.Run`.
OpenForms	Returns a collection holding references to all of the application's open forms.

Property	Purpose
ProductName	Returns the application's product name.
ProductVersion	Gets the product version associated with this application.
StartupPath	Returns the fully qualified path to the directory where the program starts.
UserAppDataPath	Returns the path where the program should store data for this user. By default, this path has the form base_path\company_name\product_name\product_version. The base_path is typically C:\Documents and Settings\user_name\Application Data.
UserAppDataRegistry	Returns the Registry key where the program should store application data for this user. By default, this path has the form HKEY_CURRENT_USER\Software\company_name\product_name\product_version.
UseWaitCursor	Determines whether this thread's forms display a wait cursor. Set this to True before performing a long operation, and set it to False when the operation is finished.

Example program ListForms, which is available for download on the book's web site, uses the Application.OpenForms collection to list its running forms.

To set the CompanyName, ProductName, and ProductVersion, open Solution Explorer, double-click the My Project entry, and select the Application tab. Then click the Assembly Information button and enter the values on the Assembly Information dialog box. Example program ShowProductInfo displays these three values.

Application Methods

The following table describes the Application object's most useful methods.

Method	Purpose
AddMessageFilter	Adds a message filter to monitor the event loop's Windows messages. See the following text for an example.
DoEvents	Processes Windows messages that are currently in the message queue. If the thread is performing a long calculation, it would normally prevent the rest of the thread from taking action such as processing these messages. Calling DoEvents lets the user interface catch up with the user's actions. Note that you can often avoid the need for DoEvents if you perform the long task on a separate thread.

Method	Purpose
Exit	Ends the whole application. This is a rather abrupt halt and any forms that are loaded do not execute their FormClosing or FormClosed event handlers, so be certain that the application has executed any necessary clean-up code before calling Application.Exit.
ExitThread	Ends the current thread. This is a rather abrupt halt, and any forms running on the thread do not execute their FormClosing or FormClosed event handlers.
OnThreadException	Raises the Application object's ThreadException event, passing it an exception. If your application throws an uncaught exception in the IDE, the IDE halts. That makes it hard to test Application.ThreadException event handlers. You can call OnThreadException to invoke the event handler.
RemoveMessageFilter	Removes a message filter.
Run	Runs a message loop for the current thread. If you pass this method a form object, it displays the form and processes its messages until the form closes.
SetSuspendState	Makes the system suspend operation or hibernate. When the system hibernates, it writes its memory contents to disk. When you restart the system, it resumes with its previous desktop and applications running. When the system suspends operation, it enters low-power mode. It can resume more quickly than a hibernated system, but memory contents are not saved, so they will be lost if the computer loses power.

Example program FilterMessages, which is available for download on the book's web site, uses the following code to filter messages and ignore left mouse button down messages:

```
Public Class Form1
    ' Filter out left mouse button down messages.
    Private Class NoLeftDownMessageFilter
        Implements IMessageFilter

        Public Function PreFilterMessage( _
         ByRef m As System.Windows.Forms.Message) _
         As Boolean Implements IMessageFilter.PreFilterMessage
            ' If the message is left mouse down, return True
            ' to indicate that the message should be ignored.
            Const WM_LBUTTONDOWN As Long = &H201
            Return (m.Msg = WM_LBUTTONDOWN)
```

```
            End Function
        End Class

        ' Install the message filter.
        Private Sub Form1_Load() Handles MyBase.Load
            Dim no_left_down_message_filter As New NoLeftDownMessageFilter
            Application.AddMessageFilter(no_left_down_message_filter)
        End Sub

        ' Toggle the wait cursor.
        Private Sub Form1_Click() Handles Me.Click
            Application.UseWaitCursor = Not Application.UseWaitCursor
        End Sub
    End Class
```

The `NoLeftDownMessageFilter` class implements the `IMessageFilter` interface, which specifies the `PreFilterMessage` function. That function examines a message and returns `True` if it wants to filter the message out of the form's message queue. In this example, the function returns `True` if the message is `WM_LBUTTONDOWN`, indicating that the left button has been pressed.

The form's `Load` event handler creates a new instance of the filter class and uses the `Application` object's `AddMessageFilter` method to install the filter.

The form's `Click` event handler toggles the state of the `Application` object's `UseWaitCursor` property. This displays or hides the wait cursor.

When you left-click the form, the message filter intercepts the left button down message, so the `Click` event doesn't occur. If you right-click the form, the filter allows all messages through so the `Click` event occurs and the form displays or hides the wait cursor.

Application Events

The `Application` object provides a few events that give you information about the application's state. The following table describes these events.

Event	Purpose
ApplicationExit	Occurs when the application is about to shut down.
Idle	Occurs when the application finishes executing some code and is about to enter an idle state to wait for events.
ThreadException	Occurs when the application throws an unhandled exception. See the following code for an example.
ThreadExit	Occurs when a thread is about to exit.

When you end an application by unloading its form, the program receives the events `FormClosing`, `FormClosed`, `ThreadExit`, and `ApplicationExit`, in that order.

If you end the application by calling the `Application` object's `Exit` method, the program only receives the `ThreadExit` and `ApplicationExit` events. If more than one thread is running, they each receive `ThreadExit` events, and then they each receive `ApplicationExit` events.

Example program CatchThreadException, which is available for download on the book's web site, uses the following code to catch all exceptions thrown by the application:

```
Imports System.IO

Public Class Form1
    ' Install the ThreadException event handler.
    Private Sub Form1_Load() Handles Me.Load
        AddHandler Application.ThreadException, _
            AddressOf Me.app_ThreadException
    End Sub

    ' Catch a ThreadException event.
    Private Sub app_ThreadException(ByVal sender As Object, _
     ByVal e As System.Threading.ThreadExceptionEventArgs)
        MessageBox.Show("Caught unhandled exception:" & _
            vbCrLf & vbCrLf & e.Exception.Message)
    End Sub

    ' Throw an InvalidDataException.
    Private Sub btnThrow_Click() Handles btnThrow.Click
        Throw New InvalidDataException("Bad data! Bad!")
    End Sub

    ' Call the OnThreadException method.
    Private Sub btnOnThreadException_Click() _
     Handles btnOnThreadException.Click
        Application.OnThreadException( _
            New InvalidDataException("Bad data! Bad!"))
    End Sub
End Class
```

When it starts, the form's `Load` event handler uses the `Application` object's `AddHandler` method to add the `app_ThreadException` subroutine as a handler for the `Application`'s `ThreadException` event.

The `app_ThreadException` subroutine simply displays an error message describing the exception that it caught. A real application would take different actions such as logging the error and a stack trace, restarting the application, and so forth.

When the user clicks the `Throw` button, the program throws an exception. If you are running the program in the development environment, Visual Studio halts at the `Throw` statement and tells you that it encountered an unhandled exception. If you run the compiled executable outside of the development environment, the application's `ThreadException` event occurs. The `app_ThreadException` routine catches the event and displays its message.

When the user clicks the `OnThreadException` button, the program calls the `Application` object's `OnThreadException` method, passing it an exception object. Whether you are running in the development environment or running the compiled executable, the application's `ThreadException` event occurs and the `app_ThreadException` routine catches it. You can use `OnThreadException` to throw the exception without the IDE's interference, so you can catch it and debug the exception handling code.

Summary

Visual Studio provides many ways to store and use application configuration and resource information. Some of the most useful of these include environment variables, the Registry, configuration files, and resource files. The My namespace and the `Application` object make working with some of these easier.

Store configuration information that changes relatively often in configuration files. Store resources that determine the application's appearance in resource files. If you will distribute the application in multiple languages, use localized resource files to manage the different languages. If necessary, you can change the data stored in configuration and resource files and redistribute them to your users without rebuilding the entire application.

You can store small pieces of information between program runs in the System Registry. Use databases, XML files, and other files to store larger amounts of data.

Using all of these techniques, you can make your application easily configurable. You can satisfy the needs of different kinds of users and customize the application without recompiling it.

This chapter explained ways that a program can save configuration and resource information using tools such as the Registry, environment variables, and resource files. Generally, these kinds of data are of relatively limited size. If an application needs to store larger amounts of data, it generally uses a database or file.

Chapter 37, "Streams," explains classes that a Visual Basic application can use to work with stream data in general, and files in particular. Using streams attached to files, a program can read and write large amounts of data without cluttering up the Registry, environment variables, or resource files.

37

Streams

At some very primitive level, all pieces of data are just piles of bytes. The computer doesn't really store invoices, employee records, and recipes. At its most basic level, the computer stores bytes of data (or even bits, but the computer naturally groups them in bytes). It is only when a program interprets those bytes that they acquire a higher-level meaning that is valuable to the user.

Although you generally don't want to treat high-level data as undifferentiated bytes, there are times when thinking of the data as bytes lets you treat it in more uniform ways.

One type of byte-like data is the *stream*, an ordered series of bytes. Files, data flowing across a network, messages moving through a queue, and even the memory in an array all fit this description.

Defining the abstract idea of a stream lets applications handle these different types of objects uniformly. If an encryption or serialization routine manipulates a generic stream of bytes, it doesn't need to know whether the stream represents a file, a chunk of memory, plain text, encrypted text, or data flowing across a network.

Visual Studio provides several classes for manipulating different kinds of streams. It also provides higher-level classes for working with this kind of data at a more abstract level. For example, it provides classes for working with streams that happen to represent files and directories.

This chapter describes some of the classes you can use to manipulate streams. It explains lower-level classes that you may use only rarely and higher-level classes that let you read and write strings and files relatively easily.

The following table summarizes the most useful stream classes.

Class	Use
FileStream	Read and write bytes in a file.
MemoryStream	Read and write bytes in memory.
BinaryReader, BinaryWriter	Read and write specific data types in a stream.
StringReader, StringWriter	Read and write text with or without new lines in a string.
StreamReader, StreamWriter	Read and write text with or without new lines in a stream (usually a file stream).

Stream

The `Stream` class defines properties and methods that derived stream classes must provide. These let the program perform relatively generic tasks with streams such as determining whether the stream allows writing.

The following table describes the `Stream` class's most useful properties.

Property	Purpose
CanRead	Returns `True` if the stream supports reading.
CanSeek	Returns `True` if the stream supports seeking to a particular position in the stream.
CanTimeout	Returns `True` if the stream supports timing out of read and write operations.
CanWrite	Returns `True` if the stream supports writing.
Length	Returns the number of bytes in the stream.
Position	Returns the stream's current position in its bytes. For a stream that supports seeking, the program can set this value to move to a particular position.
ReadTimeout	Determines the number of milliseconds that a read operation will wait before timing out.
WriteTimeout	Determines the number of milliseconds that a write operation will wait before timing out.

The following table describes the `Stream` class's most useful methods.

Method	Purpose
BeginRead	Begins an asynchronous read.
BeginWrite	Begins an asynchronous write.
Close	Closes the stream and releases any resources it uses (such as file handles).
EndRead	Waits for an asynchronous read to finish.
EndWrite	Ends an asynchronous write.
Flush	Flushes data from the stream's buffers into the underlying storage medium (device, file, memory, and so forth).
Read	Reads bytes from the stream and advances its position by that number of bytes.
ReadByte	Reads a byte from the stream and advances its position by one byte.
Seek	If the stream supports seeking, sets the stream's position.
SetLength	Sets the stream's length. If the stream is currently longer than the new length, it is truncated. If the stream is shorter than the new length, it is enlarged. The stream must support both writing and seeking for this method to work.
Write	Writes bytes into the stream and advances the current position by this number of bytes.
WriteByte	Writes one byte into the stream and advances the current position by one byte.

You can learn about the other members of the `Stream` class at `msdn2.microsoft.com/en-us/library/system.io.stream.aspx`.

FileStream

The `FileStream` class provides a stream representation of a file.

The `FileStream` class's parent class `Stream` defines most of its properties and methods. See the section "Stream" earlier in this chapter for descriptions of those properties and methods.

`FileStream` adds two useful new properties to those it inherits from `Stream`. First, `IsAsync` returns `True` if the `FileStream` was opened asynchronously. Second, the `Name` property returns the file name passed into the object's constructor.

The class also adds two new useful methods to those it inherits from `Stream`. The `Lock` method locks the file, so other processes can read it but not modify it. `Unlock` removes a previous lock.

Overloaded versions of the `FileStream` class's constructor let you specify a file name or handle, the file mode (`Append`, `Create`, `CreateNew`, `Open`, `OpenOrCreate`, or `Truncate`), access mode (`Read`, `Write`, or `ReadWrite`), file sharing (`Inheritable`, which allows child processes to inherit the file handle; `None`, `Read`; `Write`; or `ReadWrite`), a buffer size, and file options (`Asynchronous`, `DeleteOnClose`, `Encrypted`, `None`, `RandomAccess`, `SequentialScane`, or `WriteThrough`).

Example program FileStreamWrite, which is available for download on the book's web site, uses the following code to create a file. It creates a file and uses a Universal Transformation Format (UTF) `UTF8Encoding` object to convert a string into an array of bytes. It writes the bytes into the file and then closes the `FileStream`.

```
Dim file_name As String = Application.StartupPath & "\test.txt"
Using file_stream As New FileStream(file_name, FileMode.Create)
    Dim bytes As Byte() = New UTF8Encoding().GetBytes("Hello world!")

    file_stream.Write(bytes, 0, bytes.Length)
    file_stream.Close()
End Using
```

The 8-bit UTF encoding is the most popular type on the Web, although there are other encoding formats such as UTF-7 and UTF-16. For additional information, see `zsigri.tripod.com/fontboard/cjk/unicode.html` *or* `www.i18nguy.com/unicode/codepages.html`.

As this example demonstrates, the `FileStream` class provides only low-level methods for reading and writing files. These methods let you read and write bytes, but not integers, strings, or the other types of data that you are more likely to want to use.

The `BinaryReader` and `BinaryWriter` classes let you read and write binary data more easily than the `FileStream` class does. The `StringReader` and `StringWriter` classes let you read and write string data more easily. See the section "StringReader and StringWriter" describing these classes later in this chapter for more information.

MemoryStream

Like `FileStream`, the `MemoryStream` class inherits from the `Stream` class. This class represents a stream with data stored in memory. Like the `FileStream`, it provides only relatively simple methods for reading and writing data. Usually, you will want to attach a higher-level object to the `MemoryStream` to make using it easier.

Example program MemoryStreamWrite, which is available for download on the book's web site, uses the following code to write and read from a `MemoryStream` object. It first creates the `MemoryStream`. It then creates a `BinaryWriter` attached to the `MemoryStream` and uses it to write some text into the stream. Next, the program creates a `BinaryReader` object attached to the same `MemoryStream`. It uses the stream's `Seek` method to rewind the stream to its beginning, and then uses the `BinaryReader` object's `ReadString` method to read the string out of the `MemoryStream`.

```
Dim memory_stream As New MemoryStream()
Dim binary_writer As New BinaryWriter(memory_stream)
binary_writer.Write("Peter Piper picked a peck of pickled peppers.")

Dim binary_reader As New BinaryReader(memory_stream)
memory_stream.Seek(0, SeekOrigin.Begin)
MessageBox.Show(binary_reader.ReadString())
binary_reader.Close()
```

The following example does the same things as the previous example, except that it uses the
`StreamWriter` and `StreamReader` classes instead of `BinaryWriter` and `BinaryReader`. Note that this
version must call the `StreamWriter` class's `Flush` method to ensure that all of the text is written into the
`MemoryStream` before it can read the memory using the `StreamReader`.

```
Using memory_stream As New MemoryStream()
    Dim stream_writer As New StreamWriter(memory_stream)
    stream_writer.Write("Peter Piper picked a peck of pickled peppers.")
    stream_writer.Flush()

    Dim stream_reader As New StreamReader(memory_stream)
    memory_stream.Seek(0, SeekOrigin.Begin)
    MessageBox.Show(stream_reader.ReadToEnd())
    stream_reader.Close()
End Using
```

BufferedStream

The `BufferedStream` class adds buffering to another stream class. For example, you can create a
`BufferedStream` class attached to a network stream that communicates with another application
through sockets. The `BufferedStream` class buffers data passing through the network connection.

Most programs don't need to explicitly create their own buffered streams, so this class isn't described
further here. See the online help for more information.

BinaryReader and BinaryWriter

The `BinaryReader` and `BinaryWriter` classes are not stream classes. Instead, they are helper classes
that work with stream classes. They let you read and write data in files using a specific encoding. For
example, the `BinaryReader` object's `ReadInt32` method reads a 4-byte (32-bit) signed integer from the
stream. Similarly, the `ReadUInt16` method reads a 2-byte (16-bit) unsigned integer.

These classes still work at a relatively low level, and you should generally use higher-level classes to
read and write data. For example, you shouldn't tie yourself to a particular representation of an integer
unless you really must.

`BinaryReader` and `BinaryWriter` objects are attached to stream objects that provide access to
the underlying bytes. Both of these classes have a `BaseStream` property that returns a reference to the
underlying stream. Note also that the `Close` method provided by each of these classes automatically
closes the underlying stream.

The following table describes the `BinaryReader` class's most useful methods.

Method	Purpose
Close	Closes the `BinaryReader` and its underlying stream.
PeekChar	Reads the stream's next character but does not advance the reader's position, so other methods can still read the character later.
Read	Reads characters from the stream and advances the reader's position.
ReadBoolean	Reads a Boolean from the stream and advances the reader's position by 1 byte.
ReadByte	Reads a byte from the stream and advances the reader's position by 1 byte.
ReadBytes	Reads a number of bytes from the stream into a byte array and advances the reader's position by that number of bytes.
ReadChar	Reads a character from the stream, and advances the reader's position according to the stream's encoding and the character.
ReadChars	Reads a number of characters from the stream, returns the results in a character array, and advances the reader's position according to the stream's encoding and the characters.
ReadDecimal	Reads a decimal value from the stream and advances the reader's position by 16 bytes.
ReadDouble	Reads an 8-byte floating-point value from the stream and advances the reader's position by 8 bytes.
ReadInt16	Reads a 2-byte signed integer from the stream and advances the reader's position by 2 bytes.
ReadInt32	Reads a 4-byte signed integer from the stream and advances the reader's position by 4 bytes.
ReadInt64	Reads an 8-byte signed integer from the stream and advances the reader's position by 8 bytes.
ReadSByte	Reads a signed byte from the stream and advances the reader's position by 1 byte.
ReadSingle	Reads a 4-byte floating-point value from the stream and advances the reader's position by 4 bytes.
ReadString	Reads a string from the current stream and advances the reader's position past it. The string begins with its length.
ReadUInt16	Reads a 2-byte unsigned integer from the stream and advances the reader's position by 2 bytes.
ReadUInt32	Reads a 4-byte unsigned integer from the stream and advances the reader's position by 4 bytes.
ReadUInt64	Reads an 8-byte unsigned integer from the stream and advances the reader's position by 8 bytes.

The following table describes the `BinaryWriter` class's most useful methods.

Method	Purpose
Close	Closes the `BinaryWriter` and its underlying stream.
Flush	Writes any buffered data into the underlying stream.
Seek	Sets the position within the stream.
Write	Writes a value into the stream. This method has many overloaded versions that write characters, arrays of characters, integers, strings, unsigned 64-bit integers, and so forth.

You can learn about the other members of the `BinaryWriter` and `BinaryReader` classes at msdn2.microsoft.com/en-us/library/system.io.binarywriter.aspx and msdn2.microsoft .com/en-us/library/system.io.binaryreader.aspx, respectively.

TextReader and TextWriter

The `TextReader` and `TextWriter` classes are also not stream classes. They provide properties and methods for working with text, which is stream-related. In particular, the `StreamWriter` and `StreamReader` classes derived from `TextReader` and `TextWriter` are associated with streams.

`TextReader` and `TextWriter` are abstract (`MustInherit`) classes that define behaviors for derived classes that read or write text characters. For example, the `StringWriter` and `StreamWriter` classes derived from `TextWriter` let a program write characters into a string or stream, respectively. Normally, you would use these derived classes to read and write text, but you might want to use the `TextReader` or `TextWriter` classes to manipulate the underlying classes more generically. You may also encounter a method that requires a `TextReader` or `TextWriter` object as a parameter. In that case, you could pass the method either a `StringReader`/`StringWriter` or a `StreamReader`/`StreamWriter`. For more information on these, see the sections "StringReader and StringWriter" and "StreamReader and StreamWriter" later in this chapter.

The following table describes the `TextReader` object's most useful methods.

Method	Purpose
Close	Closes the reader and releases any resources that it is using.
Peek	Reads the next character from the text without changing the reader's state, so other methods can read the character later.
Read	Reads data from the input. Overloaded versions of this method read a single character or an array of characters up to a specified length.
ReadBlock	Reads data from the input into an array of characters.
ReadLine	Reads a line of characters from the input and returns the data in a string.
ReadToEnd	Reads any remaining characters in the input and returns them in a string.

The `TextWriter` class has three useful properties. `Encoding` specifies the text's encoding (ASCII, UTF-8, Unicode, and so forth).

`FormatProvider` returns an object that controls formatting. For example, you can build a `FormatProvider` object that knows how to display numbers in different bases (such as hexadecimal or octal).

The `NewLine` property gets or sets the string used by the writer to end lines. Usually, this value is something similar to a carriage return or a carriage return plus a line feed.

The following table describes the `TextWriter` object's most useful methods.

Method	Purpose
`Close`	Closes the writer and releases any resources it uses.
`Flush`	Writes any buffered data into the underlying output.
`Write`	Writes a value into the output. This method has many overloaded versions that write characters, arrays of characters, integers, strings, unsigned 64-bit integers, and so forth.
`WriteLine`	Writes data into the output followed by the new line sequence.

You can learn about the other members of the `TextWriter` and `TextReader` classes at `msdn2 .microsoft.com/en-us/library/system.io.textwriter.aspx` and `msdn2.microsoft .com/en-us/library/system.io.textreader.aspx`, respectively.

StringReader and StringWriter

The `StringReader` and `StringWriter` classes let a program read and write text in a string.

These classes are derived from `TextReader` and `TextWriter` and inherit the definitions of most of their properties and methods from those classes. See the section "TextReader and TextWriter" earlier in this chapter for details.

The `StringReader` provides methods for reading lines, characters, or blocks of characters from the string. Its `ReadToEnd` method returns any of the string that has not already been read. The `StringReader` class's constructor takes as a parameter the string that it should process.

The `StringWriter` class lets an application build a string. It provides methods to write text into the string with or without a new-line character. Its `ToString` method returns the `StringWriter` class's string.

The `StringWriter` stores its string in an underlying `StringBuilder` class. `StringBuilder` is designed to make incrementally building a string more efficient. For example, if an application needs to build a

very large string by concatenating a series of long substrings, it may be more efficient to use a `StringBuilder` rather than adding the strings to a normal `String` variable. `StringWriter` provides a simple interface to the `StringBuilder` class.

The most useful method provided by `StringWriter` that is not defined by the `TextWriter` parent class is `GetStringBuilder`. This method returns a reference to the underlying `StringBuilder` object that holds the class's data.

Example program StringWriterReader, which is available for download on the book's web site, uses the following code to demonstrate the `StringWriter` and `StringReader` classes. It creates a `StringWriter` object and uses its `WriteLine` method to add two lines to the string. It then displays the result of the writer's `ToString` method. This method returns the writer's current contents. Next, the program creates a `StringReader`, passing its constructor the string from which it will read. It closes the `StringWriter` because it is no longer needed. The code displays the result of the `StringReader` class's `ReadLine` method. Because the `StringWriter` created the string as two separate lines, this displays only the first line, "The quick brown fox." Next, the code uses the `StringReader` class's `ReadToEnd` method to read and display the rest of the text, "jumps over the lazy dog." The code finishes by closing the `StringReader`.

```
' Use a StringWriter to write into a string.
Using string_writer As New StringWriter()
    string_writer.WriteLine("The quick brown fox")
    string_writer.WriteLine("jumps over the lazy dog.")
    MessageBox.Show(string_writer.ToString)

    ' Use a StringReader to read from the string.
    Using string_reader As New StringReader(string_writer.ToString)
        string_writer.Close()
        MessageBox.Show(string_reader.ReadLine())
        MessageBox.Show(string_reader.ReadToEnd())
        string_reader.Close()
    End Using
End Using
```

StreamReader and StreamWriter

The `StreamReader` and `StreamWriter` classes let a program read and write data in a stream. The underlying stream is usually a `FileStream`. You can pass a `FileStream` into these classes' constructors, or you can pass a file name and the object will create a `FileStream` automatically.

The `StreamReader` provides methods for reading lines, characters, or blocks of characters from the stream. Its `ReadToEnd` method returns any of the stream that has not already been read. The `EndOfStream` method returns True when the `StreamReader` has reached the end of the stream.

Example program ReadLines, which is available for download on the book's web site, uses the following code fragment to read the lines from a file and add them to the a `ListBox` control.

```
    Do Until stream_reader.EndOfStream()
        lstValues.Items.Add(stream_reader.ReadLine())
    Loop
```

The `StreamWriter` class provides methods to write text into the stream with or without a new-line character.

`StreamReader` and `StreamWriter` are derived from the `TextReader` and `TextWriter` classes and inherit the definitions of most of their properties and methods from those classes. See the section "TextReader and TextWriter" earlier in this chapter for a description of these properties and methods.

The `StreamWriter` class adds a new `AutoFlush` property that determines whether the writer flushes its buffer after every write.

Example program StreamWriterReader, which is also available for download on the book's web site, uses the following code to demonstrate the `StreamReader` and `StreamWriter` classes. It generates a file name and passes it into a `StreamWriter` class's constructor. It uses the `StreamWriter` class's `Write` and `WriteLine` methods to place two lines of text in the file. It then closes the file. If you were to open the file now with a text editor, you would see the text. The program then creates a new `StreamReader`, passing its constructor the same file name. It uses the reader's `ReadToEnd` method to grab the file's contents and displays the results.

```
    Dim file_name As String = Application.StartupPath & "\test.txt"
    Using stream_writer As New StreamWriter(file_name)
        stream_writer.Write("The quick brown fox")
        stream_writer.WriteLine(" jumps over the lazy dog.")
        stream_writer.Close()
    End Using

    Using stream_reader As New StreamReader(file_name)
        MessageBox.Show(stream_reader.ReadToEnd())
        stream_reader.Close()
    End Using
```

This example would have been much more awkward using a `FileStream` object's lower-level `Write` and `Read` methods to manipulate byte arrays. Compare this code to the example in the "FileStream" section earlier in this chapter.

OpenText, CreateText, and AppendText

The `File` class in the System.IO namespace provides four shared methods that are particularly useful for working with `StreamReader` and `StreamWriter` objects associated with text files. The following table summarizes these four methods.

Method	Purpose
Exists	Returns `True` if a file with a given path exists.
OpenText	Returns a `StreamReader` that lets you read from an existing text file.
CreateText	Creates a new text file, overwriting any existing file at the given path, and returns a `StreamWriter` that lets you write into the new file.
AppendText	If the indicated file does not exist, creates the file. Whether the file is new or previously existing, returns a `StreamWriter` that lets you append text at the end of the file.

The following code demonstrates the `Exists` and `OpenText` methods. First, it uses `Exists` to see if the file exists. If the file does exist, the code uses `OpenText` to open the file and get a `StreamReader` associated with it. It uses the `StreamReader` class's `ReadToEnd` method to display the file's text in the text box `txtData`.

```
Dim file_name As String = Application.StartupPath & "\test.txt"
If Not Exists(file_name) Then
    txtData.Text = "<File not found>"
Else
    Using sr As StreamReader = OpenText(file_name)
        txtData.Text = sr.ReadToEnd()
        sr.Close()
    End Using
End If
```

The following code demonstrates the `CreateText` method. The code uses `CreateText` to create a new text file named `test.txt`. If `test.txt` already exists, `CreateText` overwrites it without warning. The program uses the `StreamWriter` returned by `CreateText` to write the contents of the `txtData` text box into the file and closes the file.

```
Dim file_name As String = Application.StartupPath & "\test.txt"
Using sw As StreamWriter = CreateText(file_name)
    sw.Write(txtData.Text)
    sw.Close()
End Using
```

The following code demonstrates the `AppendText` method. The `AppendText` method creates the file if it doesn't already exist, or opens it for appending if it does exist. The program uses the `StreamWriter` returned by `AppendText` to write into the file and then closes the file.

```
Dim file_name As String = Application.StartupPath & "\test.txt"
Using sw As StreamWriter = AppendText(file_name)
    sw.Write(txtData.Text)
    sw.Close()
End Using
```

Example program OpenCreateAppendText, which is available for download on the book's web site, uses these code snippets to see if a file exists, create a new file, open an existing file, append to an existing file, and read from a file.

Custom Stream Classes

Visual Studio provides a few other stream classes with more specialized uses.

The `CryptoStream` class applies a cryptographic transformation to data that passes through it. For example, if you attach a `CryptoStream` to a file using a particular cryptographic transformation and then use it to write data, the `CryptoStream` automatically transforms the data and produces an encrypted file. Similarly, you can use a `CryptoStream` to read an encrypted file and recover the original text.

The `NetworkStream` class represents a socket-based stream over a network connection. You can use this class to make different applications communicate over a network.

Three other special uses of streams are standard input, standard output, and standard error. Console applications define these streams for reading and writing information to and from the console. An application can interact directly with these streams by accessing the `Console.In`, `Console.Out`, and `Console.Error` properties. It can change these streams to new stream objects such as `StreamReaders` and `StreamWriters` by calling the `Console.SetIn`, `Console.SetOut`, and `Console.SetError` methods.

Summary

Streams let a program consider a wide variety of data sources in a uniform way. If a subroutine takes a stream as a parameter, it doesn't need to worry about whether the stream is attached to a string, file, block of memory, or network connection.

Many applications use the `StringReader` and `StringWriter` classes to read and write text in strings, and the `StreamReader` and `StreamWriter` classes to read and write text in streams (usually files). The `Exists`, `OpenText`, `CreateText`, and `AppendText` methods are particularly useful for working with `StreamReader` and `StreamWriter` objects associated with text files.

The other stream classes are often used at lower levels or as more abstract classes to allow a routine to process different kinds of streams in a uniform way. If you focus on these four classes (`StringReader`, `StringWriter`, `StreamReader`, and `StreamWriter`), you will quickly learn how to perform the most common stream operations.

Programs often use the `StreamReader` and `StreamWriter` classes to read and write files. Chapter 38, "File-System Objects," describes classes that let a Visual Basic application interact with the file system in other ways. These classes let a program examine, rename, move, and delete files and directories.

38

File-System Objects

Visual Basic includes a bewildering assortment of objects that you can use to manipulate drives, directories, and files. The stream classes described in Chapter 37 enable you to read and write files, but they don't really capture any of the special structure of the file system.

A Visual Basic application has two main choices for working with the file system: Visual Basic methods and .NET Framework classes. This chapter describes these two approaches and the classes that they use. It finishes by describing some of the My namespace properties and methods that you can use to access file-system tools more easily. For more information on the My namespace, see the section "My" in Chapter 36, "Configuration and Resources," and Appendix S, "The My Namespace."

Permissions

An application cannot perform a task if the user running it doesn't have the appropriate permissions. Although this is true of any operation a program must perform, permission issues are particularly common when working with files, and the Windows Vista operating system is particularly strict about enforcing permission requirements.

A common mistake is for developers to build an application while logged in as a user who has a lot of privileges. Sometimes, developers even have system administrator privileges, so their programs can do pretty much anything on the computer. To ensure that users will have the permissions needed by an application, develop or at least test the code using an account with the privileges that typical users will have.

Chapter 24, "UAC Security," describes permissions in greater detail.

Visual Basic Methods

Visual Basic provides a number of commands for manipulating the file system. These commands are relatively flexible and easy to understand. Most of them have been around since the early days of Visual Basic, so many long-time Visual Basic developers prefer to use them rather than the newer .NET Framework methods.

One disadvantage to these methods is that they do not natively allow you to read and write nonstandard data types. They can handle string, date, integer, long, single, double, and decimal data. They can also handle structures and arrays of those types. They cannot, however, handle classes themselves. You can use XML serialization to convert a class object into a string and then use these methods to read and write the result, but that requires an extra step with some added complexity.

The section "File-System Methods" later in this chapter describes the native file-system methods of Visual Basic. The sections "Sequential-File Access," "Random-File Access," and "Binary-File Access" later in this chapter describe specific issues for working with sequential, random, and binary files.

File Methods

The following table describes the methods Visual Basic provides for working with files.

Method	Purpose
EOF	Returns `True` if a file open for reading is at the end of file. (EOF stands for End Of File.)
FileClose	Closes an open file.
FileGet	Reads data from a file opened in `Random` and `Binary` mode into a variable.
FileGetObject	Reads data as an object from a file opened in `Random` and `Binary` mode into a variable.
FileOpen	Opens a file for reading or writing. Parameters indicate the mode (`Append`, `Binary`, `Input`, `Output`, or `Random`), access type (`Read`, `Write`, or `ReadWrite`), and sharing (`Shared`, `LockRead`, `LockWrite`, or `LockReadWrite`).
FilePut	Writes data from a variable into a file opened for `Random` or `Binary` access.
FilePutObject	Writes an object from a variable into a file opened for `Random` or `Binary` access.
FreeFile	Returns a file number that is not currently associated with any file in this application. You should use `FreeFile` to get file numbers rather than using arbitrary numbers such as 1.
Input	Reads data written into a file by the `Write` method back into a variable.
InputString	Reads a specific number of characters from the file.
LineInput	Returns the next line of text from the file.
Loc	Returns the current position within the file.

Method	Purpose
LOF	Returns the file's length in bytes. ("LOF" stands for Length Of File.)
Print	Prints values into the file. Multiple values separated by commas are aligned at tab boundaries.
PrintLine	Prints values followed by a new line into the file. Multiple values separated by commas are aligned at tab boundaries.
Seek	Moves to the indicated position within the file.
Write	Writes values into the file, delimited appropriately so that they can later be read by the Input method.
WriteLine	Writes values followed by a new line into the file, delimited appropriately so that they can later be read by the Input method.

Many of the Visual Basic file methods use a file number to represent an open file. The file number is just a number used to identify the file. There's nothing magic about it. You just need to be sure not to use the same file number for more than one file at a time. The FreeFile method returns a number that is not in use so that you know it is safe to use as a file number.

The following example uses FreeFile to get an available file number. It uses FileOpen to open a file for reading. Then, while the EOF method indicates that the code hasn't reached the end of the file, the program uses LineInput to read a line from the file and it displays the line. When it finishes reading the file, the program uses FileClose to close it.

```
' Get an available file number.
Dim file_num As Integer = FreeFile()

' Open the file.
FileOpen(file_num, _
    "C:\Temp\test.txt", _
    OpenMode.Input, OpenAccess.Read, OpenShare.Shared)

' Read the file's lines.
Do While Not EOF(file_num)
    ' Read a line.
    Dim txt As String = LineInput(file_num)
    Debug.WriteLine(txt)
Loop

' Close the file.
FileClose(file_num)
```

Note that Windows Vista restricts access to certain directories by normal non-administrator users. In general, you need the correct permissions to work with files. For example, you would need increased permissions to write into the Windows *directory. This example reads a file in the* Temp *directory, which should be accessible to all users, so it should work for everyone.*

File-System Methods

Visual Basic also provides several methods for working with the file system. The following table describes methods that manipulate directories and files.

Method	Purpose
ChDir	Changes the application's current working directory.
ChDrive	Changes the application's current working drive.
CurDir	Returns the application's current working directory.
Dir	Returns a file matching a directory path specification that may include wildcards, and matching certain file properties such as ReadOnly, Hidden, or Directory. The first call to Dir should include a path. Subsequent calls can omit the path to fetch the next matching file for the initial path. Dir returns file names without the path and returns Nothing when no more files match.
FileCopy	Copies a file to a new location.
FileDateTime	Returns the date and time when the file was created or last modified.
FileLen	Returns the length of a file in bytes.
GetAttr	Returns a value indicating the file's attributes. The value is a combination of the values vbNormal, vbReadOnly, vbHidden, vbSystem, vbDirectory, vbArchive, and vbAlias.
Kill	Permanently deletes a file.
MkDir	Creates a new directory.
Rename	Renames a directory or file.
RmDir	Deletes an empty directory.
SetAttr	Sets the file's attributes. The attribute value is a combination of the values vbNormal, vbReadOnly, vbHidden, vbSystem, vbDirectory, vbArchive, and vbAlias.

Sequential-File Access

With sequential file access, a program reads or writes the contents of a file byte-by-byte from start to finish with no jumping around. In contrast, in a random access file, the program can jump freely to any position in the file and write data wherever it likes.

A text file is a typical sequential file. The program can read the text in order, and read it one line at a time, but it cannot easily jump around within the file.

The `Input`, `InputString`, `LineInput`, `Print`, `PrintLine`, `Write`, and `WriteLine` methods provide sequential access to files.

The `Print` and `PrintLine` methods provide mostly unformatted results. If you pass these methods multiple parameters separated by commas, they align the results on tab boundaries. `Write` and `WriteLine`, on the other hand, delimit their output so that it can be easily read by the `Input` method.

A program cannot directly modify only part of a sequential file. For example, it cannot modify, add, or remove a sentence in the middle of a paragraph. If you must modify the file, you should read it into a string, make the changes you want, and then rewrite the file.

If you must frequently modify text in the middle of a file, you should consider using random or binary access, or storing the data in a database.

Random-File Access

A random-access file contains a series of fixed-length records. For example, you could create an employee file that contains a series of values defining an employee. Each record would have fixed-length fields to hold an employee's ID, first name, last name, street address, and so forth, as shown in the following structure definition:

```
Structure Employee
    Public Id As Long
    <VBFixedString(20)> Public FirstName As String
    <VBFixedString(20)> Public LastName As String
    <VBFixedString(40)> Public Street As String
    ...
End Structure
```

When you open a file for random access, you can jump to any record in the file. That makes certain kinds of file manipulation easier. For example, if the file is sorted, you can use a binary search to locate records in it.

You can overwrite the values in a record within the file, but you cannot add or remove records in the middle of the file. If you must make those sorts of changes, you must load the file into memory and then rewrite it from scratch.

The `FileGet`, `FileGetObject`, `FilePut`, and `FilePutObject` methods read and write records in random-access files. Example program RandomAccessEmployees, which is available for download on the book's web site, uses the following code to demonstrate the `FilePut` and `FileGet` methods:

```
Public Class Form1
    Public Structure Employee
        Public ID As Integer
        <VBFixedString(15)> Public FirstName As String
        <VBFixedString(15)> Public LastName As String

        Public Sub New(ByVal new_id As Integer, ByVal first_name As String, _
         ByVal last_name As String)
            ID = new_id
            FirstName = first_name
            LastName = last_name
        End Sub

        Public Overrides Function ToString() As String
            Return ID & ": " & FirstName & " " & LastName
        End Function
    End Structure

    Private Sub btnMakeRecords_Click() Handles btnMakeRecords.Click
        ' Declare a record variable.
        Dim emp As New Employee

        ' Get an available file number.
        Dim file_num As Integer = FreeFile()

        ' Open the file.
        FileOpen(file_num, "MYFILE.DAT", OpenMode.Random, _
            OpenAccess.ReadWrite, OpenShare.Shared, _
            Len(emp))

        ' Make some records.
        FilePut(file_num, New Employee(1, "Alice", "Altanta"))
        FilePut(file_num, New Employee(2, "Bob", "Bakersfield"))
        FilePut(file_num, New Employee(3, "Cindy", "Chicago"))
        FilePut(file_num, New Employee(4, "Dan", "Denver"))
        FilePut(file_num, New Employee(5, "Erma", "Eagle"))
        FilePut(file_num, New Employee(6, "Fred", "Frisco"))

        ' Fetch and display the records.
        Dim obj As ValueType = DirectCast(emp, ValueType)
        For Each i As Integer In New Integer() {3, 1, 5, 2, 6}
            FileGet(file_num, obj, i)
            emp = DirectCast(obj, Employee)
            Debug.WriteLine("[" & emp.ToString() & "]")
        Next i

        ' Close the file.
        FileClose(file_num)
    End Sub
End Class
```

First, the code defines a structure named `Employee` to hold the data in a record. Notice how the code uses the `VBFixedString` attribute to flag the strings as fixed length. The structure must have a fixed length if you want to jump randomly through the file because Visual Basic calculates a record's position by multiplying a record's size by its index in the file. If records contained strings of unknown length, the calculation wouldn't work.

When the user clicks the Make Records button, the `btnMakeRecords_Click` event handler executes. This code declares a variable of the record type, `Employee`. It uses the `FreeFile` method to get an available file number and uses `FileOpen` to open the file for random access. The final parameter to `FileOpen` is the length of the file's records. To calculate this length, the program uses the `Len` function, passing it the `Employee` instance `emp`.

Next, the program uses the `FilePut` method to write six records into the file. It passes `FilePut` the file number and a new `Employee` structure. The structure's constructor makes initializing the new records easy.

The program then uses `FileGet` to retrieve the six records using their indexes as keys, fetching them out of numeric order to demonstrate random access. It then displays each record's data in the Output window surrounded by brackets so you can see where the data starts and ends.

There are two key points to notice here. First, the file numbers records starting with 1 not 0, so the first record in the file has index 1.

Second, the `FileGet` method does not have an overloaded version that takes an `Employee` structure as a parameter. Because this example has `Option Strict` set to `On`, the code must perform some shenanigans to pass `FileGet` a `ValueType` variable and then later convert it into an `Employee`.

If you set `Option Strict` to `Off`, you can pass an `Employee` object directly into `FileGet`. Turning off `Option Strict` is generally a bad idea, however, because it can hide implicit data type conversions that may indicate a mistake. You can minimize the danger by placing as little code as possible in the file with `Option Strict Off`. For example, if the code that uses `FileGet` is in a class, you can use the `Partial` keyword to move that code into a separate module. Then that module can turn off `Option Strict` whereas the rest of the class's code keeps `Option Strict On`.

After if it has read and displayed the records, the program uses `FileClose` to close the file.

The following text shows the result. Notice that the first and last names are padded with spaces to 15 characters, the length of the `Employee` structure's fixed-length strings. The last names are also padded to 15 characters.

```
[3: Cindy          Chicago        ]
[1: Alice          Altanta        ]
[5: Erma           Eagle          ]
[2: Bob            Bakersfield    ]
[6: Fred           Frisco         ]
```

Binary-File Access

Binary access is similar to random access, except that it does not require its data to fit into neat records. You get control over pretty much every byte in the file, and you can jump to an arbitrary byte number in the file. If the items in the file are not fixed-length records, however, you cannot jump to a particular record because you cannot calculate where that record would begin.

.NET Framework Classes

The System.IO namespace provides several classes for working with the file system. The `Directory` and `File` classes provide shared methods that you can use to manipulate the file system without creating instances of helper objects.

The `DirectoryInfo` and `FileInfo` classes let you work with specific relevant file system objects. For example, a `FileInfo` object represents a particular file and provides methods to create, rename, delete, and get information about that file.

The following sections describe these and the other classes that the Framework provides to help you work with the file system.

Directory

The `Directory` class provides shared methods for working with directories. These methods let you create, rename, move, and delete directories. They let you enumerate the files and subdirectories within a directory, and get and set directory information such as the directory's creation and last access time.

The following table describes the `Directory` class's shared methods.

Method	Purpose
CreateDirectory	Creates a directory and any missing ancestors (parent, grandparent, and so on).
Delete	Deletes a directory and its contents. It can recursively delete all subdirectories.
Exists	Returns `True` if the path points to an existing directory.
GetCreationTime	Returns a directory's creation date and time.
GetCreationTimeUtc	Returns a directory's creation date and time in Coordinated Universal Time (UTC).
GetCurrentDirectory	Returns the application's current working directory.

Method	Purpose
GetDirectories	Returns an array of strings holding the fully qualified names of a directory's subdirectories.
GetDirectoryRoot	Returns the directory root for a path (the path need not exist). For example, `C:\`.
GetFiles	Returns an array of strings holding the fully qualified names of a directory's files.
GetFileSystemEntries	Returns an array of strings holding the fully qualified names of a directory's files and subdirectories.
GetLastAccessTime	Returns a directory's last access date and time.
GetLastAccessTimeUtc	Returns a directory's last access date and time in UTC.
GetLastWriteTime	Returns the date and time when a directory was last modified.
GetLastWriteTimeUtc	Returns the date and time in UTC when a directory was last modified.
GetLogicalDrives	Returns an array of strings listing the system's logical drives as in `A:\`. The list only includes drives that are attached. For example, it lists an empty floppy drive and a connected flash disk but doesn't list a flash disk after you disconnect it.
GetParent	Returns a `DirectoryInfo` object representing a directory's parent.
Move	Moves a directory and its contents to a new location on the same disk volume.
SetCreationTime	Sets a directory's creation date and time.
SetCreationTimeUtc	Sets a directory's creation date and time in UTC.
SetCurrentDirectory	Sets the application's current working directory.
SetLastAccessTime	Sets a directory's last access date and time.
SetLastAccessTimeUtc	Sets a directory's last access date and time in UTC.
SetLastWriteTime	Sets a directory's last write date and time.
SetLastWriteTimeUtc	Sets a directory's last write date and time in UTC.

File

The `File` class provides shared methods for working with files. These methods let you create, rename, move, and delete files. They also make working with file streams a bit easier.

The following table describes the `File` class's most useful shared methods.

Method	Purpose
AppendAll	Adds text to the end of a file, creating it if it doesn't exist, and then closes the file.
AppendText	Opens a file for appending UTF-8 encoded text and returns a `StreamWriter` class attached to it.
Copy	Copies a file.
Create	Creates a new file and returns a `FileStream` attached to it.
CreateText	Creates or opens a file for writing UTF-8 encoded text and returns a `StreamWriter` class attached to it.
Delete	Permanently deletes a file.
Exists	Returns `True` if the specified file exists.
GetAttributes	Gets a file's attributes. This is a combination of flags defined by the `FileAttributes` enumeration: `Archive`, `Compressed`, `Device`, `Directory`, `Encrypted`, `Hidden`, `Normal`, `NotContextIndexed`, `Offline`, `ReadOnly`, `ReparsePoint`, `SparseFile`, `System`, and `Temporary`.
GetCreationTime	Returns a file's creation date and time.
GetCreationTimeUtc	Returns a file's creation date and time in UTC.
GetLastAccessTime	Returns a file's last access date and time.
GetLastAccessTimeUtc	Returns a file's last access date and time in UTC.
GetLastWriteTime	Returns a file's last write date and time.
GetLastWriteTimeUtc	Returns a file's last write date and time in UTC.
Move	Moves a file to a new location.
Open	Opens a file and returns a `FileStream` attached to it. Parameters let you specify the mode (`Append`, `Create`, `CreateNew`, `Open`, `OpenOrCreate`, or `Truncate`), access (`Read`, `Write`, or `ReadWrite`), and sharing (`Read`, `Write`, `ReadWrite`, or `None`) settings.
OpenRead	Opens a file for reading and returns a `FileStream` attached to it.

Method	Purpose
OpenText	Opens a UTF-8-encoded text file for reading and returns a `StreamReader` attached to it.
OpenWrite	Opens a file for writing and returns a `FileStream` attached to it.
ReadAllBytes	Returns a file's contents in an array of bytes.
ReadAllLines	Returns a file's lines in an array of strings.
ReadAllText	Returns a file's contents in a string.
Replace	This method takes three file paths as parameters, representing a source file, a destination file, and a backup file. If the backup file exists, the method permanently deletes it. It then moves the destination file to the backup file, and moves the source file to the destination file. For example, imagine a program that writes a log file every time it runs. It could use this method to keep three versions of the log: the current log (the method's source file), the most recent backup (the method's destination file), and a second backup (the method's backup file). This method throws an error if either the source or destination file doesn't exist.
SetAttributes	Sets a file's attributes. This is a combination of flags defined by the `FileAttributes` enumeration: `Archive`, `Compressed`, `Device`, `Directory`, `Encrypted`, `Hidden`, `Normal`, `NotContextIndexed`, `Offline`, `ReadOnly`, `ReparsePoint`, `SparseFile`, `System`, and `Temporary`.
SetCreationTime	Sets a file's creation date and time.
SetCreationTimeUtc	Sets a file's creation date and time in UTC.
SetLastAccessTime	Sets a file's last access date and time.
SetLastAccessTimeUtc	Sets a file's last access date and time in UTC.
SetLastWriteTime	Sets a file's last write date and time.
SetLastWriteTimeUtc	Sets a file's last write date and time in UTC.
WriteAllBytes	Creates or replaces a file, writes an array of bytes into it, and closes the file.
WriteAllLines	Creates or replaces a file, writes an array of strings into it, and closes the file.
WriteAllText	Creates or replaces a file, writes a string into it, and closes the file.

DriveInfo

A `DriveInfo` object represents one of the computer's drives. The following table describes the properties provided by this class. Note that some of these properties are available only when the drive is ready, as indicated in the Must Be Ready column. If you try to access them when the drive is not ready, Visual Basic throws an exception. The program should check the `IsReady` property to determine whether the drive is ready before trying to use the `AvailableFreeSpace`, `DriveFormat`, `TotalFreeSpace`, or `VolumeLabel` properties.

DriveInfo Property	Purpose	Must Be Ready
`AvailableFreeSpace`	Returns the amount of free space available on the drive in bytes.	True
`DriveFormat`	Returns the name of the file-system type such as NTFS (NT File System) or FAT32 (32-bit File Allocation Table). (For a comparison of these, see `www.ntfs.com/ntfs_vs_fat.htm`.)	True
`DriveType`	Returns a `DriveType` enumeration value indicating the drive type. This value can be `CDRom`, `Fixed`, `Network`, `NoRootDirectory`, `Ram`, `Removable`, or `Unknown`.	False
`IsReady`	Returns `True` if the drive is ready. Many `DriveInfo` properties are unavailable and raise exceptions if you try to access them while the drive is not ready.	False
`Name`	Return's the drive's name. This is the drive's root name (as in `A:\` or `C:\`).	
`RootDirectory`	Returns a `DirectoryInfo` object representing the drive's root directory. See the section "DirectoryInfo" later in this chapter for more information on this class.	False
`TotalFreeSpace`	Returns the total amount of free space on the drive in bytes.	True
`VolumeLabel`	Gets or sets the drive's volume label.	True

The `DriveInfo` class also has a public shared method `GetDrives` that returns an array of `DriveInfo` objects describing the system's drives.

DirectoryInfo

A `DirectoryInfo` object represents a directory. You can use its properties and methods to create and delete directories and to move through a directory hierarchy.

The following table describes the most useful public properties and methods provided by the `DirectoryInfo` class.

Property or Method	Purpose
Attributes	Gets or sets flags for the directory from the `FileAttributes` enumeration: `Archive`, `Compressed`, `Device`, `Directory`, `Encrypted`, `Hidden`, `Normal`, `NotContentIndexed`, `Offline`, `ReadOnly`, `ReparsePoint`, `SparseFile`, `System`, and `Temporary`.
Create	Creates the directory. You can create a `DirectoryInfo` object, passing its constructor the fully qualified name of a directory that doesn't exist. You can then call the object's `Create` method to create the directory.
CreateSubdirectory	Creates a subdirectory within the directory and returns a `DirectoryInfo` object representing it. The subdirectory's path must be relative to the `DirectoryInfo` object's directory, but can contain intermediate subdirectories. For example, `dir_info .CreateSubdirectory("Tools\Bin")` creates the `Tools` subdirectory and the `Bin` directory inside that.
CreationTime	Gets or sets the directory's creation time.
CreationTimeUtc	Gets or sets the directory's creation time in UTC.
Delete	Deletes the directory if it is empty. A parameter lets you tell the object to delete its contents, too, if it isn't empty.
Exists	Returns `True` if the directory exists.
Extension	Returns the extension part of the directory's name. Normally, this is an empty string for directories.
FullName	Returns the directory's fully qualified path.
GetDirectories	Returns an array of `DirectoryInfo` objects representing the directory's subdirectories. An optional parameter gives a pattern to match. This method does not recursively search the subdirectories.

(continued)

Property or Method	Purpose
GetFiles	Returns an array of `FileInfo` objects representing files inside the directory. An optional parameter gives a pattern to match. This method does not recursively search subdirectories.
GetFileSystemInfos	Returns a strongly typed array of `FileSystemInfo` objects, representing subdirectories and files inside the directory. The items in the array are `DirectoryInfo` and `FileInfo` objects, both of which inherit from `FileSystemInfo`. An optional parameter gives a pattern to match. This method does not recursively search subdirectories.
LastAccessTime	Gets or sets the directory's last access time.
LastAccessTimeUtc	Gets or sets the directory's last access time in UTC.
LastWriteTime	Gets or sets the directory's last write time.
LastWriteTimeUtc	Gets or sets directory's last write time in UTC.
MoveTo	Moves the directory and its contents to a new path.
Name	The directory's name without the path information.
Parent	Returns a `DirectoryInfo` object, representing the directory's parent. If the directory is its file system's root (for example, `C:\`), then this returns `Nothing`.
Refresh	Refreshes the `DirectoryInfo` object's data. For example, if the directory has been accessed since the object was created, you must call `Refresh` to load the new `LastAccessTime` value.
Root	Returns a `DirectoryInfo` object representing the root of the directory's file system.
ToString	Returns the directory's fully qualified path and name.

FileInfo

A `FileInfo` object represents a file. You can use its properties and methods to create and delete directories and to move through a directory hierarchy.

The following table describes the most useful public properties and methods provided by the `FileInfo` class.

Property or Method	Purpose
AppendText	Returns a StreamWriter that appends text to the file.
Attributes	Gets or sets flags for the file from the FileAttributes enumeration: Archive, Compressed, Device, Directory, Encrypted, Hidden, Normal, NotContentIndexed, Offline, ReadOnly, ReparsePoint, SparseFile, System, and Temporary.
CopyTo	Copies the file and returns a FileInfo object, representing the new file. A parameter lets you indicate whether the copy should overwrite an existing file. If the destination path is relative, it is relative to the application's current directory, not to the FileInfo object's directory.
Create	Creates the file and returns a FileStream object attached to it. For example, you can create a FileInfo object, passing its constructor the name of a file that doesn't exist. Then you can call the Create method to create the file.
CreateText	Creates the file and returns a StreamWriter attached to it. For example, you can create a FileInfo object passing its constructor the name of a file that doesn't exist. Then you can call the CreateText method to create the file.
CreationTime	Gets or sets the file's creation time.
CreationTimeUtc	Gets or sets the file's creation time in UTC.
Delete	Deletes the file.
Directory	Returns a DirectoryInfo object representing the file's directory.
DirectoryName	Returns the name of the file's directory.
Exists	Returns True if the file exists.
Extension	Returns the extension part of the file's name, including the period. For example, the extension for game.txt is .txt.
FullName	Returns the file's fully qualified path and name.
IsReadOnly	Returns True if the file is marked read-only.
LastAccessTime	Gets or sets the file's last access time.
LastAccessTimeUtc	Gets or sets the file's last access time in UTC.
LastWriteTime	Gets or sets the file's last write time.
LastWriteTimeUtc	Gets or sets the file's last write time in UTC.
Length	Returns the number of bytes in the file.
MoveTo	Moves the file to a new location. If the destination uses a relative path, it is relative to the application's current directory, not to the FileInfo object's directory. When this method finishes, the FileInfo object is updated to refer to the file's new location.

(continued)

Property or Method	Purpose
Name	The file's name without the path information.
Open	Opens the file with various mode (Append, Create, CreateNew, Open, OpenOrCreate, or Truncate), access (Read, Write, or ReadWrite), and sharing (Read, Write, ReadWrite, or None) settings. This method returns a FileStream object attached to the file.
OpenRead	Returns a read-only FileStream attached to the file.
OpenText	Returns a StreamReader with UTF-8 encoding attached to the file for reading.
OpenWrite	Returns a write-only FileStream attached to the file.
Refresh	Refreshes the FileInfo object's data. For example, if the file has been accessed since the object was created, you must call Refresh to load the new LastAccessTime value.
Replace	Replaces a target file with this one, renaming the old target as a backup copy. If the backup file already exists, it is deleted and replaced with the target. You can use this method to save backups of logs and other periodically updated files.
ToString	Returns the file's fully qualified name.

FileSystemInfo

The FileSystemInfo class is the parent class for the FileInfo and DirectoryInfo classes. It is a MustInherit class so you cannot create instances of it directly, but some routines return this class rather than the more specific child classes. For example, the DirectoryInfo class's GetFileSystemInfos method returns an array of FileSystemInfo objects describing the files in the directory.

FileSystemWatcher

The FileSystemWatcher class keeps an eye on part of the file system and raises events to let your program know if something changes. For example, you could make a FileSystemWatcher monitor a work directory. When a new file with a .job extension arrives, the watcher could raise an event and your application could process the file.

The FileSystemWatcher class's constructor takes parameters that tell it which directory to watch and that give it a filter for selecting files to watch. For example, the filter might be "*.txt" to watch for changes to text files. The default filter is "*.*", which catches changes to all files that have an extension. Set the filter to the empty string "" to catch changes to all files including those without extensions.

The following table describes the FileSystemWatcher class's most useful properties.

Property	Purpose
EnableRaisingEvents	Determines whether the component is enabled. Note that this property is False by default, so the watcher will not raise any events until you set it to True.
Filter	Determines the files for which the watcher reports events. You cannot watch for multiple file types as in *.txt and *.dat. Instead use multiple FileSystemWatcher classes. If you like, you can use AddHandler to make all of the FileSystemWatcher classes use the same event handlers.
IncludeSubdirectories	Determines whether the object watches subdirectories within the main path.
InternalBufferSize	Determines the size of the internal buffer. If the watcher is monitoring a very active directory, a small buffer may overflow.
NotifyFilter	Determines the types of changes that the watcher reports. This is a combination of values defined by the NotifyFilters enumeration and can include the values Attributes, CreationTime, DirectoryName, FileName, LastAccess, LastWrite, Security, and Size.
Path	Determines the path to watch.

The FileSystemWatcher class provides only two really useful methods. First, Dispose releases resources used by the component. When you are finished using a watcher, call its Dispose method to allow garbage collection to reclaim its resources more efficiently.

Second, the WaitForChanged method waits for a change synchronously (with an optional timeout). When a change occurs, the method returns a WaitForChangedResult object, giving information about the change that occurred.

When the FileSystemWatcher detects a change asynchronously, it raises an event to let the program know what has happened. The following table describes the class's events.

Name	Description
Changed	A file or subdirectory has changed.
Created	A file or subdirectory was created.
Deleted	A file or subdirectory was deleted.
Error	The watcher's internal buffer overflowed.
Renamed	A file or subdirectory was renamed.

The following simple example shows how to use a `FileSystemWatcher` to look for new files in a directory:

```
Private WithEvents fswJobFiles As FileSystemWatcher

Private Sub Form1_Load() Handles MyBase.Load
    Dim watch_path As String = _
        FileSystem.GetParentPath(Application.StartupPath)
    fswJobFiles = New FileSystemWatcher(watch_path, "*.job")
    fswJobFiles.NotifyFilter = NotifyFilters.FileName
    fswJobFiles.EnableRaisingEvents = True
End Sub

Private Sub fswJobFiles_Created(ByVal sender As Object, _
 ByVal e As System.IO.FileSystemEventArgs) Handles fswJobFiles.Created
    ' Process the new file...
    MessageBox.Show("Process new job: " & e.FullPath)

    File.Delete(e.FullPath)
End Sub
```

The program uses the `WithEvents` keyword to declare a `FileSystemWatcher` object. When the program's main form loads, the `Form1_Load` event handler allocates this object. Its constructor sets the object's path to the program's startup directory's parent. It sets the object's filter to "`*.job`" so that the object will watch for changes to files that end with a `.job` extension.

The event handler sets the watcher's `NotifyFilter` to `FileName`, so it will raise its `Created` event if a new file name appears in the target directory. Unfortunately, the `NotifyFilter` values (`Attributes`, `CreationTime`, `DirectoryName`, `FileName`, `LastAccess`, `LastWrite`, `Security`, and `Size`) do not match up well with the events provided by the `FileSystemWatcher`, so you need to figure out which `NotifyFilter` values to set to raise different kinds of events.

The `Form1_Load` event handler finishes by setting the watcher's `EnableRaisingEvents` property to `True` so the object starts watching.

When a `.job` file is created in the watcher's target directory, the program's `fswJobFiles_Created` executes. The program processes and then deletes the file. In this example, the program processes the file by displaying a message giving its fully qualified name. A more realistic example might read the file; parse fields, indicating the type of job this is; assign it to an employee for handling; and then e-mail it to that employee.

The UseFileSystemWatcher example program, which is available for download on the book's web site, uses similar code without the filter to look for any new file in the program's startup directory.

Path

The `Path` class provides shared properties and methods that you can use to manipulate paths. Its methods return the path's file name, extension, directory name, and so forth. Other methods provide values that do not relate to a specific path. For example, they can give you the system's temporary directory path, or the name of a temporary file.

The following table describes the `Path` class's most useful public properties.

Property	Purpose
AltDirectorySeparatorChar	Returns the alternate character used to separate directory levels in a hierarchical path. Typically this is `/`.
DirectorySeparatorChar	Returns the character used to separate directory levels in a hierarchical path. Typically this is `\` (as in `C:\Tests\Billing\2008q2.dat`).
InvalidPathChars	Returns a character array that holds characters that are not allowed in a path string. Typically, this array includes characters such as `"`, `<`, `>`, and `|`, as well as nonprintable characters such as those with ASCII values between 0 and 31.
PathSeparator	Returns the character used to separate path strings in environment variables. Typically this is `;`.
VolumeSeparatorChar	Returns the character placed between a volume letter and the rest of the path. Typically this is `:` (as in `C:\Tests\Billing\2008q2.dat`).

The following table describes the `Path` class's most useful methods.

Method	Purpose
ChangeExtension	Changes a path's extension.
Combine	Returns two path strings concatenated.
GetDirectoryName	Returns a path's directory.
GetExtension	Returns a path's extension.
GetFileName	Returns a path's file name and extension.
GetFileNameWithoutExtension	Returns a path's file name without the extension.
GetFullPath	Returns a path's fully qualified value. This can be particularly useful for converting a partially relative path into an absolute path. For example, the statement `Path.GetFullPath("C:\Tests\OldTests\Software\..\..\New\Code")` returns the string `"C:\Tests\New\Code"`.
GetInvalidFileNameChars	Returns an array listing characters that are invalid in file names.

(continued)

867

Method	Purpose
GetInvalidPathChars	Returns an array listing characters that are invalid in file paths.
GetPathRoot	Returns a path's root directory string. For example, the statement `Path.GetPathRoot("C:\Invoices\Unpaid\Deadbeats")` returns the string `"C:\"`.
GetRandomFileName	Returns a random file name.
GetTempFileName	Creates a uniquely named, empty temporary file and returns its fully qualified path. Your program can open that file for scratch space, do whatever it needs to do, close the file, and then delete it. A typical file name might be `C:\Documents and Settings\Rod\Local Settings\Temp\tmp19D.tmp`.
GetTempPath	Returns the path to the system's temporary folder. This is the path part of the file names returned by `GetTempFileName`.
HasExtension	Returns `True` if a path includes an extension.
IsPathRooted	Returns `True` if a path is an absolute path. This includes `\Temp\Wherever` and `C:\Clients\Litigation`, but not `Temp\Wherever` or `..\Uncle`.

My.Computer.FileSystem

The `My.Computer.FileSystem` object provides tools for working with drives, directories, and files. The following table summarizes this object's properties.

Property	Description
CurrentDirectory	Gets or sets the fully qualified path to the application's current directory.
Drives	Returns a read-only collection of `DriveInfo` objects describing the system's drives. See the section "DriveInfo" earlier in this chapter for information about the `DriveInfo` class.
SpecialDirectories	Returns a `SpecialDirectoriesProxy` object that has properties giving the locations of various special directories (such as the system's temporary directory and the user's `MyDocuments` directory). See the section "My.Computer.FileSystem.SpecialDirectories" later in this chapter for more information.

The following list describes the `My.Computer.FileSystem` object's methods.

Method	Purpose
CombinePath	Combines a base path with a relative path reference and returns a properly formatted fully qualified path. For example, the following code displays the name of the directory that is the parent of the application's current directory: `MessageBox.Show ( _    My.Computer.FileSystem.CombinePath ( _My.Computer.FileSystem.CurrentDirectory(), _         "..")`
CopyDirectory	Copies a directory. Parameters indicate whether to overwrite existing files, whether to display a progress indicator, and what to do if the user presses Cancel during the operation.
CopyFile	Copies a file. Parameters indicate whether to overwrite existing files, whether to display a progress indicator, and what to do if the user presses Cancel during the operation.
CreateDirectory	Creates a directory. This method will create ancestor directories if necessary. For example, if the `C:\Temp` directory contains no subdirectories, creating `C:\Temp\ Project\Data` will automatically create `C:\Temp\Project` and `C:\Temp\ Project\Data`.
DeleteDirectory	Deletes a directory. Parameters indicate whether to recursively delete subdirectories, prompt the user for confirmation, or move the directory into the Recycle Bin.
DeleteFile	Deletes a file. Parameters indicate whether to prompt the user for confirmation or move the file into the Recycle Bin, and what to do if the user presses Cancel while the deletion is in progress.
DirectoryExists	Returns `True` if a specified directory exists.
FileExists	Returns `True` if a specified file exists.
FindInFiles	Returns a read-only collection of strings listing files that contain a target string.
GetDirectories	Returns a string collection listing subdirectories of a given directory. Parameters tell whether to recursively search the subdirectories, and the wildcards to match.
GetDirectoryInfo	Returns a `DirectoryInfo` object for a directory. See the section "DirectoryInfo" earlier in this chapter for more information.

(continued)

Method	Purpose
GetDriveInfo	Returns a `DriveInfo` object for a drive. See the section "DriveInfo" earlier in this chapter for more information.
GetFileInfo	Returns a `FileInfo` object for a file. See the section "FileInfo" earlier in this chapter for more information.
GetFiles	Returns a string collection holding the names of files within a directory. Parameters indicate whether the search should recursively search subdirectories, and give wildcards to match.
GetParentPath	Returns the fully qualified path of a path's parent. For example, this returns a file's or directory's parent directory.
MoveDirectory	Moves a directory. Parameters indicate whether to overwrite files that have the same name in the destination directory and whether to prompt the user when such a collision occurs.
MoveFile	Moves a file. Parameters indicate whether to overwrite a file that has the same name as the file's destination and whether to prompt the user when such a collision occurs.
OpenTextFieldParser	Opens a `TextFieldParser` object attached to a delimited or fixed-field file such as a log file. You can use the object to parse the file.
OpenTextFileReader	Opens a `StreamReader` object attached to a file. You can use the object to read the file.
OpenTextFileWriter	Opens a `StreamReader` object attached to a file. You can use the object to write into the file.
ReadAllBytes	Reads all of the bytes from a binary file into an array.
ReadAllText	Reads all of the text from a text file into a string.
RenameDirectory	Renames a directory within its parent directory.
RenameFile	Renames a file with its directory.
WriteAllBytes	Writes an array of bytes into a binary file. A parameter tells whether to append the data or rewrite the file.
WriteAllText	Writes a string into a text file. A parameter tells whether to append the string or rewrite the file.

My.Computer.FileSystem.SpecialDirectories

The `My.Computer.FileSystem.SpecialDirectories` property returns a `SpecialDirectoriesProxy` object that has properties giving the locations of various special directories such as the system's temporary directory and the user's `MyDocuments` directory.

The following table describes these special directory properties.

Property	Purpose
AllUsersApplicationData	Application settings for all users.
CurrentUserApplicationData	Application settings for the current user.
Desktop	The current user's desktop directory.
MyDocuments	The current user's MyDocuments directory.
MyMusic	The current user's MyMusic directory.
MyPictures	The current user's MyPictures directory.
Programs	The current user's Start Menu\Programs directory.
ProgramFiles	The current user's Start Menu\Programs directory.
Temp	The current user's temporary directory.

Note that these directories may not all exist on a particular system. For example, it may not define the MyMusic or MyPictures directories. Trying to access the values of a missing directory causes a DirectoryNotFoundException. You can use a Try Catch block to protect the program from the exception.

Summary

Visual Basic provides a native set of methods for reading and writing files, including FreeFile, FileOpen, Input, LineInput, Print, Write, and FileClose. It also provides method for working with the file system (such as ChDir, MkDir, Kill, and RmDir). If you have a lot of previous experience with Visual Basic, you may prefer these familiar methods.

The System.IO namespace offers many objects that provide even more powerful capabilities than the native methods of Visual Basic. Classes such as Directory, DirectoryInfo, File, and FileInfo make it easy to create, examine, move, rename, and delete directories and files. The File class's methods make it particularly easy to read or write an entire file and to create streams attached to files for reading or writing.

The FileSystemWatcher class lets an application keep an eye on a file or directory and take action when it is changed. For example, a program can watch a spooling directory and take action when a new file appears in it.

The Path class provides miscellaneous support for working with paths. For example, it provides methods for examining a path's file name or extension.

The My.Computer.FileSystem namespace provides shortcuts to some of the more useful of the methods offered by the other file system classes. Its methods let you create, examine, and delete files and directories. The `SpecialDirectories` object also provides information about the locations of system directories.

There is considerable overlap among all of these tools, so you don't need to feel that you have to use them all. Take a good look so you know what's there, and then pick the tools that you find the most comfortable.

The tools described in this chapter allow you fairly unstructured access to files. These classes and methods let you do just about anything you want to a file. That flexibility, however, means that you must know exactly what you want to do to the file. By letting you do anything, these tools make you do everything.

One of the most important ways an application can interact with the computer that is running it is through the file system. The classes and methods described in this chapter allow an application to interact with the local computer's file system relatively easily.

Interacting with other computers is much more complicated. Chapter 39, "Windows Communication Foundation," describes tools added relatively recently to the .NET Framework to make interacting with remote computers easier.

39

Windows Communication Foundation

Programmers have long been able to have one program to call routines provided by another program that is running either on the local computer or some other computer on the same network. The omnipresent Internet extended this capability to new and greater levels, allowing a *client* program to call service routines provided by a *server* that could be physically on the other side of the world.

New web technologies such as Simple Object Access Protocol (SOAP) made it easy enough to build web services for use by other programs over the Internet. This gave rise to a whole new type of application that implements a significant amount of its functionality by calling services. Because these programs focus on the use of services, this design is called service-oriented architecture (SOA).

Windows Communication Foundation (WCF) is a set of classes and tools in .NET Framework 3.0 that make it easier to build SOA applications. It includes attribute classes that let you easily mark pieces of a server application to publish services for use by clients. It also includes tools to automatically generate the Visual Basic code you need to use or consume the services.

WCF is quite large and very flexible. It gives you the ability to write secure, reliable services that support transactions and can use a variety of transport methods. For example, clients and services can communicate using HTTP or TCP network protocols, or named pipes or message queues on the local computer.

Because WCF is so flexible, there isn't space to cover it all here. Instead, this chapter provides an overview of the main concepts behind WCF, and describes a simple example client and server implementation.

Early Version Warning

There are some significant differences between the ways in which Visual Studio 2008 and Visual Studio 2005 handle WCF. Much of the code behind the scenes is very similar, but the tools are slightly different. In general Visual Studio 2008 is more streamlined and provides better integration for building and testing WCF services and clients, but these changes highlight the fact that WCF is a relatively new technology.

The version of WCF included in Visual Studio 2008 is really only the second version. Many products don't really become fully formed until at least their third version. While the first two versions of WCF seem much closer than is often the case with new technologies, and while the tools work fairly well, you should be aware that there might be changes in the future.

WCF Concepts

WCF is based on the concept of messages. A *message* contains some sort of communication between a client and a service. Note that the program doesn't need to deal directly with messages. It can issue subroutine and function calls just as if it were calling a local object's methods. The WCF library routines convert the call into a message and send it to the recipient transparently.

An *endpoint* is a place where messages are sent or received. Typically, a service creates endpoints to receive request messages from clients and clients create endpoints to initiate those requests.

Endpoints define the characteristics of the communication. They determine the number and types of parameters passed to a request and the type of any returned data. They determine whether the communication uses a request-reply, one-way, or duplex style of communication. The definition of the message format is called its *service contract*.

The message definitions at the endpoints at the two ends of a communication must agree. They must satisfy the same service contract. If a client sends a message in one format, but the service expects the message in a different format, the communication won't work. WCF provides tools that help you define service endpoints and automatically generate Visual Basic code to properly use corresponding client endpoints.

After you have built the client and server, the two pass messages between their endpoints following the rules of the service contract. For example, if the contract indicates that the communication is one-way, the client invokes service subroutines that do not return any data. If the communication has a request-reply style, the client invokes service functions that return some sort of reply. If the contract indicates duplex communication, then the client can call service subroutines and the server can invoke client callbacks. For example, the client can tell the service that it is interested in certain events such as stock price updates, and then the service can call the client as the updates are available.

The following sections describe a concrete example that implements a simple client and server.

WCF Example

To build a service from scratch, you follow the steps outlined in the following list:

1. Define the service contract in a Visual Basic interface.

2. Implement the service contract in a service class.

3. Build the host application to run the service.

4. Configure the service to specify bindings and endpoints.

5. Run the service.

After you build the service, you follow these steps to build a client:

1. Use the SvcUtil tool to discover information about the service contract and build Visual Basic code to implement a client class.

2. Write the client application that uses the client class.

These steps are somewhat involved and require that you know a lot about service configuration files and tools such as SvcUtil.exe. Fortunately, Visual Basic 2008 provides some application templates that make building a simple service much easier.

The book's web site contains a single example solution that contains three projects for this chapter. The QuoteServiceLib project is a service library that provides a service for generating random quotes. Program QuoteServiceHost is a host program that runs the service so clients can connect to it. Program QuoteClient is a client application that invokes the GetQuote service method.

Building the Initial Service

To build a service, open the file menu and select New Project. Under the Visual Basic project type, select the WCF category. Click the WCF Service Library template, enter a meaningful project name, and click OK.

Initially, Visual Basic creates an interface named IService1 shown in the following code to define the service's contract:

```
' NOTE: If you change the interface name "IService1" here, you must also
' update the reference to "IService1" in App.config.
<ServiceContract()> _
Public Interface IService1

    <OperationContract()> _
    Function GetData(ByVal value As Integer) As String

    <OperationContract()> _
    Function GetDataUsingDataContract(ByVal composite As CompositeType) _
```

```
            As CompositeType

        ' TODO: Add your service operations here

    End Interface
```

This interface defines two methods decorated by `OperationContract` attributes to identify them as methods that the service will expose to clients.

The `GetData` function takes an integer parameter and returns a string result. This function demonstrates a simple service method that uses standard Visual Basic data types.

The `GetDataUsingDataContract` function takes an object of class `CompositeType` as a parameter and returns another object of the same class. This function demonstrates a slightly more complicated function that works with a program-defined data type.

The following code shows the initial implementation of the service class:

```
' NOTE: If you change the class name "Service1" here, you must also update
' the reference to "Service1" in App.config.
Public Class Service1
    Implements IService1

    Public Function GetData(ByVal value As Integer) As String _
     Implements IService1.GetData
        Return String.Format("You entered: {0}", value)
    End Function

    Public Function GetDataUsingDataContract( _
     ByVal composite As CompositeType) As CompositeType _
     Implements IService1.GetDataUsingDataContract
        If composite.BoolValue Then
            composite.StringValue = (composite.StringValue & "Suffix")
        End If
        Return composite
    End Function
End Class
```

The class `Service1` implements the `IService1` interface. The `GetData` method simply returns a string echoing its numeric parameter. The `GetDataUsingDataContract` method modifies its `CompositeType` parameter's `StringValue` property and returns its parameter object.

The final piece to the service is its configuration file. The following code shows the `App.config` file initially built by Visual Basic for the service class, slightly reformatted to make it easier to read:

```
<?xml version="1.0" encoding="utf-8" ?>
<configuration>
  <!-- When deploying the service library project, the content of the config
       file must be added to the host's app.config file. System.Configuration
       does not support config files for libraries. -->
```

```
      <system.serviceModel>

        <services>
          <service name="WcfServiceLibrary1.Service1"
           behaviorConfiguration="WcfServiceLibrary1.Service1Behavior">
            <host>
              <baseAddresses>
                <add baseAddress = "http://localhost:8080/Service1" />
              </baseAddresses>
            </host>
            <!-- Service Endpoints -->
            <!-- Unless fully qualified, address is relative to base address
                 supplied above -->
            <endpoint address ="" binding="wsHttpBinding"
             contract="WcfServiceLibrary1.IService1" />
            <!-- Metadata Endpoints -->
            <!-- The Metadata Exchange endpoint is used by the service to
                 describe itself to clients. -->
            <!-- This endpoint does not use a secure binding and should be
                 secured or removed before deployment -->
            <endpoint address="mex" binding="mexHttpBinding"
             contract="IMetadataExchange" />
          </service>
        </services>

        <behaviors>
          <serviceBehaviors>
            <behavior name="WcfServiceLibrary1.Service1Behavior">
              <!-- To avoid disclosing metadata information,
              set the value below to false and remove the metadata endpoint
              above before deployment -->
              <serviceMetadata httpGetEnabled="True"/>
              <!-- To receive exception details in faults for debugging purposes,
              set the value below to true.  Set to false before deployment
              to avoid disclosing exception information -->
              <serviceDebug includeExceptionDetailInFaults="False" />
            </behavior>
          </serviceBehaviors>
        </behaviors>

      </system.serviceModel>
    </configuration>
```

The `<services>` element contains service definitions. Each service gives its name and the names of the behaviors it provides. This example defines the service library `WcfServiceLibrary1.Service1`. The `<host>` element tells where the service will listen for requests.

The `<service>` element contains endpoint definitions. These definitions set the addresses, bindings, and contracts for the endpoints. The binding attribute gives the name of the binding that the endpoint uses. This example implements the contract defined by `WcfServiceLibrary1.IService1`.

The last endpoint in this example is a Metadata Exchange (MEX) endpoint. It exposes metadata that describes the service to potential clients. A client can use a tool such as SvcUtil to query this endpoint to learn about the service.

The configuration file's <serviceBehaviors> section describes the service's behaviors. In this example, the behavior elements indicate that the service allows clients to look up information about the service and that the service provides details when it has an error.

Building QuoteService

Modifying the initial service definition to implement the QuoteService isn't too hard. The following code shows the revised interface that defines the service contract. The differences between this version and the initial version are highlighted in bold, so they are easy to see.

```
<ServiceContract()> _
Public Interface IQuoteService

    <OperationContract()> _
    Function GetData(ByVal value As Integer) As String

    <OperationContract()> _
    Function GetDataUsingDataContract(ByVal composite As CompositeType) _
        As CompositeType

    ' TODO: Add your service operations here
    <OperationContract()> _
    Function GetQuote() As String

End Interface
```

This example changes the name of the interface to IQuoteService. This will require changes to the other parts of the service but makes the names more meaningful.

The code leaves the initial GetData and GetDataUsingDataContract methods alone and adds a new GetQuote function that takes no parameters and that returns a string.

The following code shows the revised service class that implements this contract. The differences between this version and the initial version are again shown in bold.

```
Public Class QuoteService
    Implements IQuoteService

    ' Methods GetData and GetDataUsingDataContract omitted.
    ' ...

    ' Return a random quote.
    Public Function GetQuote() As String Implements IQuoteService.GetQuote
        Dim quotes() As String = { _
            "I stand by all the misstatements that I've made. -- Dan Quayle", _
            "You can observe a lot just by watching. -- Yogi Berra", _
            ...
```

```
            "Two nations divided by a common language. -- Winston Churchill" _
        }

        ' Return a random quote.
        Dim rand As New Random
        Return quotes(rand.Next(0, quotes.Length))
    End Function
End Class
```

This version renames the service class `QuoteService`. The `GetData` and `GetDataUsingDataContract` are the same as before, so they are not shown here.

This code adds the new `GetQuote` method. That method simply contains an array of quote strings, picks one randomly, and returns it.

The last change needed to build QuoteService is in the configuration file. The following code shows the new `App.config` file with the changes highlighted in bold:

```xml
<?xml version="1.0" encoding="utf-8" ?>
<configuration>
  <!-- When deploying the service library project, the content of the config
       file must be added to the host's app.config file. System.Configuration
       does not support config files for libraries. -->
  <system.serviceModel>

    <services>
      <service name="QuoteServiceLib.QuoteService" _
      behaviorConfiguration="QuoteServiceLib.QuoteServiceBehavior">
       <host>
         <baseAddresses>
           <add baseAddress = "http://localhost:8080/QuoteService" />
         </baseAddresses>
       </host>
       <!-- Service Endpoints -->
       <!-- Unless fully qualified, address is relative to base address
            supplied above -->
       <endpoint address ="" binding="wsHttpBinding"
        contract="QuoteService.IQuoteService" />
       <!-- Metadata Endpoints -->
       <!-- The Metadata Exchange endpoint is used by the service to describe
            itself to clients. -->
       <!-- This endpoint does not use a secure binding and should be secured
            or removed before deployment -->
       <endpoint address="mex" binding="mexHttpBinding"
        contract="IMetadataExchange" />
      </service>
    </services>

    <behaviors>
      <serviceBehaviors>
```

```
            <behavior name="QuoteService.QuoteServiceBehavior">
              <!-- To avoid disclosing metadata information,
              set the value below to false and remove the metadata endpoint
              above before deployment -->
              <serviceMetadata httpGetEnabled="True"/>
              <!-- To receive exception details in faults for debugging purposes,
              set the value below to true.  Set to false before deployment
              to avoid disclosing exception information -->
              <serviceDebug includeExceptionDetailInFaults="False" />
            </behavior>
          </serviceBehaviors>
        </behaviors>

      </system.serviceModel>
    </configuration>
```

When I built this example, I named the initial project QuoteServiceLib, instead of accepting the default project name WcfServiceLibrary1, so the full service name is QuoteServiceLib.QuoteService. The other changes in this file change the names `IService1` and `Service1` to `IQuoteService` and `QuoteService`.

Testing QuoteService

After you have built a server, you should test it. Visual Studio provides integrated support for a test service host named WVF Service Host and a test client named WCF Test Client. If you press F5 to run the service library, those programs automatically start so you can test the service.

When you try to test the service, you need permission to install the service on the computer's port 8080. In Windows Vista, you can give yourself permission by running the Network Command Shell netsh. To do that, open the start menu and type netsh in the search box. To give yourself permission to use the port, you must run this program as an administrator, so right-click netsh.exe *and select "Run as administrator." Enter an administrator's password in the UAC privilege elevation dialog.*

Inside netsh, enter the following command, replacing "Developer" with your user name:
`http add urlacl url=http://+:8080/QuoteService user=Developer`
Close netsh and you should be able to test the service.

When you run the program, the WCF Service Host starts and runs the service. Next the WCF Test Client shown in Figure 39-1 starts. Find the service on the left and expand it to see a list of its behaviors. Double-click a behavior to open it in a tab on the right. In Figure 39-1 the `Get Quote` behavior is shown on the right.
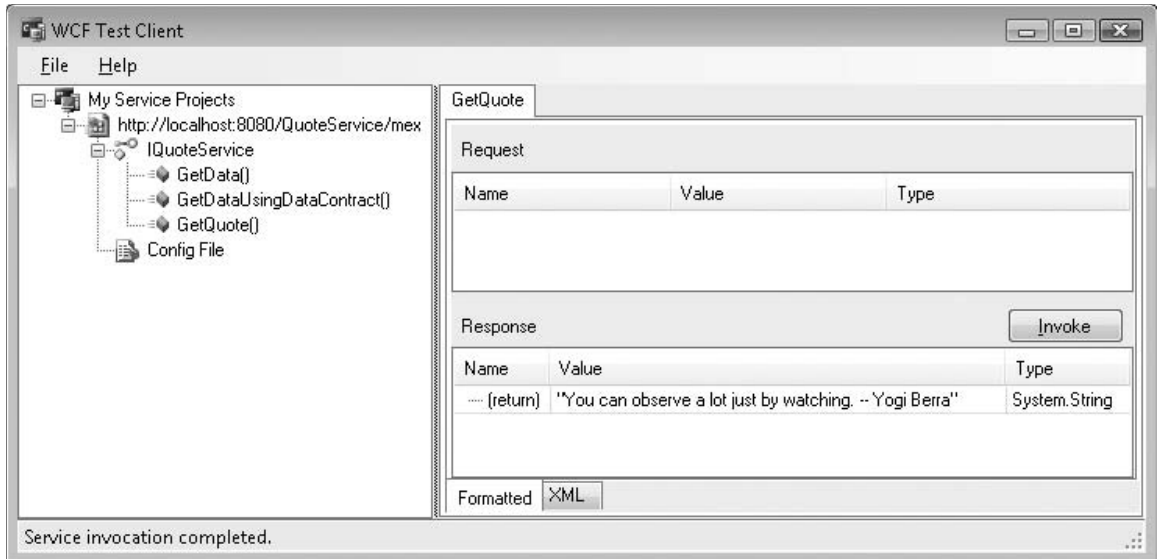
Figure 39-1: The WCF Test Client lets you test a WCF service.

If the GetQuote method required parameters, they would be listed in the upper grid. You could click a parameter's Value entry and type in a new value.

When you click the Invoke button, the client uses your parameter values to build a request and send it to the service. It displays the results in the lower grid. In Figure 39-1, the GetQuote method returned the quote "You can observe a lot just by watching. -- Yogi Berra."

Building QuoteClient

The client for the QuoteService can be any Windows application. Keeping the service project loaded, open the File menu, expand its Add submenu, and select New Project. In the New Project dialog, select the Windows Forms Application template, name it QuoteClient, and click OK.

First, in Solution Explorer, right-click the QuoteClient entry and select Add Service Reference. In the resulting dialog, click the Discover button to find the service, and then click OK to add the reference to the program.

Next, add code to the client application. The example client available for download displays a Get Quote button that executes the following code:

```
Private Sub btnGetQuote_Click() Handles btnGetQuote.Click
    Me.Cursor = Cursors.WaitCursor

    Dim quote_service As New ServiceReference.QuoteServiceClient
    lblQuote.Text = quote_service.GetQuote()

    Me.Cursor = Cursors.Default
End Sub
```

This code creates a new `ServiceReference.QuoteServiceClient` object, calls its `GetQuote` method, and displays the result in a label.

When you add the service reference, Visual Studio automatically generates a lot of code including the `QuoteServiceClient` class. This class includes methods that automatically configure service end points and that call the methods exposed by the service.

> *To see the definition of the* `QuoteServiceClient` *class, open Solution Explorer, click the Show All Files button, drill down to Service* `References/ServiceReference/Reference.svcmap`, *and open the file* `Reference.vb`*. Alternatively after you have entered the previous code in the client program, right-click the* `QuoteServiceClient` *data type and select Go To Definition.*

Before you can run the QuoteClient program, you must start the service. Make the service library the startup program, and press Ctrl+F5 to run it without debugging.

After the test host has started, right-click the QuoteClient program and make it the startup program. Then press F5 to run the client. When you click the Get Quote button, the program uses the service to display a random quote.

Hosting the Service

The WCF Service Host is fine for testing a service, but normally you will want to run the service from some other host. There are several ways you can host a service, including in Internet Information Server (IIS), as a Windows Service, and as a Windows Activation Service (WAS). For more information on those options, see the online help or the Web. The Microsoft article "Hosting Services" at `http://msdn2` `.microsoft.com/en-us/library/ms730158.aspx` can get you started.

This section explains another option: self-hosting. In self-hosting, a managed application such as a Windows Forms or console application hosts the service.

To add a host application to the QuoteServiceLib solution, open the File menu's Add submenu and select New Project. Select the Windows Forms Application template and click OK. The example provided on the book's web site displays two buttons that start and stop the service. To build your own host, add similar buttons or menu items to control the service.

The code uses objects defined in the System.ServiceModel namespace so open Solution Explorer, right-click the project, and select Add Reference. Select the System.ServiceModel namespace and click OK.

The code also uses information about the `QuoteService` class so add a reference to the QuoteServiceLib project as well.

The following code shows how the host works:

```vb
Imports System.ServiceModel
Imports QuoteServiceLib

Public Class Form1
```

```
        Private m_Host As ServiceHost

        Private Sub btnStartService_Click() Handles btnStartService.Click
            m_Host = New ServiceHost(GetType(QuoteService))
            m_Host.Open()

            btnStopService.Enabled = True
            btnStartService.Enabled = False
        End Sub

        Private Sub btnStopService_Click() Handles btnStopService.Click
            m_Host.Close()
            m_Host = Nothing

            btnStopService.Enabled = False
            btnStartService.Enabled = True
        End Sub
    End Class
```

When you click the Start Service button, the code creates a new ServiceHost object, passing its constructor type information describing the QuoteService class. It then calls the host object's Open method to start the service.

When you click the Stop Service button, the code simply calls the host object's Close method to stop the service.

After you enter the code, you need to add a configuration file to tell the host project how to start the service. In Solution Explorer, right-click the project, open the Add submenu, and select New Item. On the Add New Item dialog, select the General tab and select the Application Configuration File template. Leave the file's name app.config and click OK.

Edit the configuration file so it looks like the following:

```xml
<?xml version="1.0" encoding="utf-8" ?>
<configuration>
  <system.serviceModel>
    <services>
      <service name="QuoteServiceLib.QuoteService">
        <endpoint address="http://localhost:8080/QuoteService"
                  binding="wsHttpBinding"
                  contract="QuoteServiceLib.IQuoteService" />
      </service>
    </services>
  </system.serviceModel>
</configuration>
```

This configuration file tells the host where to listen for service requests.

Now you can build this program and run the compiled executable program. After you click the Start Service button to start the service, you can run the client program.

Summary

The idea behind WCF is relatively simple: Allow a client application to call methods provided by a service. Although the idea is simple, WCF is a complicated topic because it provides so much flexibility. It lets clients and services communicate through a variety of transport mechanisms using an assortment of security protocols. WCF provides attributes that make defining service contracts easy, but the great flexibility it provides makes configuring services more difficult.

For more information on WCF, search the Microsoft online help and the Web. A good starting point is the Microsoft WCF home page at `http://msdn2.microsoft.com/en-us/library/aa388579.aspx`. There are also several books available that cover WCF in depth such as *Professional WCF Programming: .NET Development with the Windows Communication Foundation* (Klein, Wrox, 2007).

WCF is huge but the .NET Framework is even larger, containing thousands of classes, types, enumerations, interfaces, and other items. To make finding and using all of this material easier, the .NET Framework divides groups of useful files into namespaces. For example, WCF classes are in the System. ServiceModel namespace.

Chapter 40, "Useful Namespaces," describes some other useful namespaces defined by the .NET Framework. It provides a brief overview of some of the most important System namespaces and gives more detailed examples that demonstrate regular expressions, XML, cryptography, reflection, threading, and Direct3D.

Useful Namespaces

The .NET Framework is a library of classes, interfaces, and types that add extra power to Visual Studio .NET. These features go beyond what is normally provided by a programming language such as Visual Basic.

The .NET Framework is truly enormous. To make it more manageable, Microsoft has broken it into namespaces. The namespaces form a hierarchical catalog that groups related classes and functions in a meaningful way.

For example, the System namespace contains basic classes and methods that an application can use to perform common tasks. The System.Drawing namespace is the part of the System namespace that holds graphical tools. The System.Drawing.Design, System.Drawing.Drawing2D, System .Drawing.Imaging, System.Drawing.Printing, and System.Drawing.Text namespaces further subdivide System.Drawing into finer groupings.

Many of the .NET Framework namespaces are essential for day-to-day programming. For example, many Visual Basic applications need to produce printouts, so they use the System. Drawing.Printing namespace. Different applications draw graphics or images on the screen, so they need to use other System.Drawing namespaces.

Because so much of the .NET Framework is used in everyday programming tasks, this book doesn't strongly differentiate between Visual Basic and .NET Framework functionality. Presumably, the book could have focused solely on the Visual Basic language and ignored the .NET Framework, but it would have been a much less useful book.

Although the book covers many useful .NET Framework features, there's a huge amount that it doesn't cover. Currently the .NET Framework includes more than 160 namespaces that define a huge number of classes, types, enumerated values, and other paraphernalia.

The following sections describe some of the highest-level and most useful namespaces provided by the .NET Framework.

High-Level Namespaces

The .NET Framework includes two root namespaces: Microsoft and System.

Your program may include references to many other namespaces. If you add references to development libraries, your program will have access to their namespaces. For example, you might have Amazon .com, Google, eBay, and other development toolkits installed and they come with their own namespaces. Later versions of Windows will also provide namespaces that you may want to reference.

Also note that the My namespace provides shortcuts that make common programming tasks easier. For more information on the My namespace, see the section "My" in Chapter 36, "Configuration and Resources," and Appendix S, "The My Namespace."

The Microsoft Namespace

The Microsoft root namespace contains Microsoft-specific items. In theory, any vendor can implement .NET languages that translate into Intermediate Language (IL) code. If you were to build such a language, the items in the Microsoft namespace would generally not apply to your language. Items in the System namespace described next would be as useful to users of your language as they are to programmers who use the Microsoft languages, but the items in the Microsoft namespace would probably not be as helpful.

The following table describes the most important second-level namespaces contained in the Microsoft root namespace.

Namespace	Contains
Microsoft.Csharp	Items supporting compilation and code generation for C#.
Microsoft.JScript	Items supporting compilation and code generation for JScript.
Microsoft.VisualBasic	Items supporting compilation and code generation for Visual Basic. Some of the items in this namespace are useful to Visual Basic programmers, mostly for compatibility with previous versions of Visual Basic.
Microsoft.Vsa	Items supporting Visual Studio for Applications (VSA), which lets you include scripting in your application.
Microsoft .WindowsCE	Items supporting Pocket PC and Smartphone applications using the .NET Compact Framework.
Microsoft.Win32	Classes that handle operating system events and that manipulate the System Registry.

The System Namespace

The System namespace contains basic classes used to define fundamental data types. It also defines important event handlers, interfaces, and exceptions.

The following table describes the second-level namespaces contained in the System root namespace.

Namespace	Contains
System.CodeDom	Classes for representing and manipulating source-code documents.
System.Collections	Interfaces and classes for defining various collection classes, lists, queues, hash tables, and dictionaries.
System.ComponentModel	Classes that control design time and runtime behavior of components and controls. Defines several useful code attributes such as `Description`, `DefaultEvent`, `DefaultProperty`, and `DefaultValue`. Also defines some useful classes such as `ComponentResourceManager`.
System.Configuration	Classes and interfaces for working with configuration files.
System.Data	Mostly ADO.NET classes. Subnamespaces include features for specific kinds of databases and database technologies such as SQL Server, Oracle, OLE DB, and so forth.
System.Deployment	Classes that let you programmatically update ClickOnce deployments.
System.Diagnostics	Classes for working with system processes, performance counters, and event logs.
System.DirectoryServices	Classes for working with Active Directory.
System.Drawing	Classes for using GDI+ graphics routines to draw two-dimensional graphics, text, and images.
System.EnterpriseServices	Tools for working with COM+ and building enterprise applications.
System.Globalization	Classes that help with internationalization. Includes tools for customizing an application's language and resources, and for using localized formats such as date, currency, and number formats.
System.IO	Classes for reading and writing streams and files.
System.Linq	Classes for LINQ. See Chapter 21, "LINQ," for more information.
System.Management	Classes for system management and monitoring.

(continued)

Namespace	Contains
System.Media	Classes for playing sounds. For example, you can use the following code to play the system's "hand" sound:`System.Media.SystemSounds.Hand.Play()` Example program SystemSounds, which is available for download on the book's web site, uses this namespace to play the system sounds.
System.Messaging	Classes for working with message queues to send and receive messages across the network.
System.Net	Classes for working with network protocols.
System.Reflection	Classes for working with loaded types. A program can use these to learn about classes and their capabilities, and to invoke an object's methods.
System.Resources	Classes to create and manage culture-specific resources programmatically.
System.Runtime	Classes for working with metadata for compilers, interop services (interoperating with unmanaged code), marshalling, remoting, and serialization.
System.Security	Classes for security and cryptography.
System.ServiceProcess	Classes that let you implement, install, and control Windows service processes.
System.Text	Classes representing various character encodings. Also contains the `StringBuilder` class, which lets you build large strings quickly, and classes for working with regular expressions.
System.Threading	Classes for multithreading.
System.Timers	Contains the `Timer` class.
System.Transactions	Classes for working with transactions involving multiple distributed components and multiphase notifications.
System.Web	Classes for web programming and browser/server interactions.
System.Windows.Forms	Defines the Windows forms controls.
System.Xml	Classes that let you manipulate XML files.

Advanced Examples

Several chapters in this book have covered pieces of the .NET Framework namespaces. For example, Chapter 36, "Configuration and Resources," described many of the most useful tools provided by the System.Globalization and System.Resources namespaces. Similarly, Chapters 30 through 34 explained many of the most useful drawing tools provided by the System.Drawing namespace.

Other parts of the .NET Framework namespaces are quite specialized, and you may never need to use them. For example, many developers can use fairly standard installation techniques, so they will never need to use the System.Deployment classes to programmatically update ClickOnce deployments.

A few namespaces bear some special mention here, however. They don't really fit into the rest of the book, but they are important enough that you may find them useful. The following sections give a few examples that demonstrate some of the more useful of these namespaces.

Regular Expressions

A *regular expression* is a series of symbols that represents a class of strings. A program can use regular expression tools to determine whether a string matches a regular expression or to extract pieces of a string that match an expression. For example, a program can use regular expressions to see if a string has the format of a valid phone number, Social Security number, ZIP code or other postal code, e-mail address, and so forth.

The following regular expression represents a 7- or 10-digit phone number in the United States:

```
^([2-9]\d{2}-)?[2-9]\d{2}-\d{4}$
```

The following table describes the pieces of this expression.

Subexpression	Meaning
^	(The caret symbol.) Matches the beginning of the string.
[2-9]	Matches the characters 2 through 9 (United States phone numbers cannot begin with 0 or 1).
\d	Matches any digit 0 through 9.
{2}	Repeat the previous group ([0-9]) exactly two times.
-	Match a dash.
([2-9]\d{2}-)?	The parentheses group the items inside. The ? makes the expression match the previous item exactly zero or one times. Thus the subexpression matches three digits and a dash, zero or one times.
[2-9]\d{2}-	Matches one digit 2 through 9 followed by two digits 0 through 9 followed by a dash.
\d{4}	Matches any digit exactly four times.
$	Matches the end of the string.

Taken together, this regular expression matches strings of the form NXX-XXXX and NXX-NXX-XXXX where N is a digit 2 through 9 and X is any digit.

A complete discussion of regular expressions is outside the scope of this book. Search the online help or the Microsoft web site to learn about the rules for building regular expressions. The web page `http://msdn2.microsoft.com/library/az24scfc.aspx` provides useful links to information about regular expression language elements. Another useful page is `www.regexlib.com/RETester.aspx`, which provides a regular expression tester and a library of useful regular expressions.

As you read the rest of this section and when visiting regular expression web sites, be aware that there are a couple different types of regular expression languages and that they won't all work with every regular expression class.

The following code shows how a program can validate a text field against a regular expression. When the user changes the text in the `txtTestExp` control, its `Changed` event handler creates a new `Regex` object, passing its constructor the regular expression held in the `txtRegExp` text box. It then calls the `Regex` object's `IsMatch` method to see if the text matches the regular expression. If the text matches, the program sets the `txtTestExp` control's background color to white. If the text doesn't match the expression, the program makes the control's background yellow to indicate an error.

```
Private Sub txtTestExp_TextChanged() Handles txtTestExp.TextChanged
    Dim reg_exp As New Regex(txtRegExp.Text)
    If reg_exp.IsMatch(txtTestExp.Text) Then
        txtTestExp.BackColor = Color.White
    Else
        txtTestExp.BackColor = Color.Yellow
    End If
End Sub
```

The following example uses a `Regex` object's `Matches` method to retrieve a collection of `Match` objects that describe the places where a string matches a regular expression. It then loops through the collection, highlighting the matches in a Rich Text Box.

```
Private Sub btnGo_Click() Handles btnGo.Click
    Dim reg_exp As New Regex(txtPattern.Text)
    Dim matches As MatchCollection
    matches = reg_exp.Matches(txtTestString.Text)

    rchResults.Text = txtTestString.Text
    For Each a_match As Match In matches
        rchResults.Select(a_match.Index, a_match.Length)
        rchResults.SelectionBackColor = Color.Black
        rchResults.SelectionColor = Color.White
    Next a_match
End Sub
```

In this example, the regular expression is `(in|or)`, so the program finds matches where the string contains `in` or `or`.

The following code uses a `Regex` object to make replacements in a string. It creates a `Regex` object, passing its constructor the `IgnoreCase` option to tell the object to ignore capitalization in the string. It then calls the object's `Replace` method, passing it the string to modify and the pattern that it should use to make the replacement.

```
Dim reg_exp As New Regex(txtPattern.Text, RegexOptions.IgnoreCase)
lblResult.Text = reg_exp.Replace(Me.txtTestString.Text, _
    txtReplacementPattern.Text)
```

The `Regex` class can perform much more complicated matches. For example, you can use it to find fields within each line in a multiline string and then build a string containing the fields reformatted or reordered. See the online help for more details.

XML

Extensible Markup Language (XML) is a simple language for storing data in a text format. It encloses data within tags that delimit the data. You can give those tags any names that you want. For example, the following text shows an XML file containing three Employee records:

```
<?xml version="1.0" encoding="utf-8" standalone="yes"?>
<Employees>
    <Employee>
        <FirstName>Albert</FirstName>
        <LastName>Anders</LastName>
        <EmployeeId>11111</EmployeeId>
    </Employee>
    <Employee>
        <FirstName>Betty</FirstName>
        <LastName>Beach</LastName>
        <EmployeeId>22222</EmployeeId>
    </Employee>
    <Employee>
        <FirstName>Chuck</FirstName>
        <LastName>Cinder</LastName>
        <EmployeeId>33333</EmployeeId>
    </Employee>
</Employees>
```

The System.Xml namespace contains classes for reading, writing, and manipulating XML data. Different classes let you process XML files in different ways. For example, the `XmlDocument` class lets you represent an XML document completely within memory. Using this class, you can perform complex manipulations of an XML file, adding and removing elements, searching for elements with particular attributes, and merging XML documents.

The `XmlTextReader` and `XmlTextWriter` classes let you read and write XML data in a fast, forward-only fashion. These classes can be more efficient than `XmlDocument` when you must quickly build or scan very large XML files that might not easily fit in memory all at once.

The following code shows one way a program can use the System.Xml namespace to generate the previous employee XML file:

```
Private Sub btnGo_Click() Handles btnGo.Click
    Dim xml_text_writer As _
        New XmlTextWriter("employees.xml", System.Text.Encoding.UTF8)

    ' Use indentation to make the result look nice.
```

```
        xml_text_writer.Formatting = Formatting.Indented
        xml_text_writer.Indentation = 4

        ' Write the XML declaration.
        xml_text_writer.WriteStartDocument(True)

        ' Start the Employees node.
        xml_text_writer.WriteStartElement("Employees")

        ' Write some Employee elements.
        MakeEmployee(xml_text_writer, "Albert", "Anders", 11111)
        MakeEmployee(xml_text_writer, "Betty", "Beach", 22222)
        MakeEmployee(xml_text_writer, "Chuck", "Cinder", 33333)

        ' End the Employees node.
        xml_text_writer.WriteEndElement()

        ' End the document.
        xml_text_writer.WriteEndDocument()

        ' Close the XmlTextWriter.
        xml_text_writer.Close()
    End Sub

    ' Add an Employee node to the document.
    Private Sub MakeEmployee(ByVal xml_text_writer As XmlTextWriter, _
     ByVal first_name As String, ByVal last_name As String, _
     ByVal emp_id As Integer)
        ' Start the Employee element.
        xml_text_writer.WriteStartElement("Employee")

        ' Write the FirstName.
        xml_text_writer.WriteStartElement("FirstName")
        xml_text_writer.WriteString(first_name)
        xml_text_writer.WriteEndElement()

        ' Write the LastName.
        xml_text_writer.WriteStartElement("LastName")
        xml_text_writer.WriteString(last_name)
        xml_text_writer.WriteEndElement()

        ' Write the EmployeeId.
        xml_text_writer.WriteStartElement("EmployeeId")
        xml_text_writer.WriteString(emp_id.ToString)
        xml_text_writer.WriteEndElement()

        ' Close the Employee element.
        xml_text_writer.WriteEndElement()
    End Sub
```

The code starts by creating an `XmlTextWriter` object. This class provides methods for efficiently writing items into an XML file. The code sets the writer's `Formatting` and `Indentation` properties to make the object indent the resulting XML file nicely. If you don't set these properties, the file comes out all run together on a single line. That's fine for programs that process XML files but makes the file hard for humans to read.

The program calls the `WriteStartDocument` method to write the file's XML declaration, including the XML version, encoding, and standalone attribute. It calls `WriteStartElement` to write the starting `<Employees>` XML tag and then calls subroutine `MakeEmployee` to generate three Employee items. It calls the `WriteEndElement` method to write the `</Employees>` end tag, and calls `WriteEndDocument` to end the document. The program then closes the `XmlTextWriter` to close the file.

Subroutine `MakeEmployee` writes a starting `<Employee>` element into the file. It then uses the `WriteStartElement`, `WriteString`, and `WriteEndElement` methods to add the employee's `FirstName`, `LastName`, and `EmployeeId` elements to the document. The routine finishes by calling `WriteEndElement` to create the `</Employee>` end tag.

Other classes within the System.Xml namespace let you load and manipulate XML data in memory, read XML data in a fast forward–only manner, and search XML documents for elements matching certain criteria. XML is quickly becoming a common language that allows unrelated applications to communicate with each other. Using the XML tools provided by the System.Xml namespace, your application can read, write, and manipulate XML data, too.

Cryptography

The System.Security namespace includes objects for performing various cryptographic operations. The four main scenarios supported by these objects include the following:

❏ **Secret-key encryption** — This technique encrypts data so you cannot read it unless you know the secret key. This is also called *symmetric cryptography*.

❏ **Public-key encryption** — This technique encrypts data using a public key that everyone knows. Only the person with a secret private key can read the data. This is useful if you want anyone to be able to send messages to you, but only you should be able to read them. This is also called *asymmetric cryptography*.

❏ **Signing** — This technique signs data to guarantee that it really came from a specific party. For example, you can sign an executable program to prove that it's really your program and not a virus substituted by some hacker.

❏ **Hashing** — This technique maps a piece of data such as a document into a hash value so it's very unlikely that two different documents will map to the same hash value. If you know a document's hash value, you can later hash the document again and compare the values. If the calculated value matches the previously known value, it is very unlikely that anyone has modified the file since the first hashing.

The example described later in this section encrypts and decrypts files. The basic idea is to create a `CryptoStream` object attached to a file stream opened for writing. As you write data into the `CryptoStream`, it encrypts or decrypts the data and sends the result to the output file stream.

Although the classes provided by Visual Studio are easier to use than the routines contained in the underlying cryptography API, the details are still somewhat involved. To encrypt and decrypt files, you must first select an encryption algorithm. You need to pick key and block sizes that are supported by the corresponding encryption provider.

To use an encryption provider, you must pass it a key and initialization vector (IV). Each of these is a series of bytes that the encryption provider uses to initialize its internal state before it encrypts or decrypts files.

If you want to control the encryption with a textual password, you must convert it into a series of bytes that you can use for the key and initialization vector. You can do that with a `PasswordDeriveBytes` object, but that object also requires the name of the hashing algorithm that it should use to convert the password into the key and initialization vector bytes.

Working through the following example should make this less confusing. Example program DesFile, which is available for download on the book's web site, uses a triple DES encryption algorithm to encrypt and decrypt files. It uses the SHA384 hashing algorithm to convert a text password into key and initialization vector bytes.

```
' Encrypt or decrypt a file, saving the results
' in another file.
Private Sub CryptFile(ByVal password As String, ByVal in_file As String, _
 ByVal out_file As String, ByVal encrypt As Boolean)
    ' Create input and output file streams.
    Dim in_stream As New FileStream(in_file, FileMode.Open, FileAccess.Read)
    Dim out_stream As New FileStream(out_file, FileMode.Create, _
        FileAccess.Write)

    ' Make a triple DES service provider.
    Dim des_provider As New TripleDESCryptoServiceProvider()

    ' Find a valid key size for this provider.
    Dim key_size_bits As Integer = 0
    For i As Integer = 1024 To 1 Step -1
        If des_provider.ValidKeySize(i) Then
            key_size_bits = i
            Exit For
        End If
    Next i
    Debug.Assert(key_size_bits > 0)

    ' Get the block size for this provider.
    Dim block_size_bits As Integer = des_provider.BlockSize

    ' Generate the key and initialization vector.
    Dim key As Byte() = Nothing
    Dim iv As Byte() = Nothing
    Dim salt As Byte() = {&H0, &H0, &H1, &H2, &H3, &H4, &H5, &H6, _
        &HF1, &HF0, &HEE, &H21, &H22, &H45}
    MakeKeyAndIV(password, salt, key_size_bits, block_size_bits, key, iv)

    ' Make the encryptor or decryptor.
    Dim crypto_transform As ICryptoTransform
```

```
        If encrypt Then
            crypto_transform = des_provider.CreateEncryptor(key, iv)
        Else
            crypto_transform = des_provider.CreateDecryptor(key, iv)
        End If

        ' Attach a crypto stream to the output stream.
        Dim crypto_stream As New CryptoStream(out_stream, crypto_transform, _
            CryptoStreamMode.Write)

        ' Encrypt or decrypt the file.
        Const BLOCK_SIZE As Integer = 1024
        Dim buffer(BLOCK_SIZE) As Byte
        Dim bytes_read As Integer
        Do
            ' Read some bytes.
            bytes_read = in_stream.Read(buffer, 0, BLOCK_SIZE)
            If bytes_read = 0 Then Exit Do

            ' Write the bytes into the CryptoStream.
            crypto_stream.Write(buffer, 0, bytes_read)
        Loop

        ' Close the streams.
        crypto_stream.Close()
        in_stream.Close()
        out_stream.Close()
    End Sub

    ' Use the password to generate key bytes.
    Private Sub MakeKeyAndIV(ByVal password As String, ByVal salt() As Byte, _
     ByVal key_size_bits As Integer, ByVal block_size_bits As Integer, _
     ByRef key As Byte(), ByRef iv As Byte())
        Dim derive_bytes As New Rfc2898DeriveBytes( _
            txtPassword.Text, salt, 1000)

        key = derive_bytes.GetBytes(key_size_bits \ 8)
        iv = derive_bytes.GetBytes(block_size_bits \ 8
    End Sub
```

Subroutine `CryptFile` encrypts or decrypts a file, saving the result in a new file. It takes as parameters a password string, the names of the input and output files, and a Boolean indicating whether it should perform encryption or decryption.

The routine starts by opening the input and output files. It then makes a `TripleDESCryptoServiceProvider` object to provide the encryption and decryption algorithms using triple DES.

The program must find a key length that is supported by the encryption service provider. This code counts backward from 1,024 until it finds a value that the provider's `ValidKeySize` method approves. On my computer, the largest key size the provider supports is 192 bits.

The triple DES algorithm encrypts data in blocks. The program uses the provider's `BlockSize` property to see how big those blocks are. The program must generate an initialization vector that has this same size.

The program calls the `MakeKeyAndIV` subroutine. This routine, which is described shortly, converts a text password into arrays of bytes for use as the key and initialization vector. The `salt` array contains a series of random bytes to make guessing the password harder for an attacker. The `Rfc2898DeriveBytes` class used by subroutine `MakeKeyAndIV` can generate a random salt for the program, but this example uses a `salt` array written into the code to make reading the code easier.

After obtaining the key and initialization vector, the program makes an object to perform the encryption or decryption transformation, depending on whether the subroutine's encrypt parameter is `True` or `False`. The program uses the encryption provider's `CreateEncryptor` or `CreateDecryptor` method, passing it the key and initialization vector.

Now, the program makes a `CryptoStream` object attached to its output file stream. It passes the object's constructor and output file stream, the cryptographic transformation object, and a flag indicating that the program will write to the stream.

At this point, the program has set the stage and can finally begin processing data. It allocates a buffer to hold data and then enters a `Do` loop. In the loop, it reads data from the input file into the buffer. If it reads no bytes, the program has reached the end of the input file, so it exits the loop. If it reads some bytes, the program writes them into the `CryptoStream`. The `CryptoStream` uses its cryptographic transformation object to encrypt or decrypt the data and sends the result to its attached output file stream.

When it has finished processing the input file, the subroutine closes its streams.

Subroutine `MakeKeyAndIV` uses a text password to generate arrays of bytes to use as a key and initialization vector. It begins by creating an `Rfc2898DeriveBytes` object, passing to its constructor the password text, the salt, and the number of iterations the object should use to generate the random bytes. The salt can be any array of bytes as long as it's the same when encrypting and decrypting the file. The salt makes it harder for an attacker to build a dictionary of key and initialization vector values for every possible password string.

Having built the `PasswordDeriveBytes` object, the subroutine calls its `GetBytes` method to get the proper number of bytes for the key and initialization vector.

The following code uses the `CryptFile` subroutine to encrypt and then decrypt a file. First it calls `CryptFile`, passing it a password, input and output file names, and the value `True` to indicate that the routine should encrypt the file. Next, the code calls `CryptFile` again, this time to decrypt the encrypted file.

```
' Encrypt the file.
CryptFile(txtPassword.Text, txtPlaintextFile.Text, txtCyphertextFile.Text, _
    True)

' Decrypt the file.
CryptFile(txtPassword.Text, txtCyphertextFile.Text, txtDecypheredFile.Text, _
    False)
```

The `DesFile` example program, which is available for download on the book's web site, demonstrates the `CryptFile` subroutine. Enter some text and a password, and then click the left > button to encrypt the file. Click the right > button to decrypt the encrypted file and see if it matches the original text.

If you change the password by even a single character, the decryption returns gibberish. Figure 40-1 shows the program trying to decrypt a message incorrectly. When decrypting the file, I added an "s" to the end of the password. The result is completely unreadable.
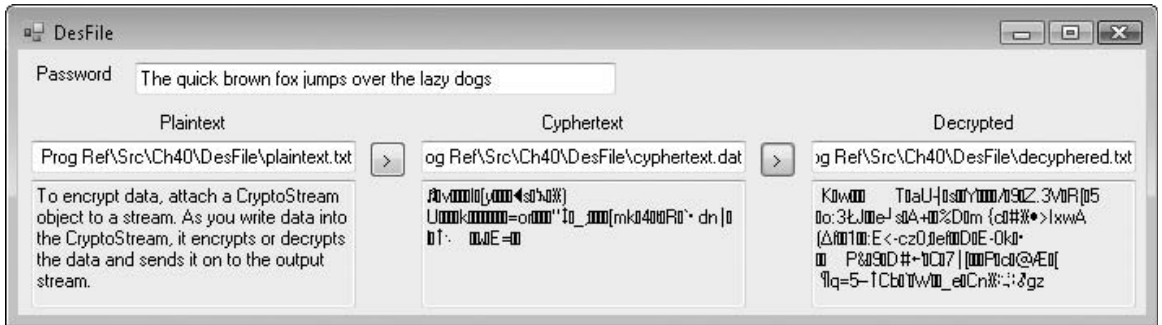
Figure 40-1: Changing even a single character in the password makes decryption produce an unintelligible result.

See the online help for information about the other main cryptographic operations (secret-key encryption, public-key encryption, signing, and hashing). Other books may also provide additional insights into cryptography. For example, the book *Applied Cryptography: Protocols, Algorithms, and Source Code in C, Second Edition* (Schneier, Wiley Publishing, Inc., 1996) provides an excellent overview of modern cryptography and describes many important algorithms in detail.

Reflection

Reflection lets a program learn about itself and other programming entities. It includes objects that tell the program about assemblies, modules, and types.

Example program ReflectionFormProperties, which is available for download on the book's web site, uses the following code to examine the program's form and display a list of its properties, their types, and their values:

```
Private Sub Form1_Load() Handles MyBase.Load
    ' Make column headers.
    lvwProperties.View = View.Details
    lvwProperties.Columns.Clear()
    lvwProperties.Columns.Add("Property", 10, _
        HorizontalAlignment.Left)
    lvwProperties.Columns.Add("Type", 10, _
        HorizontalAlignment.Left)
    lvwProperties.Columns.Add("Value", 10, _
```

```
                  HorizontalAlignment.Left)

        ' List the properties.
        Dim property_value As Object
        Dim properties_info As PropertyInfo() = _
            GetType(Form1).GetProperties()
        lvwProperties.Items.Clear()
        For i As Integer = 0 To properties_info.Length - 1
            With properties_info(i)
                If .GetIndexParameters().Length = 0 Then
                    property_value = .GetValue(Me, Nothing)
                    If property_value Is Nothing Then
                        ListViewMakeRow(lvwProperties, _
                            .Name, _
                            .PropertyType.ToString, _
                            "<Nothing>")
                    Else
                        ListViewMakeRow(lvwProperties, _
                            .Name, _
                            .PropertyType.ToString, _
                            property_value.ToString)
                    End If
                Else
                    ListViewMakeRow(lvwProperties, _
                        .Name, _
                        .PropertyType.ToString, _
                        "<array>")
                End If
            End With
        Next i

        ' Size the columns to fit the data.
        lvwProperties.Columns(0).Width = -2
        lvwProperties.Columns(1).Width = -2
        lvwProperties.Columns(2).Width = -2
    End Sub

    ' Make a ListView row.
    Private Sub ListViewMakeRow(ByVal lvw As ListView, _
     ByVal item_title As String, ByVal ParamArray subitem_titles() As String)
        ' Make the item.
        Dim new_item As ListViewItem = lvw.Items.Add(item_title)

        ' Make the subitems.
        For i As Integer = subitem_titles.GetLowerBound(0) To _
            subitem_titles.GetUpperBound(0)
            new_item.SubItems.Add(subitem_titles(i))
        Next i
    End Sub
```

The program starts by formatting the `ListView` control named `lvwProperties`. Next, it defines an array of `PropertyInfo` objects named `properties_info`. It uses `GetType` to get type information about the `Form1` class and then uses the type's `GetProperties` method to get information about the properties. The program then loops through the `PropertyInfo` objects.

If the object's `GetIndexParameters` array contains no entries, the property is not an array. In that case, the program uses the `PropertyInfo` object's `GetValue` method to get the property's value. The code then displays the property's name, type, and value.

If the `PropertyInfo` object's `GetIndexParameters` array contains entries, the property is an array. In that case, the program displays the property's name and type, and the string `<array>`.

The subroutine finishes by sizing the `ListView` control's columns and then making the form fit the columns.

The helper subroutine `ListViewMakeRow` adds a row of values to the `ListView` control. It adds a new item to the control and then adds subitems to the item. The item appears in the control's first column and the subitems appear in the other columns.

Using reflection to learn about your application is interesting, but not always necessary. After all, if you build an object, you probably know what its properties are.

Reflection can also tell you a lot about other applications. The ReflectionGetResources example program, also available for download, uses the following code to learn about another application. This program reads the assembly information in a file (example ReflectionHasResources is a resource-only DLL that this program can examine) and lists the embedded resources that it contains. The user can then select a resource to view it.

```
Private m_TargetAssembly As Assembly

' List the target assembly's resources.
Private Sub btnList_Click() Handles btnList.Click
    ' Get the target assembly.
    m_TargetAssembly = Assembly.LoadFile(txtFile.Text)

    ' List the target's manifest resource names.
    lstResourceFiles.Items.Clear()
    For Each str As String In m_TargetAssembly.GetManifestResourceNames()
        lstResourceFiles.Items.Add(str)
    Next str
End Sub

' List this file's resources.
Private Sub lstResourceFiles_SelectedIndexChanged() _
 Handles lstResourceFiles.SelectedIndexChanged
    lstResources.Items.Clear()

    Dim resource_reader As ResourceReader
    resource_reader = New ResourceReader( _
        m_TargetAssembly.GetManifestResourceStream(lstResourceFiles.Text))
```

```
        Dim dict_enumerator As IDictionaryEnumerator = _
            resource_reader.GetEnumerator()
        While dict_enumerator.MoveNext()
            lstResources.Items.Add(New ResourceInfo( _
                dict_enumerator.Key, _
                dict_enumerator.Value))
        End While
        resource_reader.Close()
    End Sub

    ' Display the selected resource.
    Private Sub lstResources_SelectedIndexChanged() _
     Handles lstResources.SelectedIndexChanged
        lblString.Text = ""
        picImage.Image = Nothing
        Me.Cursor = Cursors.WaitCursor
        Refresh()

        Dim resource_info As ResourceInfo = _
            DirectCast(lstResources.SelectedItem, ResourceInfo)
        Select Case resource_info.Value.GetType.Name
            Case "Bitmap"
                picImage.Image = CType(resource_info.Value, Bitmap)
                lblString.Text = ""
            Case "String"
                picImage.Image = Nothing
                lblString.Text = CType(resource_info.Value, String)
            Case Else
                ' Try to play it as audio.
                Try
                    My.Computer.Audio.Play(resource_info.Value, _
                        AudioPlayMode.WaitToComplete)
                Catch ex As Exception
                    MessageBox.Show(resource_info.Key & _
                        " has an unkown resource type", _
                        "Unknown Resource Type", MessageBoxButtons.OK)
                End Try
        End Select

        Me.Cursor = Cursors.Default
    End Sub

    Private Class ResourceInfo
        Public Key As Object
        Public Value As Object
        Public Sub New(ByVal new_key As Object, ByVal new_value As Object)
            Key = new_key
            Value = new_value
        End Sub
        Public Overrides Function ToString() As String
            Return Key.ToString & " (" & Value.ToString & ")"
        End Function
    End Class
```

The user enters the name of the assembly to load the `txtFile` text box. For example, this can be the name of a .NET executable program.

When the user clicks the List button, the `btnList_Click` event handler uses the `Assembly` class's shared `LoadFile` method to load an `Assembly` object representing the indicated assembly. It then loops through the array of strings returned by the `Assembly` object's `GetManifestResourceNames` method, adding the resource file names to the `ListBox` named `lstResourceFiles`.

When the user selects a resource file from the list, the `lstResourceFiles_SelectedIndexChanged` event handler displays a list of resources in the file. It uses the `Assembly` object's `GetManifestResourceStream` method to get a stream for the resources. It uses the stream to make a `ResourceReader` object and then enumerates the items found by the `ResourceReader`. It saves each object in a new `ResourceInfo` object (this class is described shortly) and adds it to the `lstResources` list.

When the user selects a resource from `lstResources`, its `SelectedIndexChanged` event handler retrieves the selected `ResourceInfo` object, converts its `Value` property into an appropriate data type, and displays the result. The `ResourceInfo` class stores Key and Value information for a resource enumerated by a `ResourceReader` object's enumerator. It provides an overloaded `ToString` that the `lstResources` list uses to represent the items.

This is admittedly a fairly complex example, but it performs the fairly remarkable feat of pulling resources out of another compile application.

Reflection can provide a lot of information about applications, modules, types, methods, properties, events, parameters, and so forth. It lets a program discover and invoke methods at runtime and build types at runtime.

An application also uses reflection indirectly when it performs such actions as serialization, which uses reflection to learn how to serialize and deserialize objects.

Reflection is a very advanced and somewhat arcane topic, but it is extremely powerful.

Direct3D

DirectX is a set of APIs that provide tools for high-performance multimedia applications. These APIs include tools for working with audio, music, input devices (such as joysticks and force-feedback devices), and other multimedia objects.

Direct3D is the three-dimensional drawing library provided by DirectX. Figure 40-2 shows a simple Direct3D application that displays an octahedron rotating around a vertical axis. Each of the octahedron's faces has a different color so that it's easy to see it rotating.

Before an application can use the DirectX and Direct3D libraries, you must perform a few preliminary tasks. First, you need to download and install the latest DirectX development kit. You can find it by going to the Microsoft download site `www.microsoft.com/downloads` and searching for the DirectX SDK. Alternatively you can go to the DirectX Resource Center `msdn2.microsoft.com/xna/aa937781 .aspx`, which should have a link to the latest version.

The most recent version of DirectX is version 10. Be warned that DirectX 10 only runs on the Windows Vista operating system and Microsoft does not plan to add support for other operating systems later.

You also won't get the full benefits of DirectX 10 unless your computer has DirectX 10 compatible hardware. For example, three-dimensional graphics applications won't be able to use hardware shading unless your graphics hardware supports it. Without that support, programs must rely on slower emulation techniques implemented in software. When Vista was released, no hardware fully supported DirectX 10 so that level of support is still fairly uncommon.

Next, start a new Windows Forms application. Use the Project menu's Add Reference command to add references to the Microsoft.DirectX and Microsoft.DirectX.Direct3D libraries.
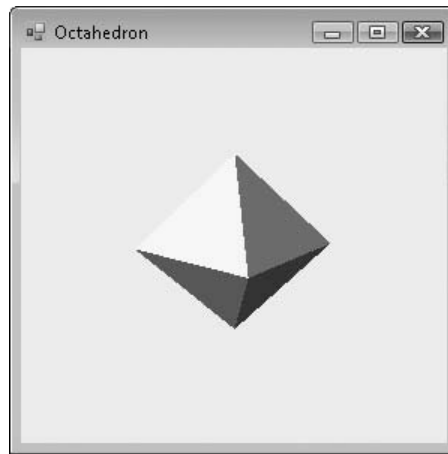
**Figure 40-2: This Direct3D application
displays a rotating octahedron.**

Add a new module to the application and give it a `Sub Main` procedure. This procedure will control the application and prepare it to use Direct3D.

To allow `Sub Main` to control the application, you need to set it as the startup "object." In Solution Explorer, double-click My Project. Select the Application tab, uncheck the "Enable application framework" box, open the "Startup object" dropdown, and select Sub Main.

Now, you are ready to add the Direct3D code necessary to make the program draw. The Octahedron example program, available for download on the book's web site, uses the following `Main` subroutine:

```
Public Sub Main()
    ' Make the form.
    Dim frm As New OctahedronForm

    ' Initialize Direct3D.
    If frm.InitializeGraphics() Then
        frm.Show()

        ' While the form is valid, render the scene and process messages.
```

```
            Do While frm.Created
                frm.Render()
                Application.DoEvents()
            Loop
        End If
    End Sub
```

The subroutine creates a new `OctahedronForm` object, calls its `InitializeGraphics` method to get it ready to display graphics, and displays the form. It then enters an event loop. As long as the form is valid, the program calls its `Render` method to draw the octahedron, and then calls `Application.DoEvents` to process any events that have occurred (such as the user closing the form).

The following code shows the `OctahedronForm`'s `InitializeGraphics` method:

```
' The Direct3D device.
Private m_Device As Device

' Data variables.
Private Const NUM_TRIANGLES As Integer = 8
Private Const NUM_POINTS As Integer = 3 * NUM_TRIANGLES

' The vertex buffer that holds drawing data.
Private m_VertexBuffer As VertexBuffer = Nothing

' initialize the graphics device. Return True if successful.
Public Function InitializeGraphics() As Boolean
    Try
        Dim params As New PresentParameters
        params.Windowed = True
        params.SwapEffect = SwapEffect.Discard

        ' Use hardware vertex processing if supported.
        m_Device = New Device(0, DeviceType.Hardware, Me, _
            CreateFlags.SoftwareVertexProcessing, params)

        ' Turn off D3D lighting because
        ' we set the vertex colors explicitly.
        m_Device.RenderState.Lighting = False

        ' Create the vertex data.
        CreateVertexBuffer()

        Return True
    Catch ex As Exception
        MessageBox.Show("Error initializing Direct3D" & _
            vbCrLf & vbCrLf & ex.Message, _
            "Direct3D Error", MessageBoxButtons.OK)
        Return False
    End Try
End Function
```

This code begins by defining some module-scope variables that are used to control the drawing. The `m_Device` object will represent the Direct3D drawing device. The `m_VertexBuffer` object will contain information about points that Direct3D must draw to display the octahedron.

The `InitializeGraphics` subroutine starts by creating a `PresentParameters` object to help describe the Direct3D device that the program needs to build. It sets the `Windowed` value to true to indicate that the drawing should sit inside the form. It sets `SwapEffect` to allow the rendering engine to handle buffering in whatever way it thinks will be best.

The code then creates a Direct3D device object to represent the drawing. This example turns off Direct3D lighting because the program explicitly assigns colors to the octahedron's faces.

The subroutine finishes by calling subroutine `CreateVertexBuffer`, which is shown in the following code, to initialize the vertex data:

```
' Create a vertex buffer for the device.
Public Sub CreateVertexBuffer()
    ' Create a vertex buffer.
    m_VertexBuffer = New VertexBuffer( _
        GetType(CustomVertex.PositionColored), _
        NUM_POINTS, m_Device, 0, _
        CustomVertex.PositionColored.Format, _
        Pool.Default)

    ' Lock the vertex buffer.
    ' Lock returns an array of positionColored objects.
    Dim vertices As CustomVertex.PositionColored() = _
        CType(m_VertexBuffer.Lock(0, 0),  _
            CustomVertex.PositionColored())
    Dim start_index As Integer = 0

    Const WID As Single = 2
    MakeTriangle(vertices, start_index, Color.Red, _
        0, WID, 0, _
        0, 0, WID, _
        WID, 0, 0)
    MakeTriangle(vertices, start_index, Color.Yellow, _
        0, WID, 0, _
        WID, 0, 0, _
        0, 0, -WID)
        ...

    m_VertexBuffer.Unlock()
End Sub
```

This code makes a new `VertexBuffer` object to hold the point coordinates used to draw the octahedron. The first parameter to the constructor indicates that the vertex data will include positions and colors. Other parameters indicate the number of vertices, the Direct3D device, the points' format, and a flag indicating that the buffer should be placed in the default memory pool.

The code then locks the vertex buffer so it won't move in memory, and calls subroutine `MakeTriangle`, which is shown in the following code, eight times to define the triangles that make up the octahedron. It finishes by unlocking the vertex buffer.

```
Private Sub MakeTriangle( _
    ByVal vertices As CustomVertex.PositionColored(), _
    ByRef start_index As Integer, ByVal clr As Color, _
```

```
        ByVal x1 As Single, ByVal y1 As Single, ByVal z1 As Single, _
        ByVal x2 As Single, ByVal y2 As Single, ByVal z2 As Single, _
        ByVal x3 As Single, ByVal y3 As Single, ByVal z3 As Single)

    With vertices(start_index)
        .X = x1
        .Y = y1
        .Z = z1
        .Color = clr.ToArgb()
    End With
    start_index += 1

    With vertices(start_index)
        .X = x2
        .Y = y2
        .Z = z2
        .Color = clr.ToArgb()
    End With
    start_index += 1

    With vertices(start_index)
        .X = x3
        .Y = y3
        .Z = z3
        .Color = clr.ToArgb()
    End With
    start_index += 1
End Sub
```

Subroutine `MakeTriangle` fills in the data for a triangle inside the vertex buffer. This code creates three points to represent the triangle's corners and sets each corner's color. After it creates each point, the code increments the `start_index` parameter so it can save the following point in the next vertex buffer location.

That finishes all of the setup code. After setup is finished, the `Main` subroutine enters its event loop, repeatedly calling the form's `Render` subroutine, which is shown in the following code:

```
Public Sub Render()
    If m_Device Is Nothing Then Exit Sub

    ' Clear the back buffer.
    m_Device.Clear(ClearFlags.Target, Me.BackColor, 1, 0)

    ' Make a scene.
    m_Device.BeginScene()

    ' Setup the world, view, and projection matrices.
    SetupMatrices()

    ' Set the device's data stream source (the vertex buffer).
    m_Device.SetStreamSource(0, m_VertexBuffer, 0)

    ' Tell the device the format of the vertices.
```

```
    m_Device.VertexFormat = CustomVertex.PositionColored.Format

    ' Draw the primitives in the data stream.
    m_Device.DrawPrimitives(PrimitiveType.TriangleList, 0, NUM_TRIANGLES)

    ' End the scene and display.
    m_Device.EndScene()
    m_Device.Present()
End Sub
```

If the Direct3D device is not initialized, the subroutine simply exits. The subroutine then clears the device's drawing surface and calls its `BeginScene` method to prepare to start drawing. It then calls subroutine `SetupMatrices`, described shortly, to prepare the transformation and viewing matrices that it will need to draw.

Next subroutine `Render` sets the device's stream source to the vertex buffer to tell the device where to get its drawing data. It calls the device's `DrawPrimitives` method to make it draw the triangles. The parameters to this call indicate the type of data stored in the vertex buffer (a list of triangles), the index of the first item to draw (start at the first triangle), and the number of items to draw. Other types of data include a series of connected triangles, a fan of triangles that share a common vertex, a series of points to connect in a polyline, a series of line segments, or a series of points.

After it finishes drawing, the subroutine ends the scene and calls the device's `Present` method to display the result.

The following code shows the program's last piece: the `SetupMatrices` subroutine.

```
' Setup the world, view, and projection matrices.
Private Sub SetupMatrices()
    ' World Matrix:
    ' Rotate the object around the Y axis by
    ' 2 * Pi radians per 2000 ticks (2 seconds).
    Const TICKS_PER_REV As Integer = 2000
    Dim ms_rotated As Integer = Environment.TickCount Mod TICKS_PER_REV
    Dim angle As Double = ms_rotated * (2 * Math.PI) / TICKS_PER_REV
    m_Device.Transform.World = Matrix.RotationY(CSng(angle))

    ' View Matrix:
    ' This is defined by giving:
    '       An eye point            (0, 3, -10)
    '       A point to look at      (0, 0, 0)
    '       An "up" direction       <0, 1, 0>
    m_Device.Transform.View = Matrix.LookAtLH( _
        New Vector3(0, 3, -10), _
        New Vector3(0, 0, 0), _
        New Vector3(0, 1, 0))

    ' Projection Matrix:
    ' Perspective transformation defined by:
    '       Field of view           Pi / 4
```

```
'        Aspect ratio            1
'        Near clipping plane    Z = 1
'        Far clipping plane     Z = 100
m_Device.Transform.Projection = _
    Matrix.PerspectiveFovLH(Math.PI / 4, 1, 1, 100)
End Sub
```

Subroutine `SetupMatrices` builds three matrices: the world, view, and projection matrices.

The world matrix determines how the raw vertex data is transformed before it is drawn. This example rotates the data slightly each time it is drawn.

The view matrix determines how the device should represent the scene's point of view. You can think of this as determining where the camera is positioned and oriented. Three vectors determine where the camera is located, the point at which it is directed, and whether the camera is tilted to the side — the "up" vector.

The projection matrix determines how the result is projected from three-dimensional space onto the two-dimensional screen. This example uses perspective projection so objects closer to the camera appear larger than those farther away.

Setting all this up is a lot of work, but once it is running, it's not too hard to make changes. You can add, remove, or modify the vertex data. You can also change the view matrix to look at the data from different positions.

Example program Sphere, also available for download and shown in Figure 40-3, is a bit more ambitious. It uses 80 triangles to draw a sphere. It also uses a lighting model with gray triangles illuminated by a green light and a red light. Aside from the lighting details, the program's structure is very similar to that of program Octahedron. Download the program to see the details.
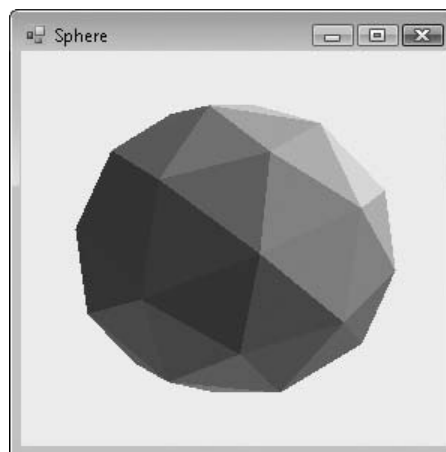
Figure 40-3: This program displays a rotating sphere illuminated by two light sources.

Direct3D is just one part of DirectX, and even that part is too complicated to describe completely here. For more information, see the online help, the examples, and the tutorials that come with the development kit.

For more information about three-dimensional graphics in general, transformations, and the matrixes that define transformations, you can also see a more theoretical three-dimensional graphics book such as *3D Computer Graphics, Third Edition* by Allan H. Watt (Addison Wesley, 2000).

Summary

The .NET Framework defines more than 160 namespaces, and this chapter described only a few. It provided a brief overview of some of the most important System namespaces and gave more detailed examples that demonstrated regular expressions, XML, cryptography, reflection, and Direct3D.

Even in these somewhat specialized areas, the examples can cover only a tiny fraction of the capabilities of the namespaces; however, the examples should give you an idea of the types of features that these namespaces can add to your application. If you need to do something similar, they will hopefully inspire you to do more in-depth research so that you can take full advantage of these powerful tools.

The chapters in this book cover a wide variety of Visual Basic programming topics. In the first part of the book, Chapters 1 through 7 described the Visual Studio integrated development environment and many of the tools that you use to build Visual Basic programs. In the second part of the book, Chapters 8 through 24 explained basic topics of Visual Basic programming (such as the language itself, using standard controls, and drag and drop). In the third part of the book, Chapters 25 through 29 described object-oriented concepts (such as class and structure declaration, namespaces, and generics). In the fourth part of the book, Chapters 30 through 35 covered graphical topics (such as how to draw shapes and text, image manipulation, printing, and report generation). In the fifth part of the book, Chapters 36 through 40 explained ways a program can interact with its environment by using such techniques as configuration files, the Registry, streams, and file-system objects.

The rest of this book contains appendixes that provide a categorized reference for Visual Basic .NET. You can use them to review quickly the syntax of a particular command, select from among several overloaded versions of a routine, or refresh your memory of what a particular class can do.

Part VI

Appendices

A

Useful Control Properties, Methods, and Events

A control interacts with a program or the user through properties, methods, and events. Although each type of control provides different features, they are all derived from the `Control` class. This class provides many useful properties, methods, and events that other controls inherit, if they don't take special action to override them. The following sections describe some of the most useful of these inherited features.

> *You can learn more about the* `Control` *class at* `msdn2.microsoft.com/library/system.windows.forms.control.aspx`.

Properties

The following table lists properties implemented by the `Control` class. All controls that inherit from this class inherit these properties unless they override the `Control` class's behavior.

Property	Purpose
AllowDrop	Determines whether the control allows drag-and-drop operations.
Anchor	Determines which of the control's edges are anchored to the edges of the control's container.
AutoSize	Determines whether the control automatically resizes to fit its contents.
BackColor	Determines the control's background color.
BackgroundImage	Determines the control's background image.

(continued)

Property	Purpose
BackgroundImageLayout	Determines how the control's background image is used to fill the control. This can be Center, None, Tile, Stretch, and Zoom.
Bottom	Returns the distance between the top edge of the control's container and the bottom edge of the control. This is read-only. Modify the Top and Height properties to change this value.
Bounds	Determines the control's size and location, including nonclient areas.
CanFocus	Determines whether the control can receive the input focus. See also the Focus method.
CanSelect	Determines whether the control can select. For example, a TextBox can select some or all of its text. See also the Select method.
Capture	Determines whether the control has captured the mouse.
CausesValidation	Determines whether the control makes other controls validate when it receives the focus.
ClientRectangle	This Rectangle structure represents the control's client area.
ClientSize	This Size structure represents the control's height and width.
ContainsFocus	Indicates whether the control or one of its child controls has the input focus. This is read-only.
ContextMenu	Determines the context menu associated with the control.
ContextMenuStrip	Determines the context menu strip associated with the control.
Controls	This collection contains references to the controls contained within this control.
Cursor	Determines the cursor that the control displays when the mouse is over it.
DataBindings	Gets the control's DataBindings, used to bind the control to a data source.
DefaultBackColor	Returns the control's default background color.
DefaultFont	Returns the control's default font.
DefaultForeColor	Returns the control's default foreground color.
DisplayRectangle	Returns a Rectangle structure giving the control's display area. Figure A-1 shows two GroupBoxes containing labels. Label1 and Label2 cover the left GroupBox's ClientRectangle and DisplayRectangle. Label3 covers the second GroupBox's DisplayRectangle.

Property	Purpose
Dock	Determines the edge of the control's parent to which the control is docked.
Enabled	Determines whether the control will interact with the user.
Focused	Indicates whether the control has the input focus. This is read-only.
Font	Determines the control's font.
ForeColor	Determines the control's foreground color.
Handle	Returns the control's window handle. This is read-only.
HasChildren	Indicates whether the control holds any child controls. This is read-only. Also see the `Controls` property.
Height	Determines the control's height.
InvokeRequired	Returns `True` if the calling code is running on a thread different from the control's thread and therefore must use an invoke method to interact with the control.
Left	Determines the X coordinate of the control's left edge.
Location	This `Point` structure determines the position of the control's upper-left corner.
Margin	Determines the spacing between this control and another control's margin within an arranging container.
MaximumSize	Determines the control's largest allowed size.
MinimumSize	Determines the control's smallest allowed size.
ModifierKeys	Indicates what modifier keys (`Shift`, `Ctrl`, and `Alt`) are pressed. This is read-only.
MouseButtons	Indicates what mouse buttons (`Left`, `Right`, `Middle`, `None`) are pressed. This is read-only.
MousePosition	Returns a `Point` structure giving the mouse's current position in screen coordinates (the point (0, 0) is in the screen's upper-left corner). This is read-only.
Name	Determines the control's name.
Padding	Determines the spacing of the control's contents.
Parent	Determines the parent containing the control.
PreferredSize	Returns a size that is big enough to hold the control's contents.

(continued)

Property	Purpose
Region	Determines the control's window region. This is the area in which the control may draw.
Right	Returns the distance between the left edge of the control's container and the right edge of the control. This is read-only. Modify the Left and Width properties to change this value.
Size	This Size structure determines the control's size including client and nonclient areas.
TabIndex	Determines the control's position in its container's tab order. If more than one control has the same TabIndex, they are traversed front to back using the stacking order.
TabStop	Determines whether the user can tab to the control.
Tag	This property can hold an object that you want to associate with the control.
Text	Determines the control's text.
Top	Determines the Y coordinate of the control's top edge.
TopLevelControl	Returns the control's top-level ancestor. Usually that is the outermost Form containing the control. This is read-only.
Visible	Determines whether the control is visible.
Width	Determines the control's width.

Figure A-1: The DisplayRectangle property gives the area in which you should normally place items within a control.

Methods

The following table lists useful methods implemented by the `Control` class. All controls that inherit from this class inherit these properties unless they override the `Control` class's behavior.

Many of the entries in the Method column wrap across multiple lines. In Visual Basic code, each would be all on a single line.

Method	Purpose
`Sub BringToFront()`	Brings the control to the front of the stacking order.
`Function Contains(ByVal child As Control) As Boolean`	Returns `True` if the control `child` is contained by this control.
`Function CreateGraphics() As Graphic`	Creates a `Graphic` object that you can use to draw on the control's surface.
`Function DoDragDrop(ByVal dragging_object As Object, ByVal allowed_effects As DragDropEffects)`	Starts a drag-and-drop operation.
`Sub DrawToBitmap(ByVal bm As Bitmap, ByVal rect As Rectangle)`	Draws an image of the control including contained controls onto the `Bitmap` in the indicated `Rectangle`.
`Function FindForm() As Form`	Returns the `Form` that contains this control.
`Function Focus() As Boolean`	Gives the control the input focus.
`Function GetChildAtPoint (ByVal pt As Point) As Control`	Returns the control's child that contains the indicated point. If more than one control contains the point, the method returns the control that is higher in the stacking order.
`Function GetNextControl (ByVal ctl As Control, ByVal next As Boolean) As Control`	If `next` is `True`, returns the next control in the tab order of this control's children after control `ctl`. If `next` is `False`, returns the previous control in the tab order. Set `ctl = Nothing` to start from the start/end of the tab order. Returns `Nothing` when you reach the start/end.
`Function GetPreferredSize (ByVal proposed_size) As Size`	Returns a size that is big enough to hold the control's contents.
`Function GetType() As Type`	Returns a `Type` object representing the control's class. You can use this object to get information about the class.

(continued)

915

Method	Purpose
`Sub Hide()`	Hides the control by setting its `Visible` property to `False`.
`Sub Invalidate()`	Invalidates some or all of the control and sends it a `Paint` event so that it redraws itself.
`Sub Invoke(ByVal delegate As Delegate)`	Invokes a delegate on the thread that owns the control.
`Function PointToClient (ByVal screen_point Point) As Point`	Converts a `Point` in screen coordinates into the control's `As` coordinate system.
`Function PointToScreen (ByVal control_point As Point) As Point`	Converts a `Point` in control coordinates into the screen coordinate system.
`Function RectangleToClient (ByVal screen_rect As Rectangle) As Rectangle`	Converts a `Rectangle` in screen coordinates into the control's coordinate system.
`Function RectangleToScreen (ByVal control_rect As Rectangle) As Rectangle`	Converts a `Rectangle` in control coordinates into the screen coordinate system.
`Sub Refresh()`	Invalidates the control's client area, so the control redraws itself and its child controls.
`Sub ResetBackColor()`	Resets the control's background color to its default value.
`Sub ResetCursor()`	Resets the control's cursor to its default value.
`Sub ResetFont()`	Resets the control's font to its default value.
`Sub ResetForeColor()`	Resets the control's foreground color to its default value.
`Sub ResetText()`	Resets the control's text to its default value.
`Sub Scale(ByVal scale_factor As Single)`	Scales the control and any contained controls by multiplying the `Left`, `Top`, `Width`, and `Height` properties by `scale_factor`.
`Sub Select()`	Moves the input focus to the control. Some controls have overloaded versions.
`Function SelectNextControl (ByVal ctl As Control, ByVal forward As Boolean, ByVal tab_ stop_only As Boolean, ByVal include_nested As Boolean, ByVal wrap As Boolean) As Boolean`	Moves the input focus to the next control contained within this one.
`Sub SendToBack()`	Sends the control to the back of the stacking order.

Method	Purpose
`Sub SetBounds(ByVal x As Integer, ByVal y As Integer, ByVal width As Integer, ByVal height As Integer)`	Sets the control's position and size.
`Sub Show()`	Displays the control by setting its `Visible` property to `True`.
`Function ToString() As String`	Returns a textual representation of the control. This is generally the type of the control followed by its most commonly used property.
`Sub Update()`	Makes the control redraw any invalidated areas.

Events

The following table lists useful events implemented by the `Control` class. All controls that inherit from this class inherit these properties unless they override the `Control` class's behavior.

Event	Purpose
`AutoSizeChanged`	Occurs when the control's `AutoSize` property changes.
`BackColorChanged`	Occurs when the control's `BackColor` property changes.
`BackgroundImageChanged`	Occurs when the control's `BackgroundImage` property changes.
`BackgroundImageLayoutChanged`	Occurs when the control's `BackgroundImageLayout` property changes.
`Click`	Occurs when the user clicks the control. This event is at a higher logical level than the `MouseClick` event, and it can be triggered by other actions than a mouse click (such as pressing the Enter key or a shortcut key).
`ContextMenuChanged`	Occurs when the control's `ContextMenu` property changes.
`ContextMenuStripChanged`	Occurs when the control's `ContextMenuStrip` property changes.

(continued)

Event	Purpose
ControlAdded	Occurs when a new control is added to the control's contained child controls.
ControlRemoved	Occurs when a control is removed from the control's contained child controls.
CursorChanged	Occurs when the control's Cursor property changes.
DockChanged	Occurs when the control's Dock property changes.
DoubleClick	Occurs when the user double-clicks the control.
DragDrop	Occurs when the user drops something on the control in a drag-and-drop operation. This event handler should process the dropped information appropriately.
DragEnter	Occurs when the user drags something over the control in a drag-and-drop operation.
DragLeave	Occurs when the user drags something off of the control in a drag-and-drop operation.
DragOver	Occurs when the user has dragged something over the control in a drag-and-drop operation. This event fires repeatedly until the user drags off of the control, drops on the control, or cancels the drop.
EnabledChanged	Occurs when the control's Enabled property changes.
Enter	Occurs when the control is entered. This event fires before the GotFocus event.
FontChanged	Occurs when the control's Font property changes.
ForeColorChanged	Occurs when the control's ForeColor property changes.
GiveFeedback	Occurs during a drag-and-drop operation to let the drag source control take action.
GotFocus	Occurs when the control receives the input focus. This event fires after the Enter event. Generally, the Enter event is preferred.
HelpRequested	Occurs when the user requests help for the control. For example, if the user moves the focus to a TextBox and presses F1, the TextBox raises this event.

Event	Purpose
`Invalidated`	Occurs when part of the control is invalidated.
`KeyDown`	Occurs when the user presses a key while the control has the input focus.
`KeyPress`	Occurs when the user presses and releases a key while the control has the input focus.
`KeyUp`	Occurs when the user releases a key while the control has the input focus.
`Layout`	Occurs when the control should arrange its child controls. This event occurs before the `Resize` and `SizeChanged` events and is preferred for arranging child controls.
`Leave`	Occurs when the input focus leaves the control. This event fires before the `LostFocus` event.
`LocationChanged`	Occurs when the control's `Location` property changes. This event fires after the `Move` event fires.
`LostFocus`	Occurs when the input focus leaves the control. This event fires after the `Leave` event. Generally, the `Leave` event is preferred.
`MarginChanged`	Occurs when the control's `Margin` property changes.
`MouseCaptureChanged`	Occurs when the control loses a mouse capture.
`MouseClick`	Occurs when the user clicks the mouse on the control.
`MouseDoubleClick`	Occurs when the user double-clicks the mouse on the control.
`MouseDown`	Occurs when the user presses a mouse button down over the control.
`MouseEnter`	Occurs when the mouse enters the control.
`MouseHover`	Occurs when the mouse hovers over the control.
`MouseLeave`	Occurs when the mouse leaves the control.
`MouseMove`	Occurs when the mouse moves over the control.
`MouseUp`	Occurs when the user releases a mouse button over the control.
`MouseWheel`	Occurs when the user moves the mouse wheel while the control has the input focus.

(continued)

Event	Purpose
Move	Occurs when the control is moved. This event fires before the LocationChanged event fires.
PaddingChanged	Occurs when the control's Padding property changes.
Paint	Occurs when the control must redraw itself. Normally the program draws on the control during this event (if it draws on the control at all).
ParentChanged	Occurs when the control's Parent property changes.
QueryContinueDrag	Occurs when something changes during a drag-and-drop operation so that the drag source can decide whether to modify or cancel the drag.
RegionChanged	Occurs when the control's Region property changes.
Resize	Occurs while the control is resizing. This event occurs after the Layout event, but before the SizeChanged event.
SizeChanged	Occurs while the control is resizing. This event occurs after the Layout and Move events.
SystemColorsChanged	Occurs when the system colors change. For instance, you might want to draw something using the same color that the operating system uses for active forms. If the user changes the system's color for borders, you can use this event to update your application.
TabIndexChanged	Occurs when the control's TabIndex property changes.
TabStopChanged	Occurs when the control's TabStop property changes.
TextChanged	Occurs when the control's Text property changes.
Validated	Occurs when the control has successfully finished validating its data.
Validating	Occurs when the control should validate its data.
VisibleChanged	Occurs when the control's Visible property changes.

Event Sequences

Several situations generate a series of events in a precise order.

There are a couple ways you can discover event sequences such as these. One is to place Debug .WriteLine *statements in the event handlers so that you can see the events as they occur. Another method is to use the Spy++ tool to track events. For more information on that technique, see the article "Working with Windows Messages in .NET" by John Mueller at* www.devsource.com/ article2/0,1895,1961574,00.asp.

Mouse Events

When you click a control, the following events are raised in the order shown. The first instance of the MouseMove event can occur any number of times if you move the mouse while holding the mouse button down. The final MouseMove event occurs whether or not you move the mouse.

```
MouseDown
  [MouseMove]
Click
MouseClick
MouseUp
MouseCaptureChanged
MouseMove
```

When you double-click a control, the following events are raised in the order shown:

```
MouseDown
  [MouseMove]
Click
MouseClick
MouseUp
MouseCaptureChanged
MouseMove
MouseDown
DoubleClick
MouseDoubleClick
MouseUp
MouseCaptureChanged
MouseMove
```

Resize Events

When you resize a control, the following events are raised in this order. These events are repeated as long as you are resizing the control.

```
Layout
Resize
SizeChanged
```

Form controls also provide ResizeBegin and ResizeEnd events that occur before and after the other events, respectively.

921

Move Events

When you move a control, the following events are raised in this order. These events are repeated as long as you are moving the control.

```
Move
LocationChanged
```

Form controls also provide `ResizeBegin` and `ResizeEnd` events that occur before and after the other events, respectively.

B

Variable Declarations and Data Types

This appendix provides information about variable declarations and data types.

Variable Declarations

The following code shows a standard variable declaration:

```
[attribute_list] [accessibility] [Shared] [Shadows] [ReadOnly] _
Dim [WithEvents] name[?] [(bounds_list)] [As [New] type[?]] _
[= initialization_expression]
```

The following list describes the pieces of this declaration:

❑ `attribute_list` — A comma-separated list of attributes specific to a particular task. For example, `<XmlAttributeAttribute(AttributeName:="Cost")>`.

❑ `accessibility` — `Public`, `Protected`, `Friend`, `Protected Friend`, `Private`, or `Static`.

❑ `Shared` — Means that all instances of the class or structure containing the variable share the same variable.

❑ `Shadows` — Indicates that the variable hides a variable with the same name in a base class.

❑ `ReadOnly` — Indicates that the program can read, but not modify, the variable's value. You can set the value in an initialization statement or in an object constructor.

❑ `Dim` — Officially tells Visual Basic that you want to create a variable. You can omit the `Dim` keyword if you specify `Public`, `Protected`, `Friend`, `Protected Friend`, `Private`, `Static`, or `ReadOnly`.

❑ `WithEvents` — Tells Visual Basic that the variable is of a specific object type that may raise events that you will want to catch.

❑   `name` — Gives the name of the variable.

❑   `?` — Indicates this should be a nullable variable. For more information, see the section "Nullable Types" in Chapter 15, "Data Types, Variables, and Constants."

❑   `bounds_list` — Bounds for an array.

❑   `New` — Use `New` to make a new instance of an object variable. Include parameters for the class's constructor if appropriate.

❑   `type` — The variable's data type.

❑   `initialization_expression` — An expression that sets the initial value for the variable.

Visual Basic enables you to declare and initialize more than one variable in a single declaration statement, but that can make the code more difficult to read. To avoid possible later confusion, declare only variables of one type in a single statement.

Initialization Expressions

Initialization expressions assign a value to a new variable. Simple expressions assign a literal value to a simple data type. The following example sets the value of a new string variable:

```
Dim txt As String = "Test"
```

The assignment expression can also initialize a variable to the result of a function or constructor, as in the following example:

```
Dim a_person As Person = New Person("Rod", "Stephens")    ' Constructor.
Dim num_tools As Integer = CountTools()                   ' Function.
```

An initialization expression for an object can use the `With` keyword to specify values for the object's public properties as in the following example, which sets the object's `FirstName` and `LastName` properties:

```
Dim emp As New Employee With {.FirstName = "Rod", .LastName = "Stephens"}
```

To initialize a one-dimensional array, put the array's values inside curly braces separated by commas as in the following code:

```
Dim fibonacci() As Integer = {1, 1, 2, 3, 5, 8, 13, 21, 33, 54, 87}
```

To initialize higher-dimensional arrays, places lower-dimensional array values inside curly brackets and separate them with commas as in the following example, which initializes a two-dimensional array:

```
Dim int_values(,) As Integer = _
{ _
    {1, 2, 3}, _
    {4, 5, 6} _
}
```

With

When you create a new object variable, you include a `With` clause to initialize the object's properties. The following code uses the `Person` class's parameterless constructor to make a new `Person` object. The `With` statement then sets values for the object's `FirstName` and `LastName` values.

```
Dim author As New Person() With {.FirstName = "Rod", .LastName = "Stephens"}
```

Using

To make it easy to call an object's `Dispose` method, you can declare a variable in a `Using` statement. When the code reaches the corresponding `End Using` statement, Visual Basic automatically calls the object's `Dispose` method.

You can only place `Using` statements inside code blocks, not at the module level, so the syntax is somewhat simpler than the syntax for declaring a variable in general. The following code shows the syntax for declaring a variable in a `Using` statement:

```
Using name [(bounds_list)] [As [New] type] [= initialization_expression]
...
End Using
```

The parts of this statement are described in the previous section.

If it declares the variable, the `Using` statement must also initialize either with the `As New` syntax or with an initialization expression.

Note that you can also use a `Using` statement to make it easier to call a previously created object's `Dispose` method. The following code defines the `thick_pen` object, and then is used in a `Using` statement:

```
Dim thick_pen As New Pen(Color.Red, 10)
Using thick_pen
...
End Using
```

With this technique, the variable is available outside of the `Using` block, which may occasionally lead to confusion, so I recommend declaring variables in their `Using` blocks whenever possible.

Enumerated Type Declarations

The syntax for declaring an enumerated type is as follows:

```
[attribute_list] [accessibility] [Shadows] Enum name [As type]
    [attribute_list] value_name [= initialization_expression]
    [attribute_list] value_name [= initialization_expression]
    ...
End Enum
```

Most of these terms (including *attribute_list* and *accessibility*) are similar to those used by variable declarations. See the section "Variable Declarations" earlier in this appendix for more information.

XML Variables

To initialize XML data, declare an `XElement` variable and set it equal to properly formatted XML code. For example, the following code declares a variable named `book_node` that contains XML data representing a book:

```
Dim book_node As XElement = _
    <Book>
        <Title>The Bug That Was</Title>
        <Year>2008</Year>
        <Pages>376</Year>
    </Book>
```

Option Explicit and Option Strict

When `Option Explicit` is on, you must explicitly declare all variables before using them. When `Option Explicit` is off, Visual Basic creates a variable the first time it is encountered if is has not yet been declared. To make your code easier to understand, and to avoid problems such as Visual Basic creating a new variable because of a typographical error, you should always turn `Option Explicit` on.

When `Option Strict` is on, Visual Basic will not implicitly perform narrowing type conversions. For example, if you set an Integer variable equal to a String value, Visual Basic will raise an error because the String might not contain an Integer value. When `Option Strict` is off, Visual Basic will silently attempt narrowing conversions. It tries to convert the String value into an Integer and raises an error if the String doesn't contain an integral value. To avoid confusion and potentially slow conversions, always turn `Option Strict` on.

Option Infer

When `Option Infer` is on, Visual Basic can infer the data type of a variable from its initialization expression. For example, Visual Basic would infer that the variable `txt` in the following code has data type `String`:

```
Dim message = "Hello!"
```

Type inference only works on local variables declared within a subroutine, function, property, or other local context. It doesn't work for variables declared at the class level or in code modules.

Because inferred data types do not explicitly give the variable's data type, they can make the code harder to understand. To avoid confusion, leave `Option Infer` off unless you really need it.

For example, LINQ (Language Integrated Query) lets a program generate results that have an *anonymous* type. LINQ creates an object data type to hold results but the type is not given a name for the program to use. Instead type inference allows the program to manipulate the results without ever referring to the type by name. In this case, `Option Infer` must be on. For more information on LINQ, see Chapter 21, "LINQ."

Data Types

The following table summarizes the Visual Basic data types.

Type	Size	Values
Boolean	2 bytes	`True` or `False`
Byte	1 byte	0 to 255 (unsigned byte)
SByte	1 byte	−128 to 127 (signed byte)
Char	2 bytes	0 to 65,535 (unsigned character)
Short	2 bytes	−32,768 to 32,767
UShort	2 bytes	0 through 65,535 (unsigned short)
Integer	4 bytes	−2,147,483,648 to 2,147,483,647
UInteger	4 bytes	0 through 4,294,967,295 (unsigned integer)
Long	8 bytes	−9,223,372,036,854,775,808 to 9,223,372,036,854,775,807
ULong	8 bytes	0 through 18,446,744,073,709,551,615 (unsigned long)
Decimal	16 bytes	0 to +/−79,228,162,514,264,337,593,543,950,335 with no decimal point 0 to +/−7.9228162514264337593543950335 with 28 places
Single	4 bytes	−3.4028235E+38 to −1.401298E-45 (negative values) 1.401298E-45 to 3.4028235E+38 (positive values)
Double	8 bytes	−1.79769313486231570E+308 to −4.94065645841246544E-324 (negative values) 4.94065645841246544E-324 through 1.79769313486231570E+308 (positive values)
String	variable	Depending on the platform, approximately 0 to 2 billion Unicode characters
Date	8 bytes	January 1, 0001 0:0:00 to December 31, 9999 11:59:59 pm
Object	4 bytes	Points to any type of data
Structure	variable	Structure members have their own ranges

Data Type Characters

The following table lists the Visual Basic data type characters.

Character	Data Type
%	Integer
&	Long
@	Decimal
!	Single
#	Double
$	String

Using data type characters alone to determine a variable's data type can be confusing, so I recommend that you use an As clause instead.

Literal Type Characters

The following table lists the Visual Basic literal type characters.

Character	Data Type
S	Short
US	UShort
I	Integer
UI	UInteger
L	Long
UL	ULong
D	Decimal
F	Single (F for "floating point")
R	Double (R for "real")
c	Char (note that this is a lowercase "c")

Data Type Conversion Functions

The following table lists the Visual Basic data type conversion functions.

Function	Converts To
CBool	Boolean
CByte	Byte
CChar	Char
CDate	Date
CDbl	Double
CDec	Decimal
CInt	Integer
CLng	Long
CObj	Object
CSByte	SByte
CShort	Short
CSng	Single
CStr	String
CUInt	UInteger
CULng	ULong
CUShort	UShort

Remember that data types have their own parsing methods in addition to these data type conversion functions. For example, the following code converts the String variable `a_string` into an Integer value:

```
an_integer = Integer.Parse(a_string)
```

These methods are faster than the corresponding data type conversion function (in this case, `CInt`).

CType and DirectCast

The `CType` and `DirectCast` statements also perform type conversion. `CType` converts data from one type to another type if the types are compatible. For example, the following code converts the string "1234" into an integer:

```
Dim value As Integer = CType("1234", Integer)
```

`DirectCast` converts an object reference into a reference of another type provided the reference is actually of the second type. For example, suppose the `Employee` class inherits from the `Person` class, and consider the following code:

```
Dim emp1 As New Employee

' Works because emp1 is an Employee and a Person.
Dim per1 As Person = DirectCast(emp1, Person)

' Works because per1 happens to point to an Employee object.
Dim emp2 As Employee = DirectCast(per1, Employee)

Dim per2 As New Person

' Fails because per2 is a Person but not an Employee.
Dim emp3 As Employee = DirectCast(per2, Employee)
```

The code creates an `Employee` object. It then uses `DirectCast` to convert the `Employee` into a `Person` and then to convert the new `Person` back into an `Employee`. This works because this object is both an `Employee` and a `Person`.

Next, the code creates a `Person` object and tries to use `DirectCast` to convert it into an `Employee`. This fails because this `Person` is not an `Employee`.

Operators

The Visual Basic operators fall into five main categories: arithmetic, concatenation, comparison, logical, and bitwise. The following sections explain these categories and the operators they contain. The end of this appendix describes special Date and TimeSpan operators, as well as operator overloading.

Arithmetic Operators

The following table lists the arithmetic operators provided by Visual Basic.

Operator	Purpose	Example	Result
^	Exponentiation	`2 ^ 3`	(2 to the power 3) = `2 * 2 * 2 = 8.`
–	Negation	`–2`	`–2`
*	Multiplication	`2 * 3`	`6`
/	Division	`3 / 2`	`1.5`
\	Integer division	`17 \ 5`	`3`
`Mod`	Modulus	`17 Mod 5`	`2`
+	Addition	`2 + 3`	`5`
–	Subtraction	`3 – 2`	`1`
<<	Bit left shift	`&H57 << 1`	`&HAE`
>>	Bit right shift	`&H57 >> 1`	`&H2B`

The bit shift operators deserve a little extra discussion. These operators shift the binary representation of a number by a given number of bits either left or right. Unfortunately Visual Basic doesn't understand binary so you must manually translate between binary and decimal, octal, or hexadecimal.

For example, the hexadecimal value &H57 is 01010111 in binary. If you shift this one bit to the left, you get 10101110, which is &HAE in hexadecimal. If you shift the original value one bit to the right, you get 00101011, which is &H2B in hexadecimal.

When working with binary values, many developers prefer to work in hexadecimal because each hexadecimal digit corresponds to four binary bits so you can work with each group of four bits separately.

Concatenation Operators

Visual Basic provides two concatenation operators: + and &. Both join two strings together. Because the + symbol also represents an arithmetic operator, your code will be easier to read if you use the & symbol for concatenation.

Comparison Operators

The following table lists the comparison operators provided by Visual Basic.

Operator	Purpose	Example	Result
=	Equals	A = B	True if A equals B
<>	Not equals	A <> B	True if A does not equal B
<	Less than	A < B	True if A is less than B
<=	Less than or equal to	A <= B	True if A is less than or equal to B
>	Greater than	A > B	True if A is greater than B
>=	Greater than or equal to	A >= B	True if A is greater than or equal to B
Is	Equality of two objects	emp Is mgr	True if emp and mgr refer to the same object
IsNot	Inequality of two objects	emp IsNot mgr	True if emp and mgr refer to different objects
TypeOf... Is	Object is of a certain type	TypeOf(obj) Is Manager	True if obj points to a Manager object
Like	Matches a text pattern	A Like "###-####"	True if A contains three digits, a dash, and four digits

The following table lists characters that have special meanings to the `Like` operator.

Character(s)	Meaning
?	Matches any single character
*	Matches any zero or more characters
#	Matches any single digit
[characters]	Matches any of the characters between the brackets
[!characters]	Matches any character not between the brackets
A-Z	When inside brackets, matches any character in the range A to Z

The following table lists some useful `Like` patterns.

Pattern	Meaning
[2-9]##-####	Seven-digit phone number
[2-9]##-[2-9]##-####	Ten-digit phone number including area code
1-[2-9]##-[2-9]##-####	Eleven-digit phone number beginning with 1 and area code
#####	Five-digit ZIP code
#####-####	Nine-digit ZIP+4 code
?*@?*.?*	e-mail address

Logical Operators

The following table summarizes the Visual Basic logical operators.

Operator	Purpose	Example	Result
Not	Logical or bitwise negation	Not A	True if A is false
And	Logical or bitwise And	A And B	True if A and B are both true
Or	Logical or bitwise Or	A Or B	True if A or B or both are true

(continued)

933

Operator	Purpose	Example	Result
Xor	Logical or bitwise exclusive Or	A Xor B	True if A or B but not both is true
AndAlso	Logical or bitwise And with short-circuit evaluation	A AndAlso B	True if A and B are both true
OrElse	Logical or bitwise Or with short-circuit evaluation	A OrElse B	True if A or B or both are true

Bitwise Operators

Bitwise operators work much as logical operators do, except that they compare values one bit at a time. Visual Basic provides bitwise versions of Not, And, Or, and Xor but not bitwise versions of AndAlso or OrElse.

Operator Precedence

The following table lists the operators in order of precedence. When evaluating an expression, the program evaluates an operator before it evaluates those lower than it in the list. When operators are on the same line, the program evaluates them from left to right.

Operator	Description
^	Exponentiation
–	Negation
*, /	Multiplication and division
\	Integer division
Mod	Modulus
+, –, +	Addition, subtraction, and concatenation
&	Concatenation
<<, >>	Bit shift
=, <>, <, <=, >, >=, Like, Is, IsNot, TypeOf...Is	All comparisons
Not	Logical and bitwise negation
And, AndAlso	Logical and bitwise And with and without short-circuit evaluation
Xor, Or, OrElse	Logical and bitwise Xor, and Or with and without short-circuit evaluation

Use parentheses to change the order of evaluation and to make expressions easier to read.

Assignment Operators

The following table summarizes the Visual Basic assignment operators.

Operator	Example	Original Syntax Equivalent
=	A = B	A = B
^=	A ^= B	A = A ^ B
*=	A *= B	A = A * B
/=	A /= B	A = A / B
\=	A \= B	A = A \ B
+=	A += B	A = A + B
-=	A -= B	A = A - B
&=	A &= B	A = A & B
<<=	A <<= B	A = A << B
>>=	A >>= B	A = A >> B

There are no assignment operators corresponding to Mod or the Boolean operators.

Choose, If, and IIf

The Choose, If, and IIf statements return values that you can assign to a variable. These statements are not really assignment operators (you need to use = to assign their results to a variable) and they perform decisions so they are described in Appendix E, "Control Statements."

Date and TimeSpan Operators

The Date and TimeSpan data types are related through their operators. The following list shows the relationships between these two data types:

❑ Date – Date = TimeSpan

❑ Date + TimeSpan = Date

❑ TimeSpan + TimeSpan = TimeSpan

❑ TimeSpan – TimeSpan = TimeSpan

The following table lists convenient methods provided by the Date data type.

Syntax	Meaning
`result_date = date1.Add(timespan1)`	Returns `date1` plus `timespan1`
`result_date = date1` `.AddYears(num_years)`	Returns the date plus the indicated number of years
`result_date = date1` `.AddMonths(num_months)`	Returns the date plus the indicated number of months
`result_date = date1` `.AddDays(num_days)`	Returns the date plus the indicated number of days
`result_date = date1` `.AddHours(num_hours)`	Returns the date plus the indicated number of hours
`result_date = date1` `.AddMinutes(num_minutes)`	Returns the date plus the indicated number of minutes
`result_date = date1` `.AddSeconds(num_seconds)`	Returns the date plus the indicated number of seconds
`result_date = date1.AddMilliseconds` `(num_milliseconds)`	Returns the date plus the indicated number of milliseconds
`result_date = date1` `.AddTicks(num_ticks)`	Returns the date plus the indicated number of ticks (100 nanosecond units)
`result_timespan = date1` `.Subtract(date2)`	Returns the time span between `date2` and `date1`
`result_integer = date1` `.CompareTo(date2)`	Returns a value indicating whether `date1` is greater than, less than, or equal to `date2`
`result_boolean = date1.Equals(date2)`	Returns `True` if `date1` equals `date2`

Operator Overloading

The syntax for defining an operator for a class is as follows:

```
[ <attributes> ] Public [ Overloads ] Shared [ Shadows ] _
  [ Widening | Narrowing ] Operator symbol ( operands ) As type
    ...
End Operator
```

The operator's symbol can be +, -, *, /, \, ^, &, <<, >>, =, <>, <, >, <=, >=, Mod, Not, And, Or, Xor, Like, IsTrue, IsFalse, or CType.

For example, the following code defines the + operator for the ComplexNumber class. This class has two public properties, Re and Im, that give the number's real and imaginary parts.

```
Public Shared Operator +( _
 ByVal c1 As ComplexNumber, _
 ByVal c2 As ComplexNumber) As ComplexNumber
    Return New ComplexNumber With {
        .Re = c1.Re + c2.Re, _
        .Im = c1.Im + c2.Im}
End Operator
```

Some operands come in pairs, and if you define one, you must define the other. The pairs are = and <>, < and >, <= and >=, and IsTrue and IsFalse.

If you define And and IsFalse, Visual Basic uses them to define the AndAlso operator. Similarly, if you define Or and IsTrue, Visual Basic automatically provides the OrElse operator.

Subroutine and Function Declarations

This appendix provides information about subroutine, function, and generic declarations. A property procedure includes a subroutine and function pair, so they are also described here.

Subroutines

The syntax for writing a subroutine is as follows:

```
[attribute_list] [interitance_mode] [accessibility]
Sub subroutine_name [(parameters)] [ Implements interface.procedure ]
    [ statements ]
End Sub
```

The *inheritance_mode* can be one of the following values: Overloads, Overrides, Overridable, NotOverridable, MustOverride, Shadows, or Shared. These values determine how a subroutine declared within a class inherits from the parent class or how it allows inheritance in derived classes.

The *accessibility* clause can take one of the following values: Public, Protected, Friend, Protected Friend, or Private. These values determine which pieces of code can invoke the subroutine.

Functions

The syntax for writing a function is as follows:

```
[attribute_list] [interitance_mode] [accessibility] _
Function function_name([parameters]) [As return_type] [ Implements
interface.function ]
    [ statements ]
End Function
```

This is the same as the syntax used for declaring a subroutine, except that a function includes a return type and ends with `End Function`.

The *inheritance_mode* can be one of the values `Overloads`, `Overrides`, `Overridable`, `NotOverridable`, `MustOverride`, `Shadows`, or `Shared`. These values determine how a subroutine declared within a class inherits from the parent class or how it allows inheritance in derived classes.

The *accessibility* clause can take one of the following values: `Public`, `Protected`, `Friend`, `Protected Friend`, or `Private`. These values determine which pieces of code can invoke the subroutine.

A function assigns its return value either by setting its name equal to the value or by using the `Return` statement. Using the `Return` statement may allow the compiler to optimize the code more, so it is generally preferred.

Property Procedures

The syntax for read/write property procedures is as follows:

```
Property property_name() As data_type
    Get
        ...
    End Get
    Set(ByVal Value As data_type)
        ...
    End Set
End Property
```

The syntax for a read-only property procedure is as follows:

```
Public ReadOnly Property property_name() As data_type
    Get
        ...
    End Get
End Property
```

The syntax for a write-only property procedure is as follows:

```
Public WriteOnly Property property_name() As data_type
    Set(ByVal Value As data_type)
        ...
    End Set
End Property
```

In all three of these cases, you don't need to remember all the declaration details. If you type the first line (including the `ReadOnly` or `WriteOnly` keywords if you want them) and press Enter, Visual Basic creates blank property procedures for you.

The `Property Get` procedures should all assign return values, as in `property_name = return_value` or by using the `Return` statement, as in `Return return_value`.

Lambda Functions

A *lambda function* (also called an *inline function*) is a function declared inline within the code. You can use lambda functions to initialize a delegate or to pass the function to a method that takes a delegate as a parameter.

For example, the following code creates an inline delegate named `F`. It then displays the value of `F(12)`.

```
Dim F = Function(x As Integer) Sin(x / 2) + 2 * Cos(x / 3)
Debug.WriteLine(F(12))
```

The following code calls subroutine `ApplyFunction`. This function takes as parameters an array of values and a function that it should apply to each of the values. The code passes an inline delegate that doubles a number into `ApplyFunction` to double each of the values.

```
ApplyFunction(values, Function(x As Single) 2 * x)
```

Extension Methods

To make an extension method, place a method in a code module and decorate it with the `Extension` attribute. The first parameter to the method determines the class that the method extends. For example, the following code gives the `String` class a `MatchesRegexp` method that returns True if the `String` matches a regular expression:

```
Module StringExtensions
    <Extension()> _
    Public Function MatchesRegexp(ByVal the_string As String, _
     ByVal regular_expression As String) As Boolean
        Dim reg_exp As New Regex(regular_expression)
        Return reg_exp.IsMatch(the_string)
    End Function
End Module
```

Partial Methods

A partial method is a private subroutine that is declared in one place and implemented in another. The following code defines the signature of the `RecordException` subroutine and then later defines its body:

```
Public Class PathAlgorithm
    Partial Private Sub RecordException(ByVal ex As Exception)
    End Sub
    ...
    Private Sub RecordException(ByVal ex As Exception)
        Debug.WriteLine("Error: " & ex.Message)
    End Sub
    ...
End Class
```

Partial methods are mainly intended for use by code generators. In your code, you can usually use events instead. It's useful to understand what they do in case you need to read generated code.

Control Statements

Control statements tell an application which other statements to execute under a particular set of circumstances. They control the path that execution takes through the code. They include statements that tell the program to execute some statements but not others and to execute certain statements repeatedly.

The two main categories of control statements are decision statements and looping statements. The following sections describe the decision and looping statements provided by Visual Basic .NET.

Decision Statements

A decision statement represents a branch in the program. It marks a place where the program can execute one set of statements or another or possibly no statements at all. These include `If`, `Choose`, and `Select Case` statements.

Single-Line If Then

A single-line `If Then` statement tests a condition and, if the condition is true, executes a piece of code. The code may include more than one simple statement separated by a colon.

Optional `Else If` clauses let the program evaluate other conditions and execute corresponding pieces of code. A final optional `Else` clause lets the program execute a piece of code if none of the previous conditions is true.

The syntax is as follows:

```
If condition Then statement

If condition Then statement1 Else statement2

If condition1 Then statement1 Else If condition2 Then statement2
```

```
Else statement3

If condition Then statement1 : statement2

If condition Then statement1 : statement2 Else statement3 : statement4
```

Complicated single-line `If Then` statements can be confusing and difficult to read, so I recommend using the multiline versions if the statement includes an `Else` clause or executes more than one statement.

Multiline If Then

A multiline `If Then` statement is similar to the single-line version, except the pieces of code executed by each part of the statement can include multiple lines. Each piece of code ends before the following `ElseIf`, `Else`, or `End If` keywords. In complex code, this format is often easier to read than a complicated single-line `If Then` statement.

The syntax is as follows:

```
If condition1 Then
    statements1...
ElseIf condition2
    statements2...
Else
    statements3...
End If
```

The statement can contain any number of `ElseIf` sections.

Select Case

A `Select Case` statement lets a program execute one of several pieces of code based on a test value. `Select Case` is equivalent to a long `If Then Else` statement.

The syntax is as follows:

```
Select Case test_value
    Case comparison_expression1
        statements1
    Case comparison_expression2
        statements2
    Case comparison_expression3
        statements3
    ...
    Case Else
        else_statements
End Select
```

A comparison expression can contain multiple expressions separated by commas, can use the `To` keyword to specify a range of values, and can use the `Is` keyword to evaluate a logical expression using the test value. The following example's first case looks for a string in the range "A" to "Z" or "a" to "z." Its second and third cases look for values less than "A" and greater than "Z," respectively.

```
Select Case key_pressed
    Case "A" To "Z", "a" To "z"
        ...
    Case Is < "A"
        ...
    Case Is > "Z"
        ...
End Select
```

Many developers always include a `Case Else` section to catch unexpected situations. If every possible situation should be covered by other cases, some developers throw an exception inside the `Case Else` section to make it easier to find errors.

If and IIf

`IIf` takes a Boolean value as its first parameter. It returns its second parameter if the value is true, and it returns its third parameter if the value is false.

The syntax is as follows:

```
variable = IIf(condition, value_if_false, value_if_true)
```

Note that `IIf` always evaluates all of its arguments. For example, if the condition is true, `IIf` only returns the second argument, but it evaluates both the second and third arguments.

The `If` function does the same thing as `IIf` except it uses short-circuit evaluation, so it only evaluates the second and third arguments if necessary. If the condition is true in the following code, `If` evaluates the second argument but not the third:

```
variable = If(condition, value_if_false, value_if_true)
```

A second form if the `If` function takes two parameters: an object reference or a nullable type and a return value. The `If` function returns the first parameter if it is not `Nothing` and the second argument if it is `Nothing`. The following code shows the syntax:

```
variable = If(nullable_value, default_if_nothing)
```

`IIf` is sometimes used when the code must evaluate both results so short-circuiting would cause problems. For example, suppose the `value_if_true` and `value_if_false` parts have *side effects*. In other words, they perform actions that may not be obvious in addition to returning their results. They may open databases, initialize network connections, and perform other actions that the program will need finished for later tasks.

Side effects are often confusing, however, because it's not always obvious what side effects a particular function call has. That can make the code harder to understand, debug, and maintain. To avoid potential trouble, I recommend always using functions without side effects and moving any other necessary code

into a subroutine that the program can call before the call to `IIf` or `If`. In that case, `IIf` has no advantage over `If`.

I have yet to see a convincing case for using `IIf` and functions with side effects. If you think you can make that case, let me know at RodStephens@vb-heleper.com and I'll post your comments on the book's web site.

`IIf` and `If` are often confusing and `IIf` at least is slower than an `If Then Else` statement, so you may want to use `If Then Else` instead.

Choose

`Choose` takes an index value as its first parameter and returns the corresponding one of its other parameters.

The syntax is as follows:

```
variable = Choose(index, value1, value2, value3, value4, ...)
```

`Choose` is rarely used by many programmers, so it can be confusing. To avoid unnecessary confusion, you may want to use a `Select Case` statement instead.

Looping Statements

A looping statement makes the program execute a series of statements repeatedly. The loop can run for a fixed number of repetitions, run while some condition holds true, run until some condition holds true, or run indefinitely.

For Next

A `For Next` loop executes a piece of code while a loop control variable ranges from one value to another.

The syntax is as follows:

```
For variable [As data_type] = start_value To stop_value [Step increment]
    statements
    [Exit For]
    statements
Next [variable]
```

For Each

A `For Each` loop executes a piece of code while a loop control variable ranges over all of the items contained in a group class such as a collection or array.

The syntax is as follows:

```
For Each variable [As object_type] In group
    statements
    [Exit For]
    statements
Next [variable]
```

The *group* in this code can also be a LINQ (Language Integrated Query) query. The following code creates a LINQ query to select information from the `book_data` array, and then uses a `For Each` loop to display the results:

```
Dim book_query = From book_info In book_data _
    Select book_info Where book_info.Year >= 2000 _
    Order By book_info.Year
For Each bi In book_query
    Debug.WriteLine(bi.Title)
Next bi
```

For more information about LINQ, see Chapter 21, "LINQ."

Do Loop

`Do Loop` statements come in three forms. First, if the statement has no `While` or `Until` clause, the loop repeats infinitely or until the code uses an `Exit Do`, `Exit Sub`, `GoTo`, or some other statement to break out of the loop.

The syntax is as follows:

```
Do
    statements
    [Exit Do]
    statements
Loop
```

The other two forms of `Do Loop` statements execute as long as a condition is true (`Do While condition`) or until a condition is true (`Do Until condition`).

The second form of `Do Loop` statement tests its condition before it executes, so the code it contains is not executed even once if the condition is initially false.

The syntax is as follows:

```
Do {While | Until} condition
    statements
    [Exit Do]
    statements
Loop
```

The third form of `Do Loop` statement tests its condition after it executes, so the code it contains is executed at least once even if the condition is initially false.

The syntax is as follows:

```
Do
    statements
    [Exit Do]
    statements
Loop {While | Until} condition
```

While End

The `While End` loop executes a series of statements as long as a condition is true. It tests its condition before it executes, so the code it contains is not executed even once if the condition is initially false.

The syntax is as follows:

```
While condition
    statements
    [Exit While]
    statements
End While
```

This statement is equivalent to the `Do Loop`:

```
Do While condition
    statements
    [Exit Do]
    statements
Loop
```

GoTo

`GoTo` performs an unconditional jump to a specified line.

The syntax is as follows:

```
    GoTo line_label
    ...
line_label:
    ...
```

Because undisciplined use of `GoTo` can lead to "spaghetti code," which is difficult to understand, debug, and maintain, you should generally avoid using `GoTo`.

Error Handling

This appendix provides information on error handling.

Structured Error Handling

A `Try` block tries to execute some code and reacts to errors. The syntax is as follows:

```
Try
    try_statements...
[Catch ex As exception_type_1
    exception_statements_1...]
[Catch ex As exception_type_2
    exception_statements_2...]
...
[Catch
    final_exception_statements...]
[Finally
    finally_statements...]
End Try
```

When an error occurs, the program examines the `Catch` statements until it finds one that matches the current exception. The program executes the `finally_statements` after the `try_statements` succeed or after any `Catch` block is done executing.

Throwing Exceptions

Use the `Throw` statement to throw an exception, as in the following code:

```
Throw New ArgumentException("Width must be greater than zero")
```

Exception classes provide several overloaded constructors so you can indicate such things as the basic error message, the name of the variable that caused the exception, and an inner exception.

For information on useful exception classes and custom exception classes, see Appendix O, "Useful Exception Classes."

Classic Error Handling

The `On Error` statement controls error handlers in Visual Basic classic error handling. You can use structured and classic error handling in the same program but not in the same routine.

The following list briefly describes the `On Error` statement's four variations:

❑ `On Error GoTo` *line* — If an error occurs, the program enters error-handling mode and control jumps to the indicated line.

❑ `On Error Resume Next` — If an error occurs, the program ignores it. The code can use the `Err` object to see whether an error occurred and what error it was.

❑ `On Error GoTo 0` — This command disables any currently active error handler. If the program encounters an error after this statement, the routine fails and control passes up the call stack until the program finds an active error handler or the program crashes.

❑ `On Error GoTo −1` — This command is similar to `On Error GoTo 0`, except that it also ends error-handling mode if the program is in error-handling mode.

Visual Basic provides four ways to exit error-handling mode:

❑ `Exit Sub` (*or* `Exit Function` *or* `Exit Property`) — Ends error-handling mode and exits the current routine.

❑ `Resume` — Makes the program resume execution with the statement that caused the error. If the program has not taken some action to correct the problem, the error will occur again, triggering the error handler and possibly entering an infinite loop.

❑ `Resume Next` — Makes the program resume execution with the statement after the one that caused the error.

❑ `On Error GoTo −1` — Ends error-handling mode and lets execution continue with the statement that follows.

Using `On Error GoTo −1` to end error-handling mode can be very confusing because it's hard to tell when the program is in error-handling mode and when it isn't. Usually, the code is easier to understand if all of the error-handling code is grouped at the end of the routine and if each block of error-handling code ends with one of the other methods (`Exit Sub`, `Exit Function`, `Resume`, or `Resume Next`).

G

Windows Forms Controls and Components

This appendix describes the standard controls and components provided by Visual Basic .NET. Some of these are quite complicated, providing dozens or even hundreds of properties, methods, and events, so it would be impractical to describe them all completely here. However, it's still worthwhile having a concise guide to the most important properties, methods, and events provided by the Windows Forms controls.

The sections in this appendix describe the components' general purposes and give examples of what I believe to be their simplest, most common, and most helpful usages. The idea is to help you decide which components to use for which purposes, and to give you some idea about the components' most commonly used properties, methods, and events. To learn more about a particular component, see the online help.

> *You can find information about most of these controls under the "System.Windows.Forms Namespace" topic in the MSDN help at* `msdn2.microsoft.com/library/system .windows.forms.aspx`*. Use the navigation tree in the left pane to find the controls you want to study.*

You can also learn more by studying this appendix's example programs, which are available for download on the book's web site.

Note that all of these components inherit from the `Component` class, and the controls inherit from the `Control` class. Except where overridden, the components and controls inherit the properties, methods, and events defined by the `Component` and `Control` classes. Chapter 9, "Using Windows Forms Controls," discusses some of the more useful properties, methods, and events provided by the `Control` class, and many of those apply to these controls as well. Appendix A, "Useful Control Properties, Methods, and Events," summarizes the `Control` class's most useful properties.

Figure G-1 shows the Visual Basic Toolbox displaying the standard Windows Forms controls.
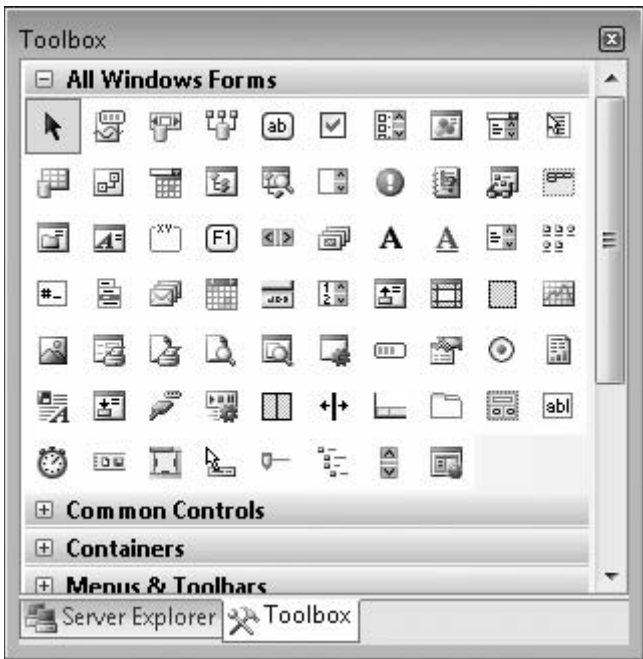
Figure G-1: Visual Basic provides a large number of standard components and controls for Windows Forms.

The following table lists the components shown in Figure G-1 in the same order in which they appear in the figure.

Pointer	BackgroundWorker	BindingNavigator	BindingSource
Button	CheckBox	CheckedListBox	ColorDialog
ComboBox	ContextMenuStrip	DataGridView	DataSet
DateTimePicker	DirectoryEntry	DirectorySearcher	DomainUpDown
ErrorProvider	EventLog	FileSystemWatcher	FlowLayoutPanel
FolderBrowserDialog	FontDialog	GroupBox	HelpProvider
HScrollBar	ImageList	Label	LinkLabel
ListBox	ListView	MaskedTextBox	MenuStrip
MessageQueue	MonthCalendar	NotifyIcon	NumericUpDown
OpenFileDialog	PageSetupDialog	Panel	PerformanceCounter

PictureBox	PrintDialog	PrintDocument	PrintPreviewControl
PrintPreviewDialog	Process	ProgressBar	PropertyGrid
RadioButton	ReportViewer	RichTextBox	SaveFileDialog
SerialPort	ServiceController	SplitContainer	Splitter
StatusStrip	TabControl	TableLayoutPanel	TextBox
Timer	ToolStrip	ToolStripContainer	ToolTip
TrackBar	TreeView	VScrollBar	WebBrowser

Components' Purposes

By default, the Toolbox provides several tabs that group related components together. With such a large number of components at your fingertips, having categorized tabs sometimes makes finding a particular tool easier. Each tab also contains a Pointer tool.

The following table lists the tools in various Toolbox tabs. You can use this table to help decide which tool to use for a particular purpose.

Common Controls			
Button	CheckBox	CheckedListBox	ComboBox
DateTimePicker	Label	LinkLabel	ListBox
ListView	MaskedTextBox	MonthCalendar	NotifyIcon
NumericUpDown	PictureBox	ProgressBar	RadioButton
RichTextBox	TextBox	ToolTip	TreeView
WebBrowser			
Containers			
FlowLayoutPanel	GroupBox	Panel	SplitContainer
TabControl	TableLayoutPanel		
Menus and Toolbars			
ContextMenuStrip	MenuStrip	StatusStrip	ToolStrip
ToolStripContainer			

(continued)

Common Controls			
Data			
DataSet	DataGridView	BindingSource	BindingNavigator
Components			
BackgroundWorker	DirectoryEntry	DirectorySearcher	ErrorProvider
EventLog	FileSystemWatcher	HelpProvider	ImageList
MessageQueue	PerformanceCounter	Process	SerialPort
ServiceController	Timer		
Printing			
PageSetupDialog	PrintDialog	PrintDocument	PrintPreviewControl
PrintPreviewDialog			
Dialogs			
ColorDialog	FolderBrowserDialog	FontDialog	OpenFileDialog
SaveFileDialog			
WPF Interoperability			
ElementHost			
Reporting			
MicrosoftReportViewer	CrystalReportViewer	CrystalReportDocument	
Visual Basic Power Packs			
PrintForm			

One other section, General, is initially empty.

The following sections describe the tools shown in Figure G-1. Except for the generic pointer tool, all tools are presented in alphabetical order.

Pointer

Each of the Toolbox's sections begins with an arrow in its upper-left corner. This is the only tool shown in Figure G-1 that does not represent a type of control or component. Selecting the pointer deselects any other currently selected tool. You can then click the controls on the form to select them without creating a new control.

BackgroundWorker

The `BackgroundWorker` component simplifies multithreading. When a program invokes its `RunWorkerAsync` method, the component starts running on a new thread. It raises its `DoWork` method on the new thread, and the corresponding event handler should perform the necessary work. While it runs, the worker can call the component's `ReportProgress` method to raise a `ProgressChanged` event on the main thread to let the program know how it is progressing.

When the worker thread finishes, the component receives a `RunWorkerCompleted` event on the main thread.

The UseBackgroundWorker example program, which is available for download on the book's web site, demonstrates the `BackgroundWorker` component. It allows the user to start a `BackgroundWorker` that simulates a long task. The program displays the worker's progress and lets the user cancel the task, stopping the worker before it finishes.

BindingNavigator

A `BindingNavigator` provides a user interface so the user can control a data source. It initially appears as a toolbar docked to the top of the form, although you can move it if you like. It contains navigation buttons that move to the beginning, previous record, next record, and end of the data source. It also contains a text box where you can enter a record number to jump to, a label showing the current record number, and buttons to add and delete records.

See Chapter 20, "Database Controls and Objects," for more information on `BindingNavigator` and other database controls.

BindingSource

A `BindingSource` provides control of bound data on a form. It provides programmatic methods for navigating through the data, adding items, deleting items, and otherwise managing the data at the code level.

Typically you attach the `BindingSource` to a data source. You then bind controls to the `BindingSource`. When the `BindingSource` changes its position in the data source, it automatically updates the bound controls. If you attach a `BindingNavigator` to the `BindingSource`, then the user can use the `BindingNavigator` to control the `BindingSource`.

See Chapter 20, "Database Controls and Objects," for more information on `BindingNavigator` and other database controls.

Button

The Button control is a simple push button. You can use it to let the user tell the program to do something.

A Button can display a textual caption, a picture, or both. Use the ImageAlign and TextAlign properties to determine where the caption and picture appear on the Button.

When the user clicks the Button, it raises its Click event. The program can take the appropriate action in the Button control's Click event handler, as shown in the following code:

```
Private Sub btnValidatePhoneNumber_Click(ByVal sender As System.Object, _
 ByVal e As System.EventArgs) _
 Handles btnValidatePhoneNumber.Click
    ValidatePhoneNumber(txtPhoneNumber.Text)
End Sub
```

Note that many button Click event handlers are assigned to a single button so they don't need to use their sender and e parameters. In that case, you can use relaxed delegates to omit the parameters completely, significantly simplifying the event handler as shown in the following code:

```
Private Sub btnValidatePhoneNumber_Click() _
 Handles btnValidatePhoneNumber.Click
    ValidatePhoneNumber(txtPhoneNumber.Text)
End Sub
```

For more information on relaxed delegates, see the section "Relaxed Delegates" in Chapter 17, "Subroutines and Functions."

You can use the control's ImageList and ImageIndex properties to assign an image to the Button.

If you set a form's AcceptButton property to a Button, the Button control's Click event handler runs when the user presses the Enter key while the form has focus. Similarly if you set a form's CancelButton property to a Button, the Button control's Click event handler runs when the user presses the Escape key while the form has focus.

CheckBox

A CheckBox displays a box that enables the user to select or clear an option.

A CheckBox can display a textual caption, a picture, or both. Use the ImageAlign and TextAlign properties to determine where the caption and picture appear in the CheckBox.

You can also use the control's ImageList and ImageIndex properties to assign an image to the CheckBox.

Use the control's CheckAlign property to determine where the check box appears. Normally the box appears on the left, but you can make it appear on the right, center, upper-left corner, and so forth.

Usually a program uses the `CheckBox` control's `Checked` property to tell if it is checked. This property returns `True` if the `CheckBox` is checked and `False` if it is not. Your program can also set this property to `True` or `False` to check or uncheck the control.

Although a `CheckBox` usually is either checked or not, this control also has a third indeterminate state. This state is represented as a grayed-out check in the box. Some applications use this state to represent a partial or unknown selection.

If you want to allow the user to cycle through the three values (checked, indeterminate, and unchecked), set the control's `ThreeState` property to `True`.

Most programs use `CheckBoxes` to gather information and only process the information when the user clicks a button or selects a menu item, so they don't need to process any `CheckBox` events. The control does provide a `CheckedChanged` event, however, that fires whenever the control's value changes, either because the user clicked it or because your program's code changed the value. For example, the program could hide and display extra information that only applies when the box is checked, as shown in the following code:

```
Private Sub chkExtraInfo_CheckedChanged() Handles chkExtraInfo.CheckedChanged
    grpExtraInfo.Visible = chkExtraInfo.Checked
End Sub
```

CheckedListBox

A `CheckedListBox` control displays a series of items with check boxes in a list format. This enables the user to pick and choose similar items from a list of choices. You can also use a `ListBox` to allow the user to select items in a list, but there are some important differences between the two controls' behaviors.

First, in a `CheckedListBox`, previously checked items remain checked when the user clicks another item. If the user clicks an item in a `ListBox`, the control deselects any previously selected items. Though you can use the Shift and Ctrl keys to modify this behavior, making complex selections can be tricky.

Second, the user must click each `CheckedListBox` item individually to select it. You can make a `ListBox` allow simple or extended selections. That means, for example, the user could Shift+click to select all of the items in a range. If the user is likely to want that type of selection, consider using a `ListBox` instead of a `CheckedListBox`.

If a `CheckedListBox` isn't big enough to display all of its items at once, it displays a vertical scroll bar to let the user see all the items. If some of the items are too wide to fit, set the control's `HorizontalScrollBar` property to `True` to display a horizontal scroll bar.

If you set the `MultiColumn` property to `True`, the control displays items in multiple columns.

By default, the user must click an item and then click its box to check the item. To allow the user to select an item with a single click, set the control's `CheckOnClick` property to `True`. This usually makes selection easier.

If the control's `IntegralHeight` property is `True`, the control will not display a partial item. For example, if the control is tall enough to display 10.7 items, it will make itself slightly shorter so that it can only display 10 items.

Set the control's `Sorted` property to `True` to make the control display its items in sorted order.

Use the control's `Items.Add` method to add an item to the list. This method has three overloaded versions. All three take a generic `Object` as the first parameter. The control uses this object's `ToString` method to generate the text that it displays to the user. The first overloaded version takes no extra parameters. The second version takes a Boolean parameter indicating whether the new item should be checked. The last version takes a parameter that indicates whether the new item should be checked, unchecked, or indeterminate.

For example, suppose that a program defines the following `Employee` class. The important part here is the `ToString` method, which tells the `CheckedListBox` how to display an `Employee` object, as shown in the following code:

```
Public Class Employee
    Public FirstName As String
    Public LastName As String

    Public Sub New(ByVal first_name As String, ByVal last_name As String)
        FirstName = first_name
        LastName = last_name
    End Sub

    Public Overrides Function ToString() As String
        Return FirstName & " " & LastName
    End Function
End Class
```

Example program UseCheckedListBox, which is available for download on the book's web site, demonstrates a `CheckedListBox` that contains `Employee` objects.

The `CheckedListBox` item's `CheckedItems` property returns a collection containing the objects that are checked, including those that are in the indeterminate state. The control's `CheckedIndices` property returns a collection of integers representing the items that are selected or indeterminate (numbered starting with zero).

ColorDialog

The `ColorDialog` component displays a dialog that enables the user to select a color from a standard palette or from a custom color palette. A program calls its `ShowDialog` method to display a color selection dialog. `ShowDialog` returns `DialogResult.OK` if the user selects a color and clicks OK. It returns `DialogResult.Cancel` if the user cancels.

The following code sets the dialog box's `Color` property to the `btnPickColor` control's current background color. It displays the dialog box and, if the user clicks OK, it sets the `btnPickColor` control's background color to the user's selection.

```
Private Sub btnPickColor_Click() Handles btnPickColor.Click
    dlgColor.Color = btnPickColor.BackColor
    If dlgColor.ShowDialog() = DialogResult.OK Then
        btnPickColor.BackColor = dlgColor.Color
    End If
End Sub
```

The dialog box provides an area on the right where the user can define custom colors. Set the component's `AllowFullOpen` property to `True` to allow the user to access this area. Set the `FullOpen` property to `True` to make the dialog appear with this area already open (otherwise the user must click the Define Custom Colors button to show this area).

If you set the `SolidColorOnly` property to `True`, the dialog box only allows the user to select solid colors. This applies only to systems using 256 or fewer colors, where some colors are dithered combinations of other colors. All colors are solid on systems using more than 256 colors.

Dithering is the process of using dots or other shapes of various sizes to create the illusion of another color. For example, you can make orange by displaying a red area sprinkled with tiny yellow dots or checks. On a system that uses a higher color model such as 24-bit color, the system can display every color directly. If you're using a lower color model system such as 8-bit color (256 colors), the system might dither to simulate colors that it cannot display directly.

The component's `CustomColors` property is an array of integers that determine the colors that the dialog displays in its custom colors area. These color values are a combination of red, green, and blue values between 0 and 255. In hexadecimal, the form of a value is *BBGGRR*, where *BB* is the blue component, *GG* is the green component, and *RR* is the red component.

For example, the color &HFF8000 has a blue component of &HFF = 255, a green component of &H80 = 128, and a red component of 0. This color is light blue. Unfortunately, the `Color` object's `ToArgb` method returns the color in the reversed format RRGGBB, so you cannot use that method to calculate these values. Instead, you need to calculate them yourself.

Example program UseColorDialog demonstrates a simple color dialog. Example program CustomColorDialog displays a dialog initialized with a custom color palette. Both of these programs are available for download on the book's web site.

ComboBox

The `ComboBox` control contains a text box where the user can enter a value. It also provides a list box or drop-down list where the user can select a value. How the text box, list box, and drop-down list work depends on the control's `DropDownStyle` property. Figure G-2 shows the three styles.

Figure G-2: The ComboBox provides three different styles: Simple, DropDown, and DropDownList.

When `DropDownStyle` is `Simple`, the `ComboBox` displays a text box and a list, as shown on the left in Figure G-2. The user can type a value in the text box, or select one from the list. The user can enter any text in the text box, even if it does not appear in the list.

When `DropDownStyle` is `DropDown`, the `ComboBox` displays a text box and a drop-down list, as shown in the middle in Figure G-2. The user can type a value in the text box. If the user clicks the drop-down arrow to the right of the text box, the control displays the list where the user can select an item. The user can enter any text in the text box, even if it does not appear in the list. In Figure G-2, the middle `ComboBox` control's text box contains the value Persimmon, which does not appear in the list.

When `DropDownStyle` is `DropDownList`, the `ComboBox` displays a non-editable text box and a drop-down list. If the user clicks the control, the `ComboBox` displays a drop-down list exactly as it does when `DropDownStyle` is `DropDown`. The difference is that the user must select an item from the list. If the user sets focus to the control and types a letter, the control selects the next item in the list that begins with that letter. If the user presses the same letter again, the control moves to the next choice beginning with that letter.

Setting `DropDownStyle` to `DropDownList` restricts the user's choices the most and allows the least room for error. So, if you know all of the user's choices, you should use the `DropDownList` style. If you must allow the user to enter new values, you should use one of the other styles. The `DropDown` style takes less room on the form and is more familiar to most users, so that is often the better choice.

The control's `DropDownWidth` property determines how wide the drop-down list should be.

The `ComboBox` control's `MaxDropDownItems` property determines how many items the control displays in its drop-down list. For example, if you set this to `10` and the list contains more than 10 items, the drop-down list displays a scroll bar to let the user find the additional items.

The `MaxLength` property lets you specify the maximum number of characters the user can type into the control's text box. Note, however, that the control will display a longer value if the user selects it from the control's list box or drop-down list. Set `MaxLength` to `0` to allow entries of any length.

If you set the control's `Sorted` property to `True`, the `ComboBox` lists its choices in sorted order.

The `ComboBox` control's `Text` property gets or sets the value displayed by the control's text box. If the control's `DropDownStyle` is `DropDownList`, this property does nothing at design time and the program can only set it to values that are in the control's list of allowed values at runtime. Many programs use this property to see what value is selected in the control.

Like the `CheckedListBox` described earlier in this appendix, the items in a `ComboBox` can be any type of object and the control uses the objects' `ToString` methods to figure out what text to display to the user. As is the case with the `CheckedListBox`, you can use the `ComboBox` control's `Items.Add` method to add new objects to the control. See the "CheckedListBox" section earlier in this appendix for more information and an example `Employee` class that will also work with `ComboBox` controls.

If an item is selected, the `ComboBox` control's `SelectedItem` property returns the item's object. If no item is selected, this property returns `Nothing`.

If an item is selected, the `ComboBox` control's `SelectedIndex` property returns the item's index, numbered starting with zero. If no item is selected, this property returns `-1`.

Note that the `SelectedItem` and `SelectedIndex` properties return `Nothing` and `-1`, respectively, if the user types a new value into the text area, even if the user types a value that appears in the control's item list. If you want the user to select an item rather than typing some text, you should set the control's `DropDownStyle` property to `DropDownList`.

ContextMenuStrip

The `ContextMenuStrip` component represents a context menu. When you select it on the form at design time, the development environment displays the menu at the top of the form. Enter the menu's items, use the `Property` window to set their names and other properties, and double-click the items to edit their event handlers. See the section "MenuStrip" later in this appendix for information on menu item properties and events.

To use a `ContextMenuStrip`, you need to attach it to a control. Use the Properties window to set the control's `ContextMenuStrip` property to your `ContextMenuStrip` component. The rest is automatic. When the user right-clicks this control at runtime, Visual Basic automatically displays the `ContextMenuStrip`. If the user selects one of the menu's items, Visual Basic triggers the menu item's event handler.

DataGridView

The `DataGridView` control displays a table-like grid display. The control's underlying data can come from a data source such as a `DataSet` or `BindingSource`, or the program can add rows and columns directly to the control. The `DataGridView` provides many properties for customizing the grid's appearance. For example, it lets you change column header styles and cell border styles, determine whether rows and columns are resizable, and determine whether the control displays tooltips and errors in data cells.

Visual Basic can automatically create a `DataGridView` bound to a `BindingSource` and associated with a `BindingNavigator`. To do this, create a data source and drag a table from the Data Sources window onto a form. For more information on this technique, or for information on using the control in general, see Chapter 20, "Database Controls and Objects."

DataSet

The `DataSet` component holds data in a relational format. It provides all the features you need to build, load, store, manipulate, and save data similar to that stored in a relational database. It can hold multiple tables related with complex parent/child relationships and uniqueness constraints. It provides methods for merging `DataSets`, searching for records that satisfy criteria, and saving data in different ways (such as into a relational database or an XML file).

One of the most common ways to use a `DataSet` is to load it from a relational database when the program starts, use various controls to display the data and let the user manipulate it interactively, and then save the changes back into the database when the program ends.

For more information on the `DataSet` component, see the online help (`msdn2.microsoft.com/en-us/library/system.data.dataset.aspx`) and Chapter 20, "Database Controls and Objects."

DateTimePicker

The `DateTimePicker` control allows the user select a date and time. The control can display one of several styles, depending on its property values.

If the `ShowUpDown` property is `True`, the control displays small up and down arrows on its right, as shown at the top of Figure G-3. Click a date field (month, date, year) to select it, and use the up and down arrow buttons to adjust that field.

If `ShowUpDown` is `False` (the default), the control displays a drop-down arrow on its right, as shown in the second `DateTimePicker` in Figure G-3. If you click this arrow, the control displays the calendar shown under the control in Figure G-3. The right and left arrows at the top of the calendar let you move through months. If you click the calendar's month, the control displays a pop-up menu listing the months so that you can quickly select one. If you click the year, the control displays small up and down arrows that you can use to change the year. When you have found the month and year you want, click a date to select it and close the calendar.

If you get lost while scrolling through the calendar's months, you can click the Today entry at the bottom of the calendar to jump back to the current date. You can also right-click the calendar and select the "Go to today" command.
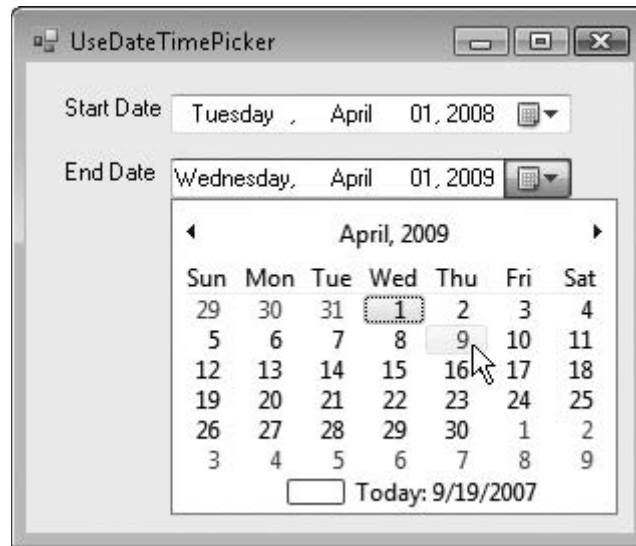
Figure G-3: The DateTimePicker control lets the user select a date and time.

Whether `ShowUpDown` is `True` or `False`, you can click a date field (month, date, year) and then use the up and down arrow keys to adjust the field's value. You can also type a new value into numeric fields (such as the date and year).

The control's `Format` property determines the way in which the control displays dates and times. This property can take the values `Long`, `Short`, `Time`, and `Custom`. The results depend on the regional settings on the computer. The following table shows typical results for the `Long`, `Short`, and `Time` settings in the United States.

Format Property	Example
Long	Friday, February 20, 2004
Short	2/20/2004
Time	3:12:45 PM

When the `Format` property is set to `Custom`, the control uses the date and time format string stored in the control's `CustomFormat` property. For example, the `DateTimePicker` on the bottom in Figure G-3 has `CustomFormat` set to h:mm tt, MMM d, yyyy to display the time, abbreviated month, date, and year. See Appendix P, "Date and Time Format Specifiers," for information on date and time format specifiers.

If the control displays time (either because `Format` is set to `Time` or because a `CustomFormat` value includes time fields), the user can click a time field and use the arrow keys to adjust its value. You can also click a numeric field or AM/PM designator and type a new value.

The `DateTimePicker` control's `MinDate` and `MaxDate` properties determine the first and last dates that the control will let the user select.

The control has several properties that determine the appearance of the calendar, if it displays one. These include `CalendarFont`, `CalendarForeColor`, `CalendarMonthBackground`, `CalendarTitleBackColor`, `CalendarTitleForeColor`, and `CalendarTrailingForeColor`.

The program can use the control's `Value` property to get or set the control's date and time.

DirectoryEntry

The `DirectoryEntry` component represents a node or object in an Active Directory hierarchy. Active Directory is a service that provides a common, hierarchical view of distributed resources and services on a network.

Active Directory is really a Windows operating system topic, not a Visual Basic topic, so it is not covered further here. For more information, see the `DirectoryEntry` class's web page at msdn.microsoft.com/library/en-us/cpref/html/ frlrfsystemdirectoryservicesdirectoryentryclasstopic.asp.

DirectorySearcher

The `DirectorySearcher` component performs searches on an Active Directory hierarchy. See the online help for more information on Active Directory (msdn2.microsoft.com/library/aa286486 .aspx) and the `DirectorySearcher` component (msdn2.microsoft.com/library/system .directoryservices.directorysearcher.aspx).

DomainUpDown

The `DomainUpDown` control displays a list of items that the user can select by clicking the up and down arrow buttons beside the control. For example, the control might let the user select one of the values High, Medium, and Low.

If the control's `InterceptArrowKeys` property is `True`, the user can also scroll through the items by using the up and down arrow keys. If `InterceptArrowKeys` is `False`, the user must click the arrow buttons to change the value.

Normally, the control's `ReadOnly` property is set to `False` so the user can type text into the control's text area much as you can enter text in a `ComboBox`. If `ReadOnly` is `True`, the user cannot type in this area and must use the arrow keys or buttons to pick one of the control's items. Unfortunately, setting

ReadOnly to True gives the control a gray background, so it appears disabled unless you look closely and notice that the text is black rather than dark gray.

Like the CheckedListBox control, the DomainUpDown control can hold arbitrary objects as items. It displays the string returned by an object's ToString method. See the "CheckedListBox" section earlier in this appendix for more information about displaying objects in the control.

The control's SelectedItem property returns the object representing the item that is currently selected. Note that there may be no item selected if the user typed a value in the text area, rather than selecting a value from the list of items. The SelectedIndex property returns the index of the currently selected item or -1 if no choice is selected.

The control's Text property returns the text that the control is currently displaying. This property returns something meaningful whether the user typed a value or selected an item from the list.

When the control is first displayed, no item is selected. You can use the Properties window to give the control a Text value at design time but you cannot make it select an item, even if the Text value matches an item's text. If you want the control to begin with an item selected, you can use code similar to the following in the form's Load event handler:

```
' Select the first Priority value.
dudPriority.SelectedIndex = 0
```

If you set the control's Sorted property to True, the control displays its items in sorted order.

If you set the Wrap property to True, the control wraps its list of items around if the user moves past the beginning or end of the list.

ErrorProvider

The ErrorProvider component indicates to the user that another control has an error associated with it. ErrorProvider is an extender provider, so it adds a new Error property to the other controls on its form. For example, if the ErrorProvider is named ErrorProvider1, each control on the form gets a new property named "Error on ErrorProvider1." At design time, use the Properties window to set or clear this value.

To associate an error with a control at runtime, use the ErrorProvider's SetError method. The ErrorProvider automatically displays a red circle containing an exclamation mark next to the control. If the user hovers the mouse over the circle, the ErrorProvider displays a tooltip giving the error text.

To remove an error on a control at runtime, use the ErrorProvider's SetError method to set the control's error message to an empty string.

Many programs set or clear errors on a control in the control's Validating event. Example program UseErrorProvider, which is available for download on the book's web site, uses a Validating event to validate a ZIP code text box.

The component's `BlinkRate` property determines how quickly the error icon blinks. The `BlinkStyle` property determines how it blinks.

If `BlinkStyle` is `BlinkIfDifferentError`, the component makes the icon blink several times whenever the program sets a control's error message to a new nonblank value. Because the previous code uses the same error message whenever the ZIP code value does not contain exactly five digits, the message remains unchanged if the user changes the ZIP code to a new invalid value, so the icon does not blink again.

If `BlinkStyle` is `AlwaysBlink`, the component makes the icon blink as long as the control has an associated error. The icon continues blinking, even if another application has the focus, until the user fixes the error and moves to a new field to trigger the `Validating` event handler again.

If `BlinkStyle` is `NeverBlink`, then the component displays the error icon without blinking.

The component's `Icon` property gives the icon that the component displays for an error. You can change this icon if you want to use a special error image.

Blinking text can be extremely irritating to users, so don't abuse it. The default behavior of blinking a couple of times and then stopping is reasonable, but a message that is constantly blinking very quickly is a bad idea. Note that the United States Accessibility code prohibits objects that blink faster than 2 Hz and slower than 55 Hz (see `508.nih.gov/saos/excerpted_stds.html`*) at least in part because blinking can cause seizures and other life-threatening reactions in some people.*

EventLog

The `EventLog` component enables an application to manipulate event logs. It provides methods to create logs, write and read log messages, and clear logs. Event logs are a more advanced topic. For detailed information, see the MSDN topic "Logging Application, Server, and Security Events" at `msdn2` `.microsoft.com/en-us/library/e6t4tk09.aspx`. Example program UseEventLog, which is available for download on the book's web site, demonstrates some of the features of event logs. It shows how to create, read, write, and clear a log.

FileSystemWatcher

The `FileSystemWatcher` component keeps an eye on part of the file system and raises events to let your program know if something changes. For example, it can notify your program if a file is created in a particular directory.

For more information on the `FileSystemWatcher` component, see Chapter 38, "File-System Objects," and Appendix U, "File-System Classes."

FlowLayoutPanel

The `FlowLayoutPanel` control displays the controls that it contains in rows or columns. For example, when laying out rows, it places controls next to each other horizontally in a row until it runs out of room, and then it starts a new row.

The `FlowLayoutPanel` is particularly useful for Toolboxes and in situations where the goal is to display as many of the contained controls as possible at one time, and the exact arrangement of the controls isn't too important.

The control's `FlowDirection` property determines the manner in which the control arranges its contained controls. This property can take the values `LeftToRight`, `RightToLeft`, `TopDown`, and `BottomUp`. Example program FlowDirections, which is available for download on the book's web site, demonstrates these different arrangements.

The control's `AutoScroll` property determines whether the control automatically provides scroll bars if its contents won't fit within the control all at once.

The `Padding` property determines how much space the control leaves between its edges and the controls that it contains. Use the `Margin` properties of the contained controls to specify the spacing between the controls.

The `TableLayoutPanel` control also arranges its contained controls, but in a grid. For information on that control, see the section "TableLayoutPanel" later in this appendix.

FolderBrowserDialog

The `FolderBrowserDialog` component displays a dialog box that lets the user select a folder (directory) in the file system. The program displays the dialog box by calling the component's `ShowDialog` method.

The component's `SelectedPath` property not only returns the path selected by the user, but it also determines where the dialog begins browsing. If your code uses the dialog box, does not change this value, and then uses the dialog box again later, the dialog box starts the second time where it left off the first time.

The program can also explicitly set the `SelectedPath` value to start browsing at a particular folder. For example, the following code makes the dialog begin browsing in the `C:\Temp` directory:

```
dlgFolder.SelectedPath = "C:\Temp"
```

Alternatively, you can use the component's `RootFolder` property to make the component start in one of the system folders. Set this property to one of the `Environment.SpecialFolder` values shown in the following list. For example, to start browsing in the `MyPictures` directory, set `RootFolder` to `Environment.SpecialFolder.MyPictures`.

ApplicationData	InternetCache	Programs
CommonApplicationData	LocalApplicationData	Recent
CommonProgramFiles	MyComputer	SendTo
Cookies	MyMusic	StartMenu
Desktop	MyPictures	Startup
DesktopDirectory	Personal	System
Favorites	ProgramFiles	Templates
History		

The dialog box will not allow the user to leave the root folder. For example, if you set the `RootFolder` property to `Environment.SpecialFolder.ProgramFiles`, then the user will be able to browse through the `Program Files` hierarchy (normally, `C:\Program Files`), but will not be able to move to other parts of the system.

If you want to start browsing at a particular directory but want to allow the user to move to other parts of the directory hierarchy, leave the `RootFolder` with its default value of `Environment.SpecialFolder.Desktop` and then set the `SelectedPath` property appropriately. For example, the following code uses the `Environment` object's `SpecialFolder` method to make the browser start browsing at the `Program Files` folder:

```
dlgFolder.RootFolder = Environment.SpecialFolder.Desktop
dlgFolder.SelectedPath = _

Environment.GetFolderPath(Environment.SpecialFolder.ProgramFiles)
```

FontDialog

The `FontDialog` component displays a font selection dialog. If the user selects a font and clicks OK, the `ShowDialog` method returns `DialogResult.OK`.

The component has several properties that determine the options that the dialog displays and the types of fonts it will allow the user to select. The following table describes some of the most important of the component's properties.

Property	Purpose
AllowScriptChange	Determines whether the component allows the user to change the character set shown in the Script combo box. If this is `False`, the dropdown is still visible, but it only contains one choice.
AllowSimulations	Determines whether the component allows graphics device font simulations. For example, many fonts do not include bold or italics, but the graphics device interface (GDI) can simulate them.

Property	Purpose
AllowVectorFonts	Determines whether the component allows vector fonts. (Characters in a raster font are drawn as bitmaps. Characters in a vector font are drawn as a series of lines and curves. Vector fonts may provide a nicer look because they scale more easily than raster fonts, but vector fonts may take longer to draw.)
AllowVerticalFonts	Determines whether the component allows vertical fonts (such as Chinese).

Color	Sets or gets the font's color. Note that this is not part of the Font property, so if you want to let the user set a control's font and color, you must handle them separately, as shown in the following code:
	`dlgFont.Font = Me.Font`
	`dlgFont.Color = Me.ForeColor`
	`dlgFont.ShowColor = True`
	`If dlgFont.ShowDialog() = DialogResult.OK Then`
	`    Me.Font = dlgFont.Font`
	`Me.ForeColor = dlgFont.Color`
	`End If`

FixedPitchOnly	Determines whether the dialog box only allows fixed-pitch (fixed-width) fonts. (In a fixed-width font, all characters have the same width. `For example, this sentence is in the Courier font, which is fixed-width.` In a variable-width font, some characters such as l and i are thinner than other characters such as W. This sentence is in the Times New Roman font, which has variable width.
Font	Sets or gets the font described by the dialog box.
FontMustExist	Determines whether the component raises an error if the user tries to select a font that doesn't exist.
MaxSize	Determines the maximum allowed point size.
MinSize	Determines the minimum allowed point size.
ShowApply	Determines whether the dialog box displays the Apply button. If you set this to True, you should catch the component's Apply event and apply the currently selected font.
ShowColor	Determines whether the component allows the user to select a color.
ShowEffects	Determines whether the component displays the Effects group box that includes the Strikeout and Underline boxes and the Color dropdown.
ShowHelp	Determines whether the dialog box displays the Help button. If you set this to True, you should catch the component's HelpRequest event. The event handler might explain to the user how the font will be used. For example, "Select the font to be used for item descriptions."

Example program UseFontDialog demonstrates a simple font selection dialog. Example program UseFontDialogWithShowEffects shows how to respond when the user clicks the font dialog's Apply button. Both of these examples are available for download on the book's web site.

GroupBox

The `GroupBox` control displays a caption and a border. This control is mostly for decoration and provides a visually appealing method for grouping related controls on the form.

The `GroupBox` is also a control container, so you can place other controls inside it. If a `GroupBox` contains `RadioButton` controls, those buttons form a group separate from any other `RadioButton` controls on the form. If you click one of those buttons, the other buttons in the `GroupBox` deselect, but any selected `RadioButton` controls outside of the `GroupBox` remain unchanged. This is important if you need to create more than one group of `RadioButton` controls.

If you want to create multiple `RadioButton` groups, but you don't want to display a caption and border, use a `Panel` control instead of a `GroupBox`.

The `GroupBox` control provides a typical assortment of properties that determine its appearance (such as `BackColor`, `BackgroundImage`, and `Font`). These properties are straightforward.

If you set the control's `Enabled` property to `False`, its caption is grayed out and any controls it contains are also disabled. This is a convenient way for a program to enable or disable a group of controls all at once.

The `GroupBox` control's `Controls` property returns a collection containing references to the controls inside the `GroupBox`.

One of the few confusing aspects to working with `GroupBox` controls in code is figuring out where to position controls within the `GroupBox`. The control's borders and caption take up room inside the control's client area, so deciding how to position controls without covering those decorations is not obvious. Fortunately, the control's `DisplayRectangle` property returns a `Rectangle` object that you can use to position items. This rectangle fills most of the control's area that isn't occupied by the caption and borders.

HelpProvider

The `HelpProvider` component displays help for other controls. You can associate a `HelpProvider` with a control. Then, if the user sets focus to the control and presses the F1 key, the `HelpProvider` displays help for the control. The `HelpProvider` either displays a small tooltip-like pop-up displaying a help string, or it opens a help file.

To assign a help string to a control at design time, open the form in the form designer and select the control. In the `Properties` window, look for a property named `HelpString on HelpProvider1`, where `HelpProvider1` is the name of your `HelpProvider` component. If the form contains more than one `HelpProvider`, the control should have more than one `HelpString on` property.

Enter the text you want the `HelpProvider` to display in this property and you're finished. When the user sets focus to the control and presses F1, the `HelpProvider` displays the string automatically.

To set the help string programmatically, call the `HelpProvider` component's `SetHelpString` method passing it the control and the help string that it should display for the control.

To provide help using a help file, set the `HelpProvider` component's `HelpNamespace` property to the full name and path to the help file. Set the other control's `HelpNavigator on HelpProvider1` property to one of the values shown in the following table to tell the `HelpProvider` how to use the help file when the user asks for help on this control.

HelpNavigator Value	Purpose
AssociateIndex	Opens the help file's Index page and goes to the first entry that begins with the same letter as the control's `HelpKeyword on HelpProvider1` property.
Find	Opens the help file's Index tab.
Index	Opens the help file's Index tab and searches for the value entered in the control's `HelpKeyword on HelpProvider1` property.
KeywordIndex	Opens the help file's Index tab and searches for the value entered in the control's `HelpKeyword on HelpProvider1` property.
TableOfContents	Opens the help file's Table of Contents tab.
Topic	Displays the topic in the help file that has URL stored in the control's `HelpKeyword on HelpProvider1` property. For example, the URL `street_name.htm` might contain the help file's page for the Street field.

To set a control's `HelpNavigator` value in code, call the `HelpProvider` component's `SetHelpNavigator` method passing it the control and the navigator method that you want to use.

A control's `ShowHelp on HelpProvider1` property indicates whether the control should use the `HelpProvider` to display its help.

HScrollBar

The `HScrollBar` control represents a horizontal scroll bar. The user can drag the scroll bar's "thumb" to select a number.

The control's `Value` property gets and sets its current numeric value. The `Minimum` and `Maximum` properties determine the range of values that the control can display. These are integer values, so the `HScrollBar` control is not ideal for letting the user select a non-integral value such as 1.25.

The control's `SmallChange` property determines how much the control's `Value` property changes when the user clicks the arrows at the scroll bar's ends. The `LargeChange` property determines how much the `Value` changes when the user clicks the scroll bar between the thumb and the arrows.

Strangely, the control does not let the user actually select the value given by its `Maximum` property. The program can select that value using code, but the largest value the user can select is `Maximum` – `LargeChange` + 1. For example, if `Maximum` is 100 and `LargeChange` is 10 (the default values), the user can select values up to 100 – 10 + 1 = 91.

If you set the control's `TabStop` property to `True`, then the control can hold the input focus. While the control has the focus, you can use the arrow keys to change its value by the `SmallChange` amount.

The control's `Scroll` event fires when the user changes the control's value interactively. The `ValueChanged` event occurs when the control's value changes either because the user changed it interactively, or because the program changed it with code. The following code shows how a program can display the `hbarDays` control's `Value` property when the user or program changes it:

```
Private Sub hbarDays_ValueChanged() Handles hbarDays.ValueChanged
    lblDays.Text = hbarDays.Value.ToString
End Sub
```

Note that many controls that might otherwise require scroll bars can provide their own. For example, the `ListBox`, `TextBox`, and `Panel` controls can display their own scroll bars when necessary, so you don't need to add your own.

ImageList

The `ImageList` component stores a series of images for use by other controls or by the program's code. For example, one way to display an image on a `Button` control is to create an `ImageList` component holding the image. Set the `Button`'s `ImageList` property to the `ImageList` component and set its `ImageIndex` property to the index of the image in the `ImageList`.

To add images to the component at design time, open the form designer, select the component, click the `Images` property in the Properties window, and click the ellipsis (...) on the right. The Image Collection Editor that appears has buttons that let you add, remove, and rearrange the images.

The `ImageList` component's `ImageSize` property determines the size of the images. The component stretches any images of different sizes to fit the `ImageSize`. This means that a single `ImageList` component cannot provide images of different sizes. If you must store images of different sizes in the application, use another method such as multiple `ImageList` components, `PictureBox` controls (possibly with the `Visible` property set to `False`), or resources.

Label

The `Label` control displays some read-only text. Note that you cannot even select the text at runtime so, for example, you cannot copy it to the clipboard. If you want to allow the user to select and copy text, but not modify it, use a `TextBox` with the `ReadOnly` property set to `True`.

The `Label` control can display an image in addition to text. To display an image, either set the control's `Image` property to the image or set the control's `ImageList` and `ImageIndex` properties. Use the `ImageAlign` and `TextAlign` properties to determine where the image and text are positioned within the control.

If you set the `Label` control's `AutoSize` property to `True` (the default), the control resizes itself to fit its text. This can be particularly useful for controls that contain text that changes at runtime because it ensures that the control is always big enough to hold the text. Note that the control does not automatically make itself big enough to display any image it contains.

The `Label` control automatically breaks lines that contain embedded carriage returns. The following code makes a label display text on four lines:

```
lblInstructions.Text = "Print this message and either:" & vbCrLf & _
"    - Mail it to the recipient" & vbCrLf & _
"    - Fax it to the recipient" & vbCrLf & _
"    - Throw it away"
```

Text that contains carriage returns confuses the control's `AutoSize` capabilities, however, so you should not use `AutoSize` with multiline text.

The `Label` control also automatically wraps to a new line if the text it contains is too long to fit within the control's width.

LinkLabel

The `LinkLabel` control displays a label that is associated with a hyperlink. By default, the label is blue and underlined, so it is easy to recognize as a link. It also displays a pointing hand cursor when the mouse moves over it, so it looks more or less like a link on a web page.

When the user clicks a `LinkLabel`, the control raises its `LinkClicked` event. The program can catch the event and take whatever action is appropriate. For example, it could display another form, open a document, or open a web page.

The `LinkLabel` control provides all the formatting properties that the `Label` control does. See the section "Label" earlier in this appendix for more information on formatting the control's label.

The control also provides several properties for determining the appearance of its link. The following table describes some of the most useful.

Property	Purpose
ActiveLinkColor	The color of an active link.
DisabledLinkColor	The color of a disabled link.
LinkArea	The piece of the control's text that is represented as a link. This includes a start position and a length in characters.
LinkBehavior	Determines when the link is underlined. This can take the values `AlwaysUnderline`, `HoverUnderline`, `NeverUnderline`, and `SystemDefault`.
LinkColor	The color of a normal link.
Links	A collection of objects representing the link(s) within the control's text.
LinkVisited	A Boolean that indicates whether the link should be displayed as visited.
VisitedLinkColor	The color of a visited link.

A `LinkLabel` can display more than one link within its text. For example, in the text "The quick brown fox jumps over the lazy dog," the control might display the words *fox* and *dog* as links and the rest as normal text. At design time, you can use the `LinkArea` property to specify only one link. To make *fox* the link, the program would set `LinkArea` to `16, 3` to start with the seventeenth character (remember indexing starts at 0) and include 3 letters.

At runtime, the program can add other links to the control. The following code clears the `llblPangram` control's `Links` collection and then adds two new link areas. The program sets each of the new `Link` objects' `LinkData` property to a URL that the program should display when the user clicks that link.

```
Dim new_link As System.Windows.Forms.LinkLabel.Link

llblPangram.Links.Clear()
new_link = llblPangram.Links.Add(16, 3)
new_link.LinkData = "http://www.somewhere.com/fox.htm"
new_link = llblPangram.Links.Add(40, 3)
new_link.LinkData = "http://www.somewhere.com/dog.htm"
```

The following code shows how the program displays the URL corresponding to the link the user clicked. The code gets the appropriate `Link` object from the event handler's event arguments, converts the `Link` object's `LinkData` property into a string, and uses `System.Diagnostics.Process.Start` to open it with the system's default browser.

```
' Display the URL associated with the clicked link.
Private Sub llblPangram_LinkClicked(ByVal sender As System.Object, _
 ByVal e As System.Windows.Forms.LinkLabelLinkClickedEventArgs) _
 Handles llblPangram.LinkClicked
    System.Diagnostics.Process.Start(e.Link.LinkData.ToString)
End Sub
```

ListBox

The `ListBox` control displays a list of items that the user can select. The following table describes some of the control's most useful properties.

Property	Purpose
SelectionMode	Determines how the user can select text. See the following text for details.
MultiColumn	If this is `True`, the control does not display a vertical scroll bar. Instead, if there are too many items to fit, the control displays them in multiple columns. If the columns will not all fit, the control displays a horizontal scroll bar to let you see them all. The control's `ColumnWidth` property determines the width of the columns.
IntegralHeight	If this is `True`, the control will not display a partial item. For example, if the control is tall enough to display 10.7 items, it will shrink slightly so it can only display 10 items.
ScrollAlwaysVisible	If this is `True`, the control displays its vertical scroll bar even if all of its items fit. This can be useful if the program will add and remove items to and from the list at runtime and you don't want the control to change size depending on whether the items all fit.
Sorted	Determines whether the control displays its items in sorted order.
SelectedItem	Returns a reference to the first selected item or `Nothing` if no item is selected. This is particularly useful if the control's `SelectionMode` is `One`.
SelectedIndex	Returns the zero-based index of the first selected item or `-1` if no item is selected. This is particularly useful if the control's `SelectionMode` is `One`.
Text	Returns the text displayed for the first currently selected item, or an empty string if no item is selected. Your code can set this property to a string to make the control select the item that displays exactly that string.
SelectedItems	A collection containing references to all the items that are currently selected.
SelectedIndices	A collection containing the indexes of all the items that are currently selected.
UseTabStops	Determines whether the control recognizes tabs embedded within its items' text. If `UseTabStops` is `True`, the control replaces tab characters with empty space. If `UseTabStops` is `False`, the control displays tab characters as thin black boxes.

The control's `SelectionMode` property determines how the user can select items. This property can take the value `None`, `One`, `MultiSimple`, or `MultiExtended`.

When `SelectionMode` is `None`, the user cannot select any items. This mode can be useful for displaying a read-only list. It can be particularly handy when the list is very long and the control's automatic scrolling is useful, allowing the user see all of the list's items.

When `SelectionMode` is `One`, the user can select a single item. When the user clicks an item, any previously selected item is deselected.

When `SelectionMode` is `MultiSimple`, the user can select multiple items by clicking them one at a time. When the user clicks an item, the other items keep their current selection status. This mode is useful when the user needs to select multiple items that are not necessarily near each other in the list. It is less useful if the user must select a large number of items. For example, clicking 100 items individually would be tedious.

When `SelectionMode` is `MultiExtended`, the user can select multiple items in several ways. The user can click and drag to manipulate several items at once. If the first item clicked is not selected, then all of the items are selected. If the first item is already selected, then all of the items are deselected. If the user holds down the Ctrl key and clicks an item, the other items' selection status remains unchanged. If the user doesn't hold down the Ctrl key, any other items are deselected when the user selects new items. If the user clicks an item and then clicks another item while holding down the Shift key, all of the items between those two are selected. If the user holds down the Ctrl key at the same time, those items are selected and the other items' selection status remains unchanged.

The `MultiExtended` mode is useful when the user needs to select many items, some of which may be next to each other. This mode is quite complicated, however, so `MultiSimple` may be a better choice if the user doesn't need to select ranges of items or too many items. The `CheckedListBox` control is often a good alternative when the user must make many complicated selections.

Use the control's `Items.Add` method to add an object to the list. If the object isn't a string, the control uses the object's `ToString` method to determine the value it displays to the user.

The `ListBox` control's `FindString` method returns the index of the first item that begins with a given string. For example, the following code selects the first item that begins with the string `Code`:

```
lstTask.SelectedIndex = lstTask.FindString("Code")
```

The `FindStringExact` method returns the index of the first item that matches a given string exactly.

ListView

The `ListView` control displays a list of items in one of five possible views, determined by the control's `View` property. The `View` property can take the following values:

❑   `Details` — For each item, displays a small icon, the item's text, and the sub-items' text on a row.

❑   `LargeIcon` — Displays large icons above the item's text. Entries are arranged from left to right until they wrap to the next row.

❑   `List` — Displays small icons to the left of the item's text. Each entry is placed on its own row.

❑   `SmallIcon` — Displays small icons to the left of the item's text. Entries are arranged from left to right until they wrap to the next row.

❑   `Tile` — Displays large icons to the left of the item's text. Entries are arranged from left to right until they wrap to the next row.

Figure G-4 shows each of these views for the same list of items. The second tiled view shown in the lower-right corner uses the control's `CheckBoxes` and `StateImageList` properties, and is described shortly.

Set the control's `LargeImageList` and `SmallImageList` properties to `ImageList` controls containing the images that you want to use for the `LargeIcon` and `SmallIcon` views.

Each of the `ListView` control's items may contain one or more sub-items that are displayed in the Details view. To create the items and sub-items, open the form designer, select the `ListView` control, click the `Items` property in the Properties window, and click the ellipsis (...) button to the right to display the `ListViewItem` Collection Editor.

Click the Add button to make a new item. Set the item's `Text` property to the string you want the control to display. If you have attached `ImageList` controls to the `ListView`, set the new item's `ImageIndex` property to the index of the image you want to display for this item in the `LargeIcon` and `SmallIcon` views.

For example, the program in Figure G-4 contains two `ImageList` controls. The `imlBig` control contains 32 × 32 pixel images and the `imlSmall` control contains 16 × 16 pixel images. Each holds one image of a book. All of the items in the `ListView` items have `ImageIndex` set to 0, so they all display the first images in the `imlBig` and `imlSmall` controls.

To give an item sub-items at design time, select it in the `ListViewItem` Collection Editor, click its `SubItems` property, and then click the ellipsis (...) button to the right to display the `ListViewSubItem` Collection Editor. Use the Add button to make sub-items. Set the sub-items' `Text` properties to determine what the Details view displays.
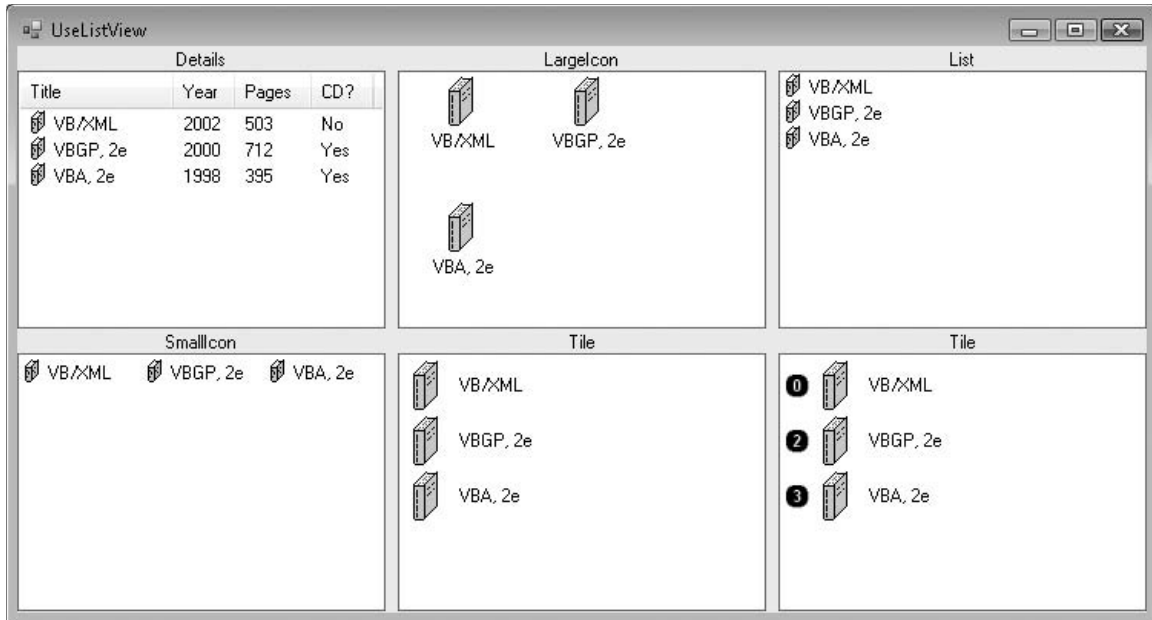
Figure G-4: The ListView control can display five views.

If you set the `ListView` control's `CheckBoxes` property to `True`, the control displays check boxes next to its items. If you set the control's `StateImageList` property to an `ImageList` control, the control displays the images in that list. When the user double-clicks an item, the control toggles the image index between 0 and 1 and displays the first or second image in the `ImageList` control. In Figure G-4, the `ListView` on the lower-right uses check box images that look like circles with numbers inside. If you set `CheckBoxes` to `True` but do not set the `ListView` control's `StateImageList` property, the control displays simple boxes containing check marks.

If `CheckBoxes` is `True`, the program can use the `CheckedIndices` or `CheckedItems` collections to see which items the user has selected. If the `StateImageList` control holds more than two images, an item is considered checked if it is displaying any picture other than the first one. The following code lists the currently checked items in the `lvwMeals` `ListView` control:

```
For Each checked_item As ListViewItem In lvwMeals.CheckedItems
    Debug.WriteLine(checked_item.ToString)
Next checked_item
```

The control's `SelectedIndices` and `SelectedItems` collections let the program see which items the user has currently selected. The user can select items by clicking them. If the user holds down the Ctrl key while clicking, any items that are already selected remain selected. If the user clicks an item, holds down the Shift key, and then clicks another item, the control selects all of the items in between the two.

If you are using the `ListView` in `Details` mode, you must define the control's columns. Open the form designer, select the control, click the `Columns` property in the Properties window, and click the ellipsis (...) button to the right to display the `ColumnHeader` Collection Editor.

Use the Add button to create column headers and then set each header's text. If you don't define enough columns for all of the sub-items, some of the sub-items will not be visible to the user. This is one way you can include data for an item but hide it from the user.

The `LabelEdit` control has several other properties that determine its appearance and how the control interacts with the user. The following table describes some of the most important of these.

Property	Purpose
AllowColumnReorder	If `True`, the user can rearrange the columns by dragging their column headers while in `Detail` mode.
FullRowSelect	If `True`, then clicking an item or any of its sub-items selects the item. If `False`, the user must click the item, not a sub-item, to select the item. If `AllowColumnReorder` is `True`, you may want to set `FullRowSelect` to `True` also so the user doesn't need to figure out which rearranged column contains the item itself.
GridLines	If `True`, the control displays gray lines between the rows and columns while in `Detail` mode.
HeaderStyle	When in `Detail` mode, this can be `None` to not display column headers, `Clickable` to allow the user to click column headers, or `Nonclickable` to not let the user click column headers. If this is `Clickable`, the program can catch the control's `ColumnClick` event to learn the index of the column clicked. For example, you may want to sort the `ListView` control's items using the clicked column.
LabelEdit	If `True`, the user can modify the items' labels. The user can never change the sub-items' labels.
MultiSelect	If `True`, the user can use the Ctrl and Shift keys to select multiple items.
Sorting	Indicates whether the control displays its items sorted ascending, sorted descending, or not sorted.

Example program UseListView, shown in Figure G-4 and available for download on the book's web site, uses these techniques to initialize its `ListView` controls at design time.

ListView Helper Code

In addition to using the `ListView` control's collection property editors at design time, you can manipulate the control's items and sub-items at runtime using code.

The control's `Columns` collection contains `ColumnHeader` objects representing the control's column headers. You can use the collection's `Add`, `Count`, `Remove`, `RemoveAt`, and other methods to manage the text displayed above the columns.

The `ListViewMakeColumnHeaders` subroutine shown in the following code uses the `Columns` collection to define a `ListView` control's column headers. The routine takes as parameters a `ListView` control and a `ParamArray` of values that contain title strings, alignment values, and widths. The code clears the control's `Columns` collection and then loops through the `ParamArray`. For each triple of array entries, the control creates a column header using the title string, alignment value, and width.

```
' Make the ListView's column headers.
' The ParamArray entries should be triples holding
' column title, HorizontalAlignment value, and width.
Private Sub ListViewMakeColumnHeaders(ByVal lvw As ListView, _
 ByVal ParamArray header_info() As Object)
    ' Remove any existing headers.
    lvw.Columns.Clear()

    ' Make the column headers.
    For i As Integer = header_info.GetLowerBound(0) To _
                       header_info.GetUpperBound(0) Step 3
        Dim col_header As ColumnHeader = lvw.Columns.Add( _
            DirectCast(header_info(i), String), _
            -1, _
            DirectCast(header_info(i + 1), HorizontalAlignment))
        col_header.Width = DirectCast(header_info(i + 2), Integer)
    Next i
End Sub
```

The following code shows how a program might use subroutine `ListViewMakeColumnHeaders` to define the `lvwBooks` control's column headers. Because the Pages and Year columns contain numeric values, the control aligns them on the right of their columns.

```
' Make the ListView column headers.
ListViewMakeColumnHeaders(lvwBooks, _
    "Title", HorizontalAlignment.Left, 120, _
    "URL", HorizontalAlignment.Left, 120, _
    "ISBN", HorizontalAlignment.Left, 90, _
    "Picture", HorizontalAlignment.Left, 120, _
    "Pages", HorizontalAlignment.Right, 50, _
    "Year", HorizontalAlignment.Right, 40)
```

The `ListView` control's `Items` collection contains `ListViewItem` objects that represent the control's items. Each `ListViewItem` has a `SubItems` collection that represents the item's sub-items. These collections provide the usual assortment of methods for managing collections: `Count`, `Add`, `Remove`, `RemoveAt`, and so forth.

The `ListViewMakeRow` subroutine shown in the following code uses these collections to add an item and its sub-items to a `ListView`. The routine takes as parameters the `ListView` control, the name of the item, and a `ParamArray` containing the names of any number of sub-items. The code uses the `ListView` control's `Items.Add` method to make the new item. It then loops through the sub-item names, using the new item's `SubItems.Add` method to make the sub-items.

```
' Make a ListView row.
Private Sub ListViewMakeRow(ByVal lvw As ListView, _
 ByVal image_index As Integer, _
 ByVal item_title As String, ByVal ParamArray subitem_titles() As String)
    ' Make the item.
```

```
        Dim new_item As ListViewItem = lvw.Items.Add(item_title)
        new_item.ImageIndex = image_index

        ' Make the subitems.
        For i As Integer = subitem_titles.GetLowerBound(0) To _
                            subitem_titles.GetUpperBound(0)
            new_item.SubItems.Add(subitem_titles(i))
        Next i
    End Sub
```

If you set a `ListView` column's width to `-1`, the control automatically resizes the column so it is wide enough to display all of its data. If you set a column's width to `-2`, the control makes the column wide enough to display all of its data and its header text.

The `ListViewSizeColumns` subroutine shown in the following code sizes all of a `ListView` control's columns so that they fit their data. If the `allow_room_for_header` parameter is `True`, it also allows room for the column headers.

```
' Set column widths to -1 to fit data, -2 to fit data and header.
Private Sub ListViewSizeColumns(ByVal lvw As ListView, _
 ByVal allow_room_for_header As Boolean)
    Dim new_wid As Integer = -1
    If allow_room_for_header Then new_wid = -2

    ' Set the width for each column.
    For i As Integer = 0 To lvw.Columns.Count - 1
        lvw.Columns(i).Width = new_wid
    Next i
End Sub
```

These helper routines make working with `ListView` controls a bit easier.

Custom ListView Sorting

The `ListView` control's `Sorting` property enables you to sort items in ascending or descending order, but it only considers the items, not the sub-items. It doesn't even use the sub-items to break ties when two items have the same value.

Fortunately, the `ListView` control's `ListViewItemSorter` property provides the flexibility to change the sort order in any way you like. To use this property, you must create a class that implements the `IComparer` interface. The `ListView` control will use an object of this type to decide which items to place before other items.

The key to the `IComparer` interface is its `Compare` function. This function takes two `ListViewItem` objects as parameters and returns –1, 0, or 1 to indicate whether the first should be considered less than, equal to, or greater than the second object in the sort order.

To implement a custom sort order, the program should set the `ListView` control's `ListViewItemSorter` property to an object that implements `IComparer` and then call the control's `Sort` method. The control then uses the `IComparer` object to put the items in the proper order.

You can find other uses of the `IComparer` interface in the section "Array.Sort" in Chapter 28," Collection Classes," and in the section "Derived Controls" in Chapter 22, "Custom Controls."

981

Example program ListViewCustomSort, which is available for download on the book's web site, uses an `IComparer` class to allow the user to sort ascending or descending on any of the `ListView` control's item or sub-item columns in the control's `Details` view. The code is fairly involved so it is not shown here. Download the example from the book's web site to see the details.

MaskedTextBox

The `MaskedTextBox` control is a text box that provides a mask that helps guide the user in entering a value in a particular format. The mask determines which characters are allowed at different positions in the text. It displays placeholder characters to help prompt the user and underscores where the user can enter characters. For example, an empty United States phone number field would appear as (___)___-____ in the `MaskedTextBox`.

The control's `Mask` property uses the characters shown in the following table.

Character	Meaning
0	A required digit between 0 and 9.
9	An optional digit or space.
#	An optional digit, space, +, or -. If the user leaves this blank, this character appears as a space in the control's `Text`, `InputText`, and `OutputText` properties.
L	A required letter a–z or A–Z.
?	An optional letter a–z or A–Z.
&	A required nonspace character.
C	An optional character.
A	A required alphanumeric character a–z, A–Z, or 0–9.
a	An optional alphanumeric character a–z, A–Z, or 0–9.
.	A decimal separator placeholder. The control automatically displays the appropriate decimal separator character for the current UI culture.
,	A thousands separator placeholder. The control automatically displays the appropriate thousands separator character for the current UI culture.
:	A time separator placeholder. The control automatically displays the appropriate time separator character for the current UI culture.
/	A date separator placeholder. The control automatically displays the appropriate date separator character for the current UI culture.
$	A currency symbol placeholder. The control automatically displays the appropriate currency symbol character for the current UI culture.
<	Automatically converts the characters that the user types after this point into lowercase.

Character	Meaning
>	Automatically converts the characters that the user types after this point into uppercase.
|	Disables the previous < or > character.
\	Escapes a character so it is displayed literally by the control even if the character would otherwise have special meaning. For example, \9 places a 9 in the output and \\ displays a \.

All other characters appear as literals within the mask. Dashes and parentheses are common literal characters. For example, the Social Security number mask 000-00-0000 displays dashes as in " - - ".

The control's `MaskCompleted` property returns `True` if the user has entered characters to satisfy all of the required pieces of the mask. For example, suppose that the control uses the mask (999)000-0000 to represent a United States phone number. The control's `MaskCompleted` property returns `True` if the user enters (123)456-7890 (where the parentheses and dashes are added automatically by the control). Because the first three digits are optional, the property is also `True` if the user enters ( )456-7890. Because the last seven digits are required, the `MaskCompleted` property returns `False` if the user enters (123) -7890.

The following table shows the `MaskTextBox` control's most useful properties. Note that this control inherits from the `TextBox` control, so it inherits most of that control's properties, methods, and events. See the section "TextBox" later in this appendix for more information.

Property	Purpose
AllowPromptAsInput	Determines whether the user can enter the prompt character determined by the `PromptChar` property (normally an underscore).
AsciiOnly	Determines whether the control allows non-ASCII Unicode characters.
BeepOnError	Determines whether the control beeps whenever the user types an invalid keystroke.
EnableCutCopyLiterals	Determines whether literal characters such as the parentheses in the mask (999)000-0000 are included when the user copies and pastes the control's text.
HidePromptOnLeave	Determines whether the control hides its prompt characters when it loses the focus.
IncludeLiterals	Determines whether the control includes literal characters in the `Text` and `OutputText` properties.
IncludePrompt	Determines whether the control includes the `PromptChar` character in the `OutputText` property.

(continued)

Property	Purpose
InputText	Gets or sets the characters input by the user. This doesn't include any literal mask characters.
Mask	Gets or sets the mask.
MaskCompleted	Returns True if the user's input satisfies the required mask characters.
MaskFull	Returns True if the user has entered characters for all of the mask's required and optional elements.
OutputText	Returns the user's text modified by the IncludeLiterals and IncludePrompt properties.
PromptChar	Determines the character that the control uses as a placeholder for user input.
Text	Gets or sets the text as it is currently displayed to the user, including prompt and literal characters.

The following table describes the control's most useful events.

Event	Occurs When
InputTextChanged	The control's text has been modified.
MaskChanged	The control's mask changed.
MaskInputRejected	The user's input does not satisfy the mask at the current position.
OutputTextChanged	The control's text has been modified.
TextChanged	The control's text has been modified.

Unfortunately, the MaskedTextBox control is relatively inflexible. It requires the user to enter exactly the right characters at the right positions, and there can be no variation in the format. For example, a single mask cannot let the user enter a telephone number in either of the formats 456-7890 or (123)456-7890. The mask (999)000-0000 makes the first three digits optional, but the user must enter spaces in those positions or skip over them. The mask also considers each character separately, so this mask accepts the value (3)456-7890.

This inflexibility means the MaskedTextBox control is most useful when you know *exactly* what the user will need to enter. If you want the user to type a four-digit telephone extension, a seven-digit phone number, or a five-digit ZIP code, then the control works well. If the user might enter either a seven- or ten-digit phone number, a five-digit ZIP code or a nine-digit ZIP+4 code, or an arbitrary e-mail address, the control is much less useful. In these cases, you might want to use regular expressions to validate the user's input more precisely. For more information on regular expressions, see the "Regular Expressions" section in Chapter 40, "Useful Namespaces."

MenuStrip

The `MenuStrip` control represents a form's menus, submenus, and menu items. To make the form display the menu, its `Menu` property must be set to the `MenuStrip` control. The first time you add a `MenuStrip` control to the form, Visual Basic automatically sets the form's `Menu` property to the new control, so you usually don't need to worry about this. If you later delete the control and create a new `MenuStrip`, you may need to set this property yourself.

At design time, the `MenuStrip` control is visible both at the top of the form and in the component tray. Click a menu entry and type to change the caption it displays. Place an ampersand in front of the character that you want to use as a keyboard accelerator. For example, to make the caption of the File menu display as File, set the menu's text to `&File`. If you type Alt+F at runtime, the program opens this menu.

> *If the form also contains a `ContextMenuStrip` control and you select that control, then that control appears at the top of the form instead of the `MenuStrip`. Click the `MenuStrip` in the component tray to make it reappear at the top of the form.*

To make a cascading submenu, click a menu item and enter its caption. A ghostly text box appears to the right containing the text "Type Here." Click this text and enter the submenu's name.

When you select a menu item, the Properties window displays the menu item's properties. The following table describes the most useful menu item properties.

Property	Purpose
Checked	Indicates whether the item is checked. You can use this property to let the user check and uncheck menu items.
CheckOnClick	Determines whether the item should automatically check and uncheck when the user clicks it.
CheckState	Determines whether the item is checked, unchecked, or displayed as in an indeterminate state.
DisplayStyle	Determines whether the item displays text, an image, both, or neither. The image appears on the left where a check box would otherwise go. If the item displays an image, it draws a box around the image when the item is checked.
Enabled	Determines whether the menu item is enabled. If an item is disabled, its shortcut is also disabled and the user cannot open its submenu if it contains one.
Font	Determines the font used to draw the item.
MergeAction	Determines how Visual Basic merges MDI child and parent form menus. See the online help for more information.

(continued)

Property	Purpose
MergeIndex	Determines the order in which Visual Basic merges MDI child and parent form menus. See the online help for more information.
Name	Gives the menu item's name.
ShortcutKeys	Determines the item's keyboard shortcut. For instance, if you set an item's shortcut to F5, then the user can instantly invoke the item at runtime by pressing the F5 key.
ShowShortcutKeys	Determines whether the menu displays its shortcut to the right at runtime. Usually this should be True, so users can learn about the items' shortcuts.
Text	Gives the caption displayed by the item. Place an ampersand in front of the character you want to use as a keyboard accelerator as already described.
Visible	Determines whether the item is visible. An item's shortcut will still work even if the item is not visible. You can use that feature to provide keyboard shortcuts for functions that are not available in any menu.

When you select a menu item and start typing, your text always goes into the menu item's Text property. To change some other property, such as the menu item's name, you must click the property in the Properties window before typing.

This behavior is different from that of other controls. Usually if you select a control and start typing, your text goes to the previously selected property. For example, if you select one control's Name property and then click another control, any text you type goes into the new control's Name property. That lets you quickly set the names of many controls. If you try this same technique for menu items, you'll end up changing their Text values instead.

When the user selects a menu item, the item raises a Click event. You can write an event handler to take whatever action is appropriate. For example, the following code shows how the File menu's Exit item closes the form:

```
Private Sub mnuFileExit_Click() Handles mnuFileExit.Click
    Me.Close()
End Sub
```

To create a menu item event handler, open the item in the form editor and double-click it.

For online help about the MenuStrip control, go to msdn2.microsoft.com/en-us/library/system.windows.forms.menustrip.aspx.

MessageQueue

The MessageQueue component provides access to a queue on a message-queuing server. An application can use a message queue to communicate with other applications. This is a fairly advanced and specialized topic, so it is not covered in detail here. See the online help at msdn2.microsoft.com/library/system.messaging.messagequeue.aspx for more information.

MonthCalendar

The MonthCalendar control displays a calendar that allows the user to select a range of dates. This calendar is similar to the one that the DateTimePicker control displays when its ShowUpDown property is False and you click the control's drop-down arrow (on the bottom in Figure G-3). See the section "DateTimePicker" earlier in this appendix for more information on that control.

The DateTimePicker control is designed to let the user select a single date. The MonthCalendar control is a bit more powerful. For example, this control can allow the user to select a range of dates by clicking and dragging across the calendar. The program can use the control's SelectionRange, SelectionStart, and SelectionEnd properties to see what dates the user has selected.

The following table describes the control's most useful properties for controlling its more advanced features.

Property	Purpose
AnnuallyBoldedDates	An array that specifies dates that should be bolded every year. For example, you can bold April 1 for every year displayed.
BoldedDates	An array that specifies specific dates that should be displayed in bold.
CalendarDimensions	Sets the number of columns and rows of months the control displays. Figure G-5 shows a MonthCalendar control with Calendar Dimensions = 3, 2 (three columns and two rows).
FirstDayOfWeek	Sets the day of the week shown in the leftmost column of each month. Figure G-5 uses the default value Sunday.
MaxDate	The last date the user is allowed to select.
MaxSelectionCount	The maximum number of days the user can select.
MinDate	The first date the user is allowed to select.
MonthlyBoldedDates	An array that specifies dates that should be bolded every month. For example, you can bold the 13th of every month displayed.
SelectionEnd	A DateTime object representing the control's last selected date.
SelectionRange	A SelectionRange object representing the control's selected range of dates.
SelectionStart	A DateTime object representing the control's first selected date.

(continued)

Property	Purpose
ShowToday	Determines whether the control displays today's date at the bottom.
ShowTodayCircle	Determines whether the control circles today's date (April 1, 2008 in Figure G-5). (Although on this system at least the date is "circled" with a rectangle.)
ShowWeekNumbers	Determines whether the control displays the number of each week in the year to the left of each week.
SingleMonthSize	Returns the minimum size needed to display a single month.
TodayDate	Determines the date displayed as today's date (April 1, 2008 in Figure G-5).
TodayDateSet	Boolean that indicates whether the control's TodayDate property has been explicitly set.
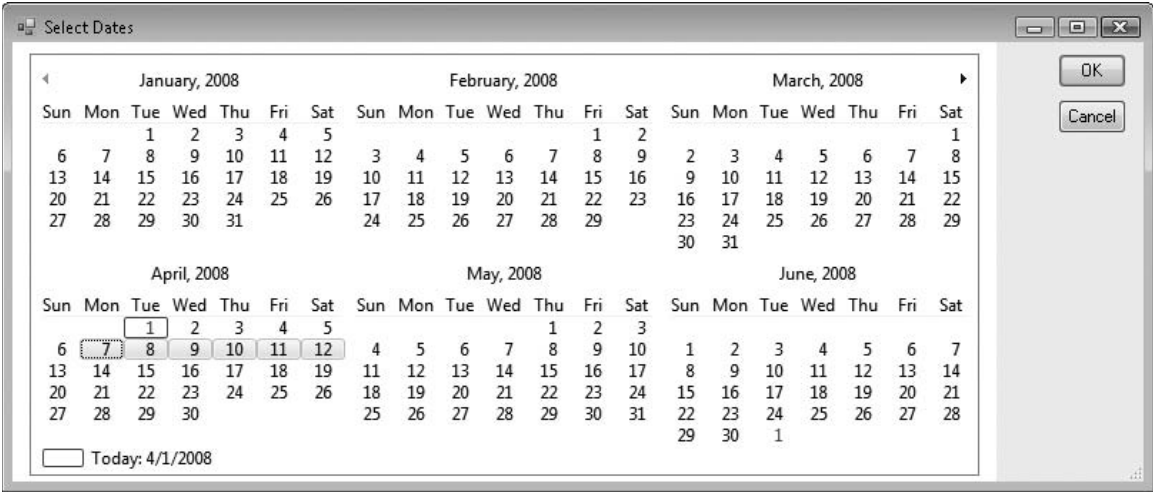
Figure G-5: The MonthCalendar control can display more than one month at a time.

The TodayDate property has an annoying side effect. If you set this value at design time and then set it back to the current day's date, the control's TodayDateSet property still returns True, indicating that you have set the TodayDate property. To clear TodayDate so that TodayDateSet returns False, right-click the name (not the value) of the TodayDate property in the Properties window and select Reset.

The MonthCalendar control provides several handy methods. The following table describes the most useful.

Method	Purpose
AddAnnuallyBoldedDate	Adds a date to the control's array of annually bolded dates. You must call UpdateBoldedDates after using this method.
AddBoldedDate	Adds a date to the control's array of bolded dates. You must call UpdateBoldedDates after using this method.
AddMonthlyBoldedDate	Adds a date to the control's array of monthly bolded dates. You must call UpdateBoldedDates after using this method.
GetDisplayRange	Returns a SelectionRange object that indicates the range of dates currently displayed by the control. If this method's visible parameter is True, the SelectionRange includes only dates that are included in the months that are completely visible (1/1/2008 to 6/30/2008 in Figure G-5). If this parameter is False, the SelectionRange includes all of the displayed dates even if they are in the partially displayed months.
RemoveAllAnnuallyBoldedDates	Empties the control's array of annually bolded dates. You must call UpdateBoldedDates after using this method.
RemoveAllBoldedDates	Empties the control's array of bolded dates. You must call UpdateBoldedDates after using this method.
RemoveAllMonthlyBoldedDates	Empties the control's array of monthly bolded dates. You must call UpdateBoldedDates after using this method.
RemoveAnnuallyBoldedDate	Removes a specific annually bolded date. You must call UpdateBoldedDates after using this method.
RemoveBoldedDate	Removes a specific bolded date. You must call UpdateBoldedDates after using this method.
RemoveMonthlyBoldedDate	Removes a specific monthly bolded date. You must call UpdateBoldedDates after using this method.
SetCalendarDimensions	Sets the control's CalendarDimensions property.
SetDate	Selects the specified date.
SetSelectionRange	Selects the range defined by two dates.
UpdateBoldedDates	Makes the control update itself to show changes to its bolded dates.

The control's bolded dates, monthly bolded dates, and annually bolded dates are all tracked separately and the control displays any date that is listed in any of those groups as bold. That means, for instance, that the RemoveAllBoldedDates subroutine does not change the monthly bolded dates or annually bolded dates.

For example, the following code sets April 1 as an annually bolded date and January 13 as a monthly bolded date. It then removes all of the nonspecific bolded dates and calls UpdateBoldedDates. The result is that April 1 in every year is bold and that the 13th of every month is bold.

```
calStartDate.AddAnnuallyBoldedDate(#4/1/2008#)
calStartDate.AddMonthlyBoldedDate(#1/13/2008#)
calStartDate.RemoveAllBoldedDates()
calStartDate.UpdateBoldedDates()
```

Example program UseMonthCalendar uses a MonthCalendar control to display a single month at a time and lets the user select a date range. Example program UseMonthCalendar2 also lets the user select a range of dates but it displays six months at a time. Both of these programs are available for download on the book's web site.

NotifyIcon

The NotifyIcon component is invisible at runtime. A program can use the NotifyIcon to display an icon in the system tray. The system tray (also called the *status area*) is the little area holding small icons in the lower-right part of the taskbar. The program can use this icon to indicate the application's state.

Figure G-6 shows part of the desktop while UseNotifyIcon example program is running. The program's NotifyIcon is displaying a happy face icon in the system tray on the lower right. When you click the program's Happy or Sad radio buttons, the NotifyIcon component displays the corresponding icon.
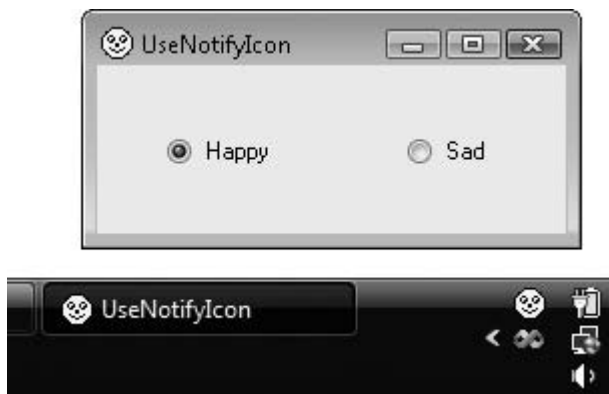
Figure G-6: The NotifyIcon component displays an icon in the system tray.

Figure G-6 also shows the program and the program's icon in the taskbar. These (and the Task Manager, too, although it isn't shown in Figure G-6) also display happy and sad icons. The pictures used for these come from the form's Icon property, not from the NotifyIcon component, so you can display different images for these and the one in the system tray, if you like. Download the UseNotifyIcon example program from the book's web site to see how it sets the icons.

Notification icons are particularly useful for programs that have no user interface or that run in the background. For example, a program that monitors the system's load could use its system tray icon to give the user an idea of the current load.

These sorts of programs, particularly those without normal user interfaces, often add a context menu to their tray icons so that the user can interact with them. This menu might include commands to minimize or restore the application if it has a user interface, or to close the application.

The `NotifyIcon` component only has a few interesting properties. Its `Icon` property determines the icon that the component displays. Its `Text` property sets the tooltip text that the component displays when the user hovers the mouse over the icon. The `Visible` property determines whether the icon is visible. Finally, the component's `ContextMenuStrip` property sets the `ContextMenuStrip` control that displays when the user right-clicks the icon.

NumericUpDown

The `NumericUpDown` control displays a number with up and down arrows that you can use to change the number. If you click an arrow and hold it down, the number changes repeatedly. After a small delay, the changes start happening faster, so you can make some fairly large changes in a reasonable amount of time. You can also change the number by clicking it and typing in a new value.

The following table lists the control's most interesting properties.

Property	Purpose
DecimalPlaces	Determines the number of decimal places that the control displays. This has no effect when `Hexadecimal` is `True`.
Hexadecimal	Determines whether the control displays the number using a hexadecimal format as in A1C when the control's value is 2588 (decimal).
Increment	Determines the amount by which the values are modified when the user clicks an arrow.
InterceptArrowKeys	If this is `True`, the user can also adjust the number's value using the up and down arrow keys.
Maximum	Determines the largest value that the control allows.
Minimum	Determines the smallest value that the control allows.
ReadOnly	Determines whether the user can type in a new value. Note that the arrow keys and arrow buttons still work when `ReadOnly` is `True`. You can disable them by setting `InterceptArrowKeys` to `False` and `Increment` to 0.
TextAlign	Determines whether the number is aligned on the left, right, or center of the control.

(continued)

Property	Purpose
ThousandsSeparator	If this is True, the control displays thousands separators when the value is greater than 999. This has no effect when Hexadecimal is True.
UpDownAlign	Determines whether the up and down arrows are positioned on the left or right.
Value	The control's numeric value.

The control's more important event, ValueChanged, fires whenever the control's numeric value changes, whether because the user changed it or because the program's code changed it.

The Click event handler is not as useful for deciding when the control's value has changed. It executes when the user changes the value by clicking an arrow button, but it does not execute if the user types a new value into the field or uses the arrow buttons. It also fires if the user clicks the control's number but doesn't make any changes.

OpenFileDialog

The OpenFileDialog component displays a standard dialog box that lets the user select a file to open. A program calls the component's ShowDialog method to display a file selection dialog. ShowDialog returns DialogResult.OK if the user selects a file and clicks OK, and it returns DialogResult.Cancel if the user cancels.

This component provides many properties for determining the kinds of files the user can select. The following table describes the most useful of these.

Property	Purpose
AddExtension	If True, the component adds the default extension specified in the DefaultExt property to the file name if the user does not include an extension.
CheckFileExists	If True, the component verifies that the file exists. If the user types in the name of a nonexistent file, the component warns the user and refuses to close.
CheckPathExists	If True, the component verifies that the file's directory path exists. If the user types in a file and path and the path doesn't exist, the component warns the user and refuses to close.
DefaultExt	The default extension that the component adds to the file's name if the user omits the extension. This property should have a value such as txt.
DereferenceLinks	If this is True and the user selects a shortcut file (.lnk), the component returns the name of the file referenced by the shortcut rather than the link file.

Property	Purpose
FileName	Sets the first file selected when the dialog is initially displayed. When the user closes the dialog box, this property returns the name of the file selected. The dialog box retains this value so the next time it is displayed it begins with this file selected.
FileNames	Gets an array of all of the files selected (if the dialog box allows multiple selections).
Filter	A string giving the filter that the dialog box should use. This string holds pairs of display names (such as Bitmaps) and their corresponding filter expressions (such as *.bmp) separated by vertical bar characters (|). Separate multiple expressions within a filter entry with semicolons. For example, the value GIFs|*.gif|JPGs| *.jpg;*.jpeg|Both|*.gif;*.jpg;*.jpeg|All Files|*.* lets the user search for GIF files, JPG files, both GIFs and JPGs, or all files.
FilterIndex	Gives the index of the filter entry that the dialog box initially displays. The indexes start with 1.
InitialDirectory	Determines the path where the dialog box starts when it is displayed. If you later redisplay the same dialog box, it will start at the path determined by its FileName property, so it continues where it last left off. If you want to change InitialDirectory to start in some other directory, you also need to set FileName = "".
MultiSelect	Determines whether the user can select multiple files.
ReadOnlyChecked	Determines whether the dialog box's Open as read-only check box is initially selected. This has no effect unless ShowReadOnly is True. The dialog box retains this value so that the next time it is displayed it has the value that the user selected. If you want the box checked every time the dialog box appears, you must set ReadOnlyChecked to True before you display the dialog each time.
RestoreDirectory	If this value is True, the dialog box restores its initial directory after the user closes it, if the user has navigated to some other directory. However, if you later redisplay the same dialog box, it will start at the path determined by its FileName property, so it continues where it last left off. That means if you want to restore the initial directory, you must also set FileName = "" before redisplaying the dialog.
ShowHelp	Determines whether the dialog box displays a Help button. If you set this to True, the application should catch the dialog box's HelpRequest event and give the user some help.
ShowReadOnly	Determines whether the dialog box displays an Open as read-only check box.
Title	Determines the dialog's title text.

The `OpenFileDialog` component raises its `FileOk` event when the user tries to accept a file. You can use an event handler to catch the event and perform extra validation. Set the event's `e.Cancel` value to `True` to stop the dialog box from accepting the selection.

The following code allows the `dlgBitmapFile` dialog box to accept only bitmap files. The code loops through the dialog box's selected files. If it finds one with a name that doesn't end in `.bmp`, the program displays an error message, sets `e.Cancel` to `True`, and exits the function.

```
' Ensure that the user only selects bitmap files.
Private Sub dlgBitmapFile_FileOk() Handles dlgBitmapFile.FileOk
    For Each file_name As String In dlgBitmapFile.FileNames
        ' See if this file name ends with .bmp.
        If Not file_name.EndsWith(".bmp") Then
            MessageBox.Show("File '" & file_name & "' is not a bitmap file", _
                "Invalid File Type", _
                MessageBoxButtons.OK, _
                MessageBoxIcon.Exclamation)
            e.Cancel = True
            Exit Sub
        End If
    Next file_name
End Sub
```

PageSetupDialog

The `PageSetupDialog` component displays a dialog box that lets the user specify properties for printed pages. For example, the user can specify the printer's paper tray, page size, margins, and orientation (portrait or landscape).

Before you can display the dialog box, you must assign it a `PageSetting` object to modify. You can do this in two ways. First, you can set the component's `Document` property to a `PrintDocument` object. If the user clicks OK, the dialog box modifies the `PrintDocument`'s settings. This method is preferred because a `PrintDocument` object defines both page settings and printer settings.

Second, you can set the dialog box's `PageSettings` property to a `PageSettings` object. If the user clicks OK, the dialog modifies that object's settings.

Your program calls the component's `ShowDialog` method to display the dialog. `ShowDialog` returns `DialogResult.OK` if the user clicks OK and it returns `DialogResult.Cancel` if the user cancels. Often, the program doesn't need to know whether the user accepted or canceled the dialog box, however, because the dialog box modifies a `PageSettings` object automatically if the user clicks OK. The program can use that object when printing later, so it doesn't need to keep track of whether the user accepted or canceled the dialog box.

The following code displays a `PageSetupDialog` attached to a `PrintDocument` object:

```
PageSetupDialog1.Document = New PrintDocument
PageSetupDialog1.ShowDialog()
```

The following table describes the `PageSetupDialog` component's most useful properties.

Property	Purpose
AllowMargins	Determines whether the dialog box lets the user modify its margin settings.
AllowOrientation	Determines whether the dialog box lets the user modify its orientation settings.
AllowPaper	Determines whether the dialog box lets the user modify its paper settings.
AllowPrinter	Determines whether the dialog box lets the user modify its printer settings.
Document	The `PrinterDocument` object that the dialog box will modify.
MinMargins	Gives the smallest allowed margin values. `MinMargins` is a reference to a `Margins` object that has `Left`, `Right`, `Top`, and `Bottom` properties that you can use to specify each margin separately.
PageSettings	The `PageSettings` object that the dialog box will modify.
PrinterSettings	The `PrinterSettings` object that the dialog box will modify when the user clicks the Printer button. If you set the `Document` property, the `PrinterDocument` object includes a `PrinterSettings` object.
ShowHelp	Determines whether the dialog box displays a Help button. If you set this to `True`, the application should catch the dialog box's `HelpRequest` event and give the user some help.
ShowNetwork	Determines whether the dialog box displays a Network button on the Printer setup dialog box when the user clicks the Printer button.

Panel

The `Panel` control is a container of other controls. By setting the `Anchor` and `Dock` properties of the contained controls, you can make those controls arrange themselves when the `Panel` is resized.

You can use a `Panel` to make it easy to manipulate the controls it contains as a group. If you move the `Panel`, the controls it contains move also. If you set the `Panel` control's `Visible` property to `False`, the controls it contains are hidden. If you set the `Panel` control's `Enabled` property to `False`, the controls it contains are also disabled.

Similarly, you can set the `Panel` control's other style properties such as `BackColor`, `ForeColor`, and `Font` and any controls contained in the `Panel` inherit these values (although a few controls insist on keeping their own values for some properties, such as the `TextBox` control's `ForeColor` and `BackColor` properties).

A `Panel` also defines a separate group for radio buttons. If you have two `Panel` controls, each containing several radio buttons, then the two groups of buttons work independently, so clicking a button in one `Panel` doesn't deselect the buttons in the other `Panel`.

The most advanced feature of the `Panel` control is its auto-scroll capability. If you set the `AutoScroll` property to `True`, the control automatically provides working scroll bars if the controls that it contains don't fit. The `AutoScrollMargin` property lets you define extra space that the control should add around its contents when it is auto-scrolling.

Use the `AutoScrollMinSize` property to ensure that the control's scrolling area is at least a certain minimum size. For example, suppose that the `Panel` contains controls with coordinates between 0 and 100 in both the X and Y directions. Normally, the control would let you scroll over the area 0 <= X <= 100, 0 <= Y <= 100 so that you can see all of the controls. If you set `AutoScrollMinSize` to `200, 50`, the control would let you scroll over the area 0 <= X <= 200, 0 <= Y <= 100 so that you can see the controls plus the area defined by `AutoScrollMinSize`.

The `AutoScrollPosition` property lets your program get or set the scroll bars' position at runtime. For example, the following code makes the `panMap` control scroll to make the upper-left corner of its contents visible:

```
panMap.AutoScrollPosition = New Point(0, 0)
```

If you set `AutoScrollPosition` to a point that is outside of the `Panel`'s display area, the control adjusts the point so that it lies within the area.

Although a program often uses a `Panel` control as an invisible container for other controls, you can use its `BackColor` and `BorderStyle` properties to make it visible if you like.

PerformanceCounter

The `PerformanceCounter` component represents a Windows NT-style performance counter. You can use the component's methods to read, increment, and decrement the counters. This is a fairly advanced and specialized topic, so it is not covered in detail here. See the online help at `msdn2.microsoft.com/library/system.diagnostics.performancecounter.aspx` for more information.

If you're interested in performance counters, you may also find the second part of the article "Detecting DDOS and Other Security Problems" at `www.informit.com/articles/article.asp?p=169493&seqNum=2&rl=1` *useful. This part explains how to create a custom performance counter.*

PictureBox

The `PictureBox` control displays images. It also provides a `Graphics` object that you can use to draw lines, rectangles, ellipses, and other shapes at runtime.

The control's `Image` property determines the picture that the control displays. Its `SizeMode` property determines how the image is sized to fit into the control. The following table describes the allowed `SizeMode` values.

Value	Meaning
Normal	The image is not resized. If it sticks off the edge of the `PictureBox`, the image is clipped.
StretchImage	The image is stretched to fill the control. This may change the image's shape, making it shorter and wider or taller and thinner than it should be.
AutoSize	The `PictureBox` adjusts its size to fit the image. If the control is displaying borders, it allows extra room for them.
CenterImage	The image is centered in the `PictureBox` at its normal size. If it sticks off the edge of the `PictureBox`, the image is clipped.

If you set the control's `BackgroundImage` property to a picture, the control tiles itself completely with copies of the picture. If you also set the `Image` property, the background shows behind the image. If you have `SizeMode` set to `StretchImage` or `AutoSize`, the image fills the entire control, so you will not see the background image.

The `PictureBox` control has several properties that deal with its size internally and externally. Its `Size`, `Width`, and `Height` properties give information about the size of the control, including its border if it has one. The `ClientRectangle`, `ClientSize`, and `DisplayRectangle` properties give information about the area inside the control, not including its border. You should use these properties when you draw on the control.

The `PictureBox` control's `CreateGraphics` method returns a `Graphics` object that represents the control's client area. Your code can use that object's methods to draw on the control.

Although you can draw on the object returned by the control's `CreateGraphics` method, that does not ensure that the drawing will remain. If you hide the `PictureBox` with another form and then bring it back to the top, the drawing is gone. There are two main approaches to keeping a drawing visible on a `PictureBox`.

First, you can place the drawing commands in the `PictureBox` control's `Paint` event handler. The `Paint` event occurs any time part of the control needs to be refreshed. That happens if the control is covered and then uncovered, when its form is minimized and then restored, and when the control is enlarged so that a new part of its display area is exposed.

The second approach is to make a `Bitmap` that fits the `PictureBox`, draw on the `Bitmap`, and then set the control's `Image` property equal to the `Bitmap`. After that, the control automatically displays its image.

This method takes more memory than the previous method of drawing in the control's `Paint` event handler. If the drawing is very complicated and takes a long time, however, it may be faster to generate the `Bitmap` once rather than redrawing the picture every time the control raises its `Paint` event.

The final `PictureBox` feature that is relevant to drawing is its `Invalidate` method. This method invalidates some or all of the control's display area and generates a `Paint` event. You can use this method to redraw the control if you have changed some data that will affect the drawing's appearance.

PrintDialog

The `PrintDialog` component displays a dialog box that lets the user prepare to print. The dialog lets the user select a printer, modify printer properties, select the pages to print, and determine the number of copies to print. A program calls the component's `ShowDialog` method to display the dialog.

The following table describes the `PrintDialog`'s most useful properties.

Property	Purpose
AllowPrintToFile	Determines whether the Print to file button is enabled.
AllowSelection	Determines whether the Selection radio button is enabled.
AllowSomePages	Determines whether the Pages radio button, as well as the From and To text boxes, are enabled.
Document	The `PrintDocument` object that provides the dialog with a `PrinterSettings` object.
PrinterSettings	The `PrinterSettings` object that the dialog modifies.
PrintToFile	Determines whether the Print to file box is checked.
ShowHelp	Determines whether the Help button is visible. If this is `True`, you should catch the component's `HelpRequest` event and give the user some help.
ShowNetwork	Determines whether the Network button is visible.

If the user clicks Print, the dialog returns `DialogResult.OK`. If the user clicks Cancel, the dialog box returns `DialogResult.Cancel`. The program can use the dialog box's `PrintToFile` property to see if the user checked the Print to file box, and it can use the `PrinterSettings` object to learn about the user's other selections.

The following table lists the `PrinterSettings` object's properties that are most useful for learning about the user's selections. You can set many of these properties before displaying the dialog box to give it initial values. After the dialog box closes, the properties indicate the user's selections.

Property	Purpose
CanDuplex	Indicates whether the printer can print in duplex.
Collate	Indicates whether the user checked the Collate box.
Copies	The number of copies the user selected.
Duplex	Indicates whether the user asked for duplex printing.

Property	Purpose
FromPage	The number the user entered in the From text box.
InstalledPrinters	Returns a collection listing the system's installed printers.
IsDefaultPrinter	`True` if the printer given by the `PrinterName` property is the default printer.
IsPlotter	`True` if the printer is a plotter device.
IsValid	`True` if the printer given by the `PrinterName` property is a valid printer.
LandscapeAngle	The angle at which the printout is rotated to produce landscape printing. The valid angles are 90 and 270 degrees, or 0 if the printer doesn't support landscape printing.
MaximumCopies	The maximum number of copies that the printer will let you print at a time.
MaximumPage	The largest value that the user is allowed to enter in the To and From boxes.
MinimumPage	The smallest value that the user is allowed to enter in the To and From boxes.
PaperSizes	Returns a collection of objects describing the paper sizes supported by the printer. These `PaperSize` objects have the properties `Height`, `Width`, `PaperName`, and `Kind` (for example, `Letter`).
PaperSources	Returns a collection of objects describing the paper trays provided by the printer. These `PaperSource` objects have the properties `SourceName` (for example, `Default tray`) and `Kind` (for example, `Upper`).
PrinterName	Gets or sets the name of the printer to use.
PrinterResolutions	Returns a collection of `PrinterResolution` objects that describe the resolutions supported by the printer. `PrinterResolution` objects have the properties `Kind` (`High`, `Medium`, `Low`, `Draft`, or `Custom`), `X`, and `Y`. The `X` and `Y` properties return negative values for standard resolutions and the number of dots per inch (dpi) for custom resolutions.
PrintRange	Indicates the pages that the user wants to print. This can have the value `AllPages` (print everything), `Selection` (print the current selection), or `SomePages` (print the pages between `FromPage` and `ToPage`).
PrintToFile	Indicates whether the Print to file check box is selected.
SupportsColor	`True` if the printer supports color.
ToPage	The number the user entered in the To text box.

The `FromPage` and `ToPage` properties must lie between the `MinimumPage` and `MaximumPage` values before you display the dialog box or the dialog box throws an error. If the user enters a value outside of the range `MinimumPage` to `MaximumPage` and clicks Print, the dialog box displays a message similar to "This value is not within the page range. Enter a number between 10 and 30." It then refuses to close.

Usually a program associates a `PrintDialog` with a `PrintDocument` object and that object provides the `PrinterSettings` object. You can either create the `PrintDialog` object at runtime, or you can use the `PrintDocument` component described in the following section at design time. If you create a `PrintDocument` component at design time, you can also set the `PrintDialog`'s Document property to that component at design time.

Example program UsePrintDialog, which is available for download on the book's web site, uses the following code to print a document. In this example, the `pdlgRectangle` and `pdlgRectangle` components were created and `pdlgRectangle.Document` was set to `pdlgRectangle` at design time. When the user clicks the Print button, the program displays the `PrintDialog`. If the user clicks the dialog box's Print button, the code calls the `PrintDocument` object's `Print` method. When the `PrintDocument` object needs to generate a page for printing, it raises its `PrintPage` event. In this example, the event handler draws a rectangle and indicates that the document has no more pages to draw.

```
Imports System.Drawing.Printing

Public Class Form1
    ' Display the print dialog.
    Private Sub btnPrint_Click() Handles btnPrint.Click
        If pdlgRectangle.ShowDialog() = Windows.Forms.DialogResult.OK Then
            ' Print the document.
            pdocRectangle.Print()
        End If
    End Sub

    ' Print a page of the document.
    Private Sub PrintDocument1_PrintPage(ByVal sender As Object, _
     ByVal e As System.Drawing.Printing.PrintPageEventArgs) _
     Handles pdocRectangle.PrintPage
        e.Graphics.DrawRectangle(Pens.Black, 100, 100, 600, 300)
        e.HasMorePages = False
    End Sub
End Class
```

For more information on the `PrintDocument` object, see the following section.

PrintDocument

The `PrintDocument` component represents an object that will be printed. Your program can use this object to send output to a printer.

The general procedure for printing using this object is to create the object, set its properties to determine how the printout is generated (the printer's name, paper tray, and so forth), and then call the object's `Print` method.

When the object needs to generate a page of output, it raises its `PrintPage` event. Your code catches that event, draws the page, and then sets the event handler's `e.HasMorePages` value to indicate whether that was the last page of output. See the previous section, "PrintDialog," for a small example.

The `PrintDocument` object provides only a few important properties itself. You set most of the values that describe the printing operation using the `PrinterSettings` object referenced by the component's `PrinterSettings` property. See the previous section, "PrintDialog," for information on the `PrinterSettings` object.

In addition to its `PrinterSettings` property, the `PrintDocument` object provides a `DocumentName` property that determines the name displayed for the document in printing-related dialog boxes such as the printer queue display.

This component also provides an `OriginAtMargins` property that determines whether each page's graphical origin begins at the page's margins. Setting `OriginAtMargins` to `True` makes it easier to draw relative to the left and top margins, rather than the upper-left corner of the physical page.

PrintPreviewControl

The `PrintPreviewControl` control (and yes, the word *Control* is part of the control's name, possibly to differentiate it from the `PrintPreviewDialog` control) displays a print preview within one of your forms. Usually, it is easier to use the `PrintPreviewDialog` control described in the next section to display a print preview dialog box, but you can use this control to display a preview integrated into some other part of your application.

Example program UsePrintPreviewControl, which is available for download on the book's web site, uses the following code to display three printed pages inside a `PrintPreviewControl`. The module-level variable `m_PageNum` indicates the next page that the `pdocShapes` `PrintDocument` component should draw. When it needs to generate a page, `pdocShapes` raises its `PrintPage` event. The event handler uses a `Select Case` statement to see which page it should generate and it draws an appropriate shape. It sets `e.HasMorePages` appropriately and increments the page number.

```
Public Class Form1
    ' The number of the current page.
    Private m_PageNum As Integer = 1

    ' Generate the print document.
    Private Sub pdocShapes_PrintPage(ByVal sender As System.Object, _
     ByVal e As System.Drawing.Printing.PrintPageEventArgs) _
     Handles pdocShapes.PrintPage
        Select Case m_PageNum
            Case 1 ' Page 1. Draw a triangle.
                Dim pts() As Point = { _
                    New Point(e.MarginBounds.X + e.MarginBounds.Width \ 2, _
                            e.MarginBounds.Y), _
                    New Point(e.MarginBounds.X + e.MarginBounds.Width, _
                            e.MarginBounds.Y + e.MarginBounds.Height), _
```

```
                    New Point(e.MarginBounds.X, _
                              e.MarginBounds.Y + e.MarginBounds.Height) _
                }
                e.Graphics.DrawPolygon(Pens.Red, pts)
                e.HasMorePages = True
                m_PageNum += 1
            Case 2 ' Page 2. Draw a rectangle.
                e.Graphics.DrawRectangle(Pens.Green, e.MarginBounds())
                e.HasMorePages = True
                m_PageNum += 1
            Case 3 ' Page 3. Draw an ellipse.
                e.Graphics.DrawEllipse(Pens.Blue, e.MarginBounds())
                e.HasMorePages = False
                m_PageNum = 1
        End Select
    End Sub
End Class
```

That's all the code that the program needs. When the program starts, the `PrintPreviewControl` control uses `pdocShapes` to generate the pages it needs and it displays them.

The following table describes some of the `PrintPreviewControl` control's most useful properties.

Property	Purpose
AutoZoom	Determines whether the control automatically adjusts its `Zoom` property to make the display fill the control.
Columns	The number of columns of pages that the control displays. In Figure G-7, `Columns = 3`.
Document	The `PrintDocument` object that the control previews.
Rows	The number of rows of pages that the control displays. In Figure G-7, `Rows = 1`.
StartPage	The page number (starting with 0) displayed in the control's first page. Your code can use this property to change the pages displayed.
UseAntiAlias	Determines whether the control uses the system's anti-aliasing features to smooth the preview image. Setting this to `True` may make the image smoother, but it may also slow down the display.
Zoom	Determines the size of the pages within the control. The value 1.0 is full size, 0.5 is half-size, 2.0 is double size, and so forth. It's usually easier to just set `AutoZoom` to `True` and let the control make the pages as large as possible. If you set the scale so large that the page(s) won't fit, the control adds scroll bars so the user can see the results.

The control's `InvalidatePreview` method makes the control regenerate the print preview.

See the following section for information about the `PrintPreviewDialog` control. You can use that control to display a print preview without needing to build your own dialog.

PrintPreviewDialog

The `PrintPreviewDialog` component displays a dialog box that shows what a print document will look like when it is printed. You can use this component to display a print preview dialog similar to the one shown in Figure G-7. This dialog box contains a `PrintPreviewControl`, plus some extra tools to let the user control the preview.
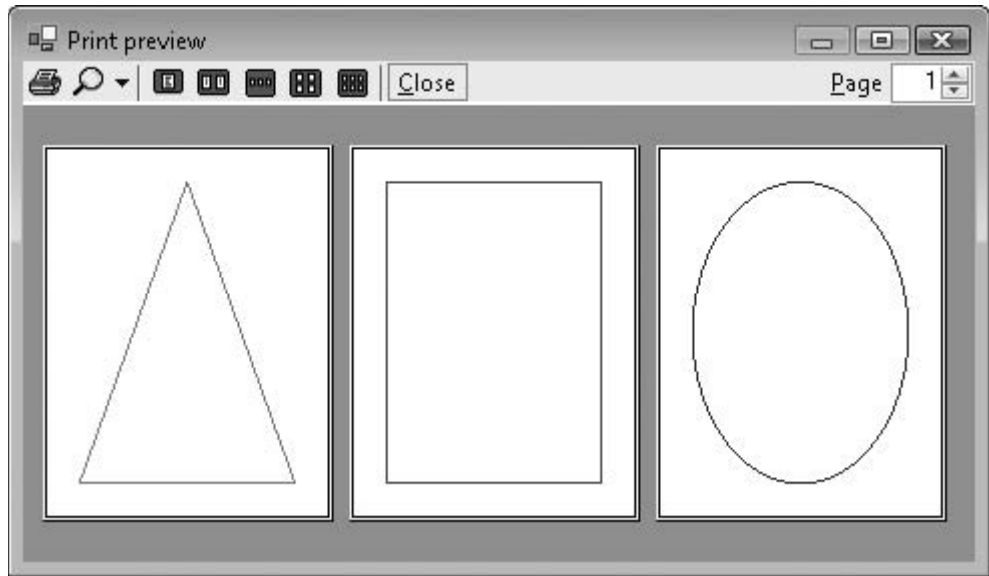
Figure G-7: The PrintPreviewDialog component lets you easily display a full-featured print preview dialog box.

The tools that run from left to right across the top of the dialog box automatically give the user the following features:

❑ A Print button that prints the document

❑ A Zoom menu that lets the user zoom to scales between 10% and 500%, or to select Auto zoom

❑ Buttons that make the dialog box display one, two, three, four, or six pages at a time

❑ A button that closes the dialog box

❑ A text box and numeric up/down control that let the user select the number of the page to display

The dialog box's most important property is `Document`. This property determines the `PrintDocument` object that the dialog box previews. See the section "PrintDocument" earlier in this appendix for more information about this class.

The component's most important methods are `Show`, which displays the dialog box, and `ShowDialog`, which displays the dialog box modally.

Using this component is remarkably simple. Set its `Document` property and catch the `PrintDocument` object's `PrintPage` event as shown in the previous section. Then display the dialog box as in the following code:

```
dlgPrintPreview.ShowDialog()
```

The rest is automatic. The dialog box lets the user move through the document's pages, zoom in and out, and even print the document.

Process

The `Process` component provides access to the processes running on the computer. You can use this object to start, stop, and monitor processes. You can use the object to get information about a running process such as its threads, the modules it has loaded, and the amount of memory it is using.

The UseProcess example program, which is available for download on the book's web site, uses the following code to start an excutable program. It creates a new `Process` object and sets values in its `StartInfo` property to define the application to run. This example sets the executable file name to the string contained in the `txtFileName` text box and sets the component's `Verb` to `Open` (*opening* an executable file makes it run). The program then calls the object's `Start` method.

```
' Start the process.
Private Sub btnRun_Click() Handles btnRun.Click
    Dim new_process As New Process
    new_process.StartInfo.FileName = txtFileName.Text
    new_process.StartInfo.Verb = "Open"
    new_process.Start()
End Sub
```

The `Process` object's `StartInfo` property contains several values that tell the object how to start the new process. These values indicate whether the new process should be created without a window; what environment variables it should use; whether the new process's standard input, output, and error streams should be redirected; and the new process's working directory.

The `Process` object itself provides only a few properties at design time. Other than the `StartInfo` property, the most useful of these is `EnableRaisingEvents`. If this property is `True`, the component monitors the new process and raises an `Exited` event when the process ends.

At runtime, the `Process` object provides read-only `StandardInput`, `StandardOutput`, and `StandardError` properties that the program can use to interact with the new process. It also provides methods for reading and writing with these streams, and properties for monitoring the process. For example, it lets you learn about the process's working set size, paged memory size, and total processor time.

This is a fairly advanced and specialized topic, so it is not covered in greater detail here. For more information, see the `Process` component's web page at `msdn2.microsoft.com/library/system .diagnostics.process.aspx`.

ProgressBar

The `ProgressBar` control lets a program display a visible indication of its progress during a long task. As the task proceeds, the `ProgressBar` fills in from the left to the right. Ideally, the `ProgressBar` is completely full just as the task finishes.

The control's `Minimum` and `Maximum` properties determine the integers over which the `ProgressBar` control's values will range. When the control's `Value` property equals its `Minimum` property, the control is completely blank. When its `Value` property equals its `Maximum` property, the control is completely filled.

By default, `Minimum` and `Maximum` are set to 0 and 100, respectively, so the `Value` property indicates the percentage of the task that is complete. However, you can set `Minimum` and `Maximum` to any values that make sense for the application. For example, if a program must back up some data by copying 173 files from one directory to another, you could set these properties to 0 and 173. As it copies each file, the program would set the `ProgressBar` control's `Value` property to the number of files it has copied.

Instead of setting the control's `Value` property to indicate the task's status, you can set the `Step` property to indicate how much the control should update at each step. Then you can call the `ProgressBar` control's `PerformStep` method to increment the `Value` by that amount.

Note that the `Minimum`, `Maximum`, `Value`, and `Step` properties are all integers. If the value you want to display has some other data type (such as Double or TimeSpan), you must convert the values into integers before you use them with the `ProgressBar`.

PropertyGrid

The `PropertyGrid` control displays information about an object in a format similar to the one used by the Properties window at design time. The control lets the user organize the properties alphabetically or by category, and lets the user edit the property values. Figure G-8 shows a `PropertyGrid` displaying information about an `Employee` object.

The control's two most important properties are `SelectedObject` and `SelectedObjects`, which get or set the object(s) associated with the `PropertyGrid`.

The `PropertyGrid` control only displays object properties not public variables. It also only displays properties that are browsable. If you give a property the `Browsable(False)` attribute, the `PropertyGrid` will not display it.

For more information, refer to the `PropertyGrid` class's web page at msdn2.microsoft.com/library/system.windows.forms.propertygrid.aspx.
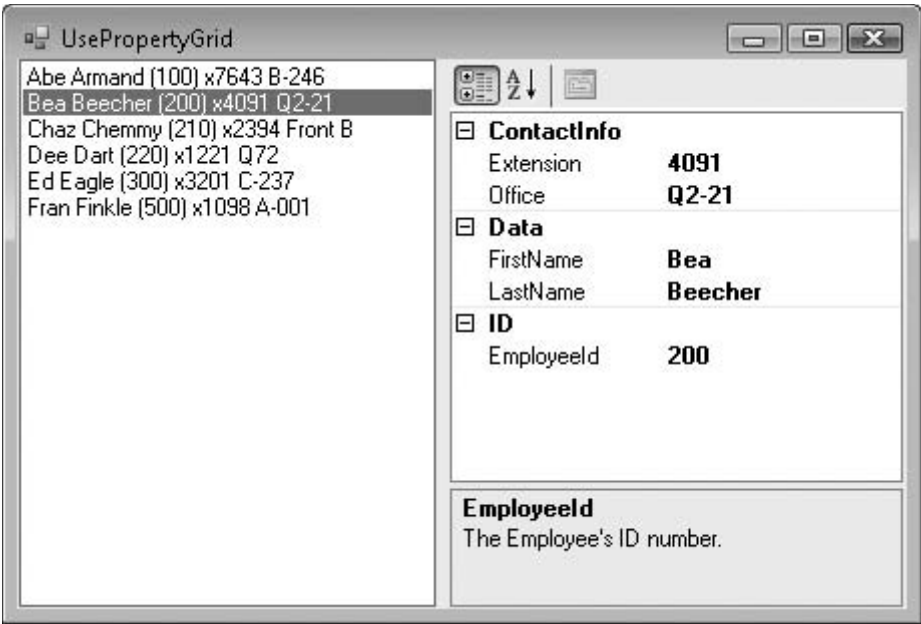
Figure G-8: The PropertyGrid control displays an object's properties.

RadioButton

A RadioButton control represents one of an exclusive set of options. For example, suppose that you want to let the user select between the choices Small, Medium, and Large. You could add three RadioButtons to a form with those captions. When the user clicks one button, Visual Basic selects it and deselects the others.

All the RadioButton controls within a particular container are part of the same RadioButton group. If the user clicks a RadioButton, Visual Basic automatically deselects the others in the same group.

If you want to make more than one group on the same form, you must place the controls in separate containers (such as GroupBox or Panel controls). For example, you could put the Small, Medium, and Large buttons in one GroupBox and then put the Red, Green, and Blue buttons in another GroupBox. Then, when the user selects a size button, the other size buttons are deselected, but the color buttons are unaffected. When the user selects a color, the other colors are deselected, but the size buttons are unaffected.

RadioButton groups provide special navigation for the user. If one of the buttons in the group has the focus, the user can press the arrow keys to move forward and backward through the group. If the user presses the Tab key, focus moves out of the group to the next control in the tab sequence.

The following table describes the RadioButton control's most useful properties.

Property	Purpose
Appearance	Determines whether the control displays with its default appearance of a selection circle containing a black dot (`Appearance = Normal`) or a raised button (`Appearance = Button`).
AutoCheck	Determines whether the control automatically selects itself when the user clicks it. If this is `False`, the code must check and uncheck the control and any other controls in the `RadioButton` group. Usually it's better to use a `CheckBox` control instead if you don't want the button to behave like a normal `RadioButton`.
CheckAlign	Determines whether the control's selection circle is positioned in the bottom center, top center, middle right, and so forth.
Checked	Determines whether the control is selected.
Image	Determines the image that the control displays.
ImageAlign	Determines whether the control's image is positioned in the bottom center, top center, middle right, and so forth.
Text	Determines the text that the control displays.
TextAlign	Determines whether the control's text is positioned in the bottom center, top center, middle right, and so forth.

The `RadioButton` control's most useful events are `Click`, which occurs when the user clicks the control, and `CheckedChanged`, which occurs when the control is checked or unchecked either because the user clicked a `RadioButton` in the group or because the code changed the button's state.

ReportViewer

The `ReportViewer` control displays a report generated by Crystal Reports. The control provides tools that let the user move between the report's different pages, zoom in and out, navigate through report groups using a tree view, view subreports, print or export the report, and so forth. See Chapter 35, "Reporting," for more information about Crystal Reports and this control.

RichTextBox

The `RichTextBox` control is a text box that supports rich text extensions. Those extensions let the control display text that is bold, underlined, italicized, indented, in different fonts, and has other special visual properties.

The control can load and save its contents in plain-text files (in which case the formatting is lost) or in Rich Text Format (RTF) files (which preserve formatting).

A program can use the `RichTextBox` control's `Select` method to select some of its text. It can then use one of the control's properties to change the appearance of the selected text. For example, the following

code selects the 10 characters starting with character 50 (the first character is number 0). It then sets the selection's color to red and makes its font bold.

```
rchNotes.Select(50, 10)
rchNotes.SelectionColor = Color.Red
rchNotes.SelectionFont = New Font(RichTextBox1.SelectionFont, FontStyle.Bold)
```

The following table lists the `RichTextBox` control's most useful properties.

Property	Purpose
AcceptsTab	For multiline controls, determines whether pressing the Tab key adds a Tab to the text, rather than moving to the next control in the tab sequence.
AutoSize	For single-line controls, determines whether the control automatically sets its height for the fonts it contains.
BulletIndent	Determines the number of pixels added after a bullet as indentation. If you make the selection a bulleted paragraph and then change this value, the paragraph's indentation is adjusted accordingly.
CanRedo	Indicates whether the control has any redo information that it can apply. See the discussion later in this section for an example.
CanUndo	Indicates whether the control has any undo information that it can apply. See the discussion later in this section for an example.
DetectUrls	Determines whether the control automatically recognizes web URLs when they are typed. If some text looks like a URL, the control displays it in blue, underlines it, and displays a hyperlink cursor (pointing hand) when the mouse hovers over the text. If the user clicks a recognized link, the control raises its `LinkClicked` event.
Lines	An array of strings giving the lines of text (separated by carriage returns) that are displayed by the control. You can use this property to give the control more than one paragraph at design time.
MaxLength	The maximum number of characters the user can enter into the control.
MultiLine	Determines whether the control displays multiple lines.
PreferredHeight	Returns the height a single-line control would want for the font size.
ReadOnly	Determines whether the user can modify the control's text.
RedoActionName	The name of the action that will be redone if the program calls the control's `Redo` method (for example, Typing or Delete). You can use this property to show the user what the next redo action is.

Property	Purpose
RightMargin	Determines the control's right margin in pixels. The value 0 means there is no right margin.
Rtf	Determines the RTF codes for the control's text. This includes the text itself, font information, and paragraph information (such as indentation, bulleting, and so forth).
ScrollBars	Determines which scroll bars the control displays. The values Horizontal, Vertical, and Both make the control display the corresponding scroll bars only when they are needed. The values ForcedHorizontal, ForcedVertical, and ForcedBoth make the control display the corresponding scroll bars always. The value None makes the control display no scroll bars. Note that some of these values may not always be honored. For example, if WordWrap is True or RightMargin is nonzero, the control never displays horizontal scroll bars.
SelectedRtf	Determines the selected text's value and RTF formatting code.
SelectedText	Determines the selected text's value without RTF formatting codes.
SelectionAlignment	Determines the selected text's alignment (Left, Center, or Right).
SelectionBullet	Determines whether the selected text's paragraph is bulleted.
SelectionCharOffset	Determines the selected text's character offset above or below the baseline in pixels.
SelectionColor	Determines the selected text's color.
SelectionFont	Determines the selected text's font.
SelectionHangingIndent	Determines the selected text's hanging indent.
SelectionIndent	Determines the number of pixels by which subsequent lines are indented in the selected text's paragraph.
SelectionLength	Determines the length of the selected text. You can use SelectionStart and SelectionLength to select text, or you can use the Select method.
SelectionProtected	Determines whether the selected text is protected so that the user cannot modify it.
SelectionRightIndent	Determines the number of pixels by which the selected text's paragraph is indented on the right.
SelectionStart	Determines the start of the selection. You can use SelectionStart and SelectionLength to select text, or you can use the Select method.

(continued)

Property	Purpose
SelectionTabs	Determines the tabs for the selected text's paragraph. For example, the array {20, 40, 60} sets tabs 20, 40, and 60 pixels from the left margin.
ShowSelectionMargin	If True, the control adds a selection margin on the left. If the user clicks inside this margin, the control selects the text to the right.
Text	Determines the control's text, not including any formatting information. If you want to preserve formatting information, use the SelectedRtf property.
TextLength	Returns the length of the control's text.
UndoActionName	The name of the action that will be undone if the program calls the control's Undo method (for example, Typing or Delete). You can use this property to show the user what the next undo action is.
WordWrap	For multiline controls, determines whether the control wraps text to a new line if it is too long to fit.

The control also provides several important methods, as shown in the following table.

Method	Purpose
AppendText	Adds text to the end of the control's text.
CanPaste	Determines whether you can paste data of a specified format from the clipboard into the control.
Clear	Clears the control's text.
ClearUndo	Empties the control's undo list.
Copy	Copies the control's selection to the clipboard.
Cut	Copies the control's selection to the clipboard and removes it from the control's text.
Find	Finds and selects text. Overloaded versions let you search for one of a group of characters or a string, possibly with options (MatchCase, NoHighlight, Reverse, or WholeWord), and possibly within a range of characters.
GetCharFromPosition	Finds the character closest to a specified (X, Y) position.
GetCharIndexFromPosition	Finds the index of the character closest to a specified (X, Y) position.
GetLineFromCharIndex	Returns the number of the line containing the specified character index.

Method	Purpose
GetPositionFromCharIndex	Returns the (X, Y) position of the character at a specified index.
LoadFile	Loads an RTF or text file or a stream into the control.
Paste	Pastes the clipboard's contents into the control, replacing the current selection.
Redo	Reapplies the last action that was undone.
SaveFile	Saves the control's text into an RTF or text file or stream.
ScrollToCaret	Scrolls the text so the insertion position is visible.
Select	Selects the indicated text.
SelectAll	Selects all of the control's text.
Undo	Undoes the most recent action.

A program can use the CanUndo and CanRedo properties to determine when it should enable Undo and Redo buttons and menu items. The following code shows how a program can manage Undo and Redo buttons for the rchNotes control. When the control's contents change, the TextChanged event handler enables or disables the buttons, depending on which information the control has. The buttons simply call the control's Undo and Redo methods.

```
Private Sub rchNotes_TextChanged() Handles rchNotes.TextChanged
    btnUndo.Enabled = rchNotes.CanUndo
    btnRedo.Enabled = rchNotes.CanRedo
End Sub

Private Sub btnUndo_Click() Handles btnUndo.Click
    rchNotes.Undo()
End Sub

Private Sub btnRedo_Click() Handles btnRedo.Click
    rchNotes.Redo()
End Sub
```

The following version of the TextChanged event handler adds the values returned by the UndoActionName and RedoActionName methods to the buttons' captions. For example, after the user deletes some text, the undo button's caption says "Undo Delete."

```
Private Sub rchNotes_TextChanged() Handles rchNotes.TextChanged
    btnUndo.Enabled = rchNotes.CanUndo
    btnRedo.Enabled = rchNotes.CanRedo

    If btnUndo.Enabled Then
        btnUndo.Text = "Undo " & rchNotes.UndoActionName
    Else
        btnUndo.Text = "Undo"
```

```
            End If

        If btnRedo.Enabled Then
            If btnRedo.Enabled Then _
                btnRedo.Text = "Redo " & rchNotes.RedoActionName
        Else
            If btnRedo.Enabled Then btnRedo.Text = "Redo"
        End If
    End Sub
```

The `RichTextBox` control's most useful event is `TextChanged`. You can use this event to take action when the user changes the control's text. For example, you can display a visible indication that the data has been modified or, as the previous examples show, you can enable and disable Undo and Redo buttons.

SaveFileDialog

The `SaveFileDialog` component displays a dialog box that lets the user select a file for saving. The `ShowDialog` method returns `DialogResult.OK` if the user selects a file and clicks OK. It returns `DialogResult.Cancel` if the user cancels.

This component provides many properties for determining the kinds of files the user can specify. Most of these properties are the same as those provided by the `OpenFileDialog` component described earlier in this appendix. See the section "OpenFileDialog" earlier in this appendix for more information about those properties.

Unlike `OpenFileDialog`, this component does not provide the properties `MultiSelect`, `ReadOnlyChecked`, and `ShowReadOnly` because those properties don't make sense when the user is selecting a file for saving. The `FileNames` collection is also less useful for this component because the user will always select only one file, so you can use the `FileName` property instead.

The `SaveFileDialog` component provides one additional property not provided by the `OpenFileDialog`: `CreatePrompt`. If this property is `True` and the user enters the name of a file that doesn't exist, then the dialog asks the user if it should create the file. If the user clicks No, the dialog box continues letting the user select a different file.

Like the `OpenFileDialog`, this component raises its `FileOk` event when the user tries to accept a file. You can use an event handler to catch the event and perform extra validation. Set the event's `e.Cancel` value to `True` to stop the dialog box from accepting the selection.

Note that the dialog box adds its default extension if applicable before it raises the `FileOk` event. If the component has `DefaultExt = "dat"` and `AddExtension = True`, then this example would accept a file name with no extension.

SerialPort

The `SerialPort` component represents one of the computer's physical serial ports. It provides properties and methods for reading and configuring the port's baud rate, break signal, Data Set Ready (DSR) state, port name, parity, and stop bits. The class has methods to write data to the port and to read synchronously or asynchronously.

Serial communications is a fairly advanced and specialized topic that depends on your particular application, so it is not covered in detail here. See the online help at `msdn2.microsoft.com/library/system.io.ports.serialport.aspx` for more information. If you plan to work extensively with serial communication, you might want to find a good book on the topic such as *Visual Basic Programmer's Guide to Serial Communications, 4th Edition* by Richard Grier (Mabry Software, 2004).

ServiceController

The `ServiceController` component represents a Windows service process. It provides methods that let you connect to a running or stopped service to control it or get information about it.

The `ServiceController` component's `ServiceName` property gets or sets the name of the service associated with the component. To set this value at design time, select a `ServiceController` in the form designer. Then, click the `ServiceName` property in the Properties window and click the drop-down arrow on the right to see a list of available services on the system. The class's methods let you start, pause, continue, or stop the service.

Windows services and their control is a relatively advanced topic, so it is not covered in detail here. For more information, see the `ServiceController` class's web page at `msdn.microsoft.com/library/en-us/cpref/html/frlrfsystemserviceprocessservicecontrollerclasstopic.asp`. For an introduction to Windows service applications, refer to `msdn.microsoft.com/library/en-us/vbcon/html/vbconintroductiontontserviceapplications.asp`. For a walkthrough that creates a Windows service application, see `msdn2.microsoft.com/library/system.serviceprocess.servicecontroller.aspx`.

SplitContainer

The `SplitContainer` control represents an area divided into two regions either vertically or horizontally. The control contains a bar (called the splitter) that the user can drag to adjust the amount of space given to each region.

Each of the `SplitContainer` control's regions holds a `Panel` control and you can place other controls inside the `Panels`. You can also use the `Panel` control's properties to affect their behavior. For example, you can set their `AutoScroll` properties to `True` so the `Panels` display scroll bars when their contents don't fit.

The following table describes the `SplitContainer` control's most useful properties.

Property	Purpose
BorderStyle	Determines the control's border style.
FixedPanel	Determines which panel keeps the same size when the control is resized.
IsSplitterFixed	Determines whether the user can drag the splitter.
Orientation	Determines whether the `Panels` are arranged vertically or horizontally.
Panel1	Returns a reference to the first panel (left or top depending on `Orientation`).
Panel1Collapsed	Determines whether the first `Panel` is collapsed. When collapsed, a `Panel` is completely hidden and the user cannot get it back by dragging the splitter.
Panel1MinSize	Determines the minimum size (width or height depending on `Orientation`) of the first `Panel`.
Panel2	Returns a reference to the second panel (right or bottom depending on `Orientation`).
Panel2Collapsed	Determines whether the second `Panel` is collapsed. When collapsed, a `Panel` is completely hidden and the user cannot get it back by dragging the splitter.
Panel2MinSize	Determines the minimum size (width or height depending on `Orientation`) of the second `Panel`.
SplitterDistance	Determines the distance from the control's left or top edge (depending on `Orientation`) to the splitter.
SplitterIncrement	Determines the number of pixels by which the splitter will move when dragged. For example, if `SplitterIncrement` is `10`, the splitter jumps in 10-pixel increments are you drag it. The default is `1`.
SplitterRectangle	Returns a `Rectangle` representing the splitter's current size and location within the `SplitContainer`.
SplitterWidth	Determines the splitter's width in pixels. The default is `4`.

The `SplitterContainer` control's most interesting events are `SplitterMoving` and `SplitterMoved`. You can catch these events if you need to take action when the user drags the splitter. You can also use the `Panel` controls' sizing events `Resize`, `ResizeBegin`, `ResizeEnd`, and `SizeChanged` to take action when the `Panel` controls resize.

One rather confusing feature of the `SplitterContainer` is the way its contained `Panel` controls behave in the form designer. The drop-down list at the top of the Properties window lets you select the controls on the form, including the `SplitterContainer`. The `Panel` controls are contained inside the

`SplitterContainer`, so they are not always listed in this dropdown. If you click one of the `Panel` controls, the dropdown lists the `Panel` and the Properties window lets you view and edit the control's properties. If some other control is selected, however, the `SplitterContainer` is listed in the dropdown, but not its `Panel` controls.

Splitter

The `Splitter` control provides the thin strip that users can grab to resize the two panes of a `SplitContainer`. In addition to using the `Splitter` within a `SplitContainer` control, you can also use it directly to separate any two other controls.

Visual Basic uses the `Dock` properties and stacking order of the two controls and the `Splitter` to determine how the `Splitter` behaves. To build a simple vertical splitter between two `Panel` controls, add the first `Panel` to the form and set its `Dock` property to `Left` so that it fills the left side of the form. Next, add a `Splitter` control. By default, its `Dock` property is also `Left`, so it attaches to the right side of the `Panel`. Finally, add a second `Panel` control, and set its `Dock` property to `Fill` so that it fills the rest of the form. Now, when you drag the `Splitter` back and forth, Visual Basic adjusts the `Panel` controls accordingly.

You can use multiple `Splitter`s to separate more than two controls. For example, you could add a `Panel` with `Dock` set to `Left`, a `Splitter`, another `Panel` with `Dock` set to `Left`, another `Splitter`, and a final `Panel` with `Dock` set to `Fill`. This would let the user divide the form between the three `Panel` controls.

The `Splitter` control uses the controls' stacking order to determine the order of the controls. When you initially create controls, their stacking order is the same as their order of creation. Unfortunately, if the stacking order changes, the positions of the controls can become very confusing very quickly. In some cases, it's easier to delete all of the controls and start over than it is to fix the stacking order.

It's far easier to use the `SplitContainer` control than it is to use `Splitter`s directly, so you should use the `SplitContainer` when you have fairly straightforward needs. Only use `Splitter`s directly if you need to provide unusual configurations such as dividing a form among three `Panel` controls.

StatusStrip

The `StatusStrip` control provides an area where the application can display brief status information, usually at the bottom of the form.

The `StatusStrip` can contain several kinds of objects such as drop-down buttons, progress bars, and panels. These objects are represented by different kinds of controls contained in the form. For example, a progress bar is represented by a `ToolStripProgressBar` control.

You can edit a `StatusStrip` much as you edit a `MenuStrip`. When you click the `StatusStrip`, a box appears that contains the text "Type Here." Enter the text that you want to display on this object and press Enter. Click an object and then click the little action arrow on the object's right edge to change the object's type (progress bar, panel, and so forth) and to configure the item.

You can also edit an object's properties in the Properties window. Simply click the object and then use the Properties window to change its appearance.

The `StatusStrip` control provides access to the objects it contains through its `Items` collection. If you click the ellipsis to the right of this property in the Properties window, the Items Collection Editor appears. To make new items, select the type of object you want to add from the editor's dropdown and click the Add button. Click an item and use the other buttons to move or delete it. Use the properties grid on the editor's right to modify the object's appearance.

The following list shows the types of objects you can add to a `StatusStrip` control:

- ❏ `ToolStripStatusLabel` — A simple label.
- ❏ `ToolStripProgressBar` — A Progress bar.
- ❏ `ToolStripDropDownButton` — A button that displays text in the `StatusStrip`. When you click its drop-down arrow, a list of buttons appears.
- ❏ `ToolStripSplitButton` — A button that displays an image in the `StatusStrip`. When you click its drop-down arrow, a list of buttons appears.

See the online help at `msdn2.microsoft.com/library/system.windows.forms.statusstrip .aspx` for more information about these classes and the `StatusStrip` control.

TabControl

The `TabControl` control (for some reason, the word *Control* is part of the class's name) displays a series of tabs attached to separate pages. Each page is a control container, holding whatever controls you want for that tab. When you click a tab at design time or the user clicks one at runtime, the control displays the corresponding page.

The control's tabs are represented programmatically by `TabPage` objects contained in the control's `TabPages` collection. To edit these objects at design time, select the control's `TabPages` property and click the ellipsis on the right to display the collection editor.

The following table describes the `TabPage` object's most useful properties.

Property	Purpose
AutoScroll	If `True`, the tab page automatically provides scroll bars if it is not big enough to display all of its contents.
BackColor	Determines the tab page's background color. This affects the tab's page, not the tab itself.
BackgroundImage	Determines the background image that tiles the tab's page. This affects the tab's page, not the tab itself.
BorderStyle	Determines the style of border around the tab's page. This can be `None`, `FixedSingle`, or `Fixed3D`.

Property	Purpose
Font	Determines the font used by the controls contained in the tab's page. To change the font used to draw the tabs, set the `TabControl` control's `Font` property.
ImageIndex	If the `TabControl` control's `ImageList` property is set to an `ImageList` control, this property determines the image within that list that the tab displays.
Text	Determines the text displayed on the tab.
ToolTipText	Determines the tooltip text displayed when the user hovers the mouse over the tab. This is ignored unless the `TabControl` control's `ShowToolTips` property is `True`.

The `TabPage` object provides several events of its own. These include the usual assortment of events for a control container such as `Click`, `Layout`, `Resize`, `Paint`, and various mouse events.

The `TabControl` provides several properties that are useful for arranging the tabs. The following table describes the most useful of these properties.

Property	Purpose
Alignment	Determines whether the control places its tabs on the `Top`, `Bottom`, `Left`, or `Right`. If you set this to `Left` or `Right`, the control rotates its tabs' text sideways. If a tab contains an image, the image is not rotated.
Appearance	Determines how the control displays its tabs. This property can take the value `Normal`, `Buttons`, or `FlatButtons`.
DrawMode	Determines whether the control draws the tabs automatically (`DrawMode = Normal`) or whether the code draws them (`DrawMode = OwnerDrawFixed`). See the discussion later in this section for an example.
Enabled	Determines whether the `TabControl` is enabled. If `Enabled` is `False`, none of the tabs will respond to the user (although the tabs do not look disabled) and all of the controls on the tab pages are disabled.
Font	Determines the font that the control uses to draw its tabs. This does not affect the font used within the tab pages.
HotTrack	If this is `True`, the tabs visually change when the mouse moves over them. For example, the tabs' text may change color.
ImageList	Determines the `ImageList` control that provides images for the tabs.
ItemSize	Determines the height of all of the tabs. Also determines the width of fixed-width tabs (see the `SizeMode` property) and owner-drawn tabs (see the `DrawMode` property).

(continued)

Property	Purpose
MultiLine	Determines whether the control allows more than one line of tabs. If MultiLine is False and the tabs won't all fit, the control displays left-arrow and right-arrow buttons on the right to let the user scroll through the tabs.
Padding	Determines the horizontal and vertical space added around the tabs' text and images.
RowCount	Returns the current number of tab rows.
SelectedIndex	Sets or gets the index of the currently selected tab. At design time, you can simply click the tab you want to select.
SelectedTab	Sets or gets the currently selected TabPage object. At design time, you can simply click the tab you want to select.
ShowToolTips	Determines whether the control displays the TabPage controls' ToolTip values when the user hovers the mouse over the tabs.
SizeMode	Determines how the control sizes its tabs. This property can take the values Normal (tabs fit their contents), FillToRight (if the control needs more than one row of tabs, the tabs resize so each row fills the width of the control), and Fixed (all tabs have the same width).
TabCount	Returns the number of tabs.
TabPages	The collection of TabPage objects.

The TabControl control's most useful event is SelectedIndexChanged, which fires when the control's selected tab index changes either because the user clicked a new tab, or because the code set the SelectedIndex or SelectedTab property.

If you set the TabControl control's DrawMode property to OwnerDrawFixed, then your code must draw the tabs in the control's DrawItem event. Example program UseTabControlOwnerDrawn, which is available for download on the book's web site, uses the following code to draw colored ellipses on its tabs:

```
' Draw ellipses in the tabs.
Private Sub tabProject_DrawItem(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.DrawItemEventArgs) _
 Handles tabProject.DrawItem
    ' Decide how thick to draw the outline.
    Dim line_wid As Integer = 1
    If (e.State And DrawItemState.Selected) = DrawItemState.Selected Then
        line_wid = 3
    End If

    ' Get the drawing bounds.
    Dim rect As New Rectangle( _
        e.Bounds.Left + (line_wid + 1) \ 2, _
        e.Bounds.Top + (line_wid + 1) \ 2 + 1, _
        e.Bounds.Width - line_wid - 2, _
```

```
                e.Bounds.Height - line_wid - 2)

    ' Get the fill colors.
    Dim fill_colors() As Color = {Color.Red, Color.Green, Color.Blue}

    ' Fill.
    Using the_brush As New SolidBrush(fill_colors(e.Index))
        e.Graphics.FillEllipse(the_brush, rect)
    End Using

    ' Outline.
    Using the_pen As New Pen(Color.Black, line_wid)
        e.Graphics.DrawEllipse(the_pen, rect)
    End Using
End Sub
```

The `DrawItem` event handler starts by setting the `line_wid` variable to the pen width it will use to draw the ellipse. It makes the line width larger for the selected tab.

The code then builds a rectangle to define the ellipse. It starts with the event handler's `e.Bounds` property and then shrinks the area slightly to make room for the ellipse's border.

The code makes a brush of the appropriate color for each tab and fills the ellipse. It finishes by making a black pen of the correct thickness and outlining the ellipse.

The `TabControl` is ideal for displaying multiple pages of related information in a limited amount of space. It works particularly well when the information is naturally categorized and each tab represents a category of data. It doesn't work as well if different tabs contain data that the user might want to compare to each other.

TableLayoutPanel

The `TableLayoutPanel` control displays the controls that it contains in rows and columns. This makes it easy to build grids of regularly spaced controls.

The following table describes the `TableLayoutPanel` control's most useful properties.

Property	Purpose
AutoScroll	Determines whether the control automatically provides scroll bars if the controls it contains won't fit.
CellBorderStyle	Determines the cell border style. This can be `None`, `NotSet` (an appropriate style is selected based on the row and column styles), `Inset` (single sunken line), `InsetDouble` (double sunken line), `Outset` (single raised line), `OutsetDouble` (double raised line), `OutsetPartial` (single line containing a raised area), and `Single` (single line).
ColumnCount	Determines the number of columns.

(continued)

Property	Purpose
ColumnStyles	A collection giving column styles.
ColumnWidths	An array of column widths.
Controls	A collection of controls contained within the control.
Enabled	Determines whether the control is enabled. If the TableLayoutPanel is disabled, the controls it contains are also disabled.
GrowStyle	Determines how the control grows when you add new child controls to it. This can be AddRows, AddColumns, or FixedSize (the control throws an exception if you add more controls).
RowCount	Determines the number of rows.
RowHeights	An array of row heights.
RowStyles	A collection of row styles.
Visible	Determines whether the control and its contents are visible.

The following table describes the TableLayoutPanel control's most useful methods.

Method	Purpose
GetColumn	Returns a child control's column number.
GetColumnSpan	Returns the number of columns that a child control spans.
GetRow	Returns a child control's row number.
GetRowSpan	Returns the number of rows that a child control spans.
ScrollControlIntoView	If the TableLayoutPanel control has AutoScroll set to True, this scrolls an indicated child control into view.
SetColumn	Sets a child control's column number.
SetColumnSpan	Sets a child control's column span.
SetRow	Sets a child control's row number.
SetRowSpan	Sets a child control's row span.

In addition to providing its own properties, the TableLayoutPanel acts as a property provider for its child controls. These properties include Column, ColumnSpan, Row, and RowSpan. For example, if you add a button to the TableLayoutPanel control named TableLayoutPanel1, then the button's Properties window will contain an entry labeled Column on TableLayoutPanel1 that determines the button's column.

The TableLayoutPanel control also changes the meaning of its child controls' Anchor property. By default, a child control has Anchor property set to None, so it is centered in its table cell. If you set Anchor to Left, the control is moved to the left edge of the cell. If you set Anchor to Left, Right, both

of the control's edges are attached to the cell's edges, so the control stretches to fit the cell's width. The `Top` and `Bottom Anchor` settings work similarly.

The `FlowLayoutPanel` control also arranges contained controls, but not in a grid. Instead it places controls one after another to fill either rows or columns. For information on that control, see the section "FlowLayoutPanel" earlier in this appendix.

TextBox

The `TextBox` control is a typical everyday text box. The user can enter and modify text, click and drag to select text, press Ctrl+C to copy the selected text to the clipboard, and so forth.

The `TextBox` control is much simpler than the `RichTextBox` control described earlier in this appendix. It can use only one font, background color, and foreground color for all of its text. It also cannot provide special formatting such as bullets, hanging indentation, and margins the way the `RichTextBox` control can. If you need those extra features, use a `RichTextBox` instead of a `TextBox` control.

The following table describes the `TextBox` control's most useful properties.

Property	Purpose
AcceptsReturn	For multiline controls, determines whether pressing the Enter key adds a new line to the text rather than triggering the form's Accept button.
AcceptsTab	For multiline controls, determines whether pressing the Tab key adds a Tab to the text rather than moving to the next control in the tab sequence.
AutoSize	For single-line controls, determines whether the control automatically sets its height for the fonts it contains.
CharacterCasing	Determines whether the control automatically changes the case of text as it is entered. This property can take the values `Normal` (leave the case alone), `Upper` (uppercase), and `Lower` (lowercase). The control changes the text's case whether the user types or pastes it into the control, or if the program sets the control's text.
Lines	An array of strings giving the lines of text (separated by carriage returns) displayed by the control. You can use this property to give the control more than one paragraph at design time.
MaxLength	The maximum number of characters the user can enter into the control.
MultiLine	Determines whether the control displays multiple lines.
PasswordChar	Determines the password character displayed by a single-line `TextBox` control for each character it contains. For example, if you set `PasswordChar` to `*`, then each character the user types appears as a `*` in the text box. The control's `Text` property returns the actual text to the program.

(continued)

Property	Purpose
PreferredHeight	Returns the height a single-line control would want to use for the font size.
ReadOnly	Determines whether the user can modify the control's text. You can display read-only text in a label, but then the user cannot select it and copy it to the clipboard. If you want to display information that the user might want to copy, place it in a TextBox control and set ReadOnly to True.
ScrollBars	Determines which scroll bars the control displays. This property can take the values None, Vertical, Horizontal, and Both. The appropriate scroll bars are always displayed, although they are disabled when they are not needed. Note that some of these values may not always be honored. For example, if WordWrap is True, then the control never displays horizontal scroll bars.
SelectedText	Gets or sets the selected text's value.
SelectionLength	Gets the length of the selected text, or selects this number of letters. You can use SelectionStart and SelectionLength to select text, or you can use the Select method.
SelectionStart	Gets or sets the start of the selection. You can use SelectionStart and SelectionLength to select text, or you can use the Select method.
Text	Gets or sets the control's text.
TextAlign	Determines the text's alignment within the control. This can be Left, Right, or Center.
TextLength	Returns the length of the control's text.
WordWrap	For multiline controls, determines whether the control wraps text to a new line if it is too long to fit.

The TextBox control also provides several important methods, described in the following table.

Method	Purpose
AppendText	Adds text to the end of the control's text.
Clear	Clears the control's text.
ClearUndo	Empties the control's undo list.
Copy	Copies the control's selection to the clipboard.
Cut	Copies the control's selection to the clipboard and removes it from the control's text.

Method	Purpose
Paste	Pastes the clipboard's contents into the control, replacing the current selection. This method does nothing if the clipboard doesn't contain textual data.
ScrollToCaret	Scrolls the text so the insertion position is visible.
Select	Selects the indicated text.
SelectAll	Selects all of the control's text.
Undo	Undoes the most recent action. The TextBox only stores information for one undo action, so calling Undo again undoes the undo. That also means that the TextBox doesn't need a Redo method because it would do the same thing as Undo.

The TextBox control's most useful event is TextChanged. You can use this event to take action when the user changes the control's text. For example, you can display a visible indication that the data has been modified.

Timer

The Timer component periodically raises a Tick event so the program can take action at specific intervals.

The component's Interval property determines the number of milliseconds (1000ths of a second) between events. This property is a 32-bit integer that must be greater than zero, so it can hold values between 1 and 2,147,483,647. If you set Interval to its maximum value, the component raises its Tick event roughly every 24.86 days.

The Timer component's Enabled property determines whether the Timer generates Tick events. The component continues raising its event as long as Enabled is True.

The component's Start and Stop methods simply set its Enabled property to True and False, respectively.

ToolStrip

The ToolStrip control displays a series of buttons, dropdowns, and other tools. The user can access these tools quickly without navigating through a series of menus, so they are most useful for performing frequently needed tasks. Menus are more appropriate for commands that are needed less often.

The following list shows the types of items that a `ToolStrip` may contain.

ToolStripButton	ToolStripProgressBar
ToolStripComboBox	ToolStripSeparator
ToolStripDropDownButton	ToolStripSplitButton
ToolStripLabel	ToolStripTextBox

These tools are relatively straightforward. `ToolStripButton` is a button that sits on a `ToolStrip`, `ToolStripComboBox` is a combo box that sits on a `ToolStrip`, and so forth.

The only tool that doesn't correspond to another type of control is the `SplitButton`. This control is a button with a drop-down area. If the user clicks the button, it raises a `Click` event. If the user clicks the drop-down arrow, the control displays a drop-down menu containing menu items that the user can select as usual. See the online help at `msdn2.microsoft.com/library/system.windows.forms` `.toolstrip.aspx` for more information on `SplitButton` and the other tool control classes.

The `ToolStrip` control stores its tools in its `Items` collection. At runtime, a program can access the controls inside this collection, or it can refer to the tools directly by name. At design time, you can select a `ToolStrip`, click its `Items` property in the Properties window, and click the ellipsis to the right to display an Items Collection Editor.

You can also click the `ToolStrip` and add items to it much as you edit a `MenuStrip` control.

The following table describes the `ToolStrip` control's most useful properties.

Property	Purpose
AllowItemReorder	Determines whether the user can drag and drop items to reorder them.
AllowMerge	Determines whether the `ToolStrip` can merge with others.
CanOverflow	Determines whether items can be sent to an overflow menu if the `ToolStrip` doesn't fit completely on the form.
GripDisplayStyle	Gets the orientation of the control's move handle.
GripMargin	Determines the space around the control's move handle.
GripRectangle	Gets the boundaries of the control's move handle.
GripStyle	Determines whether the control's move handle is visible or hidden.
Items	Returns a collection of `ToolStripItem` objects representing the control's tools.
OverflowButton	Returns a `ToolStripItem` representing the control's overflow button.
ShowItemToolTips	Determines whether the control's tools display their tooltips.

ToolStripContainer

The `ToolStripContainer` control contains a `ToolStripPanel` along each of its edges where a `ToolStrip` control can dock. The control's center is filled with another `ToolStripPanel` that can contain other controls that are not part of the tool strips.

The user can drag the `ToolStrips` around and position them inside of any of the `ToolStripPanel` controls much as you can move the toolbars in the Visual Basic development envirtonment. The user can drag the `ToolStrips` into multiple rows or columns within the panels.

Figure G-9 shows a form containing a `ToolStripContainer` with its `Dock` property set to `Fill`, so it fills the form. The lighter area in the middle is a `PictureBox` sitting inside the middle `ToolStripPanel`, also with its `Dock` property set to `Fill`.
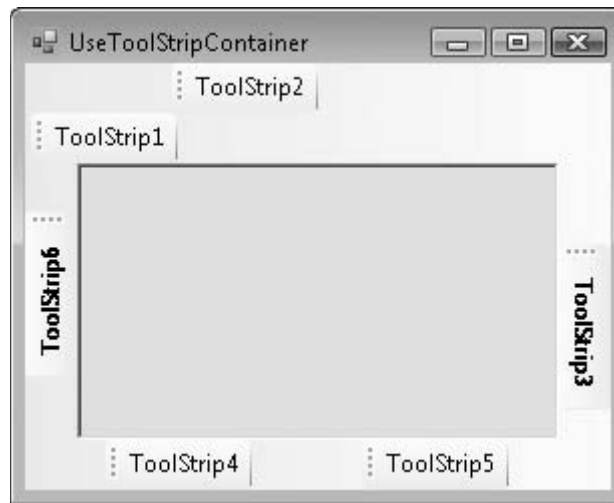
Figure G-9: The ToolStripContainer control lets the user rearrange ToolStrip controls at runtime.

The `ToolStripContainer` in Figure G-9 holds five `ToolStrip` controls positioned in the container's various edge panels. Each `ToolStrip` contains a label identifying the `ToolStrip`. The `ToolStrip3` control's `TextDirection` property is set to `Vertical90`, so it sits along the right edge of the form. The `ToolStrip1` and `ToolStrip2` controls have been dragged into two rows at the top of the form. The `ToolStrip1` and `ToolStrip2` controls share a row at the bottom.

The `ToolStripContainer` control's `LeftToolStripPanel`, `RightToolStripPanel`, `TopToolStripPanel`, `BottomToolStripPanel`, and `ContentPanel` properties contain references to the `ToolStripPanel` controls that the control contains. Its `LeftToolStripPanelVisible`, `RightToolStripPanelVisible`, `TopToolStripPanelVisible`, and `BottomToolStripPanelVisible` properties let you show or hide specific panels. For example, you can hide the bottom or side panels if you don't want the user to drag `ToolStrips` there.

The `ToolStripContainer` control's other properties are relatively straightforward. See the online help at `msdn2.microsoft.com/library/system.windows.forms.toolstripcontainer.aspx` for more information.

ToolTip

The `ToolTip` component allows you to provide tooltip help when the user hovers the mouse over another control. After you add a `ToolTip` component to a form, the other controls on the form get a special `ToolTip` property. For example, suppose that you create a `ToolTip` component named `ttHint`. Then a button on the form would have a new property named `ToolTip on ttHint`. Set that property to the text you want the `ToolTip` to display, and you are all set.

The following table describes the `ToolTip` component's most useful properties.

Property	Purpose
Active	Determines whether the component displays tooltips.
AutomaticDelay	Sets the `AutoPopDelay`, `InitialDelay`, and `ReshowDelay` properties to values that are appropriate for this value.
AutoPopDelay	The number of milliseconds before the tooltip disappears if the mouse remains stationary in the tooltip's area.
BackColor	Determines the tooltip's background color.
ForeColor	Determines the tooltip's foreground color.
InitialDelay	The number of milliseconds that the mouse must remain stationary inside the tooltip's area before the component displays the tooltip.
IsBalloon	Determines whether the tooltip is displayed as a balloon rather than a rectangle.
OwnerDraw	Determines whether your code will draw the tooltip. If you set this to `True`, catch the `ToolTip` component's `Draw` method and draw the tooltip. Parameters to the method give the `Graphics` object to use, the bounds of the area to draw, and the tooltip text. This property is ignored if `IsBalloon` is `True`.
ReshowDelay	The number of milliseconds before the next tooltip will display when the mouse moves from one tooltip area to another. The idea is that subsequent tooltips display more quickly if one is already visible.
ShowAlways	Determines whether the component still displays tooltips, even if the form does not have the focus. The mouse still must hover over the tooltip area as usual if `ShowAlways` is `True`.
StripAmpersands	Determines whether the component removes ampersand characters from tooltip text. This can be useful if the tooltip text looks like menu and label captions where ampersands are converted into underscores.
UseAnimation	Determines whether animation effects are used to show and hide the tooltip.
UseFading	Determines whether fading effects are used to show and hide the tooltip.

The `ToolTip` component's `SetToolTip` method lets a program associate a tooltip with a control at runtime. The following code adds tooltip text to several address controls:

```
ttHint.SetToolTip(txtFirstName, "Customer first name")
ttHint.SetToolTip(txtLastName, "Customer last name")
ttHint.SetToolTip(txtStreet, "Mailing address street number and name")
ttHint.SetToolTip(txtCity, "Mailing address city")
ttHint.SetToolTip(cboState, "Mailing address state")
ttHint.SetToolTip(txtZip, "Mailing address ZIP code")
```

The following table lists the `ToolTip` component's most useful methods.

Method	Purpose
GetToolTip	Returns a control's associated tooltip text.
RemoveAll	Removes all tooltip text associated with this `ToolTip` component.
SetToolTip	Sets a control's associated tooltip text. Set the text to `Nothing` or an empty string to remove that control's tooltip text.
Show	Displays a tooltip over a specific control. Different overloaded versions let you specify the tooltip's location and duration.

TrackBar

The `TrackBar` control allows the user to drag a pointer along a bar to select a numeric value. This control is very similar to a horizontal scroll bar, but with a different appearance.

The following table describes the control's most useful properties.

Property	Purpose
AutoSize	Determines whether the control automatically sets its height or width, depending on its `Orientation` property. For example, if the control's orientation is horizontal, then setting `AutoSize` to `True` makes the control pick a height that is appropriate for the control's width.
LargeChange	The amount by which the control's value changes when the user clicks the `TrackBar`, but not on its pointer.
Maximum	The largest value that the user can select.
Minimum	The smallest value that the user can select.
Orientation	Determines the control's orientation. This can be `Horizontal` or `Vertical`.
SmallChange	The amount by which the control's value changes when the user presses an arrow key.

(continued)

Property	Purpose
TickFrequency	The number of values between tick marks on the control.
TickStyle	Determines the position of tick marks on the control. This can be `TopLeft` (on the top if `Orientation` is `Horizontal`; on the left if `Orientation` is `Vertical`), `BottomRight` (on the bottom if `Orientation` is `Horizontal`; on the right if `Orientation` is `Vertical`), `Both`, or `None`.
Value	The control's current numeric value.

The control's `Value`, `Minimum`, `Maximum`, and `TickFrequency` properties are integer values, so the `TrackBar` control is not ideal for letting the user select a nonintegral value such as 1.25.

The control's `Scroll` event fires when the user changes the control's value interactively. The `ValueChanged` event occurs when the control's value changes either because the user changed it interactively or because the program changed it with code.

TreeView

The `TreeView` control displays a hierarchical data set graphically, as shown in Figure G-10.

The `TreeView` control uses `TreeNode` objects to represent the items it contains. The control's `Nodes` collection contains references to the top-level objects called its *root nodes*. In Figure G-10, the R & D and Sales & Support items are the root nodes.

Each `TreeNode` object has a `Nodes` collection of its own that contains references to its child nodes. For example, in Figure G-10 the R & D root node has children labeled Engineering and Test. Each of those nodes has child nodes representing employees.
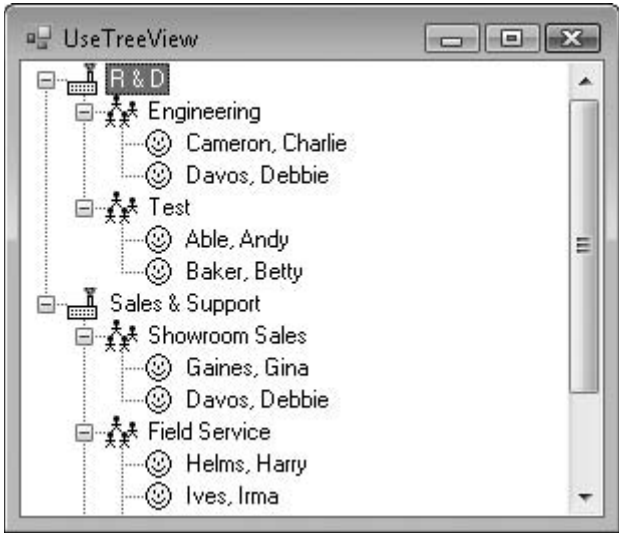
Figure G-10: The TreeView control displays hierarchical data graphically.

You can assign each of the `TreeNode` objects an icon to display. In Figure G-10, the nodes display images representing factories, workgroups, and people.

Your program can manipulate the `TreeNode` objects at runtime, but you can also edit the tree data at design time. Select the `TreeView` control, select its `Nodes` property in the Properties window, and click the ellipsis to the right to make Visual Basic display the TreeNode Editor.

Click Add Root to add a new root node to the tree. Select a node and click Add Child to give the node a new child. Select a node and click Delete to remove the node and any descendants it contains.

If the `TreeView` control's `ImageList` property is set to an `ImageList` control, you can set a node's `ImageIndex` property to the index of the image in the `ImageList` that the node should display. Set the node's `SelectedImageIndex` to the index of the image that the control should display when the node is selected.

The following table describes the `TreeView` control's most useful properties.

Property	Purpose
BorderStyle	Determines the control's border style.
CheckBoxes	Determines whether the control displays check boxes next to the nodes.
DrawMode	Determines whether your code draws nothing (the default), the nodes' text, or the nodes' text and lines.
FullRowSelect	Determines whether selection highlights span the whole width of the control.
HideSelection	Determines whether the selected node remains visibly highlighted even when the `TreeView` control loses the focus.
HotTracking	Determines whether node labels look like hyperlinks when the mouse moves over them.
ImageIndex	Determines the default image index for the nodes.
ImageList	Determines the `ImageList` control that contains the images used by the nodes.
Indent	Determines the indentation distance for each level in the tree.
ItemHeight	Determines the height of each node.
LabelEdit	Determines whether the user can edit the nodes' labels.
LineColor	Determines the color of the lines connecting the nodes.
Nodes	Returns the collection of tree nodes.
PathSeparator	Determines the delimiter string used to represent paths in the tree. For example, using the default separator \, the path to the first person in Figure G-10 is R & D\Engineering\Cameron, Charlie.

(continued)

Property	Purpose
Scrollable	Determines whether the control displays scroll bars when necessary.
SelectedImageIndex	Determines the default image index for the selected nodes.
SelectedNode	Determines the currently selected node.
ShowLines	Determines whether the control draws lines connecting the nodes.
ShowNodeToolTips	Determines whether the control displays tooltips when the mouse hovers over a node. Use the `TreeNode` objects' `ToolTipText` properties to set the tooltip text.
ShowPlusMinus	Determines whether the control displays plus and minus signs next to tree nodes. The user can click the plus and minus signs or double-click the nodes to expand and collapse them.
ShowRootLines	Determines whether the control draws lines between the root nodes. In Figure G-10, `ShowRootLines` is `True`.
Sorted	Determines whether the control displays the nodes in sorted order.
TopNode	Returns the first node that is currently completely visible.
VisibleCount	Returns the number of nodes that could be fully visible. Fewer nodes may actually be visible if some are collapsed.

The `TreeView` control provides several methods that let your code manage the data at runtime. The following table describes the most useful of these methods.

Method	Purpose
CollapseAll	Collapses all of the control's nodes.
ExpandAll	Expands all of the control's nodes. In the process, the control scrolls down, so the last node is visible and selects the topmost visible control. To select some other control, such as the topmost root node, set the control's `SelectedNode` property as in `trvOrgChart.SelectedNode = trvOrg` `.Nodes(0)`.
GetNodeAt	Returns the `TreeNode` object at a specific (X, Y) location.
GetNodeCount	Returns the number of the tree's nodes. If the method's `includeSubTrees` parameter is `False`, the routine returns only the number of root nodes. If `includeSubTrees` is `True`, the routine returns the total number of nodes in the tree.

The control provides a series of events that fire before and after the user takes certain actions. For example, when the user clicks a node's check box, the control raises its `BeforeCheck` event, changes the node's checked state, and then raises its `AfterCheck` event. The other actions that have similar `Before` and `After` event handlers are `Collapse`, `Expand`, `LabelEdit`, and `Select`.

Each of the `Before` event handlers provides a parameter that the code can set to cancel the event. For example, the UseTreeView example program, which is available for download on the book's web site, uses the following code to prevent the user from editing the labels of the tree's root nodes:

```
Private Sub trvOrgChart_BeforeLabelEdit(ByVal sender As Object, _
 ByVal e As System.Windows.Forms.NodeLabelEditEventArgs) _
 Handles trvOrgChart.BeforeLabelEdit
    e.CancelEdit = Not e.Node.FullPath.Contains(trvOrgChart.PathSeparator)
End Sub
```

When the user tries to edit a node's label, the `BeforeLabelEdit` event fires. The value `e.Node` represents the node that the user is about to edit. Its `FullPath` property returns a delimited path showing the node's position in the tree.

The code searches this path for the path separator character (normally \). If the node is a root node, then the separator is not in the path so the `Contains` method returns `False` and the code sets `e.CancelEdit` to `True` so the edit never occurs. If `Contains` finds the path separator in the node's `FullPath`, the code sets `e.CancelEdit` to `False` so the edit takes place as usual.

The `TreeNode` object also provides properties and methods if its own. The following table describes the `TreeNode` object's most useful properties.

Property	Purpose
Checked	Determines whether the node is checked, assuming that the `TreeView` control's `CheckBoxes` property is `True`.
FirstNode	Returns the node's first child node.
FullPath	Returns a string representing the node and its ancestors in the tree, delimited by the character specified by the `TreeView` control's `PathSeparator` property.
ImageIndex	Determines the index of the node's image in the `ImageList` control specified by the `TreeView` control's `ImageList` property.
Index	Returns the node's index within its parent node's collection of children.
IsEditing	Indicates whether the user is editing the node's label.
IsExpanded	Indicates whether the node is expanded.
IsSelected	Indicates whether the node is selected.
IsVisible	Indicates whether the node is at least partly visible.
LastNode	Returns the node's last child node.
Level	Returns the node's level in the tree. Root nodes have level 0, their children have level 1, the children of those nodes have level 2, and so forth.
NextNode	Returns the node's next sibling node.

(continued)

Property	Purpose
NextVisibleNode	Returns the next node that is not hidden because of a collapse. This may be a sibling, child, or some other node, depending on which nodes are expanded at the time. Note that this node may lie below the visible scrolling area, so it may not really be visible.
NodeFont	The font used to draw the node's text. If the node's font makes the text bigger than the TreeView control's Font property does, the text is clipped.
Nodes	The collection of this node's child nodes.
Parent	Returns a reference to the node's parent node in the tree.
PrevNode	Returns the node's previous sibling node.
PrevVisibleNode	Returns the previous node that is not hidden because of a collapse. This may be a sibling, parent, or some other node, depending on which nodes are expanded at the time. Note that this node may be above the visible scrolling area, so it may not really be visible.
SelectedImageIndex	Determines the index of the node's selected image in the ImageList control specified by the TreeView control's ImageList property. The node displays this image while it is selected.
Text	Determines the text displayed in the node's label.
ToolTipText	Determines the node's tooltip text.
TreeView	Returns a reference to the TreeView control that contains the node.

The TreeNode object also provides several methods. The following table describes the most useful of these.

Method	Purpose
BeginEdit	Begins editing of the node's label. This raises an error if the TreeView control's LabelEdit property is False.
Clone	Copies the node and its entire subtree.
Collapse	Collapses the node's subtree.
EndEdit	Ends editing of the node's label.
EnsureVisible	Expands nodes and scrolls the TreeView as necessary to ensure that the node is visible.
Expand	Expands the node to display its children.
ExpandAll	Expands the node's whole subtree.
GetNodeCount	Returns the number of child nodes.
Remove	Removes the node and its subtree.
Toggle	Toggles the node between expanded and collapsed.

VScrollBar

The `VScrollBar` control is similar to the `HScrollBar` control, except that it is oriented vertically instead of horizontally. See the section "HScrollBar" earlier in this appendix for more information on the control.

WebBrowser

The `WebBrowser` control displays the contents of web pages, XML documents, text files, and other documents understood by the browser. The control can automatically follow links that the user clicks in the document and provides a standard web browser context menu, containing commands such as Back, Forward, Save Background As, and Print.

Using this control, you can easily add web-based hypertext to your applications. For example, you could display an HTML help system or tutorial pages within the control.

The control provides several properties and methods for navigating to different documents. The following table describes the most useful of these.

Property/Method	Purpose
Url	Gets or sets the control's current web address.
Navigate	Makes the control open a specific URL.
GoBack	Makes the control move to the URL it previously displayed.
GoForward	After a call to `GoBack`, makes the control move forward to the next URL it displayed.
GoHome	Makes the control go to the current user's home page.
GoSearch	Makes the control go to the current user's search page.

Whenever the control moves to a new document, it fires three events. The `Navigating` event fires before the control moves to the new document. The `Navigated` event occurs after the control has navigated to the new document and is loading it. The `DocumentCompleted` event occurs when the control has finished loading the new document.

The control also supports a variety of other events that tell a program when something has changed. Some of the more useful of these notification events include `CanGoBackChanged`, `CanGoForwardChanged`, `DocumentTitleChanged`, `NewWindow` (the browser is about to open a new window), `ProgressChanged` (gives progress information on the download of a document), and `StatusTextChanged`.

After the control loads a document, the program can manipulate the document through the control's `Document` property. This property contains a reference to an `HtmlDocument` object that gives access to the document's images, forms, links, and other HTML document elements.

In addition to opening existing documents, a program can make the `WebBrowser` display a file generated within the application by setting its `DocumentText` or `DocumentStream` properties.

The `WebBrowser` control provides all of the power and flexibility of Internet Explorer. Unfortunately, that power and flexibility makes the control quite complicated, so it is not described further here. Refer to the online help at `msdn2.microsoft.com/library/system.windows.forms.webbrowser.aspx` for more information.

H

WPF Controls

This appendix lists the most useful Windows Presentation Foundation (WPF) controls that are available in the current version of .NET Framework 3.0, and briefly describes their purposes. This list does not include all of the hundreds of classes that WPF defines; it lists only the tools most likely to appear in the window designer's Toolbox.

These controls are part of the System.Windows.Controls namespace. In contrast, the controls used in Windows Forms are contained in the System.Windows.Forms namespace. Many of the controls in the two namespaces serve very similar purposes, although they have different capabilities. For example, both namespaces have buttons, labels, combo boxes, and check boxes but only the System.Windows.Controls classes provide foreground and background brushes, render transformations, complex content, and XAML-defined triggers.

This appendix describes the WPF controls in far less detail than Appendix G describes the Windows Forms controls. This is mostly attributable to time and space constraints, not because the WPF controls are inferior. These controls can do some amazing things that the Windows Forms controls cannot, such as containing other controls as content and applying transformations while drawing. Unfortunately, these new features would take at least a few hundred pages to cover in depth, and there just isn't room in this edition of the book to do them justice.

Note that not all of the controls described here are available by default when you create a new WPF application. You need to add some of these controls to the Toolbox before you can use them. To add a control that is missing, right-click a Toolbox section and select Choose Items. On the Choose Toolbox Items dialog, select the WPF Components tab to display the dialog shown in Figure H-1. Check the boxes next to the controls that you want, and click OK.
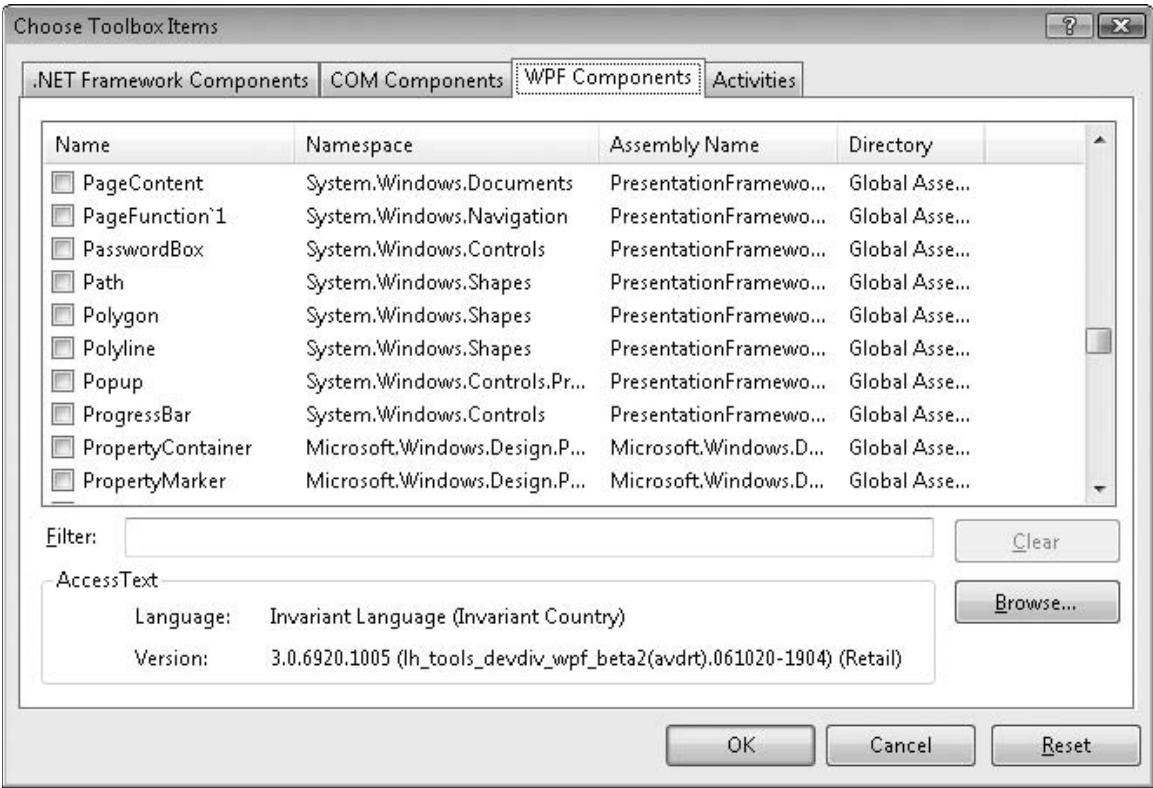
Figure H-1: Use this dialog to add new WPF controls to the Toolbox.

Controls in the following table that are marked with a superscript [1] can hold only a single child. Those marked with a superscript [2] should hold two children.

Control	Purpose
Border[1]	Provides a visible border around or background behind its contents.
BulletDecorator[2]	Contains two children. The first is used as a bullet and the second is aligned with the first. For example, you can use this to align bullet images next to labels.
Button[1]	Displays a button that the user can click. Raises a Click event that the program can catch to perform an action.
Canvas	Creates an area in which you can explicitly position children by specifying their Width, Height, Canvas.Left, and Canvas.Top properties.

Control	Purpose
CheckBox	Allows the user to select or deselect an item. Each CheckBox choice is independent of all others.
ComboBox	Allows the user to select an item from a drop-down list. The list can contain all sorts of objects, but typically holds a series of ComboBoxItems.
ComboBoxItem[1]	Represents an item in a ComboBox control's list.
ContentControl	Represents a control that contains a single piece of content. Note, however, that the content may, in turn, contain other objects.
ContextMenu	Builds a popup menu for a control. This element should be inside the control's ContextMenu property (for example, inside a <Button.ContextMenu> element). Normally the ContextMenu contains MenuItem controls.
DockPanel	Docks its children to its left, right, top, or bottom much as the Dock property does in a Windows Forms application. If the control's LastChildFill property is True, then the control makes its last child control fill the remaining space.
DocumentViewer	Displays a FixedDocument. See the section "Fixed Documents" in Chapter 12, "Using WPF Controls."
Ellipse	Displays an ellipse.
Expander[1]	Displays a header and lets the user expand and contract a single detail item. The <Expander.Header> sub-element contains the content displayed in the header.
FlowDocumentPageViewer	Displays a FlowDocument one page at a time. If the control is wide enough, it may display multiple columns although it still only displays one page at a time. See the section "Flow Documents" in Chapter 12.
FlowDocumentReader	Displays a FlowDocument in one of three modes. When in *single page* mode, it acts as a FlowDocumentPageViewer. When in *scrolling* mode, it acts as a FlowDocumentScrollViewer. In book *reading mode*, it displays two pages side-by-side much as a real book does. See the section "Flow Documents" in Chapter 12.
FlowDocumentScrollViewer	Displays a FlowDocument as a single, long, vertically scrolling page. See the section "Flow Documents" in Chapter 12.
Frame	Supports navigation and content display. The control can navigate to a .NET Framework 3.0 object or to HTML content.

(continued)

Control	Purpose
Grid	Displays children in rows and columns. This is similar to the Windows Forms `TableLayoutPanel` control.
GridSplitter	Acts as a splitter that allows the user to resize rows or columns in a `Grid`.
GridView	Displays data in columns within a `ListView` control.
GridViewColumnHeader	Represents a column header for a `GridViewColumn`.
GroupBox[1]	Displays a visible border with a header. The `Header` property determines the content displayed in the header. The control also forms a grouping for any `RadioButtons` that it contains.
GroupItem	Used to group items in other controls such as a `TreeView`.
HeaderedContentControl	This is the base class for controls that have a single content element and a header. Although you can create one directly, usually it's better use a subclass such as `GroupBox`.
HeaderedItemsControl	Displays a header and multiple content elements.
Image	Displays an image. Can optionally stretch the image with or without distortion.
InkCanvas	Displays or captures ink strokes.
InkPresenter	Displays ink strokes.
ItemsControl	Displays a collection of content items.
Label	Displays non-editable text.
Line	Draws a line segment.
ListBox	Lets the user select items from a list. `ListBoxItem` objects hold the items. The control automatically displays scroll bars when needed.
ListBoxItem[1]	Holds content for display by a `ListBox` object.
ListView	Displays a group of items in various display modes.
ListViewItem	Contains the content for an item displayed in a `ListView`.
MediaElement	Presents audio and video. To let you control the media, it provides `Play`, `Pause`, and `Stop` methods, and `Volume` and `SpeedRatio` properties.
Menu	Builds a menu that is visible, in contrast to a `ContextMenu`, which is hidden until displayed. Normally, the `Menu` contains `MenuItem` controls representing the top-level menus. Those items contain other `MenuItem` controls representing commands.

Control	Purpose
MenuItem	Defines a top-level menu, submenu, or menu item for a ContextMenu or Menu.
NavigationWindow	Navigates to content and displays it, keeping a navigation history. Similar to Frame.
Panel	Panel is the parent class for Canvas, DockPanel, Grid, TabPanel, ToolbarOverflowPanel, UniformGrid, StackPanel, VirtualizingPanel, and WrapPanel. Usually, you should use one of those classes instead of Panel but you can use Panel to implement your own custom panel controls.
PasswordBox	A text box where the user can enter sensitive information such as passwords. The control's PasswordChar property determines the character displays for each character the user types. By default, this is a solid black circle.
Path	Contains a series of drawing instructions that make line segments, arcs, curves, ellipses, and so forth. For more information, see the section "Path" in Chapter 12, "Using WPF Controls."
Polygon	Draws a closed polygon.
Polyline	Draws a series of connected line segments.
Popup	Displays content in a window above another control. Usually, you can use the Tooltip and ContextMenu controls instead of a Popup.
PrintDialog	Displays a standard Windows print dialog. You shouldn't place a PrintDialog on a window. Instead use code to build and display the PrintDialog.
ProgressBar	Indicates the fraction of a long task that has been completed. Usually, the task is performed synchronously, so the user is left staring at the form while it completes. The ProgressBar lets the user know that the operation is not stuck.
RadioButton	Lets the user pick from among a set of options. If the user checks one RadioButton, all others with the same parent become unchecked.
Rectangle	Draws a rectangle, optionally with rounded corners.
RepeatButton[1]	Acts as a Button that raises its Click event repeatedly when it is pressed and held down.
ResizeGrip	Displays a resize grip similar to the one used on the lower-right corner of a window.

(continued)

Control	Purpose
RichTextBox	Similar to a TextBox but contains text in the form of a document object. See the section "Managing Documents" in Chapter 11, "Selecting WPF Controls," for more information on documents.
ScrollBar	Allows the user to drag a "thumb" to select a numeric value. Usually scroll bars are used internally by other controls such as the ScrollViewer and your applications should use a Slider instead.
ScrollViewer[1]	Provides vertical and horizontal scroll bars for a single content element. Makes a scrollable area that can contain other controls.
Separator	Draws a vertical or horizontal separator in controls that contain other controls, such as StatusBar, Menu, ListBox, or ToolBar.
Slider	Enables the user to select a value from a range by sliding a Thumb along a Track. Similar to the Windows Forms TrackBar control.
StackPanel	Arranges children in a single row or column. If there are too many controls, those that don't fit are clipped.
StatusBar	Displays a container at the bottom of the form where you can place controls holding status information. Though you can place anything inside a StatusBar, this control is intended to hold summary status information not tools. Generally, menus, combo boxes, buttons, toolbars, and other controls that let the user manipulate the application do not belong in a SatusBar.
StatusBarItem[1]	Contains an item in a StatusBar.
TabControl	Arranges children in tabs. TabItem controls contain the items that should be displayed in the tabs.
TabItem[1]	Represents an item in a TabControl. The Header property determines the content displayed on the tab, and the Content property determines what's displayed on the tab's body.
TextBlock	Displays more complex non-editable text. This control's contents can include inline tags to indicate special formatting. Tags can include AnchoredBlock, Bold, Hyperlink, InlineUIContainer, Italic, LineBreak, Run, Span, and Underline.

Control	Purpose
TextBox	Allows the user to enter simple text. Optionally can allow carriage returns and tabs, and can wrap text.
Thumb	Represents an area that the user can grab and drag as in a ScrollBar or Slider.
ToggleButton	This is the base class for controls that toggle between two states such as a CheckBox or RadioButton. You can make one directly, but it's easier to use CheckBox or RadioButton.
ToolBar	Contains a series of tools, typically Button controls, ComboBox controls, and other small controls. The Header property gives the ToolBar a header.
ToolBarTray	Contains ToolBars and allows the user to drag them into new positions.
ToolTip	Displays a tooltip. To give a control a simple textual tooltip, set its Tooltip property. Use the Tooltip control to build more complex tooltips. For example, a Tooltip control might contain a StackPanel that holds other controls.
TreeView	Displays hierarchical data with a series of nested collapsible nodes. TreeViewItems contain the items displayed in the hierarchy.
TreeViewItem	Represents an item within a TreeView. The Header attribute or sub-element determines the content displayed for the item.
UserControl	A container that you can use to create a simple compound control. Note, however, that classes derived from UserControl do not support templates.
Viewbox[1]	Stretches its single child to fill the Viewbox. The Stretch property determines whether the control stretches its child uniformly (without changing the width-to-height ratio).
VirtualizingStackPanel	Generates child items to hold items that can fit in the available area. For example, when working with a ListBox bound to a data source, the VirtualizingStackPanel generates only the items that will fit within the ListBox. If the control is not bound to a data source, this control behaves like a StackPanel.

(continued)

Control	Purpose
Window	Represents a window, the WPF equivalent of a form. The `Window` includes two areas: the client area where you normally put controls and the non-client area where the window displays borders, title bar, caption, system menus, and so on. Normally, you add a `Window` to an application by using the Project menu's Add New Item command.
WrapPanel	Arranges children in rows or columns depending on its `Orientation` property. When a row or column is full, the next child moves to a new row or column. This is similar to the Windows Forms `FlowLayoutPanel` control.

[1]This control can hold only a single child.
[2]This control should hold two children.

For more detailed descriptions plus examples using these and other controls, see the Microsoft online help. You can find a reference for System.Windows.Controls classes at `msdn2.microsoft.com/library/system.windows.controls.aspx`. You can find a reference for the System.Windows .Controls.Primatives classes, which include base classes used by other controls, at `msdn2.microsoft .com/library/system.windows.controls.primitives.aspx`.

Visual Basic Power Packs

Power Packs are objects and tools that can make programming easier and more productive. This appendix describes the Visual Basic 2005 Power Packs available from Microsoft.

It also briefly describes some older Visual Basic 2003 Power Packs that were available from the GotDotNet web site. Although these were written in Visual Basic 2003, they may still be useful, at least as inspiration for tools you may want to build.

Finally, this appendix explains where you can find the Power Toys Pack Installer, a tool that lets you view, download, and install the latest Power Toys for Visual Studio.

Microsoft Power Packs

Currently, the Microsoft Power Packs home page (`msdn2.microsoft.com/vbasic/aa701257 .aspx`) includes three tools. These are compatibility tools that make upgrading from Visual Basic 6 to Visual Basic .NET easier.

> *Instead of going directly to the Power Packs home page, you may want to start at the Visual Basic Developer Center (`msdn2.microsoft.com/vbasic`). It should always contain a link to the latest Power Packs home page.*

To further confuse the issue, this page includes a link to Microsoft Visual Basic Power Packs 2.0, a single package that includes these three tools plus new `Line`, `OvalShape`, and `RectangleShape` controls that make drawing simple shapes easier in Windows Forms applications (WPF forms already have `Line`, `Ellipse`, `Rectangle`, `Polygon`, `Polyline`, and other shape controls).

In addition to links to these tools, this page includes a link to the Visual Basic Power Pack Suggestion Center where you can suggest new Power Packs, learn about tools that are still under development, and tell Microsoft which Power Packs you think would be most useful. For example, this page currently lets you vote on whether Microsoft should build a `Data Repeater` control similar to the one provided in Visual Basic 6.

The following sections describe the currently available tools.

Interop Forms Toolkit

It can be very expensive to rewrite large Visual Basic 6 applications in Visual Basic .NET. The Interop Forms Toolkit makes it easier to upgrade such an application gradually by adding Visual Basic .NET forms to it. (*Interop* is short for *interoperability*.)

The toolkit lets you build new forms in Visual Basic .NET so that you don't need to rewrite them later. It also lets you gradually rebuild existing forms to convert the application to Visual Basic .NET. Although it is likely that you will ultimately need to rewrite code that connects the Visual Basic 6 and Visual Basic .NET portions to complete the transition, this toolkit can let you approach the problem in pieces, instead of attempting a single massive rewrite.

Printer Compatibility Library

In Visual Basic 6 and earlier versions, programs used the `Printer` object to generate printouts. Programs used the object's properties to define printing characteristics, and called its methods to draw on the printed page. Methods let you draw shapes, text, and images. Other methods let you start a new page, cancel the print document, or finish printing and send the results to the printer.

Visual Basic .NET uses a very different printing model. Instead of calling a `Printer` object's methods, the program creates a `PrintDocument` object and then responds to that object's events. When the object needs to generate a page, it raises an event and the program responds. Instead of actively telling the `Printer` object what to do, the program reactively responds to requests from the `PrintDocument` object.

The Printer Compatibility Library provides a way for Visual Basic .NET applications to print in a manner that is similar to the one used by Visual Basic 6. You add a reference to the library, create a `Printer` object, and use its methods to generate the printout.

See Chapter 34, "Printing," for more information on printing in Visual Basic 2005. That chapter also describes another method for using metafiles to generate printouts procedurally, rather than in response to events.

PrintForm Component

In Visual Basic 6 and earlier versions, the `Form` control had a `PrintForm` method that sent an image of the form to the printer. The result was a bitmap image that usually looked grainy on the printout. It did not take full advantage of the printer's high resolution, and it didn't add extra data that doesn't fit on the monitor, but that usually fits on a printout.

However, `PrintForm` is extremely easy to use. The program simply calls the form's `PrintForm` method. This is much simpler than generating a high-resolution printout, so developers often use it to give early versions of an application a printing capability. For many applications, `PrintForm` is good enough, and it gives users a WYSIWYG (what you see is what you get) printing tool, so that's all the program needs.

This component enables a Visual Basic .NET application to print a form's image quickly and easily.

Note also that you can use the `Form` object's `DrawToBitmap` method to capture an image of the form in a bitmap. You can then print the image, save it into a file, or do anything else that you can do with a bitmap. For an example, see `www.vb-helper.com/howto_2005_drawtobitmap.html`.

Line, OvalShape, and RectangleShape

These controls draw simple shapes on a form at design time. Properties let you set the controls' pens and brushes at design time. The controls support events such as `Click` and `DoubleClick`, and many of the graphical methods provided in the System.Drawing namespace. The `OvalShape` and `RectangleShape` controls even support linear gradient brushes that let you significantly enhance your application's appearance at design time.

GotDotNet Power Pack

The GotDotNet Visual Basic Power Pack includes seven controls written in Visual Basic 2003. The following list summarizes the seven controls.

❑ `BlendPanel` — Provides a background with linear gradient shading. Note that the WPF `LinearGradientBrush` class provides a similar, but more flexible, effect. Other WPF classes such as `RadialGradientBrush` provide even more shading features.

❑ `UtilityToolbar` — A toolbar that has a look and feel similar to the Microsoft Internet Explorer toolbar.

❑ `ImageButton` — A button with a transparent background. You can use it, for example, to display a round button over a gradient shaded, or complex background, without messing up the background.

❑ `NotificationWindow` — Displays text and graphics in a popup notification window.

❑ `TaskPane` — A container that provides collapsible panes similar to the WPF `Expander` control.

❑ `FolderViewer` — Displays a hierarchical view of a directory tree.

❑ `FileViewer` — Displays a list of the files in a directory.

Unfortunately Microsoft closed the GotDotNet web site in Summer 2007. Before the site disappeared, however, I saved a copy of the Power Pack. You can get more information and download it at `www.vb-helper.com/tip_gotdotnet_powerpack.html`.

Currently the GotDotNet site is still available and even includes a few changes posted after its intended closing date so you might want to go there to see if it still holds any useful material. For example, you may want to look at the user-contributed samples at `www.gotdotnet.com/community/usersamples` to see if anything useful remains.

Power Toys Pack Installer

The Power Toys Pack Installer is a tool that lets you view, download, and install the latest Power Toys for Visual Studio. The "toys" include code snippets, starter kits, examples, and other tools divided into categories such as Visual Basic 2005, Visual Basic 6.0, C#, Printing, Interop, and Debugging.

You can learn more about the installer and download it at `www.codeplex.com/PackInstaller`.

Form Objects

This appendix describes the most useful properties, methods, and events provided by the Windows `Form` class.

The `Form` class inherits indirectly from the `Control` class (`Control` is the `Form` class's "great-grandparent"), so in many ways, a form is just another type of control. Except where overridden, `Form` inherits the properties, methods, and events defined by the `Control` class. Chapter 9, "Using Windows Forms Controls," discusses some of the more useful properties, methods, and events provided by the `Control` class and most of those apply to the `Form` class as well. Appendix A, "Useful Control Properties, Methods, and Events," summarizes the `Control` class's most useful properties.

Properties

The following table describes some of the most useful `Form` properties.

Property	Description
AcceptButton	Determines the button that clicks when the user presses the Enter key. This button basically gives the form a default action. Most forms used as dialog boxes should have an Accept button and a Cancel button (see the `CancelButton` property described shortly). This makes the form more accessible to the visually impaired and is more efficient for users who prefer to use the keyboard.
ActiveControl	Gets the form's currently active control.
ActiveForm	Gets the application's currently active form. If an MDI child form is active, this returns the active form's MDI parent.

(continued)

Property	Description
ActiveMdiChild	Gets the MDI parent form's currently active MDI child form.
AllowDrop	Determines whether the form processes drag-and-drop events. See Chapter 23, "Drag and Drop, and the Clipboard," for more information on drag-and-drop tasks.
Anchor	Determines which edges of the form are anchored to the edges of its container. This lets MDI child forms resize with their MDI parents.
AutoScroll	Determines whether the form automatically provides scroll bars when it is too small to display all of the controls it contains.
AutoScrollMargin	If AutoScroll is True, the control will provide scroll bars if necessary to display its controls plus this much margin.
AutoScrollPosition	Adjusts the AutoScroll scroll bars so this point on the form is placed at the upper-left corner of the visible area (if possible). For example, if a button has location (100, 20), the statement AutoScrollPosition = New Point(100, 20) scrolls the form so the button is in the upper-left corner of the visible area.
BackColor	Determines the form's background color.
BackgroundImage	Determines the image displayed in the form's background.
BackgroundImageLayout	Determines how the BackgroundImage is displayed. This can be None (the image is displayed at up to normal scale, or compressed, if necessary, to make it fit vertically or horizontally), Tile (the image is tiled to fill the form), Center (the image is centered on the form at up to normal scale, or compressed, if necessary, to make it fit vertically or horizontally), Stretch (the image is resized to fill the form exactly), or Zoom (the image is resized to fill the form as much as possible without distorting it).
Bottom	Returns the distance between the form's bottom edge and the top edge of its container.
Bounds	Determines the form's size and location within its container. These bounds include the form's client and non-client areas (such as the borders and caption area).
CancelButton	Determines the button that clicks when the user presses the Escape key. This button basically gives the form a cancel action. If the form is being displayed modally, clicking this button either manually or by pressing Escape automatically closes the form.

Property	Description
Capture	Determines whether the form has captured mouse events. While this is `True`, all mouse events go to the form's event handlers. For example, pressing the mouse button sends the form a `MouseDown` event even if the mouse is over a control on the form or even if it is off of the form completely.
ClientRectangle	Returns a `Rectangle` object representing the form's client area.

ClientSize	Gets or sets a `Size` object representing the client area's size. If you set this value, the form automatically adjusts to make the client area this size while allowing room for its non-client areas (such as borders and title bar). For example, the following statement makes the form just big enough to display the `txtNotes` control within the client area:
	
	`Me.ClientSize=New Size( _lblNotes.Left+lblNotes.`
	`Width, _lblNotes.Top+lblNotes.Height)`

ContainsFocus	Returns `True` if the form or one of its controls has the input focus.
ContextMenuStrip	Gets or sets the form's context menu. If the user right-clicks the form, Visual Basic automatically displays this menu. Note that controls on the form share this menu unless they have context menus of their own. Also note that some controls have their own context menus by default. For example, a `TextBox` displays a Copy, Cut, Paste menu, unless you explicitly set its `ContextMenu` property.
ControlBox	Determines whether the form displays a control box (the Minimize, Maximize, Restore, and Close buttons) on the right side of its caption area.
Controls	Returns a collection containing references to all the controls on the form. This includes only the controls contained directly within the form, and not controls contained within other controls. For example, if a form contains a `GroupBox` that holds several `TextBox` controls, only the `GroupBox` is listed in the form's `Controls` collection. You would need to search the `GroupBox` control's `Controls` collection to find the `TextBox` controls.
Cursor	Determines the cursor displayed by the mouse when it is over the form.
DesktopBounds	Determines the form's location and size as a `Rectangle`.
DesktopLocation	Determines the form's location as a `Point`.

(continued)

Property	Description
DialogResult	Gets or sets the form's dialog box result. If code displays the form modally using its ShowDialog method, the method returns the DialogResult value the form has when it closes. Setting the form's DialogResult value automatically closes the dialog box. Triggering the form's CancelButton automatically sets DialogResult to Cancel and closes the dialog box.
DisplayRectangle	Gets a Rectangle representing the form's display area. This is the area where you should display things on the form. In theory, this might not include all of the client area and could exclude form decorations, although in practice it seems to be the same as ClientRectangle.
Enabled	Determines whether the form will respond to user events. If the form is disabled, all of its controls are disabled and drawn grayed out. The user can still resize the form and its controls'Anchor and Dock properties still rearrange the controls accordingly. The user can also click the form's Minimize, Maximize, Restore, and Close buttons. Note that you cannot display a form modally using ShowDialog if it is disabled.
Font	Determines the form's font.
ForeColor	Determines the foreground color defined for the form.
FormBorderStyle	Determines the form's border style. This can be None, FixedSingle, Fixed3D, FixedDialog, Sizeable, FixedToolWindow, or SizeableToolWindow.
Handle	Returns the form's integer window handle (hWnd). You can pass this value to API functions that work with window handles. Many of the API functions that are necessary in Visual Basic 6 are no longer needed in Visual Basic .NET because their functions have been incorporated into the .NET Framework, but there are still occasions when the form's handle is useful.
HasChildren	Returns True if the form contains child controls.
Height	Determines the form's height.
HelpButton	Determines whether the form displays a Help button with a question mark in the caption area to the left of the close button. The button is only visible if the MaximizeBox and MinimizeBox properties are both False. If the user clicks the Help button, the mouse pointer turns into a question mark arrow. When the user clicks the form, Visual Basic raises the form's HelpRequested event. The form can provide help based on the location of the click and, if it provides help, it should set the event handler's hlpevent.Handled parameter to True.

Property	Description
Icon	Determines the form's icon displayed in the left of the form's caption area, in the taskbar, and by the Task Manager. Typically, this icon should contain images at the sizes 16 × 16 pixels and 32 × 32 pixels, so different displays can use an image with the correct size without resizing.

IsMdiChild	Returns `True` if the form is an MDI child form. To make an MDI application, set `IsMdiContainer = True` for the MDI parent form. Then display a child form, as shown in the following code. In the child form, `IsMdiChild` will return `True`.
	`Dim child_form As New MyChildForm`
	`child_form.MdiParent = MdiParentForm`
	`child_form.Show`

IsMdiContainer	Returns `True` if the form is an MDI parent form. See the description of `IsMdiChild` for more information.
KeyPreview	Determines whether the form receives key events before they are passed to the control with the input focus. If `KeyPreview` is `True`, the form's key event handlers can see the key, take action, and hide the key from the control that would normally receive it, if necessary. For example, the following statement in a `KeyDown` event handler would close the form if the user presses Escape, no matter what control has the focus: `If e.Keys = Keys.Escape Then Me.Close`
Left	Determines the distance between the form's left edge and the left edge of its container.
Location	Determines the coordinates of the form's upper-left corner.
MainMenuStrip	Gets or sets the form's main menu.
MaximizeBox	Determines whether the form displays a Maximize button on the right of its caption area.
MaximumSize	This `Size` object determines the maximum size the form can take.
MdiChildren	Returns an array of forms that are this form's MDI children.
MdiParent	Gets or sets the form's MDI parent form.
MinimizeBox	Determines whether the form displays a Minimize button on the right of its caption area.
MinimumSize	This `Size` object determines the minimum size the form can take.
Modal	Returns `True` if the form is displayed modally.

(continued)

Property	Description
Name	Gets or sets the form's name. Initially, this is the form's class name, but your code can change it to anything, possibly even duplicating another form's name.
Opacity	Determines the form's opacity level between 0.0 (transparent) and 1.0 (opaque).
OwnedForms	Returns an array listing this form's owned forms. To make this form own another form, call this form's AddOwnedForm method, passing it the other form. Owned forms are minimized and restored with the owner and can never lie behind the owner. Typically, they are used for things like Toolboxes and search forms that should remain above the owner form.
Region	Gets or sets the region that defines the area that the form can occupy. Pieces of the form that lie outside of the region are clipped. For more information on regions, see Chapter 31, "Brushes, Pens, and Paths."
Right	Returns the distance between the form's right edge and the left edge of its container.
ShowIcon	Determines whether the form displays an icon in its title bar. If this is False, the system displays a default icon in the taskbar and Task Manager if ShowInTaskbar is True.
ShowInTaskbar	Determines whether the form is displayed in the taskbar and Task Manager.
Size	Gets or sets a Size object representing the form's size, including client and non-client areas.
SizeGripStyle	Determines how the resize grip is shown in the form's lower-right corner. This can be Show, Hide, or Auto.
StartPosition	Determines the form's position when it is first displayed at runtime. This can be Manual (use the size and position specified by the form's properties), CenterScreen (center the form on the screen taking the taskbar into account), WindowsDefaultLocation (use a default position defined by Windows and use the form's specified size), and WindowsDefaultBounds (use Windows default position and size).
Tag	Gets or sets an object associated with the form. You can use this for whatever purpose you see fit.
Text	Determines the text displayed in the form's caption.
Top	Determines the distance between the form's top edge and the top edge of its container.

Property	Description
TopMost	Determines whether the form is a topmost form. A topmost form always sits above all other non-topmost forms, even when the other forms have the input focus.
TransparencyKey	Gets or sets a color that determines the areas of the form that are shown as transparent. This applies to the form itself and any controls it contains. For example, if you set `TransparencyKey` to the default form and control color `Colors.Control`, then the whole form and the bodies of many of its controls are invisible, so you will see text and borders floating above whatever forms lie behind.
UseWaitCursor	Determines whether the form is currently displaying the wait cursor.
Visible	Determines whether the form is visible. If the form is not visible, the user cannot interact with it. If you set `Visible = False`, the form's icon is also removed from the taskbar and Task Manager.
Width	Determines the form's width.
WindowState	Gets or sets the form's state. This can be `Normal`, `Minimized`, or `Maximized`.

Methods

The following table describes some of the most useful `Form` methods.

Method	Description
Activate	Activates the form and gives it the focus. Normally, this pops the form to the top. Note that forcing a form to the top takes control of the desktop away from the user, so you should use this method sparingly. For example, if the user dismisses one form, you might activate the next form in a logical sequence. You should not activate a form to get the user's attention every few minutes.
AddOwnedForm	Adds an owned form to this form. Owned forms are minimized and restored with the owner and can never lie behind the owner. Typically, they are used for things like Toolboxes and search forms that should remain above the owner form.
BringToFront	Brings the form to the top of the z-order. This applies only to other forms in the application. This form will pop to the top of other forms in this program, but not forms in other applications.

(continued)

Method	Description
Close	Closes the form. The program can still prevent the form from closing by catching the `FormClosing` event and setting `e.Cancel` to `True`.
Contains	Returns `True` if a specified control is contained in the form. This includes controls inside `GroupBox` controls, `Panel` controls, and other containers, which are not listed in the form's `Controls` collection.

CreateGraphics	Creates a `Graphics` object that the program can use to draw on the form's surface. For example, the following code draws a circle when the user presses a button:
	
	```Private Sub```
	```Button1_Click(_ ByVal sender As```
	```System.Object, _ ByVal e As```
	```System.EventArgs) _ Handles Button1.Click```
	```Dim gr As Graphics = Me.CreateGraphics()```
	```gr.FillEllipse(Brushes.Orange, 10, 10, 210, 220)```
	```gr.DrawEllipse(Pens.Red, 10, 10, 210, 220)```
	```End Sub```
	
	Note that the `Paint` event handler provides a `Graphics` object in its `e.Graphics` parameter when the form needs to be redrawn. You should use that object rather than a new one returned by `CreateGraphics` while inside a `Paint` event handler. Otherwise, the `Paint` event handler's version will draw over anything that you draw using the object returned by `CreateGraphics`.

DoDragDrop	Begins a drag-and-drop operation. For more information on drag and drop, see Chapter 23, "Drag and Drop, and the Clipboard."
GetChildAtPoint	Returns a reference to the child control at a specific point. Note that the control is the outermost control at that point. For example, if a `GroupBox` contains a `Button` and you call `GetChildAtPoint` for a point above the `Button`, `GetChildAtPoint` returns the `GroupBox`. To find the `Button`, you would need to use the `GroupBox` control's `GetChildAtPoint` method. Note also that the position of the `Button` within the `GroupBox` is relative to the `GroupBox` control's origin, so you would need to subtract the `GroupBox` control's position from the X and Y coordinates of the point relative to the form's origin.
GetNextControl	Returns the next control in the tab order. Parameters indicate the control to start from and whether the search should move forward or backward through the tab order.
Hide	Hides the form. This sets the form's `Visible` property to `False`.

Method	Description
Invalidate	Invalidates some or all of the form's area and generates a `Paint` event.
LayoutMdi	If this form is an MDI parent form, arranges its MDI child forms. This method can take the parameters `ArrangeIcons`, `Cascade`, `TileHorizontal`, and `TileVertical`. Typically, this command is used in a menu titled Window.
PointToClient	Converts a point from screen coordinates into the form's coordinate system.
PointToScreen	Converts a point from the form's coordinate system into screen coordinates.
RectangleToClient	Converts a rectangle from screen coordinates into the form's coordinate system.
RectangleToScreen	Converts a rectangle from the form's coordinate system into screen coordinates.
Refresh	Invalidates the form's client area and forces it to redraw itself and its controls.
RemoveOwnedForm	Removes an owned form from this form's `OwnedForms` collection.
ResetBackColor	Resets the form's `BackColor` property to its default value (`Control`). This change is adopted by any controls on the form that do not have their `BackColor` properties explicitly set.
ResetCursor	Resets the form's `Cursor` property to its default value (`Default`). This change is adopted by any controls on the form that do not have their `Cursor` properties explicitly set.
ResetFont	Resets the form's `Font` property to its default value (8-point regular Microsoft Sans Serif). This change is adopted by any controls on the form that do not have their `Font` properties explicitly set.
ResetForeColor	Resets the form's `ForeColor` property to its default value (`ControlText`). This change is adopted by any controls on the form that do not have their `ForeColor` properties explicitly set.
ResetText	Resets the form's `Text` property to its default value (an empty string).
Scale	Resizes the form and the controls it contains by a scale factor. A second overloaded version scales by different amounts in the X and Y directions. Note that this doesn't change the controls' font sizes, just their dimensions.

(continued)

Method	Description
ScrollControlIntoView	If the form has `AutoScroll` set to `True`, this scrolls to make the indicated control visible.
SelectNextControl	Activates the next control in the tab order. Parameters indicate the control to start at, whether the search should move forward or backward through the tab order, whether the search should include only controls with `TabStop` set to `True` or all controls, whether to include controls nested inside other controls, and whether to wrap around to the first/last control if the search passes the last/first control.
SendToBack	Sends the form to the back of the z-order. This puts the form behind all other forms in all applications, although it *does not* remove the focus *from this form*.
SetAutoScrollMargin	If `AutoScroll` is `True`, this method sets the `AutoScroll` margin. The control will provide scroll bars if necessary to display its controls plus this much margin.
SetBounds	Sets some or all of the form's bounds: X, Y, Width, and Height.
SetDesktopBounds	Sets the form's position and size in desktop coordinates. See `SetDesktopLocation` for more information.
SetDesktopLocation	Sets the form's position in desktop coordinates. Desktop coordinates include only the screen's working area and do not include the area occupied by the taskbar. For example, if the taskbar is attached to the left edge of the screen, the point (0, 0) in *screen coordinates* is *beneath the taskbar*. However, the point (0, 0) in *desktop coordinates* is just to the right of the taskbar. If you set the form's location to (0, 0), part of the form is hidden by the taskbar. If you set the form's desktop location to (0, 0), the form is visible just to the right of the taskbar.
Show	Displays the form. This has the same effect as setting the form's `Visible` property to `True`.
ShowDialog	Displays the form as a modal dialog box. The user cannot interact with other parts of the application before this form closes. Note that some other processes may still be running. For example, a `Timer` control on another form still raises `Tick` events and the program can still respond to them.

Events

The following table describes some of the most useful `Form` events.

Event	Description
Activated	Occurs when the form activates.
Click	Occurs when the user clicks the form. Normally, if the user clicks a control, the control rather than the form receives the `Click` event. If the form's `Capture` property is set to `True`, however, the event goes to the form.
ControlAdded	Occurs when a new control is added to the form.
ControlRemoved	Occurs when a control is removed from the form.
Deactivate	Occurs when the form deactivates.
DoubleClick	Occurs when the user double-clicks the form. Normally, if the user double-clicks a control, the control rather than the form receives the `DoubleClick` event. If the form's `Capture` property is set to `True`, however, the first click goes to the form and the second goes to the control.
DragDrop	Occurs when the user drops data onto the form. The form should process the data in an appropriate way. See Chapter 23, "Drag and Drop, and the Clipboard," for more information on drag-and-drop operations.
DragEnter	Occurs when a drag-and-drop operation moves over the form. The form should indicate what drag operations it will allow and optionally display a visible indication that the drag is over it. Refer to Chapter 23 for more information on drag-and-drop operations.
DragLeave	Occurs when a drag-and-drop operation leaves the form. If the form is displaying a visible indicator of the pending drop, it should remove that indicator now. See Chapter 23 for more information on drag-and-drop operations.
DragOver	Occurs repeatedly as long as a drag-and-drop operation is being performed over the form. The form can use this event to display a more complex visible indicator of the pending drop. For example, it might show where on the form the data will be dropped or it might highlight the area on the form under the mouse. See Chapter 23 for more information on drag-and-drop operations.

(continued)

Event	Description
FormClosed	Occurs when the form is closed. The program can still access the form's properties, methods, and controls, but it is going away. See also the FormClosing event. Note that if the program calls Application.Exit, then the form's FormClosed and FormClosing events do not occur. If you want the program to free resources before the form disappears, it should do so before calling Application.Exit.
FormClosing	Occurs when the form is about to close. The program can cancel the close (for example, if some data has not been saved) by setting the even handler's e.Cancel parameter to True.
GiveFeedback	Occurs when a drag moves over a valid drop target. The source can take action to indicate the type of drop allowed. For example, it might change the drag cursor displayed. See Chapter 23 for more information on drag-and-drop operations.
GotFocus	Occurs when focus moves into the form.
HelpRequested	Occurs when the user requests help from the form, usually by pressing F1 or by pressing a context-sensitive Help button (see the HelpButton property) and then clicking a control on the form. Help requests move up through control containers until a HelpRequested event sets its hlpevent.Handled parameter to True. For example, suppose that the user sets focus to a TextBox contained in the form and presses F1. The TextBox control's HelpRequested event handler executes. If that routine doesn't set hlpevent.Handled to True, the event bubbles up to the TextBox control's container, the form, and its HelpRequested event handler executes.
KeyDown	Occurs when the user presses a keyboard key down.
KeyPress	Occurs when the user presses and releases a keyboard key.
KeyUp	Occurs when the user releases a keyboard key.
Layout	Occurs when the form should reposition its child controls. If your code needs to perform custom repositioning, this is the event where it should do so.
Load	Occurs after the form is loaded but before it is displayed. You can perform one-time initialization tasks here.
LostFocus	Occurs when the focus moves out of the form.

Event	Description
MdiChildActivate	Occurs when an MDI child form contained in this MDI parent form is activated or closed. This activation only applies to the MDI children within this form. For example, setting focus to a different form or application and then back to the MDI child does not raise this event, but switching back and forth between two MDI children does. This event basically occurs when the MDI parent's active MDI child changes. You can catch the event to update the MDI parent's menus or perform other actions when the active child changes.
MouseClick	Occurs when the user clicks the form. You should consider the Click event to be on a logically higher level than MouseClick. For example, the Click event may be triggered by actions other than an actual mouse click (such as the user pressing the Enter key).
MouseDoubleClick	Occurs when the user double-clicks the form. You should consider the DoubleClick event to be on a logically higher level than MouseDoubleClick.
MouseDown	Occurs when the user presses the mouse down over the form. Also see the Capture property.
MouseEnter	Occurs when the mouse first moves so that it is over the form. If the mouse moves over one of the form's controls, that counts as leaving the form, so when it moves back over an unoccupied part of the form, it raises a MouseEnter event.
MouseHover	Occurs when the mouse remains stationary over the form for a while. This event is raised once when the mouse first hovers and then is not raised again until the mouse leaves the form and returns. Note that the mouse moving over one of the form's controls counts as leaving.
MouseLeave	Occurs when the mouse leaves the form. Note that the mouse moving over one of the form's controls counts as leaving.
MouseMove	Occurs when the mouse moves while over the form.
MouseUp	Occurs when the user releases the mouse button. When the user presses a mouse button down, the form will capture subsequent mouse events until the user releases the button. While the capture is in place, the form receives MouseMove events, even if the mouse is moving off of the form. It will receive a MouseHover event, even if the mouse is off of the form, if no such event has been raised since the last time the mouse moved over the form. When the user finally releases the button, the form receives a MouseUp event and then, if the mouse is no longer over the form, a MouseLeave event.

(continued)

Event	Description
MouseWheel	Occurs when the user moves the mouse wheel. The event's `e.X` and `e.Y` parameters give the mouse's current position. The `e.Delta` parameter gives the signed distance by which the wheel has been rotated. Currently, this is defined as 120 *detents* per notch of the wheel. Standards dictate that you should scroll data when the accumulated delta reaches plus or minus 120 detents, and that you should then scroll the data by the number of lines given by `SystemInformation.MouseWheelScrollLines` (currently this is 3). If higher-resolution mouse wheels are added some day, a notch might send a value smaller than 120, and you could update the data more often, but you should keep the same ratio: `SystemInformation.MouseWheelScrollLines` lines per 120 detents.
Move	Occurs when the form is moved.
Paint	Occurs when part of the form must be redrawn. You can use the `e.ClipRectangle` parameter to see what area needs to be drawn. For very complicated drawings, you may be able to draw more quickly if you only draw the area indicated by `e.ClipRectangle`. Note also that Visual Basic clips drawings outside of this rectangle and may clip some areas inside this rectangle that do not need to be redrawn. That makes drawing faster in some cases. The idea here is that part of the form has been covered and exposed so only that part must be redrawn. If you need to adjust the drawing when the form is resized, you should invalidate the form in the `Resize` event handler to force a redraw of the whole form.
QueryContinueDrag	Occurs during a drag-and-drop operation (with this form as the drag source) when the keyboard or mouse button state has changed. The form can decide to continue the drag, cancel the drag, or drop the data immediately. See Chapter 23, "Drag and Drop, and the Clipboard," for more information on drag-and-drop operations.
Resize	Occurs when the form is resized.
ResizeBegin	Occurs when the user starts resizing the form.
ResizeEnd	Occurs when the user has finished resizing the form.
SizeChanged	Occurs when the form is resized.

When focus moves into and out of a form, the sequence of events is: `Activated`, `GotFocus`, `Deactivate`, `Validating`, `Validated`, `LostFocus`.

Typically, when the user clicks the form, the sequence of events is: `MouseDown`, `Click`, `MouseClick`, `MouseUp`.

Typically, when the user double-clicks the form, the sequence of events is: `MouseDown`, `Click`, `MouseClick`, `MouseUp`, `MouseDown`, `DoubleClick`, `MouseDoubleClick`, `MouseUp`.

When code resizes the form, the sequence of events is: `Resize`, `SizeChanged`.

When the user resizes the form, the sequence of events is: `ResizeBegin`, `Resize`, `SizeChanged`, `Resize`, `SizeChanged`, …, `ResizeEnd`.

Property-Changed Events

The `Form` class provides several events that fire when certain form properties change. The name of each of these events has the form *PropertyName*Changed where *PropertyName* is the name of the corresponding property. For example, the `BackColorChanged` event fires when the form's `BackColor` property changes.

The following is a list of these events.

BackColorChanged	MaximumSizeChanged
BackgroundImageChanged	MinimumSizeChanged
ContextMenuChanged	ParentChanged
CursorChanged	SizeChanged
DockChanged	StyleChanged
EnabledChanged	SystemColorsChanged
FontChanged	TextChanged
ForeColorChanged	VisibleChanged
LocationChanged	

The names of most of these controls are self-explanatory, so they are not described further here. The exception is the `SystemColorsChanged` event. This occurs when the system's colors are changed either by the user or programmatically.

For example, suppose that you want the form to draw using its `ForeColor` property and you want that property to match the active title bar text color. Then, you could use the following code to update `ForeColor` when the user changed the system colors:

```
Private Sub Form2_SystemColorsChanged(ByVal sender As Object, _
 ByVal e As System.EventArgs) Handles MyBase.SystemColorsChanged
    Me.ForeColor = SystemColors.ActiveCaptionText
End Sub
```

Note that Visual Basic invalidates the form after raising the `SystemColorsChanged` event, so the form immediately repaints itself using the new settings.

K

Classes and Structures

This appendix provides information about class and structure declarations.

Classes

The syntax for declaring a class is:

```
   [attribute_list] [Partial] [accessibility] [Shadows] [inheritance] _
  Class name[(Of type_list)]
     [Inherits parent_class]
     [Implements interface]
     statements
 End Class
```

The attribute_list can include any number of attribute specifiers separated by commas.

The accessibility clause can take one of the following values: Public, Protected, Friend, Protected Friend, and Private.

The Partial keyword indicates that this is only part of the class declaration and that the program may include other partial declarations for this class.

The Shadows keyword indicates that the class hides the definition of some other entity in the enclosing class's base class.

The inheritance clause can take the value MustInherit or NotInheritable.

The type_list clause defines type parameters for a generic class. For information on generics, see Chapter 29, "Generics."

The Inherits statement tells which class this class inherits from. A class can include at most one Inherits statement and, if present, this must be the first non-comment statement after the Class statement.

The `Implements` statement specifies an interface that the class implements. A class can implement any number of interfaces. You can specify interfaces in separate `Interface` statements or in a single statement separated by commas.

The following example declares a simple `Person` class and an `Employee` class that inherits from it:

```
Public Class Person

End Class

Public Class Employee
    Inherits Person

End Class
```

Structures

The syntax for writing a structure is as follows:

```
[attribute_list] [Partial] [accessibility] [Shadows] _
 Structure name[(Of type_list)]
     [Implements interface]
     statements
End Structure
```

The structure's `attribute_list`, `Partial`, `accessibility`, `Shadows`, `type_list`, and `Implements` statements are the same as those for classes. See the previous section for details.

The differences between a structure and a class are:

❑ Structures cannot use the `MustInherit` or `NotInheritable` keyword (because you cannot inherit from a structure).

❑ Structures cannot use the `Inherits` clause.

❑ Structures must contain at least one instance variable or event, which may be private. Strangely, a property procedure is not enough.

❑ Structures are `value types`, whereas classes are `reference types`. See Chapter 26, "Classes and Structures," for information on the consequences of this difference.

Constructors

A *constructor* is a special subroutine named `New`.

Class constructors can take any number of parameters. If you provide no constructors, Visual Basic allows a default empty constructor that takes no parameters. If you provide *any* constructor, Visual Basic does not provide a default empty constructor. If you want to allow the program to use an empty constructor in that case, you must either provide one or provide a constructor with all optional parameters.

Example program Constructors, which is available for download on the book's web site, defines a Person class that includes both empty and non-empty constructors, and demonstrates different ways of creating and initializing objects.

Structure constructors are very similar to class constructors with two major exceptions. First, you cannot make an empty structure constructor. Second, Visual Basic always provides a default empty constructor, even if you give the structure other constructors.

Events

The syntax for declaring an event is:

```
[accessibility] [Shadows] Event event_name(parameters)
```

The *accessibility* clause can take one of the following values: Public, Protected, Friend, Protected Friend, or Private.

Use the Shadows keyword to indicate that the event shadows an item with the same name in the parent class. Any type of item can shadow any other type of item. For example, an event can shadow a subroutine, function, or variable. This would be rather bizarre and confusing, but it is possible.

The *parameters* clause specifies the parameters that you will pass when raising the event. An event handler catching the event will receive those parameters. Use ByRef parameters to allow the event handler to provide feedback to the code that raises the event.

The syntax for raising an event is as follows:

```
RaiseEvent event_name(parameters)
```

The parameters that you pass to the event handler must match those declared in the Event statement.

The following code shows pieces of a SeatAssignment class that raises a NameChanged event when its Name property changes:

```
Public Class SeatAssignment
    Public Event NameChanged()
    ...
    Private m_Name As String
    Public Property Name() As String
        Get
            Return m_Name
        End Get
        Set(ByVal value As String)
            m_Name = value
            RaiseEvent NameChanged()
        End Set
    End Property
    ...
End Class
```

LINQ

This appendix provides syntax summaries for the most useful LINQ methods. For more detailed information, see Chapter 21, "LINQ."

Basic LINQ Query Syntax

The following text shows the typical syntax for a LINQ query:

```
From ... Where ... Order By ... Select ...
```

The following sections describe these four basic clauses. The sections after those describe some of the other most useful LINQ clauses.

From

The `From` clause tells where the data comes from and defines the name by which it is known within the LINQ query.

```
From var1 In data_source1, var2 In data_source2, ...
```

Examples:

```
Dim query1 = From cust As Customer In all_customers
Dim query2 = From stu In students, score In TestScores
```

Usually, if you select data from multiple sources, you will want to use a `Where` clause to join the results from the sources.

Where

The `Where` clause applies filters to the records selected by the `From` clause. The syntax is:

```
Where conditions
```

Use comparison operators (>, <, =), logical operators (Not, Or, AndAlso), object methods (ToString, Length), and functions to build complex conditions.

For example, the following query selects student and test score data, matching students to their test scores:

```
Dim query = From stu In students, score In TestScores _
    Where stu.StudentId = score.StudentId
```

The following example selects only students with last names starting with S:

```
Dim query = From stu In students, score In TestScores _
    Where stu.StudentId = score.StudentId AndAlso _
        stu.LastName.ToUpper.StartsWith("S")
```

Order By

The Order By clause makes a query sort the selected objects. For example, the following query selects students and their scores and orders the results by student last name followed by first name:

```
Dim query = From stu In students, score In TestScores _
    Where stu.StudentId = score.StudentId AndAlso _
    Order By stu.LastName, stu.FirstName
```

Add the Descending keyword to sort a field in descending order. The following example orders the results by descending TestAverage value:

```
Dim query = From stu In students, score In TestScores _
    Where stu.StudentId = score.StudentId AndAlso _
    Order By stu.TestAverage Descending
```

Select

The Select clause lists the fields that the query should select into its result. If this is omitted, the query selects all of the data in the data sources. You can add an alias to the result.

The following query selects customers'FirstName and LastName values concatenated and gives the result the alias Name. It also selects the customers'AccountBalance value and gives it the alias Balance.

```
Dim query = From cust In all_customers
    Select Name = cust.FirstName & " " & cust.LastName, _
        Balance = Cust.AccountBalance
```

You can pass values form the data sources into functions or constructors. For example, suppose the Person class has a constructor that takes first and last names as parameters. Then the following query returns a group of Person objects created from the selected customer data:

```
Dim query = From cust In all_customers
    Select New Person(cust.FirstName, cust.LastName)
```

Distinct

The `Distinct` keyword makes a query return only one copy of each result. The following example selects the distinct `CustId` values from the `all_orders` list:

```
Dim query = From ord In all_orders _
    Select ord.CustId _
    Distinct
```

Join

The `Join` keyword selects data from multiple data sources matching up corresponding fields. The following pseudo-code shows the `Join` command's syntax:

```
From variable1 In datasource1 _
Join variable2 In datasource2 _
On variable1.field1 Equals variable2.field2
```

For example, the following query selects corresponding objects from the `all_customers` and `all_orders` lists:

```
Dim query = From cust As Customer In all_customers _
    Join ord In all_orders _
    On cust.CustId Equals ord.CustId
```

Note that you can get a similar result by using a `Where` clause. The following query selects a similar set of objects without using the `Join` keyword:

```
Dim query = From cust As Customer In all_customers, ord In all_orders _
    Where cust.CustId = ord.CustId
```

Group By

The `Group By` clause lets a program select data from a flat, relational style format and build a hierarchical arrangement of objects. The following code shows the basic `Group By` syntax:

```
Group items By value Into groupname = Group
```

Here, `items` is a list of items whose properties you want selected into the group, `value` tells LINQ on what field to group objects, and `groupname` gives a name for the group.

The following query selects objects from the `all_orders` list. The `Group By` statement makes the query group orders with the same `CustId` value.

```
Dim query1 = From ord In all_orders _
    Order By ord.CustId, ord.OrderId _
    Group ord By ord.CustId Into CustOrders = Group
```

The result is an `IEnumerable` that contains objects with two fields. The first field is the `CustId` value used to define the groups (the *value* part in the syntax shown earlier). The second field is an `IEnumerable` named `CustOrders` that contains the group of order objects for each `CustId` value.

The following code shows how a program might display the results in a TreeView control:

```
Dim root1 As TreeNode = trvResults.Nodes.Add("Orders grouped by CustId")
For Each obj In query1
    ' Display the customer id.
    Dim cust_node As TreeNode = root1.Nodes.Add("Cust Id: " & obj.CustId)

    ' List this customer's orders.
    For Each ord In obj.CustOrders
        cust_node.Nodes.Add("OrderId: " & ord.OrderId & _
            ", Date: " & ord.OrderDate)
    Next ord
Next obj
```

Another common type of query uses the `Group By` clause to apply some aggregate function to the items selected in a group. The following query selects order and order item objects, grouping each order's items and displaying each order's total price:

```
Dim query1 = From ord In all_orders, ord_item In all_order_items _
    Order By ord.CustId, ord.OrderId _
    Where ord.OrderId = ord_item.OrderId _
    Group ord_item By ord Into _
        TotalPrice = Sum(ord_item.Quantity * ord_item.UnitPrice), _
        OrderItems = Group
```

The following code shows how a program might display the results in a TreeView control named `trvResults`:

```
Dim root1 As TreeNode = trvResults.Nodes.Add("Orders")
For Each obj In query1
    ' Display the customer id.
    Dim cust_node As TreeNode = _
        root1.Nodes.Add("Order Id: " & obj.ord.OrderId & _
            ", Total Price: " & FormatCurrency(obj.TotalPrice))

    ' List this customer's orders.
    For Each ord_item In obj.OrderItems
        cust_node.Nodes.Add(ord_item.Description & ": " & _
            ord_item.Quantity & " @ " & _
            FormatCurrency(ord_item.UnitPrice))
    Next ord_item
Next obj
```

Limiting Results

LINQ includes several keywords for limiting the results returned by a query.

`Take` makes the query keep a specified number of results and discard the rest.

`Take While` makes the query keep selected results as long as some condition holds and then discard the rest.

`Skip` makes the query discard a specified number of results and keep the rest.

`Skip While` makes the query discard selected results as long as some condition holds and then keep the rest.

The following code demonstrates each of these commands:

```
Dim q1 = From cust In all_customers Take 5
Dim q2 = From cust In all_customers Take While cust.FirstName.Contains("n")
Dim q3 = From cust In all_customers Skip 3
Dim q4 = From cust In all_customers Skip While cust.FirstName.Contains("n")
```

Using Query Results

A LINQ query expression returns an `IEnumerable` containing the query's results. A program can iterate through this result and process the items that it contains.

If the selected data has a well-understood data type, such as strings or objects from a known class, you can iterate through the result by using an explicitly typed looping variable. The following example selects customer names and then displays them. The looping variable is explicitly typed as a string.

```
Dim query = From cust In all_customers
    Select Name = cust.FirstName, cust.LastName
For Each cust_name As String In query
    Debug.WriteLine(cust_name)
Next cust_name
```

If the returned data type is less well-understood, you can use a looping variable with inferred data type. The following code selects customers and their orders. It then loops through the results displaying order dates and numbers, together with the names of the customers who placed the orders. The looping variable `obj` has an inferred type.

```
Dim query = From cust In all_customers, ord In all_orders _
    Where cust.CustId = ord.CustId
    Order By ord.OrderDate

For Each obj In query
    Debug.WriteLine(obj.ord.OrderDate & vbTab & obj.ord.OrderId & _
        vbTab & obj.cust.Name)
Next obj
```

LINQ Functions

The following table summarizes LINQ extension methods that are not available from Visual Basic LINQ query syntax.

Function	Purpose
Aggregate	Uses a function specified by the code to calculate a custom aggregate.
DefaultIfEmpty	Returns the query's result or a default value if the query returns an empty result.
Concat	Concatenates two sequences into a new sequence.
Contains	Returns True if the result contains a specific value.
ElementAt	Returns an element at a specific position in the query's result.
ElementAtOrDefault	Returns an element at a specific position in the query's result or a default value if there is no such position.
Empty	Creates an empty `IEnumerable`.
Except	Returns the items in one `IEnumerable` that are not in a second `IEnumerable`.
First	Returns the first item in the query's result.
FirstOrDefault	Returns the first item in the query's result or a default value if the query contains no results.
Intersection	Returns the intersection of two `IEnumerable` objects.
Last	Returns the last item in the query's result.
LastOrDefault	Returns the last item in the query's result or a default value if the query contains no results.
Range	Creates an `IEnumerable` containing a range of integer values.
Repeat	Creates an `IEnumerable` containing a value repeated a specific number of times.
SequenceEqual	Returns True if two sequences are identical.
Single	Returns the single item selected by the query.
SingleOrDefault	Returns the single item selected by the query or a default value if the query contains no results.
Union	Returns the union of two `IEnumerable` objects.

The following table summarizes LINQ data type conversion functions.

Function	Purpose
AsEnumerable	Converts the result to `IEnumerable(Of T)`.
AsQueryable	Converts an `IEnumerable` to `IQueryable`.
OfType	Removes items that cannot be cast into a specific type.
ToArray	Places the results in an array.
ToDictionary	Places the results in a `Dictionary`.
ToList	Converts the result to `List(Of T)`.
ToLookup	Places the results in a `Lookup` (one-to-many dictionary).

LINQ to XML

LINQ provides methods to move data in and out of XML.

LINQ Into XML

To select data into XML objects, use the special characters `<%= ... %>` to indicate a "hole" within the XML literal. Inside the hole, place a LINQ query.

For example, the following code builds an `XElement` object that contains Customer XML elements for objects in the `all_customers` list.

```
Dim x_all As XElement = _
    <AllCustomers>
        <%= From cust In all_customers _
            Select New XElement("Customer", _
            New XAttribute("FirstName", cust.FirstName), _
            New XAttribute("LastName", cust.LastName), _
            New XText(cust.Balance.ToString("0.00"))) _
        %>
    </AllCustomers>
```

LINQ Out Of XML

XML classes such as `XElement` provide LINQ functions that allow you to use LINQ queries on them just as you can select data from `IEnumerable` objects.

The following code extracts the descendants of the x_all XElement object that have negative balances. It selects each XML element's FirstName and LastName attributes, and balance (saved in the element's value).

```
Dim select_all = From cust In x_all.Descendants("Customer") _
    Where CDec(cust.Value) < 0 _
    Select FName = cust.Attribute("FirstName").Value, _
           LName = cust.Attribute("LastName").Value, _
           Balance = cust.Value
```

The following table summarizes LINQ methods supported by XElement.

Function	Returns
Ancestors	IEnumerable containing all ancestors of the element.
AncestorsAndSelf	IEnumerable containing this element followed by all ancestors of the element.
Attribute	The element's attribute with a specific name.
Attributes	IEnumerable containing the element's attributes.
Descendants	IEnumerable containing all descendants of the element.
DescendantsAndSelf	IEnumerable containing this element followed by all descendants of the element.
DescendantNodes	IEnumerable containing all descendant nodes of the element. These include all nodes such as XElement and XText.
DescendantNodesAndSelf	IEnumerable containing this element followed by all descendant nodes of the element. These include all nodes such as XElement and XText.
Element	The first child element with a specific name.
Elements	IEnumerable containing the immediate children of the element.
ElementsAfterSelf	IEnumerable containing the siblings of the element that come after this element.
ElementsBeforeSelf	IEnumerable containing the siblings of the element that come before this element.
Nodes	IEnumerable containing the nodes that are immediate children of the element. These include all nodes such as XElement and XText.
NodesAfterSelf	IEnumerable containing the sibling nodes of the element that come after this element.
NodesBeforeSelf	IEnumerable containing the sibling nodes of the element that come before this element.

The following table gives examples of shorthand expressions for node axes and their functional equivalents.

Shorthand	Meaning	Equivalent
`x...<Customer>`	Descendants named `Customer`.	`x.Descendants("Customer")`
`x.<Child>`	An element named `Child` that is a child of this node.	`x.Attributes("Child")`
`x.@<FirstName>`	The value of the `FirstName` attribute.	`x.Attributes("FirstName").Value`
`x.@FirstName`	The value of the `FirstName` attribute.	`x.Attributes("FirstName").Value`

LINQ to DataSet

LINQ to DataSet refers to methods provided by database objects that support LINQ queries.

The `DataSet` class itself doesn't provide many LINQ features, but the `DataTable` objects that it holds do. The `DataTable` has an `AsEnumerable` method that converts the `DataTable` into an `IEnumerable`, which supports LINQ.

The following list summarizes the key differences between a `DataTable` query and a normal LINQ to Objects query:

❑ The code must use the `DataTable` object's `AsEnumerable` method to make the object queryable.

❑ The code can access the fields in a `DataRow` as in `stu!LastName` or as in `stu.Field(Of String)("LastName")`.

❑ If you want to display the results in a `DataGrid` control, use the query's `ToList` method.

The following example shows a query that selects student data from the `dtStudents DataTable` where the `LastName` comes before D. It selects the students' `FirstName` and `LastName` fields, and displays the result in a `DataGrid` control.

```
Dim before_d = _
    From stu In dtStudents.AsEnumerable() _
    Where stu!LastName < "D" _
    Order By stu.Field(Of String)("LastName") _
    Select First = stu!FirstName, Last = stu!LastName

dgStudentsBeforeD.DataSource = before_d.ToList
```

Method-Based Queries

LINQ query keywords including `Where`, `Order By`, and `Select` actually correspond to methods that take parameters giving the functions they should use to perform their tasks. For example, the `Where` method takes as a parameter the address of a function that returns True if an item should be selected in the query result.

In addition to using standard LINQ query syntax, you can use method-based queries to select data. The following example selects data from `all_customers` where the `OwesMoney` function returns True. The `OrderByAmount` function returns values that can be used to order the results and `SelectFields` returns an object that contains selected fields for a selected item.

```
Dim q2 = all_customers. _
    Where(AddressOf OwesMoney). _
    OrderBy(AddressOf OrderByAmount). _
    Select(AddressOf SelectFields)
```

Instead of passing the address of a function to these methods, you can pass lambda functions. The following code returns a result similar to the previous query but using lambda functions instead of addresses of functions:

```
Dim q3 = all_customers. _
    Where(Function(c As Customer) c.AccountBalance < 0). _
    OrderBy(Of Decimal)(Function(c As Customer) c.AccountBalance). _
    Select(Of CustInfo)( _
        Function(c As Customer, index As Integer) _
            Return New CustInfo() With _
                {.CustName = c.Name, .Balance = c.AccountBalance} _
    )
```

Generics

This appendix summarizes generic classes, extensions, and methods. Example program GenericExamples, which is available for download on the book's web site, demonstrates each of these.

The final section in this appendix describes items that you cannot make generic.

Generic Classes

The syntax for declaring a generic class is as follows:

```
[attribute_list] [Partial] [accessibility] [Shadows] [inheritance] _
 Class name[(Of type_list)]
     [Inherits parent_class]
     [Implements interface]
     statements
End Class
```

All of these parts of the declaration are the same as those used by a normal (non-generic) class. See Chapter 26, "Classes and Structures," and Appendix K for information about non-generic classes.

The key to a generic class is the (Of type_list) clause. Here, type_list is a list of data types separated by commas that form the generic's parameter types. Each type can be optionally followed by the keyword As and a list of constraints that the corresponding type must satisfy. The constraint list can contain any number of interfaces and, at most, one class. It can also contain the New keyword to indicate that the corresponding type must provide an empty constructor. If a constraint list contains more than one item, the list must be surrounded by braces.

The following code defines the generic MyGeneric class. It takes three type parameters. The first is named Type1 within the generic's code and has no constraints. The second type, named Type2, must satisfy the IComparable interface. The third parameter, named Type3, must provide an empty constructor, must satisfy the IDisposable interface, and must inherit directly or indirectly from the Person class.

```
Public Class MyGeneric(Of _
 Type1, _
 Type2 As IComparable, _
 Type3 As {New, IDisposable, Person})
```

Generic Extensions

Due to their somewhat idiosyncratic nature, extension methods add an extra level of complexity to generics.

Normally, a generic class declaration includes the types on which it depends and what code within the class can use those types. For example, consider the `Schedule` class shown in the following code, which represents a schedule of tasks:

```
' Represents a schedule of Tasks.
Public Class Schedule(Of Task)
    Public Sub AddTask(ByVal new_task As Task)
        ...
    End Sub
    ...
End Class
```

The type list for the `Schedule` class includes a type named `Task` and the class's code can use the type `Task`. In this example, the `AddTask` subroutine takes a parameter of this type.

Now suppose you want to add an extension method named `Prioritize` to the generic `Schedule` class. The first parameter in the extension method's declaration indicates the class that the method extends. In this case, that should be `Schedule(Of Task)`, but the extension method itself must also be generic, so it must use a type list just as any other generic method does.

The result is the following declaration. The `Prioritize` method first includes a type list indicating that it generically depends on a type named `T` within this method. It then includes the extension method parameter list. The first parameter (the only parameter in this example) gives the class that the method extends: `Schedule(Of T)`.

```
Public Module ScheduleExtensions
    ' Prioritizes the schedule.
    <Extension()> _
    Sub Prioritize(Of T)(ByVal sched As Schedule(Of T))
        Debug.WriteLine("Prioritizing Schedule of " & GetType(T).Name)
        ...
    End Sub
End Module
```

The following code fragment shows how a program could create a `Schedule` of `Job` objects and then call the `Prioritize` extension:

```
Dim sched As New Schedule(Of Job)
...
sched.Prioritize()
```

1078

Generic extension methods can become extremely complicated. For more detailed information, see the Microsoft Visual Basic Team blog post at `blogs.msdn.com/vbteam/archive/2007/02/15/ extension-methods-and-generics-extension-methods-part-5.aspx`. For more information on extension methods, see Chapter 17, "Subroutines and Functions."

Generic Methods

In addition to generic classes and extension methods, you can create generic methods. This is simply a method that takes generic parameters. The following code shows a `Switcher` class that has a shared generic `Switch` method:

```
Public Class Switcher
    Public Shared Sub Switch(Of T)(ByRef thing1 As T, ByRef thing2 As T)
        Dim temp As T = thing1
        thing1 = thing2
        thing2 = temp
    End Sub
End Class
```

The `Switcher` class is not generic but it contains a generic method. Both generic and non-generic classes can define both generic and non-generic methods.

Prohibited Generics

Unfortunately (or perhaps fortunately because this could be extremely complicated and confusing) you cannot make generic lambda functions. The following code shows a lambda function that is allowed and a generic lambda function that is not allowed:

```
' Allowed.
Dim max_index1 = Function(lst As List(Of Integer)) lst.Count - 1

' Prohibited.
Dim max_index2 = Function(Of T)(lst As List(Of T)) lst.Count - 1
```

You also cannot make generic properties, operators, events, or constructors.

N

Graphics

This appendix provides information about graphics classes.

Graphics Namespaces

This section describes the most important graphics namespaces and their most useful classes, structures, and enumerated values.

System.Drawing

This namespace defines the most important graphics objects such as `Graphics`, `Pen`, `Brush`, `Font`, `FontFamily`, `Bitmap`, `Icon`, and `Image`. The following table describes the namespace's most useful classes and structures.

Classes and Structures	Purpose
`Bitmap`	Represents a bitmap image defined by pixel data.
`Brush`	Represents area fill characteristics.
`Color`	Defines a color's red, green, blue, and alpha components as values between 0 and 255. Alpha = 0 means the object is transparent; alpha = 255 means it is opaque.
`Font`	Represents a particular font (name, size, and style, such as italic or bold).
`FontFamily`	Represents a group of typefaces with similar characteristics.

(continued)

Classes and Structures	Purpose
Graphics	Represents a drawing surface. Provides methods to draw on the surface.
Icon	Represents a Windows icon.
Image	Abstract base class from which Bitmap, Icon, and Metafile inherit.
Metafile	Represents a graphic metafile.
Pen	Represents line drawing characteristics (such as color, thickness, and dash style).
Pens	Provides a large number of predefined pens with different colors and width 1.
Point	Defines a point's X and Y coordinates.
PointF	Defines a point's X and Y coordinates with floating-point values.
Rectangle	Defines a rectangle using a Point and a Size.
RectangleF	Defines a rectangle using a PointF and a SizeF (with floating-point values).
Region	Defines a shape created from rectangles and paths for filling, hit testing, or clipping.
Size	Defines a width and height.
SizeF	Defines a width and height with floating-point values.
SolidBrush	Represents a solid brush.

System.Drawing.Drawing2D

This namespace contains classes for more advanced two-dimensional drawing. Some of these classes refine more basic drawing classes. For example, the HatchBrush class represents a specialized type of Brush that fills with a hatch pattern. Other classes define values for use by other graphics classes. For example, the Blend class defines color-blending parameters for a LinearGradientBrush.

The following table describes this namespace's most useful classes and enumerations.

Classes and Enumerations	Purpose
Blend	Defines blend characteristics for a LinearGradientBrush.
ColorBlend	Defines blend characteristics for a PathGradientBrush.
DashCap	Enumeration that determines how the ends of a dash in a dashed line are drawn.

Classes and Enumerations	Purpose
DashStyle	Enumeration that determines how a dashed line is drawn.
GraphicsPath	Represents a series of connected lines and curves for drawing, filling, or clipping.
HatchBrush	Defines a Brush that fills an area with a hatch pattern.
HatchStyle	Enumeration that determines the hatch style used by a HatchBrush object.
LinearGradientBrush	Defines a Brush that fills an area with a linear color gradient.
LineCap	Enumeration that determines how the ends of a line are drawn.
LineJoin	Enumeration that determines how lines are joined by a GDI method that draws connected lines.
Matrix	Represents a transformation matrix.
PathGradientBrush	Defines a Brush that fills an area with a color gradient that follows a path.

System.Drawing.Imaging

This namespace contains objects that deal with more advanced bitmap graphics. It includes classes that define image file formats such as GIF and JPG, classes that manage color palettes, and classes that define metafiles. The following table describes this namespace's most useful classes.

Class	Purpose
ColorMap	Defines a mapping from old color values to new ones.
ColorPalette	Represents a palette of color values.
ImageFormat	Specifies an image's format (bmp, emf, gif, jpeg, and so on).
Metafile	Represents a graphic metafile that contains drawing instructions.
MetafileHeader	Defines the attributes of a Metafile object.
MetaHeader	Contains information about a Windows metafile (WMF).
WmfPlaceableFileHeader	Specifies how a metafile should be mapped to an output device.
System.Drawing.Text	This namespace contains only three classes for working with installed fonts. The following table describes these classes.

(continued)

Class	Purpose
FontCollection	Base class for the derived InstalledFontCollection and PrivateFontCollection classes.
InstalledFontCollection	Provides a list of the system's installed fonts.
PrivateFontCollection	Provides a list of the application's privately installed fonts.

System.Drawing.Printing

This namespace contains objects for printing and managing the printer's characteristics. The following table describes the most useful of these classes.

Class	Purpose
PageSettings	Defines the page settings for either an entire PrintDocument or for a particular page. This object has properties that are Margins, PaperSize, PaperSource, PrinterResolution, and PrinterSettings objects.
Margins	Defines the margins for the printed page.
PaperSize	Defines the paper's size.
PaperSource	Defines the printer's paper source.
PrinterResolution	Defines the printer's resolution.
PrinterSettings	Defines the printer's settings.

Drawing Classes

The following sections describe the most useful properties and methods provided by key drawing classes.

Graphics

The Graphics object represents a drawing surface. It provides many methods for drawing shapes, filling areas, and determining the appearance of drawing results. All of these methods except DrawString take a Pen object as a parameter to determine the lines' color, thickness, dash style, and other properties. DrawString takes a Brush object instead of a Pen object as a parameter.

The following table lists the `Graphics` object's drawing methods.

Drawing Method	Purpose
DrawArc	Draws an arc of an ellipse.
DrawBezier	Draws a Bézier curve.
DrawBeziers	Draws a series of connected Bézier curves.
DrawClosedCurve	Draws a closed curve that connects a series of points, joining the final point to the first point.
DrawCurve	Draws a smooth curve that connects a series of points.
DrawEllipse	Draws an ellipse.
DrawIcon	Draws an `Icon` onto the `Graphics` object's drawing surface.
DrawIconUnstretched	Draws an `Icon` object onto the `Graphics` object's drawing surface without scaling.
DrawImage	Draws an `Image` object onto the `Graphics` object's drawing surface.
DrawImageUnscaled	Draws an `Image` object onto the drawing surface without scaling.
DrawLine	Draws a line.
DrawLines	Draws a series of connected lines.
DrawPath	Draws a `GraphicsPath` object.
DrawPie	Draws a pie slice taken from an ellipse.
DrawPolygon	Draws a polygon.
DrawRectangle	Draws a rectangle.
DrawRectangles	Draws a series of rectangles.
DrawString	Draws text on the drawing surface.

The following table lists the `Graphics` object's area filling methods. These methods take `Brush` objects as parameters to determine the filled shape's color, hatch pattern, gradient colors, and other fill characteristics.

Filling Method	Purpose
FillClosedCurve	Fills a smooth curve that connects a series of points.
FillEllipse	Fills an ellipse.
FillPath	Fills a `GraphicsPath` object.
FillPie	Fills a pie slice taken from an ellipse.

(continued)

Filling Method	Purpose
FillPolygon	Fills a polygon.
FillRectangle	Fills a rectangle.
FillRectangles	Fills a series of rectangles.
FillRegion	Fills a `Region` object.

The following table lists other useful `Graphics` object properties and methods.

Properties and Methods	Purpose
AddMetafileComment	Adds a comment to a metafile.
Clear	Clears the `Graphics` object and fills it with a specific color.
Clip	Determines the `Region` object used to clip drawing on the `Graphics` surface.
Dispose	Releases the resources held by the `Graphics` object.
DpiX	Returns the horizontal number of dots per inch (DPI) for this object's surface.
DpiY	Returns the vertical number of dots per inch (DPI) for this object's surface.
ExcludeClip	Updates the `Graphics` object's clipping region to exclude the area defined by a `Region` or `Rectangle`.
FromHdc	Creates a new `Graphics` object from a device context handle (hDC).
FromHwnd	Creates a new `Graphics` object from a window handle (hWnd).
FromImage	Creates a new `Graphics` object from an `Image` object.
InterpolationMode	Controls anti-aliasing when drawing images.
IntersectClip	Updates the `Graphics` object's clipping region to be the intersection of the current clipping region and the area defined by a `Region` or `Rectangle`.
IsVisible	Returns `True` if a specified point is within the `Graphics` object's visible clipping region.
MeasureCharacterRanges	Returns an array of `Region` objects that show where each character in a string will be drawn.

Properties and Methods	Purpose
MeasureString	Returns a `SizeF` structure that gives the size of a string drawn on the `Graphics` object with a particular font.
MultiplyTransform	Multiplies the `Graphics` object's current transformation matrix by another transformation matrix.
PageScale	Determines the amount by which drawing commands are scaled.
PageUnit	Determines the units of measurement: `Display` (depends on the device, typically pixel for monitors and 1/100 inch for printers), `Document` (1/300 inch), `Inch`, `Millimeter`, `Pixel`, or `Point` (1/72 inch).
RenderingOrigin	Determines the point used as a reference when hatching.
ResetClip	Resets the object's clipping region so that the drawing is not clipped.
ResetTransformation	Resets the object's transformation matrix to the identity matrix.
Restore	Restores the `Graphics` object to a state saved by the `Save` method.
RotateTransform	Adds a rotation to the object's current transformation.
Save	Saves the object's current state.
ScaleTransform	Adds a scaling transformation to the `Graphics` object's current transformation.
SetClip	Sets or merges the `Graphics` object's clipping area to another `Graphics` object, a `GraphicsPath` object, or a `Rectangle`.
SmoothingMode	Controls anti-aliasing when drawing lines, curves, or filled areas.
TextRenderingHint	Controls anti-aliasing and hinting when drawing text.
Transform	Gets or sets the `Graphics` object's transformation matrix.
TransformPoints	Applies the object's current transformation to an array of points.
TranslateTransform	Adds a translation transformation to the `Graphics` object's current transformation.

Pen

The Pen object determines the appearance of drawn lines. It determines such properties as a line's width, color, and dash style. The following table lists the Pen object's most useful properties and methods.

Properties and Methods	Purpose
Alignment	Determines whether the line is drawn inside or centered on the theoretical perfectly thin line specified by the drawing routine.
Brush	Determines the Brush used to fill lines.
Color	Determines the lines' color.
CompoundArray	Lets you draw lines that are striped lengthwise.
CustomEndCap	Determines the line's end cap.
CustomStartCap	Determines the line's start cap.
DashCap	Determines the cap drawn at the ends of dashes.
DashOffset	Determines the distance from the start of the line to the start of the first dash.
DashPattern	An array of Singles that specifies a custom dash pattern.
DashStyle	Determines the line's dash style.
EndCap	Determines the cap used at the end of the line.
LineJoin	Determines how lines are joined by a GDI method that draws connected lines.
MultiplyTransform	Multiplies the Pen object's current transformation by another transformation matrix.
ResetTransform	Resets the Pen object's transformation to the identity transformation.
RotateTransform	Adds a rotation transformation to the Pen object's current transformation.
ScaleTransform	Adds a scaling transformation to the Pen object's current transformation.
SetLineCap	This method takes parameters that let you specify the Pen object's StartCap, EndCap, and LineJoin properties at the same time.
StartCap	Determines the cap used at the start of the line.
Transform	Determines the transformation applied to the initially circular "pen tip" used to draw lines.
Width	The width of the pen.

Brushes

The `Brush` class is an abstract class, so you cannot make instances of it. Instead, you must make instances of one of its derived classes: `SolidBrush`, `TextureBrush`, `HatchBrush`, `LinearGradientBrush`, or `PathGradientBrush`. The following table briefly describes these classes.

Class	Purpose
SolidBrush	Fills areas with a single solid color.
TextureBrush	Fills areas with a repeating image.
HatchBrush	Fills areas with a repeating hatch pattern.
LinearGradientBrush	Fills areas with a linear gradient of two or more colors.
PathGradientBrush	Fills areas with a color gradient that follows a path.

GraphicsPath

The `GraphicsPath` object represents a path defined by lines, curves, text, and other drawing commands. You can use `Graphics` object methods to fill and draw a `GraphicsPath`, and you can use a `GraphicsPath` to define a clipping region. The following table lists the `GraphicsPath` object's most useful properties and methods.

Properties and Methods	Purpose
CloseAllFigures	Closes all open figures by connecting their last points with their first points and then starts a new figure.
CloseFigure	Closes the current figure by connecting its last point with its first point and then starts a new figure.
FillMode	Determines how the path handles overlaps when you fill it. This property can take the values `Alternate` and `Winding`.
Flatten	Converts any curves in the path into a sequence of lines.
GetBounds	Returns a `RectangleF` structure representing the path's bounding box.
GetLastPoint	Returns the last `PointF` structure in the `PathPoints` array.
IsOutlineVisible	Returns `True` if the indicated point lies beneath the path's outline.
IsVisible	Returns `True` if the indicated point lies in the path's interior.

(continued)

Properties and Methods	Purpose
PathData	Returns a `PathData` object that encapsulates the path's graphical data.
PathPoints	Returns an array of `PointF` structures giving the points in the path.
PathTypes	Returns an array of Bytes representing the types of the points in the path.
PointCount	Returns the number of points in the path.
Reset	Clears the path data and resets `FillMode` to `Alternate`.
Reverse	Reverses the order of the path's data.
StartFigure	Starts a new figure, so future data is added to the new figure.
Transform	Applies a transformation matrix to the path.
Warp	Applies a warping transformation defined by mapping a parallelogram onto a rectangle to the path.
Widen	Enlarges the curves in the path to enclose a line drawn by a specific pen.

StringFormat

The `StringFormat` object determines how text is formatted. It enables you to draw text that is centered vertically or horizontally, aligned on the left or right, and wrapped or truncated. The following table lists the `StringFormat` object's most useful properties and methods.

Properties and Methods	Purpose
Alignment	Determines the text's horizontal alignment. This can be `Near` (left), `Center` (middle), or `Far` (right).
FormatFlags	Gets or sets flags that modify the `StringFormat` object's behavior.
GetTabStops	Returns an array of Singles giving the positions of tab stops.
HotkeyPrefix	Determines how the hotkey prefix character is displayed. This can be `Show`, `Hide`, or `None`.
LineAlignment	Determines the text's vertical alignment. This can be `Near` (top), `Center` (middle), or `Far` (bottom).

Properties and Methods	Purpose
SetMeasureableCharacterRanges	Sets an array of CharacterRange structures representing ranges of characters that will later be measured by the Graphics object's MeasureCharacterRanges method.
SetTabStops	Sets an array of Singles giving the positions of tab stops.
Trimming	Determines how the text is trimmed if it cannot fit within the layout rectangle.

Image

The Image class represents the underlying physical drawing surface hidden below the logical layer created by the Graphics class. Image is an abstract class, so you cannot directly create instances of it. Instead, you must create instances of its child classes Bitmap and Metafile.

The following table describes the Image class's most useful properties and methods, which are inherited by the Bitmap and Metafile classes.

Properties and Methods	Purpose
Dispose	Frees the resources associated with this image.
Flags	Returns attribute flags for the image.
FromFile	Loads an image from a file.
FromHbitmap	Loads a Bitmap image from a Windows bitmap handle.
FromStream	Loads an image from a data stream.
GetBounds	Returns a RectangleF structure representing the rectangle's bounds.
GetPixelFormatSize	Returns the color resolution (bits per pixel) for a specified PixelFormat.
GetThumbnailImage	Returns a thumbnail representation of the image.
Height	Returns the image's height.
HorizontalResolution	Returns the horizontal resolution of the image in pixels per inch.
IsAlphaPixelFormat	Returns True if the specified PixelFormat contains alpha information.

(continued)

Properties and Methods	Purpose
Palette	Determines the `ColorPalette` object used by the image.
PhysicalDimension	Returns a `SizeF` structure giving the image's dimensions in pixels for `Bitmaps` and 0.01 millimeters for `Metafile` classes.
PixelFormat	Returns the image's pixel format.
RawFormat	Returns an `ImageFormat` object representing the image's raw format.
RotateFlip	Rotates, flips, or rotates and flips the image.
Save	Saves the image in a file or stream with a given data format.
Size	Returns a `Size` structure containing the image's width and height in pixels.
VerticalResolution	Returns the vertical resolution of the image in pixels per inch.
Width	Returns the image's width.

Bitmap

The `Bitmap` class represents an image defined by pixel data. It inherits the `Image` class's properties and methods described in the previous section. The following table describes some of the most useful new methods added by the `Bitmap` class.

Method	Purpose
FromHicon	Loads a `Bitmap` image from a Windows icon handle.
FromResource	Loads a `Bitmap` image from a Windows resource.
GetPixel	Returns a `Color` representing a specified pixel.
LockBits	Locks the `Bitmap` image's data in memory, so it cannot move until the program calls `UnlockBits`.
MakeTransparent	Makes all pixels with a specified color transparent by setting the alpha component of those pixels to 0.
SetPixel	Sets a specified pixel's `Color` value.
SetResolution	Sets the `Bitmap` image's horizontal and vertical resolution in DPI.
UnlockBits	Unlocks the `Bitmap` image's data in memory so that the system can relocate it, if necessary.

Metafile

The `Metafile` class represents an image defined by metafile records. It inherits the `Image` class's properties and methods described in the section "Image" earlier in this appendix. The following table describes some of the most useful new methods added by the `Metafile` class.

Method	Purpose
GetMetafileHeader	Returns the `MetafileHeader` object associated with this `Metafile`.
PlayRecord	Plays a metafile record.

Useful Exception Classes

When your program throws an exception, it's easy enough to use a `Try Catch` block to catch the exception and examine it to determine its class. When you want to throw your own exception, however, you must know what exception classes are available so that you can pick the right one.

For more information on error handling, see Chapter 19, "Error Handling," and Appendix F.

Standard Exception Classes

The following table lists some of the most useful exception classes in Visual Basic .NET. You can raise one of these when you need to throw an error.

Class	Purpose
`AmbiguousMatchException`	The program could not figure out which overloaded object method to use.
`ApplicationException`	This is the ancestor class for all nonfatal application errors. When you build custom exception classes, you should inherit from this class, or from one of its descendants.
`ArgumentException`	An argument is invalid.
`ArgumentNullException`	An argument that cannot be `Nothing` has value `Nothing`.
`ArgumentOutOfRangeException`	An argument is out of its allowed range.
`ArithmeticException`	An arithmetic, casting, or conversion operation has occurred.
`ArrayTypeMismatchException`	The program tried to store the wrong type of item in an array.

(continued)

Class	Purpose
ConfigurationException	A configuration setting is invalid.
ConstraintException	A data operation violates a database constraint.
DataException	The ancestor class for ADO.NET exception classes.
DirectoryNotFoundException	A needed directory is missing.
DivideByZeroException	The program tried to divide by zero.
DuplicateNameException	An ADO.NET operation encountered a duplicate name (for example, it tried to create a second table with the same name).
EvaluateException	Occurs when a DataColumn's Expression property cannot be evaluated.
FieldAccessException	The program tried to access a class property improperly.
FormatException	An argument's format doesn't match its required format.
IndexOutofRangeException	The program tried to access an item outside of the bounds of an array or other container.
InvalidCastException	The program tried to make an invalid conversion. For example, Integer.Parse("oops").
InvalidOperationException	The operation is not currently allowed.
IOException	The ancestor class for input/output (I/O) exception classes. A generic I/O error occurred.
EndOfStreamException	A stream reached its end.
FileLoadException	Error loading a file.
FileNotFoundException	Error finding a file.
InternalBufferOverflowException	An internal buffer overflowed.
MemberAccessException	The program tried to access a class member improperly.
MethodAccessException	The program tried to access a class method improperly.
MissingFieldException	The program tried to access a class property that doesn't exist.
MissingMemberException	The program tried to access a class member that doesn't exist.

Class	Purpose
MissingMethodException	The program tried to access a class method that doesn't exist.
NotFiniteNumberException	A floating-point number is PositiveInfinity, NegativeInfinity, or NaN (Not a Number). You can get these values from the floating-point classes (as in Single.Nan or Double.PositiveInfinity).
NotImplementedException	The requested operation is not implemented.
NotSupportedException	The requested operation is not supported. For example, the program might be asking a routine to modify data that was opened as read-only.
NullReferenceException	The program tried to use an object reference that is Nothing.
OutOfMemoryException	There isn't enough memory. Note that sometimes a program cannot recover from an OutOfMemoryException because it doesn't have enough memory to do anything useful. This exception is most useful if you can predict beforehand that you will run out of memory before you actually use up all of the memory and crash the program. For example, if the user wants to generate a really huge data set, you may be able to predict how much memory the program will need, see if it is available, and throw this error without actually allocating the data set.
OverflowException	An arithmetic, casting, or conversion operation created an overflow. For example, the program tried to assign a large Integer value to a Byte variable.
PolicyException	Policy prevents the code from running.
RankException	A routine is trying to use an array with the wrong number of dimensions.
ReadOnlyException	The program tried to modify read-only data.
SecurityException	A security violation occurred.
SyntaxErrorException	A DataColumn's Expression property contains invalid syntax.
UnauthorizedAccessException	The system is denying access because of an I/O or security error.

Use the `Throw` statement to raise an exception. The following code throws a `DivideByZeroException`. It passes the exception class's constructor a message describing the exception. In this case, the divide by zero exception occurred because the application did not have any employees defined. Notice that the message explains the reason for the exception, not the mere fact that a division by zero occurred.

```
Throw New DivideByZeroException("No employees are defined.")
```

Custom Exception Classes

To define a custom exception class, make a class that inherits from `Exception`. To give developers who use the class the most flexibility, provide four constructors that delegate their work to the `Exception` class's corresponding constructors.

The following code shows the `InvalidWorkAssignmentException` class. The empty constructor passes the `Exception` class's constructor a default error message. The other constructors simply pass their arguments to the `Exception` class's other constructors.

```
Public Class InvalidWorkAssignmentException
    Inherits Exception

    Public Sub New()
        MyBase.New("This work assignment is invalid")
    End Sub

    Public Sub New(ByVal msg As String)
        MyBase.New(msg)
    End Sub

    Public Sub New(ByVal msg As String, ByVal inner_exception As Exception)
        MyBase.New(msg, inner_exception)
    End Sub

    Public Sub New(ByVal info As SerializationInfo, _
     ByVal context As StreamingContext)
        MyBase.New(info, context)
    End Sub
End Class
```

For more information on custom exception classes, see Chapter 19, "Error Handling," and the online documentation for topics such as "Designing Custom Exceptions" (`msdn2.microsoft.com/library/ms229064.aspx`) and "Design Guidelines for Exceptions" (`msdn2.microsoft.com/library/ms229014.aspx`), or search the Web for articles such as "Custom Exceptions in VB 2005" by Josh Fitzgerald (`www.developer.com/net/vb/article.php/3590931`).

Date and Time Format Specifiers

A program uses date and time format specifiers to determine how dates and times are represented as strings. For example, the `Date` object's `ToString` method returns a string representing a date and time. An optional parameter to this method tells the object whether to format itself as in 2/20/2004, 02.20.04 A.D or Friday, February 20, 2004 2:37:18 PM.

Visual Basic provides two kinds of specifiers that you can use to determine a date and time value's format: standard format specifiers and custom format specifiers.

Standard Format Specifiers

A standard format specifier is a single character that you use alone to indicate a standardized format. For example, the format string `d` indicates a short date format (as in 2/20/2004).

The following table lists standard format specifiers that you can use to format date and time strings. The results depend on the regional settings on the computer. The examples shown in this table are for a typical computer in the United States.

Specifier	Meaning	Example
d	Short date.	2/20/2004
D	Long date.	Friday, February 20, 2004
t	Short time.	2:37 PM
T	Long time.	2:37:18 PM
f	Full date/time with short time.	Friday, February 20, 2004 2:37 PM
F	Full date/time with long time.	Friday, February 20, 2004 2:37:18 PM

(continued)

Specifier	Meaning	Example
g	General date/time with short time.	2/20/2004 2:37 PM
G	General date/time with long time.	2/20/2004 2:37:18 PM
m or M	Month and date.	February 20
r or R	RFC1123 pattern. Formatting does not convert the time to Greenwich Mean Time (GMT), so you should convert local times to GMT before formatting.	Fri, 20 Feb 2004 14:37:18 GMT
s	Sortable ISO 8601 date/time.	2004-02-20T14:37:18
u	Universal sortable date/time. Formatting does not convert the time to universal time, so you should convert local times to universal time before formatting.	2004-02-20 14:37:18Z
U	Universal full date/time. This is the full universal time, not the local time.	Friday, February 20, 2004 9:37:18 PM
y or Y	Year and month.	February, 2004

Custom Format Specifiers

Custom format specifiers describe pieces of a date or time that you can use to build your own customized formats. For example, the specifier ddd indicates the abbreviated day of the week, as in Wed.

The following table lists characters that you can use to build custom formats for date and time strings.

Specifier	Meaning	Example
d	Date of the month.	3
dd	Date of the month with two digits.	03
ddd	Abbreviated day of the week.	Wed
dddd	Full day of the week.	Wednesday
f	Fractions of seconds, one digit. Add additional f's for up to seven digits (fffffff).	8
g	Era.	A.D.
h	Hour, 12-hour clock with one digit, if possible.	1
hh	Hour, 12-hour clock with two digits.	01

Specifier	Meaning	Example
H	Hour, 24-hour clock with one digit, if possible.	13
HH	Hour, 24-hour clock with two digits.	07
m	Minutes with one digit, if possible.	9
mm	Minutes with two digits.	09
M	Month number (1–12) with one digit, if possible.	2
MM	Month number (1–12) with two digits.	02
MMM	Month abbreviation.	Feb
MMMM	Full month name.	February
s	Seconds with one digit, if possible.	3
ss	Seconds with two digits.	03
t	AM/PM designator with one character.	A
tt	AM/PM designator with two characters.	AM
y	Year with up to two digits, not zero-padded.	4
yy	Year with two digits.	04
yyyy	Year with four digits.	2004
z	Time zone offset (hours from GMT in the range −12 to +13).	−7
zz	Time zone offset with two digits.	−07
zzz	Time zone offset with two digits of hours and minutes.	−07:00
:	Time separator.	
/	Date separator.	
"..."	Quoted string. Displays the enclosed characters without trying to interpret them.	
'...'	Quoted string. Displays the enclosed characters without trying to interpret them.	
%	Displays the following character as a custom specifier. (See the following discussion.)	
\	Displays the next character without trying to interpret it.	

Some of the custom specifier characters in this table are the same as characters used by standard specifiers. For example, if you use the character d alone, Visual Basic interprets it as the standard specifier for a short date. If you use the character d in a custom specifier, Visual Basic interprets it as the date of the month.

If you want to use a custom specifier alone, precede it with the % character. The following shows two queries and their results executed in the Immediate window:

```
?Now.ToString("d")
"2/20/2004"
?Now.ToString("%d")
"20"
```

Custom specifiers are somewhat sensitive to the computer's regional settings. For example, they at least know the local names and abbreviations of the months and days of the week.

The standard specifiers have even more information about the local culture, however. For example, the date specifiers know whether the local culture places months before or after days. The d specifier gives the result 2/20/2004 for the en-US culture (English, United States), and it returns 20/02/2004 for the culture en-NZ (English, New Zealand).

To simplify cultural differences, you should use the standard specifiers whenever they will satisfy your needs rather than building your own custom format specifiers. For example, use d instead of M/d/yyyy.

Other Format Specifiers

A program uses format specifiers to determine how objects are represented as strings. For example, by using different format specifiers, you can make an integer's ToString method return a value as −12345, −12,345, (12,345), or 012,345−.

Visual Basic provides standard format specifiers in addition to custom specifiers. The standard specifiers make it easy to display values in often-used formats (such as currency or scientific notation). Custom specifiers provide more control over how results are composed.

Standard Numeric Format Specifiers

Standard numeric format specifiers enable you to easily display commonly used numeric formats. The following table lists the standard numeric specifiers.

Specifier	Meaning
C or c	Currency. The exact format depends on the computer's internationalization settings. If a precision specifier follows the C, it indicates the number of digits that should follow the decimal point. On a standard system in the United States, the value –1234.5678 with the specifier C produces ($1,234.57).
D or d	Decimal. This specifier works only with integer types. It simply displays the number's digits. If a precision specifier follows the D, it indicates the number of digits the result should have, padding on the left with zeros, if necessary. If the value is negative, the result has a minus sign on the left. The value –1234 with the specifier D6 produces –001234.
E or e	Scientific notation. The result always has exactly one digit to the left of the decimal point, followed by more digits, an E or e, a plus or minus sign, and at least three digits of exponent (padded on the left with zeros, if necessary). If a precision specifier follows the E, it indicates the number of digits the result should have after the decimal point. The value –1234.5678 with the specifier e2 produces –1.23e+003.

Specifier	Meaning
F or f	Fixed point. The result contains a minus sign if the value is negative, digits, a decimal point, and then more digits. If a precision specifier follows the F, it indicates the number of digits the result should have after the decimal point. The value –1234.5678 with the specifier f3 produces –1234.568.
G or g	General. Either scientific or fixed point notation depending on which is more compact.
N or n	Number. The result has a minus sign if the value is negative, digits with thousands separators, a decimal point, and more digits. If a precision specifier follows the N, it indicates the number of digits the result should have after the decimal point. The value –1234.5678 with the specifier N3 produces –1,234.568.
P or p	Percentage. The value is multiplied by 100 and then formatted according to the computer's settings. If a precision specifier follows the P, it indicates the number of digits that should follow the decimal point. On a typical computer, the value 1.2345678 with the specifier P produces 123.46%.
R or r	Round trip. The value is formatted in such a way that the result can be converted back into its original value. Depending on the data type and value, this may require 17 digits of precision. The value 1/7 with the specifier R produces 0.14285714285714285.
X or x	Hexadecimal. This works for integer types only. The value is converted into hexadecimal. The case of the X or x determines whether hexadecimal digits above 9 are written in uppercase or lowercase. If a precision specifier follows the X, it indicates the number of digits the result should have, padding on the left with zeros, if necessary. The value 183 with the specifier x4 produces 00b7.

Custom Numeric Format Specifiers

Custom numeric format specifiers describe how a number should be formatted. The following table lists characters that you can use to build custom numeric formats.

Specifier	Meaning
0	A digit or zero. If the number doesn't have a digit in this position, the specifier adds a 0. The value 12 with the specifier 000.00 produces 012.00.
#	A digit. If the number doesn't have a digit in this position, nothing is printed.
,	If used between two digits (either 0 or #), adds thousands separators to the result. The value 1234567 with the specifier #,# produces 1,234,567.
,	If used immediately to the left of the decimal point, the number is divided by 1000 for each comma. The value 1234567 with the specifier #,#,. produces 1,234.

Specifier	Meaning
`%`	Multiplies the number by 100 and inserts the % symbol where it appears in the specifier. The value 0.123 with the specifier `.00%` produces 12.30%.
`E0` or `e0`	Displays the number in scientific notation inserting an `E` or `e` between the number and its exponent. Use `#` and `0` to format the number before the exponent. The number of `0`s after the `E` determines the number of digits in the exponent. If you place a + sign between the `E` and `0`, the result's exponent includes a + or – sign. If you omit the + sign, the exponent only includes a sign if it is negative. The value 1234.5678 with the specifier `00.000E+000` produces 12.346E+002.
`\`	Displays the following character literally without interpreting it. Use `\\` to display the `\` character. The value `12` with the specifier `#\%` produces 12%, and the same value with the specifier `#%` produces 1200%.
`'ABC'` or `"ABC"`	Displays the characters in the quotes literally. The value `12` with the specifier `#'%'` (single quotes around the `%` symbol) produces 12%.

Numeric Formatting Sections

A numeric format specifier may contain one, two, or three sections separated by semicolons. If the specifier contains one section, the specifier is used for all numeric values.

If the specifier contains two sections, the first is used to format values that are positive or zero, and the second is used to format negative values.

If the specifier contains three sections, the first is used to format positive values, the second is used to format negative values, and the third is used to format values that are zero.

The following text shows output from the Immediate window for three values using the format specifier `#,#.00;<#,#.00>;ZERO`:

```
?(1234.5678).ToString("#,#.00;<#,#.00>;ZERO")
1,234.57
?(-1234.5678).ToString("#,#.00;<#,#.00>;ZERO")
<1,234.57>
?(0).ToString("#,#.00;<#,#.00>;ZERO")
ZERO
```

Composite Formatting

The `String.Format`, `Console.WriteLine`, and `TextWriter.WriteLine` methods provide a different method for formatting strings. These routines can take a composite formatting string parameter that contains literal characters plus placeholders for values. Other parameters to the methods give the values.

The value placeholders have the following format:

```
{index[,alignment][:format_specifier]}
```

The *index* value gives the index numbered from 0 of the parameter that should be inserted in this place-holder's position.

The optional *alignment* value tells the minimum number of spaces the item should use and the result is padded with spaces, if necessary. If this value is negative, the result is left-justified. If the value is positive, the result is right-justified.

The *format_specifier* indicates how the item should be formatted.

For example, consider the following code:

```
Dim emp As String = "Crazy Bob"
Dim sales As Single = -12345.67
MessageBox.Show(String.Format("{0} {1:earned;lost} {1:c} this year", _
    emp, sales))
```

The first placeholder refers to parameter number 0, which has the value `Crazy Bob`. The second placeholder refers to parameter number 1 and includes a two-part format specifier that displays `earned` if the value is positive or zero, and `lost` of the value is negative. The third placeholder refers to parameter number 1 again, this time formatted as currency.

The following text shows the result:

```
Crazy Bob lost ($12,345.67) this year
```

Enumerated Type Formatting

Visual Basic provides special formatting capabilities that can display the values of enumerated variables. For example, consider the following code:

```
Private Enum Dessert
    Cake = 1
    Pie = 2
    Cookie = 3
    IceCream = 4
End Enum
...
Dim dessert_choice As Dessert = Dessert.Cake
MessageBox.Show(dessert_choice.ToString)
```

This code displays the string `Cake`.

For variables of an enumerated type such as `dessert_choice`, the `ToString` method can take a specifier that determines how the value is formatted.

The specifier G or g formats the value as a string if possible. If the value is not a valid entry in the Enum's definition, the result is the variable's numeric value. For example, the previous code does not define a Dessert enumeration for the value 7 so, if you set dessert_choice to 7, then dessert_choice. ToString("G") returns the value 7.

If you define an enumerated type with the Flags attribute, variables of that type can be a combination of the Enum's values, as shown in the following code:

```
<Flags()> _
Private Enum Dessert
    Cake = 1
    Pie = 2
    Cookie = 4
    IceCream = 8
End Enum
...
Dim dessert_choice As Dessert = Dessert.IceCream Or Dessert.Cake
MessageBox.Show(dessert_choice.ToString("G"))
```

In this case, the G format specifier returns a string that contains all of the flag values separated by commas. In this example, the result is Cake, IceCream. Note that the values are returned in the order in which they are defined by the enumeration, not the order in which they are assigned to the variable.

If you do not use the Flags attribute when defining an enumerated type, the G format specifier always returns the variable's numeric value if it is a combination of values rather than a single value from the list. On the other hand, the F specifier returns a list of comma-separated values if it makes sense. If you omit the Flags attribute from the previous code, dessert_choice.ToString("G") would return 9, but dessert_choice.ToString("F") would return Cake, IceCream.

The D or d specifier always formats the variable as a number.

The specifier X or x formats the value as a hexadecimal number.

The Application Class

The `Application` class provides static properties and methods for controlling the application. This appendix contains a summary of the `Application` class's most useful properties, methods, and events. Chapter 36, "Configuration and Resources," has a bit more to say about the `Application` class and provides some example code.

Properties

The following table describes the `Application` class's most useful properties.

Property	Purpose
CommonAppDataPath	Returns the path where the program should store application data that is shared by all users. By default, this path has the form base_path\company_name\product_name\product_version. The base_path is typically C:\Documents and Settings\All Users\Application Data (here "C" may be replaced with a different drive letter depending on how your system is set up).
CommonAppDataRegistry	Returns the Registry key where the program should store application data that is shared by all users. By default, this path has the form HKEY_LOCAL_MACHINE\Software\company_name\product_name\product_version.
CompanyName	Returns the application's company name.
CurrentCulture	Gets or sets the CultureInfo object for this thread. The CultureInfo object specifies information about a specific culture (such as its name, writing system, and calendar, and its formats for dates, times, and numbers).

(continued)

Property	Purpose
CurrentInputLanguage	Gets or sets the InputLanguage for this thread. The InputLanguage object defines the layout of the keyboard for the culture. It determines how the keyboard keys are mapped to the characters in the culture's language.
ExecutablePath	Returns the fully qualified path to the file that started the execution, including the file name.
LocalUserAppDataPath	Returns the path where the program should store data for this local, nonroaming user. By default, this path has the form base_path\company_name\product_name\product_version. The base_path is typically C:\Documents and Settings\user_name\Local Settings\Application Data.
MessageLoop	Returns True if the thread has a message loop. If the program begins with a startup form, this loop is created automatically. If it starts with a custom Sub Main, then the loop doesn't initially exist, and the program must start it by calling Application.Run.
OpenForms	Returns a collection holding references to all of the application's open forms.
ProductName	Returns the application's product name.
ProductVersion	Gets the product version associated with this application.
StartupPath	Returns the fully qualified path to the file that started the execution, including the file name.
UserAppDataPath	Returns the path where the program should store data for this user. By default, this path has the form base_path\company_name\product_name\product_version. The base_path is typically C:\Documents and Settings\user_name\Application Data.
UserAppDataRegistry	Returns the Registry key where the program should store application data for this user. By default, this path has the form HKEY_CURRENT_USER\Software\company_name\product_name\product_version.
UseWaitCursor	Determines whether this thread's forms display a wait cursor. Set this to True before performing a long operation, and set it to False when the operation is finished.

Methods

The following table describes the `Application` class's most useful methods.

Method	Purpose
AddMessageFilter	Adds a message filter to monitor the event loop's Windows messages. See the following text for an example.
DoEvents	Processes Windows messages that are currently in the message queue. If the thread is performing a long calculation, it would normally prevent the rest of the thread from taking action (such as processing these messages). Calling `DoEvents` lets the user interface catch up with the user's actions. Note that you can often avoid the need for `DoEvents` if you perform the long task on a separate thread.
Exit	Ends the whole application. This is a rather abrupt halt, and any forms do not execute their `FormClosing` or `FormClosed` event handlers, so be sure the application has executed any necessary clean-up code before calling `Application.Exit`.
ExitThread	Ends the current thread. This is a rather abrupt halt, and any forms on the thread do not execute their `FormClosing` or `FormClosed` event handlers.
OnThreadException	Raises the `Application` object's `ThreadException` event, passing it an exception. If your application throws an uncaught exception in the IDE, the IDE halts. That makes it hard to test `Application.ThreadException` event handlers. You can call `OnThreadException` to invoke the event handler.
RemoveMessageFilter	Removes a message filter.
Run	Runs a message loop for the current thread. If you pass this method a form object, it displays the form and processes its messages until the form closes.
SetSuspendState	Makes the system suspend operation or hibernate. When the system *hibernates*, it writes its memory contents to disk. When you restart the system, it resumes with its previous desktop and applications running. When the system *suspends* operation, it enters low-power mode. It can resume more quickly than a hibernated system, but memory contents are not saved, so they will be lost if the computer loses power.

Events

The following table describes the `Application` object's events.

Event	Purpose
ApplicationExit	Occurs when the application is about to shut down.
Idle	Occurs when the application finishes executing some code and is about to enter an idle state to wait for events.
ThreadException	Occurs when the application throws an unhandled exception.
ThreadExit	Occurs when a thread is about to exit.

The My Namespace

The My namespace provides shortcuts to make performing common tasks easier. The following sections describe the major items within the My namespace and describe the tools that they make available.

My.Application

`My.Application` provides information about the current application. It includes properties that tell you the program's current directory, culture, `Log` object, and splash screen. It also includes information about the application's assembly, including the program's version numbering.

The following table describes the most useful `My.Application` properties, methods, and events.

Item	Purpose
ApplicationContext	Returns an `ApplicationContext` object for the currently executing thread. It provides a reference to the thread's form. Its `ExitThread` method terminates the thread and its `ThreadExit` event fires when the thread is exiting.
ChangeCurrentCulture	Changes the thread's culture used for string manipulation and formatting.
ChangeCurrentUICulture	Changes the thread's culture used for retrieving resources.
CommandLineArgs	Returns a collection containing the command-line argument strings used when the application was started. The first entry (with index 0) is the fully qualified name of the executable application.

(continued)

Item	Purpose
CurrentCulture	Returns a `CultureInfo` object that represents the settings used for culture-specific string manipulation and formatting. This includes calendar information, date and time specifications, the culture's name, keyboard layout, number formats for general numbers (for example, the thousands separator character and decimal character), currency, and percentages.
CurrentUICulture	Returns a `CultureInfo` object that represents the culture-specific settings used by the thread to retrieve resources. It determines the culture used by the Resource Manager and `My.Resources`.
Deployment	Returns the application's current `ApplicationDeployment` object used for ClickOnce deployment. Normally, you don't need to manage deployment yourself, but this object lets you check for updates, start an update synchronously or asynchronously, download files, and restart the updated application.
DoEvents	Makes the application process all of the Windows messages currently waiting in the message queue. Doing this allows controls to process messages and update their appearances while the program is performing a long calculation. Often, you can avoid using `DoEvents` by performing long calculations on a separate thread, so the user interface can continue running normally.

GetEnvironmentVariable	Returns the value of the specified environment variable. For example, the following code displays the value of the `PATH` environment variable:
	`MessageBox.Show(My.Application`
	`.GetEnvironmentVariable("PATH"))`
	This method raises an exception if the named environment variable doesn't exist. The method `Environment.GetEnvironmentVariable` performs the same function, except that it returns `Nothing` if the variable doesn't exist.

Info	Returns an `AssemblyInfo` object that provides information about the assembly such as assembly name, company name, copyright, trademark, and version.
IsNetworkDeployed	Returns `True` if the application was deployed over the network. You should check this property and only try to use the `My.Application.Deployment` object if it returns `True`.

Item	Purpose
Log	An object of the class `MyLog`. You can use this object's `WriteEntry` and `WriteException` methods to log messages and exceptions.
MainForm	Gets or sets the application's main form.
NetworkAvailabilityChanged	The application raises this event when the network's availability changes.
OpenForms	Returns a collection containing references to all of the application's open forms.
Shutdown	The application raises this event when it is shutting down. This event occurs after all forms' `FormClosing` and `FormClosed` event handlers have finished.
SplashScreen	Gets or sets the application's splash screen.
Startup	The application raises this event when it is starting up.
StartupNextInstance	The application raises this event when the user tries to start a second instance of a single-instance application.
UICulture	Gets the thread's culture used for retrieving resources.
UnhandledException	The application raises this event if it encounters an unhandled exception.

The following table lists the `Info` object's properties.

Property	Purpose
AssemblyName	Gets the assembly's name
CompanyName	Gets the assembly's company name
Copyright	Gets the assembly's copyright information
Description	Gets the assembly's description
DirectoryPath	Gets the directory where the assembly is stored
LoadedAssemblies	Returns a collection of `Assembly` objects for the application's currently loaded assemblies
ProductName	Gets the assembly's product name
StackTrace	Gets a stack trace
Title	Gets the assembly's title
Trademark	Gets the assembly's trademark information
Version	Gets the assembly's version number
WorkingSet	Gets the number of bytes mapped to the process context

The project's Application property page gives you access to most of the `Info` values at design time. To open the Application property page, open Solution Explorer, double-click the My Project entry, and select the Application tab.

To set `Info` values at design time, open the Application property page and click the Assembly Information button, and then enter the assembly information in the dialog shown in Figure S-1, and click OK.

To place code in the `My.Application` object's `NetworkAvailabilityChanged`, `Shutdown`, `Startup`, `StartupNextInstance`, or `UnhandledException` event handlers, open the Application property page and click the View Application Events button.

Alternatively, you can open Solution Explorer, click the Show All Files button, expand the My Project entry, and open the file `ApplicationEvents.vb`.

To make the application a single-instance application, open the Application property page and check the "Make single instance application" box.

Figure S-1: Use this dialog box to enter information that the program can later retrieve using My.Application.AssemblyInfo.

My.Computer

`My.Computer` provides methods to understand and control the computer's hardware and the system software. It lets you work with the audio system, clock, keyboard, clipboard, mouse, network, printers, Registry, and file system.

The following sections describe the properties, methods, and events available through `My.Computer` in detail.

Audio

This object provides access to the computer's audio system. Its methods let you play a `.wav` file synchronously or asynchronously, stop a file playing asynchronously, or play a system sound. For example, the following code plays the system's exclamation sound:

```
My.Computer.Audio.PlaySystemSound(SystemSounds.Exclamation)
```

The following table describes the `Audio` object's methods.

Method	Purpose
Play	Plays `.wav` data from a file, byte array, or stream. The second parameter can be `Background` (play asynchronously in the background), `BackgroundLoop` (play asynchronously in the background and repeat when it ends), or `WaitToComplete` (play synchronously).
PlaySystemSound	Plays a system sound. The parameter should be a member of the `SystemSounds` enumeration and can have the value `Asterisk`, `Beep`, `Exclamation`, `Hand`, or `Question`.
Stop	Stops the sound currently playing asynchronously.

Clipboard

The `Clipboard` object described in Chapter 23, "Drag and Drop, and the Clipboard," enables you to move data in and out of the system's clipboard. The `My.Computer.Clipboard` object provides extra tools that simplify some clipboard operations. The following table briefly summarizes the `My.Computer.Clipboard` object's methods.

Method	Purpose
Clear	Removes all data from the clipboard.
ContainsAudio	Returns True if the clipboard contains audio data.
ContainsData	Returns True if the clipboard contains data in a specific custom format.
ContainsFileDropList	Returns True if the clipboard contains a file drop list.
ContainsImage	Returns True if the clipboard contains image data.
ContainsText	Returns True if the clipboard contains textual data.
GetAudioStream	Gets audio data from the clipboard.
GetData	Gets data in a specific custom format from the clipboard.
GetDataObject	Gets a DataObject from the clipboard.
GetFileDropList	Gets a StringCollection holding the names of the files selected for drop from the clipboard.
GetImage	Gets image data from the clipboard.
GetText	Gets textual data from the clipboard.
SetAudio	Saves audio data to the clipboard.
SetData	Saves data in a specific custom format to the clipboard.
SetDataObject	Saves a DataObject to the clipboard.
SetFileDropList	Saves a StringCollection containing a series of fully qualified file names to the clipboard.
SetImage	Saves an image to the clipboard.
SetText	Saves textual data to the clipboard.

See Chapter 23 for more information about using the clipboard.

Clock

This property returns an object of type MyClock that you can use to learn about the current time. The following table describes this object's properties.

Property	Purpose
GmtTime	Returns a Date object that gives the current local date and time converted into Coordinated Universal Time (UTC) or Greenwich Mean Time (GMT).
LocalTime	Returns a Date object that gives the current local date and time.
TickCount	Returns the number of milliseconds since the computer started.

For example, suppose that you live in Colorado, which uses Mountain Standard Time (MST), seven hours behind Greenwich Mean Time. If My.Computer.Clock.LocalTime returns 2:03 p.m., then My.Computer.Clock.GmtTime returns 9:03 p.m.

If you must store a date and time for later use (for example, in a database), you should generally store it in UTC. Then you can meaningfully compare that value with other times stored on other computers in different time zones such as those across the Internet.

FileSystem

The FileSystem object provides tools for working with drives, directories, and files. The following table summarizes this object's properties and methods.

Item	Description
CombinePath	Returns a properly formatted combined path as a string.
CopyDirectory	Copies a directory.
CopyFile	Copies a file.
CreateDirectory	Creates a directory.
CurrentDirectory	Determines the fully qualified path to the application's current directory.
DeleteDirectory	Deletes a directory.
DeleteFile	Deletes a file.
DirectoryExists	Returns a Boolean indicating whether a directory exists.
Drives	Returns a read-only collection of DriveInfo objects describing the system's drives. See Chapter 38, "File-System Objects," for information about the DriveInfo class.
FileExists	Returns a Boolean indicating whether a file exists.
FindInFiles	Returns a collection holding names of files that contain a search string.

(continued)

Item	Description
GetDirectories	Returns a String collection representing the path names of subdirectories within a directory.
GetDirectoryInfo	Returns a DirectoryInfo object for the specified path.
GetDriveInfo	Returns a DriveInfo object for the specified path.
GetFileInfo	Returns a FileInfo object for the specified path.
GetFiles	Returns a read-only String collection representing the names of files within a directory.
GetParentPath	Returns a string representing the absolute path of the parent of the provided path.
MoveDirectory	Moves a directory.
MoveFile	Moves a file.
OpenTextFieldParser	Opens a TextFieldParser.
OpenTextFileReader	Opens a TextReader.
OpenTextFileWriter	Opens a TextWriter.
ReadAllBytes	Reads from a binary file.
ReadAllText	Reads from a text file.
RenameDirectory	Renames a directory.
RenameFile	Renames a file.
SpecialDirectories	Returns a SpecialDirectoriesProxy object that has properties giving the locations of various special directories such as the system's temporary directory and the user's MyDocuments directory. See Chapter 38, "File-System Objects," for more information.
WriteAllBytes	Writes to a binary file.
WriteAllText	Writes to a text file.

Info

The My.Computer.Info object provides information about the computer's memory and operating system. The following list describes this object's properties.

Property	Purpose
AvailablePhysicalMemory	Returns the computer's total amount of free physical memory in bytes.
AvailableVirtualMemory	Returns the computer's total amount of free virtual address space in bytes.
InstalledUICulture	Returns the current user-interface culture.
LoadedAssemblies	Returns a collection of the assemblies loaded by the application.
OSFullName	Returns the computer's full operating-system name as in Microsoft Windows XP Home Edition.
OSPlatform	Returns the platform identifier for the operating system of the computer. This can be `Unix`, `Win32NT` (Windows NT or later), `Win32S` (runs on 16-bit Windows to provide access to 32-bit applications), `Win32Windows` (Windows 95 or later), or `WinCE`.
OSVersion	Returns the operating system's version in a string with the format `major.minor.build.revision`.
StackTrace	Returns a string containing the application's current stack trace.
TotalPhysicalMemory	Returns the computer's total amount of physical memory in bytes.
TotalVirtualMemory	Returns the computer's total amount of virtual address space in bytes.
WorkingSet	Returns the amount of physical memory mapped to the process context in bytes.

Keyboard

This object returns information about the current keyboard state. The following table describes this object's properties.

Property	Purpose
AltKeyDown	Returns `True` if the Alt key is down.
CapsLock	Returns `True` if Caps Lock is on.
CtrlKeyDown	Returns `True` if the Ctrl key is down.
NumLock	Returns `True` if Num Lock is on.
ScrollLock	Returns `True` if Scroll Lock is on.
ShiftKeyDown	Returns `True` if the Shift key is down.

The `My.Computer.Keyboard` object also provides one method named `SendKeys`. This method sends keystrokes to the currently active window just as if the user had typed them. You can use this method to provide some automated control over applications.

Mouse

The `My.Computer.Mouse` object provides information about the computer's mouse. The following table describes this object's properties.

Property	Description
ButtonsSwapped	Returns `True` if the functions of the mouse's left and right buttons have been switched. This can make using the mouse easier for left-handed users.
WheelExists	Returns `True` if the mouse has a scroll wheel.
WheelScrollLines	Returns a number indicating how much to scroll when the mouse wheel rotates one notch.

Name

The `My.Computer.Name` property simply returns the computer's name.

Network

The `My.Computer.Network` object provides a few simple properties and methods for working with the network. Its single property, `IsAvailable`, returns `True` if the network is available.

The following table describes the object's methods.

Method	Description
DownloadFile	Downloads a file from a remote computer. Parameters give such values as the file name, user name, password, and connection timeout.
IsAvailable	Returns `True` if the network is available.
Ping	Pings a remote computer to see if it is connected to the network.
UploadFile	Uploads a file to a remote computer. Parameters give such values as the file name, user name, password, and connection timeout.

This object also provides one event, `NetworkAvailabilityChanged`, that you can catch to learn when the network becomes available or unavailable.

Ports

This object provides one property and a single method. Its `SerialPortNames` property returns an array of strings listing the names of the computer's serial ports.

The `OpenSerialPort` method opens the serial port with a particular name (optional parameters give the baud rate, parity, data bits, and stop bits) and returns a reference to a `SerialPort` object.

The `SerialPort` class is much more complex than the `My.Computer.Ports` object. The following table describes the `SerialPort` class's most useful properties.

Property	Purpose
BaseStream	Returns the underlying `Stream` object.
BaudRate	Gets or sets the port's baud rate.
BreakState	Gets or sets the break signal state.
BytesToRead	Returns the number of bytes of data in the receive buffer.
BytesToWrite	Returns the number of bytes of data in the send buffer.
CDHolding	Returns the state of the port's Carrier Detect (CD) line.
CtsHolding	Returns the state of the port's Clear-to-Send (CTS) line.
DataBits	Gets or sets the standard length of data bits per byte.
DiscardNull	Determines whether null characters are ignored.
DsrHolding	Returns the state of the Data Set Ready (DSR) signal.
DtrEnable	Determines enabling of the Data Terminal Ready (DTR) signal.
Encoding	Determines the character encoding for text conversion.
Handshake	Determines the handshaking protocol.
IsOpen	Returns `True` if the port is open.
NewLine	Determines the end-of-line sequence for the `ReadLine` and `WriteLine` methods. This is a linefeed by default.
Parity	Determines the parity-checking protocol.
ParityReplace	Determines the character used to replace invalid characters when a parity error occurs.
PortName	Gets or selects the port.
ReadBufferSize	Determines the port's read buffer size.
ReadTimeout	Determines the read timeout in milliseconds.

(continued)

Property	Purpose
ReceivedBytesThreshold	Determines the number of bytes in the input buffer before a ReceivedEvent is raised.
RtsEnable	Determines whether the Request to Transmit (RTS) signal is enabled.
StopBits	Determines the standard number of stop bits per byte.
WriteBufferSize	Determines the port's write buffer size.
WriteTimeout	Determines the write timeout in milliseconds.

The following table describes the SerialPort object's most useful methods.

Method	Purpose
Close	Closes the port.
DiscardInBuffer	Discards any data that is currently in the read buffer.
DiscardOutBuffer	Discards any data that is currently in the write buffer.
GetPortNames	Returns an array of strings holding the serial ports' names.
Open	Opens the port's connection.
Read	Reads data from the read buffer.
ReadByte	Synchronously reads one byte from the read buffer.
ReadChar	Synchronously reads one character from the read buffer.
ReadExisting	Reads all immediately available characters in both the stream and the read buffer.
ReadLine	Reads up to the next NewLine value in the read buffer.
ReadTo	Reads a string up to the specified value in the read buffer.
Write	Writes data into the port's write buffer.
WriteLine	Writes a string and a NewLine into the write buffer.

The SerialPort object also has a few events that you can use to learn about changes in the port's status. The following table describes the object's most useful events.

Event	Purpose
DataReceived	Occurs when the port receives data. The e.EventType parameter indicates the type of data and can be SerialData.Eof (end of file received) or SerialData.Chars (characters were received).
ErrorEvent	Occurs when the port encounters an error. The e.EventType parameter indicates the type of error and can be Frame (framing error), Overrun (character buffer overrun), RxOver (input buffer overrun), RxParity (hardware detected parity error), or TxFull (output buffer full).
PinChangedEvent	Occurs when the port's serial pin changes. The e.EventType parameter indicates the type of change and can be Break (break in the input), CDChanged (Receive Line Signal Detect, or RLSD, signal changed state), CtsChanged (CTS signal changed state), DsrChanged (DSR signal changed state), and Ring (detected a ring indicator).

Registry

My.Computer.Registry provides objects that manipulate the Registry. My.Computer.Registry has seven properties that refer to objects of type RegistryKey. The following table lists these objects and the corresponding Registry subtrees.

My.Computer.Registry Property	Registry Subtree
ClassesRoot	HKEY_CLASSES_ROOT
CurrentConfig	HKEY_CURRENT_CONFIG
CurrentUser	HKEY_CURRENT_USER
DynData	HKEY_DYNAMIC_DATA
LocalMachine	HKEY_LOCAL_MACHINE
PerformanceData	HKEY_PERFORMANCE_DATA
Users	HKEY_USERS

My.Computer.Registry also provides two methods, GetValue and SetValue, that get and set Registry values.

The program can use the RegistryKey objects to work with the corresponding Registry subtrees. The following table describes the most useful properties and methods provided by the RegistryKey class.

Property or Method	Purpose
Close	Closes the key and writes it to disk if it has been modified.
CreateSubKey	Creates a new subkey or opens an existing subkey within this key.
DeleteSubKey	Deletes the specified subkey.
DeleteSubKeyTree	Recursively deletes a subkey and any child subkeys it contains.
DeleteValue	Deletes a value from the key.
Flush	Writes any changes to the key into the Registry.
GetSubKeyNames	Returns an array of strings giving subkey names.
GetValue	Returns the value of a specified value within this key.
GetValueKind	Returns the type of a specified value within this key. This can be Binary, DWord, ExpandString, MultiString, QWord, String, or Unknown.
GetValueNames	Returns an array of strings giving the names of all of the values contained within the key.
Name	Returns the key's Registry path.
OpenSubKey	Returns a RegistryKey object representing a descendant key. A parameter indicates whether you need write access to the key.
SetValue	Sets a value within the key.
SubKeyCount	Returns the number of subkeys that are this key's direct children.
ToString	Returns the key's name.
ValueCount	Returns the number of values stored in this key.

Visual Basic's native Registry methods SaveSetting and GetSetting are generally easier to use than My.Computer.Registry, although they don't provide access to the entire Registry.

Screen

The My.Computer.Screen property returns a Screen object representing the computer's main display. The following table describes the Screen object's most useful properties.

Property	Purpose
AllScreens	Returns an array of Screen objects representing all of the system's screens.
BitsPerPixel	Returns the screen's color depth in bits per pixel.
Bounds	Returns a Rectangle giving the screen's bounds in pixels.

Property	Purpose
DeviceName	Returns the screen's device name as in \\.\DISPLAY1.
Primary	Returns True if the screen is the computer's primary screen.
PrimaryScreen	Returns a reference to a Screen object representing the system's primary display. For a single display system, the primary display is the only display.
WorkingArea	Returns a Rectangle giving the screen's working area bounds in pixels. This is the desktop area excluding taskbars, docked windows, and docked toolbars.

The following table describes the Screen class's most useful methods.

Method	Purpose
FromControl	Returns a Screen object representing the display that contains the largest piece of a specific control.
FromHandle	Returns a Screen object representing the display that contains the largest piece of the object with a given handle.
FromPoint	Returns a Screen object representing the display that contains a given point.
FromRectangle	Returns a Screen object representing the display that contains the largest piece of a given Rectangle.
GetBounds	Returns a Rectangle giving the bounds of the screen that contains the largest piece of a control, rectangle, or point.
GetWorkingArea	Returns a Rectangle giving the working area of the screen that contains the largest piece of a control, rectangle, or point.

The AllScreens and PrimaryScreen properties, and all of these methods, are shared members of the Windows.Forms.Screen class. If you refer to them using an instance of the class such as My.Computer .Screen, the IDE flags the code with a warning. You can avoid the warning by using the class itself (System.Windows.Forms.Screen) rather than an instance to refer to these properties, as in the following code:

```
Debug.WriteLine(System.Windows.Forms.Screen.AllScreens(0).DeviceName)
Debug.WriteLine(System.Windows.Forms.Screen.PrimaryScreen.DeviceName)
```

The WorkingArea property does not update after you access the Screen object. If the user moves the system taskbar, the WorkingArea property does not show the new values.

The `GetWorkingArea` method retrieves the screen's current working area, however. If you must be certain that the user has not moved the taskbar or a docked object, use the `GetWorkingArea` method.

My.Forms

`My.Forms` provides properties that give references to an instance of each of the types of forms defined by the application. If the program begins with a startup form, the corresponding `My.Forms` entry refers to that form. For example, suppose the program begins by displaying `Form1`. Then, `My.Forms.Form1` refers to the startup instance of the `Form1` class.

You can also refer to these forms directly. For example, the following two statements set the text and display the predefined instance of the `Form2` class:

```
My.Forms.Form2.Text = "Hello!"
Form2.Show()
```

Other forms that you create using the `New` keyword are separate instances from those provided by `My.Forms`.

If you know you will only want one instance of a particular form, for example if the form is a dialog box, you can use this instance instead of creating new instances of the class. If you will need to use more than one instance of the form at the same time, you must use `New` to create them.

You can set these properties to `Nothing` to dispose of the forms, but you can never set them to anything else. In particular, you cannot set them to new instances of their form classes later. When you destroy one of these instances, it is gone forever. If you will need to reuse the form later, set its `Visible` property to `False` rather than setting it equal to `Nothing`. Alternatively, you can just create new instances of the class when you need them and ignore the forms in `My.Forms`.

My.Resources

`My.Resources` provides access to the application's resources. Its `ResourceManager` property returns a reference to a `ResourceManager` object attached to the project's resources. You can use this object to retrieve the application's resources.

`My.Resources` also provides strongly typed properties that return the application's resources. For example, if you create a string resource named `Greeting`, the following code sets the form's caption to that string's value:

```
Me.Text = My.Resources.Greeting
```

See Chapter 36, "Configuration and Resources," for more information on using `My.Resources` to access the application's resources.

My.User

My.User returns information about the current user. The following table describes the My.User object's most useful properties.

Property or Method	Purpose
CurrentPrincipal	Gets or sets an IPrincipal object used for role-based security.
InitializeWithWindowsUser	Sets the thread's principal to the Windows user who started it.
IsAuthenticated	Returns True if the user's identity has been authenticated.
IsInRole	Returns True if the user belongs to a certain role.
Name	Returns the current user's name in the format domain\user_name.

Streams

Visual Studio provides several classes that treat data as a stream. These classes are not difficult to use, but they are similar enough to be confusing. This appendix summarizes the stream classes and describes their properties and their methods.

Stream Class Summary

The following table lists the Visual Studio stream classes. It can provide you with some guidance for selecting a stream class.

Class	Purpose
Stream	A generic stream class. This is a virtual (`MustInherit`) class, so you cannot create one directly. Instead, you must instantiate one of its subclasses.
FileStream	Represents a file as a stream. Usually, you can use a helper class such as `BinaryReader` or `TextWriter` to make working with a `FileStream` easier.
MemoryStream	Lets you read and write stream data in memory. This is useful when you need a stream but don't want to read or write a file.
BufferedStream	Adds buffering to another stream type. This sometimes improves performance on relatively slow underlying devices.
BinaryReader, BinaryWriter	Read and write data from an underlying stream using routines that manage specific data types (such as `ReadDouble` and `ReadUInt16`).

(continued)

Class	Purpose
TextReader, TextWriter	These virtual (MustInherit) classes define methods that make working with text on an underlying stream easier.
StringReader, StringWriter	These classes inherit from TextReader and TextWriter. They provide methods for reading and writing text into an underlying string.
StreamReader, StreamWriter	These classes inherit from TextReader and TextWriter. They provide methods for reading and writing text into an underlying stream, usually a FileStream.
CryptoStream	Applies a cryptographic transformation to its data.
NetworkStream	Sends and receives data across a network connection.

Stream

The following table describes the Stream class's most useful properties.

Property	Purpose
CanRead	Returns True if the stream supports reading.
CanSeek	Returns True if the stream supports seeking to a particular position in the stream.
CanTimeout	Returns True if the stream supports timeouts.
CanWrite	Returns True if the stream supports writing.
Length	Returns the number of bytes in the stream.
Position	Returns the stream's current position in its bytes. For a stream that supports seeking, the program can set this value to move to a particular position.
ReadTimeout	Determines the stream's read timeout in milliseconds.
WriteTimeout	Determines the stream's write timeout in milliseconds.

The following table describes the Stream class's most useful methods.

Method	Purpose
BeginRead	Begins an asynchronous read.
BeginWrite	Begins an asynchronous write.
Close	Closes the stream and releases any resources it uses (such as file handles).

Method	Purpose
EndRead	Waits for an asynchronous read to finish.
EndWrite	Ends an asynchronous write.
Flush	Flushes data from the stream's buffers into the underlying storage medium (device, file, and so on).
Read	Reads bytes from the stream and advances its position by that number of bytes.
ReadByte	Reads a byte from the stream and advances its position by 1 byte.
Seek	If the stream supports seeking, sets the stream's position.
SetLength	Sets the stream's length. If the stream is currently longer than the new length, it is truncated. If the stream is shorter than the new length, it is enlarged. The stream must support both writing and seeking for this method to work.
Write	Writes bytes into the stream and advances the current position by this number of bytes.
WriteByte	Writes 1 byte into the stream and advances the current position by 1 byte.

The `FileStream` and `MemoryStream` classes add only few methods to those defined by the `Stream` class. The most important of those are new constructors specific to the type of stream. For example, the `FileStream` class provides constructors for opening files in various modes (append, new, and so forth).

BinaryReader and BinaryWriter

These are stream helper classes that make it easier to read and write data in specific formats onto an underlying stream. The following table describes the `BinaryReader` class's most useful methods.

Method	Purpose
Close	Closes the `BinaryReader` and its underlying stream.
PeekChar	Reads the reader's next character, but does not advance the reader's position, so other methods can still read the character later.
Read	Reads characters from the stream and advances the reader's position.
ReadBoolean	Reads a Boolean from the stream and advances the reader's position by 1 byte.

(continued)

Method	Purpose
ReadByte	Reads a byte from the stream and advances the reader's position by 1 byte.
ReadBytes	Reads a number of bytes from the stream into a byte array and advances the reader's position by that number of bytes.
ReadChar	Reads a character from the stream and advances the reader's position according to the stream's encoding and the character.
ReadChars	Reads a number of characters from the stream, returns the results in a character array, and advances the reader's position according to the stream's encoding and the number of characters.
ReadDecimal	Reads a decimal value from the stream and advances the reader's position by 16 bytes.
ReadDouble	Reads an 8-byte floating-point value from the stream and advances the reader's position by 8 bytes.
ReadInt16	Reads a 2-byte signed integer from the stream and advances the reader's position by 2 bytes.
ReadInt32	Reads a 4-byte signed integer from the stream and advances the reader's position by 4 bytes.
ReadInt64	Reads an 8-byte signed integer from the stream and advances the reader's position by 8 bytes.
ReadSByte	Reads a signed byte from the stream and advances the reader's position by 1 byte.
ReadSingle	Reads a 4-byte floating-point value from the stream and advances the reader's position by 4 bytes.
ReadString	Reads a string from the current stream and advances the reader's position past it. The string begins with its length.
ReadUInt16	Reads a 2-byte unsigned integer from the stream and advances the reader's position by 2 bytes.
ReadUInt32	Reads a 4-byte unsigned integer from the stream and advances the reader's position by 4 bytes.
ReadUInt64	Reads an 8-byte unsigned integer from the stream and advances the reader's position by 8 bytes.

The following table describes the `BinaryWriter` class's most useful methods.

Name	Description
Close	Closes the `BinaryWriter` and its underlying stream.
Flush	Writes any buffered data into the underlying stream.
Seek	Sets the position within the stream.
Write	Writes a value into the stream. This method has many overloaded versions that write characters, arrays of characters, integers, strings, unsigned 64-bit integers, and so on.

TextReader and TextWriter

These are stream helper classes that make it easier to read and write text data onto an underlying stream. The following table describes the `TextReader` class's most useful methods.

Method	Purpose
Close	Closes the reader and releases any resources that it is using.
Peek	Reads the next character from the text without changing the reader's state so other methods can read the character later.
Read	Reads data from the input. Overloaded versions of this method read a single character, or an array of characters up to a specified length.
ReadBlock	Reads data from the input into an array of characters.
ReadLine	Reads a line of characters from the input and returns the data in a string.
ReadToEnd	Reads any remaining characters in the input and returns them in a string.

The following table describes the `TextWriter` class's most useful properties.

Property	Purpose
Encoding	Specifies the data's encoding (ASCII, UTF-8, Unicode, and so forth).
FormatProvider	Returns an object that controls formatting.
NewLine	Gets or sets the stream's new-line sequence.

The following table describes the `TextWriter` class's most useful methods.

Method	Purpose
Close	Closes the writer and releases any resources it uses.
Flush	Writes any buffered data into the underlying output.
Write	Writes a value into the output. This method has many overloaded versions that write characters, arrays of characters, integers, strings, unsigned 64-bit integers, and so forth.
WriteLine	Writes data into the output followed by the new-line sequence.

StringReader and StringWriter

The `StringReader` and `StringWriter` classes let a program read and write text in a string. They implement the features defined by their parent classes `TextReader` and `TextWriter`. See the section "TextReader and TextWriter" earlier in this appendix for a list of those features.

StreamReader and StreamWriter

The `StreamReader` and `StreamWriter` classes let a program read and write data in an underlying stream, often a `FileStream`. They implement the features defined by their parent classes `TextReader` and `TextWriter`. See the section "TextReader and TextWriter" earlier in this appendix for a list of the features.

Console Streams

Console applications define standard input, standard output, and standard error streams that the program can use to read and write information to and from the console. An application can also change these streams to new stream objects, thereby making the program read input and write output into the new streams.

Text File Stream Methods

The `System.IO.File` class provides several handy methods for working with text files. The following table summarizes these methods.

Method	Purpose
AppendText	Creates a text file or opens it for appending if it already exists. Returns a `StreamWriter` for writing into the file.
CreateText	Creates a text file, overwriting it if it already exists. Returns a `StreamWriter` for writing into the file.
Exists	Returns `True` if a file exists. It is better practice (and much faster) to only try to open the file if `Exists` returns `True`, rather than just trying to open the file and catching errors with a `Try Catch` block.
OpenText	Opens an existing text file and returns a `StreamReader` to read from it. This method throws a `FileNotFoundException` if the file doesn't exist.

U

File-System Classes

A Visual Basic application can take three basic approaches to file system manipulation: Visual Basic methods, System.IO Framework classes, and the My.Computer.FileSystem namespace. This appendix summaries the properties, methods, and events provided by these approaches.

Visual Basic Methods

The following table summarizes the Visual Basic methods for working with files. They let a program create, open, read, write, and learn about files.

Method	Purpose
EOF	Returns `True` if the file is at the end of file.
FileClose	Closes an open file.
FileGet	Reads data from a file opened in `Random` and `Binary` mode into a variable.
FileGetObject	Reads data as an object from a file opened in `Random` and `Binary` mode into a variable.
FileOpen	Opens a file for reading or writing. Parameters indicate the mode (`Append`, `Binary`, `Input`, `Output`, or `Random`), access type (`Read`, `Write`, or `ReadWrite`), and sharing (`Shared`, `LockRead`, `LockWrite`, or `LockReadWrite`).
FilePut	Writes data from a variable into a file opened for `Random` or `Binary` access.
FilePutObject	Writes an object from a variable into a file opened for `Random` or `Binary` access.

(continued)

Method	Purpose
FreeFile	Returns a file number that is not currently associated with any file in this application. You should use FreeFile to get file numbers rather than using arbitrary numbers such as 1.
Input	Reads data written into a file by the Write method back into a variable.
InputString	Reads a specific number of characters from the file.
LineInput	Returns the next line of text from the file.
Loc	Returns the current position within the file.
LOF	Returns the file's length in bytes.
Print	Prints values into the file. Multiple values separated by commas are aligned at tab boundaries.
PrintLine	Prints values followed by a new line into the file. Multiple values separated by commas are aligned at tab boundaries.
Seek	Moves to the indicated position within the file.
Write	Writes values into the file, delimited appropriately so that they can later be read by the Input method.
WriteLine	Writes values followed by a new line into the file, delimited appropriately so that they can later be read by the Input method.

The following table describes Visual Basic methods that manipulate directories and files. They let an application list, rename, move, copy, and delete files and directories.

Method	Purpose
ChDir	Changes the application's current working directory.
ChDrive	Changes the application's current working drive.
CurDir	Returns the application's current working directory.
Dir	Returns a file matching a directory path specification that may include wildcards, and matching certain file properties such as ReadOnly, Hidden, or Directory. The first call to Dir should include a path. Subsequent calls can omit the path to fetch the next matching file for the initial path. Dir returns file names without the path and returns Nothing when no more files match.
FileCopy	Copies a file to a new location.
FileDateTime	Returns the date and time when the file was created or last modified.

Method	Purpose
FileLen	Returns the length of a file in bytes.
GetAttr	Returns a value indicating the file's attributes. The value is a combination of the values vbNormal, vbReadOjnly, vbHidden, vbSystem, vbDirectory, vbArchive, and vbAlias.
Kill	Permanently deletes a file.
MkDir	Creates a new directory.
Rename	Renames a directory or file.
RmDir	Deletes an empty directory.
SetAttr	Sets the file's attributes The value is a combination of the values vbNormal, vbReadOjnly, vbHidden, vbSystem, vbDirectory, vbArchive, and vbAlias.

Framework Classes

The System.IO namespace provides several classes for working with the file system. The following sections describe the properties, methods, and events provided by these classes.

FileSystem

The FileSystem class provides shared methods for working with the file system at a large scale. The following table describes its most useful properties and methods.

Property or Method	Purpose
CombinePath	Combines a base path with a relative child path and returns the resulting path. For example, the statement FileSystem.CombinePath("C:\Someplace\Lost", "..\Else") returns C:\Someplace\Else.
CopyDirectory	Copies a directory and its contents to a new location. A parameter indicates whether you want to overwrite existing files that have the same names.
CopyFile	Copies a file to a new location, possibly overwriting an existing file.
CreateDirectory	Creates a new directory.
DeleteDirectory	Deletes an existing directory. Parameters indicate whether the method should recursively delete the directory's contents and whether the deleted files should be placed in the Recycle Bin or deleted permanently.

(continued)

Property or Method	Purpose
DeleteFile	Deletes a file. A parameter indicates whether the file should be placed in the Recycle Bin or deleted permanently.
DirectoryExists	Returns `True` if the specified directory exists.
FileExists	Returns `True` if the specified file exists.
FindInFiles	Returns a collection holding names of files that contain a search string.
GetDirectories	Returns a read-only collection of strings giving the subdirectories within a specific directory. Parameters indicate whether the method should recursively search the subdirectories and whether the routine should allow wildcards.
GetDirectoryInfo	Returns a `DirectoryInfo` object representing a directory. Note that the directory need not exist yet. For example, you can create a `DirectoryInfo` object and then use its `Create` method to create the directory.
GetDriveInfo	Returns a `DriveInfo` object representing a drive.
GetFileInfo	Returns a `FileInfo` object representing a file. Note that the file need not exist yet. For example, you can create a `FileInfo` object and then use its `Create` method to create the file.
GetFiles	Returns a read-only collection of strings giving the names of files within a specific directory. Parameters indicate whether the method should recursively search the subdirectories and whether the routine should allow wildcards.
GetName	Returns the name portion of a file path.
GetParentPath	Returns a directory's parent directory path.
GetTempFileName	Creates a uniquely named empty file and returns its full path.
MoveDirectory	Moves a directory to a new parent directory. A parameter indicates whether you want to overwrite existing files with the same names.
MoveFile	Moves a file to a new directory. Parameters indicate whether the file should overwrite an existing file at the new location.
OpenTextFieldParser	Returns a `TextFieldParser` for a file. A `TextFieldParser` makes it easy to read fields from a delimited file or from a file with fixed-width field columns.
OpenTextFileReader	Returns a `StreamReader` attached to a file.
OpenTextFileWriter	Returns a `StreamWriter` attached to a file. A parameter indicates whether the `StreamWriter` should append to the file or create a new file.

Property or Method	Purpose
ReadAllBytes	Returns a file's contents as an array of bytes.
ReadAllText	Returns a file's contents as a string.
RenameDirectory	Changes a directory's name within its current parent directory.
RenameFile	Changes a file's name within its current directory.
WriteAllBytes	Writes a byte array into a file. A parameter indicates whether the method should append the bytes to the file or create a new file.
WriteAllText	Writes a string into a file. A parameter indicates whether the method should append the string to the file or create a new file.

Directory

The Directory class provides shared methods for working with directories. The following table summarizes its shared methods.

Method	Purpose
CreateDirectory	Creates all of the directories along a path.
Delete	Deletes a directory and its contents. It can recursively delete all subdirectories.
Exists	Returns True if the path points to an existing directory.
GetCreationTime	Returns a directory's creation date and time.
GetCreationTimeUtc	Returns a directory's creation date and time in Coordinated Universal Time (UTC).
GetCurrentDirectory	Returns the application's current working directory.
GetDirectories	Returns an array of strings holding the fully qualified names of a directory's subdirectories.
GetDirectoryRoot	Returns the directory root for a path, which need not exist (for example, C:\).
GetFiles	Returns an array of strings holding the fully qualified names of a directory's files.
GetFileSystemEntries	Returns an array of strings holding the fully qualified names of a directory's files and subdirectories.
GetLastAccessTime	Returns a directory's last access date and time.
GetLastAccessTimeUtc	Returns a directory's last access date and time in UTC.

(continued)

Method	Purpose
GetLastWriteTime	Returns the date and time when a directory was last modified.
GetLastWriteTimeUtc	Returns the date and time when a directory was last modified in UTC.
GetLogicalDrives	Returns an array of strings listing the system's logical drives as in A:\. The list includes drives that are attached. For example, it lists an empty floppy drive and a connected flash disk but doesn't list a flash disk after you disconnect it.
GetParent	Returns a `DirectoryInfo` object representing a directory's parent directory.
Move	Moves a directory and its contents to a new location on the same disk volume.
SetCreationTime	Sets a directory's creation date and time.
SetCreationTimeUtc	Sets a directory's creation date and time in UTC.
SetCurrentDirectory	Sets the application's current working directory.
SetLastAccessTime	Sets a directory's last access date and time.
SetLastAccessTimeUtc	Sets a directory's last access date and time in UTC.
SetLastWriteTime	Sets a directory's last write date and time.
SetLastWriteTimeUtc	Sets a directory's last write date and time in UTC.

File

The `File` class provides shared methods for working with files. The following table summarizes its most useful shared methods.

Method	Purpose
AppendAllText	Adds text to the end of a file, creating it if it doesn't exist, and then closes the file.
AppendText	Opens a file for appending UTF-8 encoded text and returns a `StreamWriter` attached to it.
Copy	Copies a file.
Create	Creates a new file and returns a `FileStream` attached to it.
CreateText	Creates or opens a file for writing UTF-8 encoded text and returns a `StreamWriter` attached to it.
Delete	Permanently deletes a file.

Method	Purpose
Exists	Returns `True` if the specified file exists.
GetAttributes	Gets a file's attributes. This is a combination of flags defined by the `FileAttributes` enumeration, which defines the values `Archive`, `Compressed`, `Device`, `Directory`, `Encrypted`, `Hidden`, `Normal`, `NotContextIndexed`, `Offline`, `ReadOnly`, `ReparsePoint`, `SparseFile`, `System`, and `Temporary`.
GetCreationTime	Returns a file's creation date and time.
GetCreationTimeUtc	Returns a file's creation date and time in UTC.
GetLastAccessTime	Returns a file's last access date and time.
GetLastAccessTimeUtc	Returns a file's last access date and time in UTC.
GetLastWriteTime	Returns a file's last write date and time.
GetLastWriteTimeUtc	Returns a file's last write date and time in UTC.
Move	Moves a file to a new location.
Open	Opens a file and returns a `FileStream` attached to it. Parameters let you specify the mode (`Append`, `Create`, `CreateNew`, `Open`, `OpenOrCreate`, or `Truncate`), access (`Read`, `Write`, or `ReadWrite`), and sharing (`Read`, `Write`, `ReadWrite`, or `None`) settings.
OpenRead	Opens a file for reading and returns a `FileStream` attached to it.
OpenText	Opens a UTF-8 encoded text file for reading and returns a `StreamReader` attached to it.
OpenWrite	Opens a file for writing and returns a `FileStream` attached to it.
ReadAllBytes	Returns a file's contents in an array of bytes.
ReadAllLines	Returns a file's lines in an array of strings.
ReadAllText	Returns a file's contents in a string.
Replace	This method takes three file paths as parameters representing a source file, a destination file, and a backup file. If the backup file exists, the method permanently deletes it. It then moves the destination file to the backup file, and moves the source file to the destination file. For example, imagine a program that writes a log file every time it runs. It could use this method to keep three versions of the log: the current log (the method's source file), the most recent backup (the method's destination file), and a second backup (the method's backup file). This method throws an error if either the source or destination file doesn't exist.

(continued)

Method	Purpose
SetAttributes	Sets a file's attributes. This is a combination of flags defined by the FileAttributes enumeration, which defines the values Archive, Compressed, Device, Directory, Encrypted, Hidden, Normal, NotContextIndexed, Offline, ReadOnly, ReparsePoint, SparseFile, System, and Temporary.
SetCreationTime	Sets a file's creation date and time.
SetCreationTimeUtc	Sets a file's creation date and time in UTC.
SetLastAccessTime	Sets a file's last access date and time.
SetLastAccessTimeUtc	Sets a file's last access date and time in UTC.
SetLastWriteTime	Sets a file's last write date and time.
SetLastWriteTimeUtc	Sets a file's last write date and time in UTC.
WriteAllBytes	Creates or replaces a file, writes an array of bytes into it, and closes the file.
WriteAllLines	Creates or replaces a file, writes an array of strings into it, and closes the file.
WriteAllText	Creates or replaces a file, writes a string into it, and closes the file.

DriveInfo

A DriveInfo object represents one of the computer's drives. The following table describes the properties provided by this class. The final column in the table indicates whether a drive must be ready for the property to work without throwing an exception. Use the IsReady property to see whether the drive is ready before using those properties.

Property	Purpose	Must Be Ready?
AvailableFreeSpace	Returns the amount of free space available on the drive in bytes. This value takes quotas into account, so it may not match TotalFreeSpace.	True
DriveFormat	Returns the name of the file system type (such as NTFS or FAT32).	True
DriveType	Returns a DriveType enumeration value indicating the drive type. This value can be CDRom, Fixed, Network, NoRootDirectory, Ram, Removable, or Unknown.	False

Property	Purpose	Must Be Ready?
IsReady	Returns `True` if the drive is ready. Many `DriveInfo` properties are unavailable and raise exceptions if you try to access them while the drive is not ready.	False
Name	Return's the drive's name. This is the drive's root name as in `A:\` or `C:\`.	False
RootDirectory	Returns a `DirectoryInfo` object representing the drive's root directory. See the section "DirectoryInfo" later in this appendix for more information.	False
TotalFreeSpace	Returns the total amount of free space on the drive in bytes.	True
TotalSize	Returns the total amount of space on the drive in bytes.	True
VolumeLabel	Gets or sets the drive's volume label.	True

Different NTFS versions support different features. You can learn which version a volume is using by opening a command window and executing the command `fsutil fsinfo ntfsinfo d:`. *I don't know how to get this information from within Visual Basic. If you know how, let me know at* `RodStephens@vb-helper.com`.

DirectoryInfo

A `DirectoryInfo` object represents a directory. The following table summarizes its most useful properties and methods.

Property or Method	Purpose
Attributes	Gets or sets flags from the `FileAttributes` enumeration for the directory. These flags can include `Archive`, `Compressed`, `Device`, `Directory`, `Encrypted`, `Hidden`, `Normal`, `NotContentIndexed`, `Offline`, `ReadOnly`, `ReparsePoint`, `SparseFile`, `System`, and `Temporary`.
Create	Creates the directory. You can create a `DirectoryInfo` object, passing its constructor the fully qualified name of a directory that doesn't exist. You can then call the object's `Create` method to create the directory.

(continued)

Property or Method	Purpose
CreateSubdirectory	Creates a subdirectory within the directory and returns a DirectoryInfo object representing it. The subdirectory's path must be relative to the DirectoryInfo object's directory but can contain intermediate subdirectories. For example, the statement dir_info.CreateSubdirectory("Tools\Bin") creates the Tools subdirectory and the Bin directory inside that.
CreationTime	Gets or sets the directory's creation time.
CreationTimeUtc	Gets or sets the directory's creation time in UTC.
Delete	Deletes the directory if it is empty. A parameter lets you tell the object to delete its contents, too, if it isn't empty.
Exists	Returns True if the directory exists.
Extension	Returns the extension part of the directory's name. Normally, this is an empty string for directories.
FullName	Returns the directory's fully qualified path.
GetDirectories	Returns an array of DirectoryInfo objects representing the directory's subdirectories. An optional parameter gives a pattern to match. This method does not recursively search the subdirectories.
GetFiles	Returns an array of FileInfo objects representing files inside the directory. An optional parameter gives a pattern to match. This method does not recursively search subdirectories.
GetFileSystemInfos	Returns a strongly typed array of FileSystemInfo objects representing subdirectories and files inside the directory. The items in the array are DirectoryInfo and FileInfo objects, both of which inherit from FileSystemInfo. An optional parameter gives a pattern to match. This method does not recursively search subdirectories.
LastAccessTime	Gets or sets the directory's last access time.
LastAccessTimeUtc	Gets or sets the directory's last access time in UTC.
LastWriteTime	Gets or sets the directory's last write time.
LastWriteTimeUtc	Gets or sets the directory's last write time in UTC.
MoveTo	Moves the directory and its contents to a new path.
Name	Returns the directory's name without the path information.

Property or Method	Purpose
Parent	Returns a `DirectoryInfo` object representing the directory's parent. If the directory is its file system's root (for example, `C:\`), this returns `Nothing`.
Refresh	Refreshes the `DirectoryInfo` object's data. For example, if the directory has been accessed since the object was created, you must call `Refresh` to load the new `LastAccessTime` value.
Root	Returns a `DirectoryInfo` object representing the root of the directory's file system.
ToString	Returns the directory's fully qualified path and name.

FileInfo

A `FileInfo` object represents a file. The following table summarizes its most useful properties and methods.

Property or Method	Purpose
AppendText	Returns a `StreamWriter` that appends text to the file.
Attributes	Gets or sets flags from the `FileAttributes` enumeration for the file. These flags can include `Archive`, `Compressed`, `Device`, `Directory`, `Encrypted`, `Hidden`, `Normal`, `NotContentIndexed`, `Offline`, `ReadOnly`, `ReparsePoint`, `SparseFile`, `System`, and `Temporary`.
CopyTo	Copies the file and returns a `FileInfo` object representing the new file. A parameter lets you indicate whether the copy should overwrite an existing file if it already exists. If the destination path is relative, it is relative to the application's current directory, not to the `FileInfo` object's directory.
Create	Creates the file and returns a `FileStream` object attached to it. For example, you can create a `FileInfo` object passing its constructor the name of a file that doesn't exist. Then you can call the `Create` method to create the file.
CreateText	Creates the file and returns a `StreamWriter` attached to it. For example, you can create a `FileInfo` object passing its constructor the name of a file that doesn't exist. Then you can call the `CreateText` method to create the file.
CreationTime	Gets or sets the file's creation time.
CreationTimeUtc	Gets or sets the file's creation time in UTC.

(continued)

1149

Property or Method	Purpose
Delete	Deletes the file.
Directory	Returns a `DirectoryInfo` object representing the file's directory.
DirectoryName	Returns the name of the file's directory.
Exists	Returns `True` if the file exists.
Extension	Returns the extension part of the file's name including the period. For example, the extension for `game.txt` is `.txt`.
FullName	Returns the file's fully qualified path and name.
IsReadOnly	Returns `True` if the file is marked read-only.
LastAccessTime	Gets or sets the file's last access time.
LastAccessTimeUtc	Gets or sets the file's last access time in UTC.
LastWriteTime	Gets or sets the file's last write time.
LastWriteTimeUtc	Gets or sets the file's last write time in UTC.
Length	Returns the number of bytes in the file.
MoveTo	Moves the file to a new location. If the destination uses a relative path, it is relative to the application's current directory, not to the `FileInfo` object's directory. When this method finishes, the `FileInfo` object is updated to refer to the file's new location.
Name	The file's name without the path information.
Open	Opens the file with different mode (`Append`, `Create`, `CreateNew`, `Open`, `OpenOrCreate`, or `Truncate`), access (`Read`, `Write`, or `ReadWrite`), and sharing (`Read`, `Write`, `ReadWrite`, or `None`) settings. This method returns a `FileStream` object attached to the file.
OpenRead	Returns a read-only `FileStream` attached to the file.
OpenText	Returns a `StreamReader` with UTF-8 encoding attached to the file for reading.
OpenWrite	Returns a write-only `FileStream` attached to the file.
Refresh	Refreshes the `FileInfo` object's data. For example, if the file has been accessed since the object was created, you must call `Refresh` to load the new `LastAccessTime` value.
Replace	Replaces a target file with this one, renaming the old target as a backup copy. If the backup file already exists, it is deleted and replaced with the target. You can use this method to save backups of logs and other periodically updated files.
ToString	Returns the file's fully qualified name.

FileSystemWatcher

The `FileSystemWatcher` class lets an application watch for changes to a file or directory. The following table summarizes its most useful properties.

Property	Purpose
EnableRaisingEvents	Determines whether the component is enabled. Note that this property is `False` by default, so the watcher will not raise any events until you set it to `True`.
Filter	Determines the files for which the watcher reports events. You cannot watch for multiple file types as in `*.txt` and `*.dat`. Instead, use multiple `FileSystemWatchers`. If you like, you can use `AddHandler` to make all of the `FileSystemWatchers` use the same event handlers.
IncludeSubdirectories	Determines whether the object watches subdirectories within the main path.
InternalBufferSize	Determines the size of the internal buffer. If the watcher is monitoring a very active directory, a small buffer may overflow.
NotifyFilter	Determines the types of changes that the watcher reports. This is a combination of values defined by the `NotifyFilters` enumeration and can include the values `Attributes`, `CreationTime`, `DirectoryName`, `FileName`, `LastAccess`, `LastWrite`, `Security,` and `Size`.
Path	Determines the path to watch.

The following table summarizes the `FileSystemWatcher` class's two most useful methods.

Method	Purpose
Dispose	Releases resources used by the object.
WaitForChanged	Synchronously waits for a change to the target file or directory.

The following table summarizes the class's events.

Name	Description
Changed	A file or subdirectory has changed.
Created	A file or subdirectory was created.
Deleted	A file or subdirectory was deleted.
Error	The watcher's internal buffer overflowed.
Renamed	A file or subdirectory was renamed.

Path

The `Path` class provides shared properties and methods that you can use to manipulate paths. The following table summarizes its most useful public properties.

Property	Purpose
AltDirectorySeparatorChar	Returns the alternate character used to separate directory levels in a hierarchical path (typically, /).
DirectorySeparatorChar	Returns the character used to separate directory levels in a hierarchical path (typically, \ , as in `C:\Tests\Billing\2008q2.dat`).
InvalidPathChars	Returns a character array that holds characters that are not allowed in a path string. Typically, this array will include characters such as ", <, >, and |, as well as nonprintable characters such as those with ASCII values between 0 and 31.
PathSeparator	Returns the character used to separate path strings in environment variables (typically, ;).
VolumeSeparatorChar	Returns the character placed between a volume letter and the rest of the path (typically, :, as in `C:\Tests\Billing\2008q2.dat`).

The following table summarizes the `Path` class's most useful methods.

Method	Purpose
ChangeExtension	Changes a path's extension.
Combine	Returns two path strings concatenated. This does not simplify the result as the `FileSystem.CombinePath` method does.
GetDirectoryName	Returns a path's directory.
GetExtension	Returns a path's extension.
GetFileName	Returns a path's file name and extension.
GetFileNameWithoutExtension	Returns a path's file name without the extension.
GetFullPath	Returns a path's fully qualified value. This can be particularly useful for converting a partially relative path into an absolute path. For example, the statement `Path.GetFullPath("C:\Tests\OldTests\Software\..\..\New\Code")` returns `C:\Tests\New\Code`.

Method	Purpose
GetInvalidFileNameChars	Returns a character array that holds characters that are not allowed in a file names.
GetPathRoot	Returns a path's root directory string. For example, the statement `Path.GetPathRoot("C:\Invoices\Unpaid\Deadbeats")` returns `C:\`.
GetRandomFileName	Returns a random file name.
GetTempFileName	Creates a uniquely named, empty temporary file, and returns its fully qualified path. Your program can open that file for scratch space, do whatever it needs to do, close the file, and then delete it. A typical file name might be `C:\Documents and Settings\Rod\Local Settings\Temp\tmp19D.tmp`.
GetTempPath	Returns the path to the system's temporary folder. This is the path part of the file name returned by `GetTempFileName`.
HasExtension	Returns `True` if a path includes an extension.
IsPathRooted	Returns `True` if a path is an absolute path. This includes `\Temp\Wherever` and `C:\Clients\Litigation`, but not `Temp\Wherever` or `..\Uncle`.

My.Computer.FileSystem

The `My.Computer.FileSystem` object provides tools for working with drives, directories, and files. The following table summarizes this object's properties.

Property	Description
CurrentDirectory	Gets or sets the fully qualified path to the application's current directory.
Drives	Returns a read-only collection of `DriveInfo` objects describing the system's drives. See Chapter 38, "File-System Objects," for information about the `DriveInfo` class.
SpecialDirectories	Returns a `SpecialDirectoriesProxy` object that has properties giving the locations of various special directories such as the system's temporary directory and the user's `My Documents` directory. See the section "My.Computer.FileSystem.SpecialDirectories" later in this appendix for more information.

The following list summarizes the `My.Computer.FileSystem` object's methods.

Method	Purpose
CombinePath	Combines a base path with a relative path reference and returns a properly formatted fully qualified path.
CopyDirectory	Copies a directory. Parameters indicate whether to overwrite existing files, whether to display a progress indicator, and what to do if the user presses Cancel during the operation.
CopyFile	Copies a file. Parameters indicate whether to overwrite existing files, whether to display a progress indicator, and what to do if the user presses Cancel during the operation.
CreateDirectory	Creates all of the directories along a path.
DeleteDirectory	Deletes a directory. Parameters indicate whether to recursively delete subdirectories, prompt the user for confirmation, or move the directory into the Recycle Bin.
DeleteFile	Deletes a file. Parameters indicate whether to prompt the user for confirmation, or move the file into the Recycle Bin, and what to do if the user presses Cancel while the deletion is in progress.
DirectoryExists	Returns `True` if a specified directory exists.
FileExists	Returns `True` if a specified file exists.
FindInFiles	Returns a collection holding names of files that contain a search string.
GetDirectories	Returns a string collection listing subdirectories of a given directory. Parameters tell whether to recursively search the subdirectories, and wildcards to match.
GetDirectoryInfo	Returns a `DirectoryInfo` object for a directory. See the section "DirectoryInfo" earlier in this appendix for more information.
GetDriveInfo	Returns a `DriveInfo` object for a drive. See the section "DriveInfo" earlier in this appendix for more information.
GetFileInfo	Returns a `FileInfo` object for a file. See the section "FileInfo" earlier in this appendix for more information.
GetFiles	Returns a string collection holding the names of files within a directory. Parameters indicate whether the search should recursively search subdirectories and give wildcards to match.
GetParentPath	Returns the fully qualified path of a path's parent. For example, this returns a file's or directory's parent directory.

Method	Purpose
MoveDirectory	Moves a directory. Parameters indicate whether to overwrite files that have the same name in the destination directory and whether to prompt the user when such a collision occurs.
MoveFile	Moves a file. Parameters indicate whether to overwrite a file that has the same name as the file's destination and whether to prompt the user when such a collision occurs.
OpenTextFieldParser	Opens a `TextFieldParser` object attached to a delimited or fixed-field file (such as a log file). You can use the object to parse the file.
OpenTextFileReader	Opens a `StreamReader` object attached to a file. You can use the object to read the file.
OpenTextFileWriter	Opens a `StreamReader` object attached to a file. You can use the object to write into the file.
ReadAllBytes	Reads all the bytes from a binary file into an array.
ReadAllText	Reads all the text from a text file into a string.
RenameDirectory	Renames a directory within its parent directory.
RenameFile	Renames a file with its directory.
WriteAllBytes	Writes an array of bytes into a binary file. A parameter tells whether to append the data or rewrite the file.
WriteAllText	Writes a string into a text file. A parameter tells whether to append the string or rewrite the file.

My.Computer.FileSystem.SpecialDirectories

The `My.Computer.FileSystem.SpecialDirectories` property returns a `SpecialDirectoriesProxy` object that has properties giving the locations of various special directories (such as the system's temporary directory and the user's `My Documents` directory). The following table summarizes these special directory properties.

Property	Purpose
AllUsersApplicationData	The directory where applications should store settings for all users (typically, `C:\Documents and Settings\All Users\Application Data\<company>\<product>\<version>`).
CurrentUserApplicationData	The directory where applications should store settings for the current user (typically, `C:\Documents and Settings\<user>\Application Data\<company>\<product>\<version>`).

(continued)

1155

Property	Purpose
`Desktop`	The current user's desktop directory (typically, `C:\Documents and Settings\<user>\Desktop`).
`MyDocuments`	The current user's My Documents directory (typically, `C:\Documents and Settings\<user>\ My Documents`).
`MyMusic`	The current user's My Music directory (typically, `C:\Documents and Settings\<user>\ My Documents\My Music`).
`MyPictures`	The current user's My Pictures directory (typically, `C:\Documents and Settings\<user>\ My Documents\My Pictures`).
`Programs`	The current user's `Programs` directory (typically, `C:\Documents and Settings\<user>\ Start Menu\Programs`).
`Temp`	The current user's temporary directory (typically, `C:\Documents and Settings\<user>\ Local Settings\Temp`).

Index of Examples

This book includes 435 example programs that are available for download from the book's web site. This appendix briefly describes the examples in each chapter so you know which programs to look at for a particular topic.

Most of the chapters include example applications, so the following list includes entries for every chapter. Only Appendixes A, G, K, and M have examples so only they are listed here (although many of the chapters have examples covering material in the other appendixes).

- ❑ Chapter 1
  - ❑ There are no example programs for this chapter.
- ❑ Chapter 2
  - ❑ Factorial — Calculates factorials. This program is used for IDE screen shots. Its functionality is incidental.
- ❑ Chapter 3
  - ❑ There are no example programs for this chapter.
- ❑ Chapter 4
  - ❑ There are no example programs for this chapter.
- ❑ Chapter 5
  - ❑ There are no example programs for this chapter.
- ❑ Chapter 6
  - ❑ These programs are used to demonstrate breakpoints, bookmarks, IntelliSense, and other editing features. Their functionality is incidental. In fact, most of these are incomplete and don't run.
  - ❑ EditorStuff — Screen shots for collapsed regions.
  - ❑ Fibonacci — Calculates Fibonacci numbers. This one actually runs!
  - ❑ HoverOverVariable — Screen shots for drilling into an array to see its values.

❑　UseIntelliSense — Screen shots for IntelliSense.

❑　UseSnippets — Screen shots for using snippets.

❑　Chapter 7

❑　DebugWindows — Screen shots for Debug windows: Quick Watch, Watch, Exceptions, Locals, Breakpoint Condition, Breakpoint Hit Count, Breakpoint When Hit.

❑　Fibonacci — Another copy of this program for a screen shot of the Breakpoints window.

❑　Chapter 8

❑　EmployeePropertyGrid — Displays information about an object in a `PropertyGrid` control.

❑　LayoutPanels — Demonstrates the `FlowLayoutPanel` and `TableLayoutPanel` controls.

❑　UseDialogs — Demonstrates the `ColorDialog`, `FolderBrowserDialog`, `FontDialog`, `OpenFileDialog`, `PageSetupDialog`, `PrintDialog`, `PrintPreviewDialog`, and `SaveFileDialog` components.

❑　UseSplitContainer — Demonstrates the `SplitContainer` control.

❑　UseSplitter — Demonstrates the `Splitter` control, which requires the use of `Dock` properties and stacking order so it's harder than using a `SplitContainer`.

❑　UseToolStripContainer — Demonstrates the `ToolStripContainer`. Contains two `ToolStrip` controls that you can dock to the `ToolStripContainer`'s edges.

❑　Chapter 9

❑　AnchorButton — Anchors a button at runtime to the form's lower-right corner.

❑　ButtonContainers — Moving buttons in and out of containers at design time.

❑　CenteredButtons — Contains three buttons with Anchor = Bottom. When you resize the form, the buttons remain centered as a group.

❑　Components — Screen shot of components.

❑　CustomerDialog — Uses `Anchor` properties to make text fields resize horizontally when the form gets wider.

❑　CustomerOrders — Uses `Anchor` properties to make a list grow to use available vertical space.

❑　DisplayRectangles — Shows a `GroupBox`'s `DisplayRectangle` and `ClientRectangle`.

❑　DivideForm — Divides a form vertically between two text boxes.

❑　Docking — Demonstrates `Dock` properties.

❑　FiveDigits — Demonstrates a `Validating` event that requires the user to immediately fix problems.

❑　FiveDigitsDeferred — Demonstrates a `Validating` event that flags invalid data but allows the user to leave the invalid field and fix it later.

1159

❑ Smiley — Draws a shaped form.

❑ SplashScreen — Displays a form as a splash screen or as an About dialog.

❑ TestOpacities — Displays forms with `Opacity` values 25, 45, 65, and 85.

❑ TransparentForm — Draws a transparent form so only its controls are visible.

❑ UseMultipleWaitCursors — When you click its button, displays wait cursors on all of its forms.

❑ UseNotifyIcon — Demonstrates the `NotifyIcon` control.

❑ UseWaitCursor — When you click its button, displays a wait cursor.

❑ ViewWindowsMessages — Overrides `WndProc` and displays information about the messages the form receives.

❑ Wizard1 — Shows a particular style of wizard. This program is really intended to show the style, not implement it.

❑ Wizard2 — Shows a second style of wizard. This program is really intended to show the style, not implement it.

❑ Chapter 11

❑ DrawingShapes — Demonstrates WPF shape drawing elements: Ellipse, Line, Path, Polygon, Polyline, and Rectangle.

❑ EllipseClick — Changes the color of an ellipse when the mouse is over it and displays a message box when it's clicked.

❑ FormImage — Displays an image in a `Grid` control's background.

❑ ResizingButtons — Makes buttons with fixed height but that resize with their container's width.

❑ UseBulletDecorator — Demonstrates the `BulletDecorator` control.

❑ UseButtonRepeatButton — Demonstrates the `Button` and `RepeatButton` controls.

❑ UseCanvas — Uses a `Canvas` to exactly position controls.

❑ UseComboBox — Demonstrates a `ComboBox` control that contains items having different fonts and images.

❑ UseDockPanel — Demonstrates the `DockPanel` control.

❑ UseExpander — Demonstrates the `Expander` control.

❑ UseFrame — Demonstrates the `Frame` control, which provides navigation among `Page` objects.

❑ UseListBox — Demonstrates a `ListBox` control that contains items having different fonts and images.

❑ UseMediaElement — Demonstrates the `MediaElement` control to play a Windows movie (`.wmv`) file.

❑ UseMenuContextMenu — Demonstrates the `Menu` and `ContextMenu` controls.

❑ ProceduralAnimatedButton — Creates buttons at design time and animates them growing and shrinking when the mouse moves over them.

❑ ProceduralCalculator — Similar to program Calculator except it creates all of its buttons at runtime.

❑ RotatedButton — Displays buttons that are transformed to make them tall, wide, sideways, and rotated.

❑ RotatingCube — Uses 3D controls to display a cube. Scroll bars let you control the cube's orientation.

❑ Shapes — Demonstrates shape controls including Polygon, Polyline, Ellipse, Line, and Path.

❑ SpinAndGrowButton — Displays a button that uses XAML code to grow and rotate when clicked.

❑ SpinButton — Displays a button that uses XAML code to rotate when clicked.

❑ UseFixedDocument — Displays a `FixedDocument` object inside a `DocumentViewer` control.

❑ UseFlowDocument — Displays a `FlowDocument` object.

❑ UseFlowDocumentPageViewer — Displays a `FlowDocument` object inside a `FlowDocumentPageViewer`.

❑ UseFlowDocumentReader — Displays a `FlowDocument` object inside a `FlowDocumentReader`. Menu commands let you change the viewing mode.

❑ UseFlowDocumentScrollViewer — Displays a `FlowDocument` object inside a `FlowDocumentScrollViewer`.

❑ Chapter 13

❑ BrowserApp — Displays two `Page` objects in a web browser.

❑ BrowserWizard — Displays a wizard made up of `Page` objects in a web browser.

❑ FrameApp — Displays two `Page` objects in a `Frame` control.

❑ UseDialog — Displays a second WPF window as a dialog.

❑ UsePageFunction — Uses the `PageFunction` class to display pages in a web browser.

❑ Chapter 14

❑ AssignJobs — Defines classes that you can view in the Object Browser. Uses XML comments to generate XML documentation.

❑ CompilerConstantsInCode — Checks compiler constants that are defined in code or that are automatically defined.

❑ CompilerConstantsSettings — Checks compiler constants that are defined as settings.

❑ DebugLevel — Uses a `DEBUG_LEVEL` constant to determine the amount of debugging output.

❑ EmployeeAssert — Demonstrates `Debug.Assert`.

❑   ShowAssemblyInfo — Displays assembly information.

❑   WpfCompilerConstantsInCode — WPF version of CompilerConstantsInCode.

❑ Chapter 15

  ❑   AccessLevelEnum — Defines an `Enum` and then shows the values returned by its values' `ToString` methods.

  ❑   InitializeArrays — Shows how to initialize 2- and 3-dimensional arrays.

  ❑   NullableTypes — Demonstrates nullable type calculations.

  ❑   ScopeTest — Demonstrates scope of module-level and local variables.

  ❑   ShadowTest — Demonstrates class properties shadowing parent class properties.

  ❑   TimeGenericObjects — Compares the speeds of using an integer for a looping variable and using a variable with no declared data type.

  ❑   UseDelegates — Demonstrates delegates to shared class methods and instance methods.

  ❑   WithEventsControls — Shows how to declare objects with the `WithEvents` keyword.

❑ Chapter 16

  ❑   ComplexNumbers — Builds a `ComplexNumber` class and provides operator overloads to perform arithmetic operations.

  ❑   MultiplyTimeSpan — Shows how to multiply a `TimeSpan` by a number.

  ❑   StringBuilderTest1 — Compares the times needed to build a long string with and without the `StringBuilder` class.

  ❑   StringBuilderTest2 — Compares the times needed to build a very long string with and without the `StringBuilder` class.

❑ Chapter 17

  ❑   AttributeConditional — Demonstrates the `Conditional` attribute.

  ❑   Flavors — Uses relaxed delegates to declare an event handler's "sender" parameter with a specific data type.

  ❑   HandleMultipleEvents — Uses relaxed delegates to catch dissimilar events with a single event handler.

  ❑   InlineFunction — Demonstrates inline lambda functions.

  ❑   LambdaFunction — Demonstrates a lambda function.

  ❑   PartialMethods — Demonstrates partial methods.

  ❑   RelaxedDelegates — Uses a delegate type to call three routines that declare their parameters differently.

  ❑   RelaxedEventHandlers — Uses relaxed delegates in event handler parameters.

❑ ValidatePhone — Adds extension methods to the `String` class to see if a String matches a regular expression or looks like a U.S. phone number.

❑ Chapter 18

  ❑ EnumerateEmployees — Demonstrates a generic enumerator.

  ❑ ExitAndContinue — Demonstrates `Exit` and `Continue` statements in loops.

  ❑ Loops — Demonstrates `For Each` loops, using an enumerator with `Do While Loop`, and using an enumerator with `While End While`.

❑ Chapter 19

  ❑ ClassicErrorHandling — Demonstrates classic `On Error` style error handling.

  ❑ ClimbStackTrace — Shows how to climb a stack trace.

  ❑ CustomException — Shows how to make a custom exception.

  ❑ DrawableRect — Shows how to validate parameters and throw `ArgumentExceptions`.

  ❑ GlobalException — Shows how to catch all errors even if an error handler is not active when the error occurs.

  ❑ OnErrorGoToMinus1 — Demonstrates `On Error GoTo -1`.

  ❑ ShowExceptionInfo — Shows an exception's `Message`, `StackTrace`, and `ToString` values.

  ❑ SortOrders — Shows how a program might protect itself against errors. This program doesn't actually do anything.

  ❑ SortValues — Displays and sorts random numbers.

  ❑ ThrowError — Shows how to catch errors with `Try Catch`.

  ❑ ValidateInteger — Uses error handling to validate integer input.

❑ Chapter 20

  ❑ BindComboBox — Binds a `ComboBox`.

  ❑ BindListBox — Binds a `ListBox`.

  ❑ BindSimple — Uses simple binding on text boxes.

  ❑ BindSimpleMemoryDataSet — Uses simple binding on text boxes with a `DataSet` built in memory.

  ❑ CommandInsert — Uses a `Command` object to insert records.

  ❑ DataGrids — Demonstrates multiple `DataGrid` controls attached to different `DataViews`.

  ❑ GenerateCommands — Uses an `OleDbCommandBuilder` to get `INSERT`, `UPDATE`, and `DELETE` commands for a data adapter.

  ❑ MakeDataSource — A basic program that connects to a data source.

  ❑ MakeDataSourceFields — A basic program that connects to a data source and displays data one record at a time.

❑ OrderByExamples — Demonstrates `Order By` clauses ascending and descending, sometimes modifying the results.

❑ SetExamples — Demonstrates set clauses and functions such as `Distinct`, `Union`, `Intersect`, and `Except`.

❑ SimpleGroupBy — Copies results of relatively simple `Group By` queries into a `TreeView` control.

❑ SimpleSamples — Demonstrates simple LINQ queries, joins, result field selection, and results that of a specific class.

❑ Chapter 22

❑ BreakSignature — Modifies a strongly signed assembly to break its signature.

❑ ColorScrollerTest — Includes a composite control.

❑ EmployeeRegisterTest — Demonstrates control attributes.

❑ FaceControls — Control library containing the `SmileyFace` control.

❑ FaceControlsTest — Test program for `FaceControls`.

❑ InvisibleControlTest — Demonstrates a control that is invisible at runtime.

❑ LabControls — Contains three controls that don't do anything but that you can use to derive a new inherited control.

❑ RowSortingListViewTest — Includes the `RowSortingListView` control that inherits from `ListView`.

❑ ShowModeTest — Includes the `ShowMode` control that indicates whether it is running in design more or run mode.

❑ SignedAssembly — A signed DLL library.

❑ SignedAssemblyTest — Test program for SignedAssembly.

❑ SimpleSmileyControls — Control library containing a `SimpleSmiley` control that inherits from `Control` rather than `UserControl`.

❑ SimpleSmileyControlsTest — Test program for SimpleSmileyControls.

❑ WorkItemControls — Defines a control that has a property that contains a collection.

❑ WorkItemControlsTest — Test program for WorkItemControls.

❑ Chapter 23

❑ AcceptDroppedFiles — Displays a list of files dropped onto the program's drop target.

❑ CopyPasteEmployee — Copies and pastes an `Employee` object using the clipboard.

❑ CopyPasteRichText — Copies and pastes data in RFT, HTML, and text formats using the clipboard.

❑ DragBetweenListBoxes — Lets the user to drag values from one `ListBox` to another.

❑ DragBetweenListBoxes2 — Lets the user drag-and-drop to move or copy values from one `ListBox` to another.

❑ DragEmployee — Lets the user drag-and-drop an `Employee` object.

❑ DragEmployee2 — Lets the user drag-and-drop an `Employee` object with the data name "Employee."

❑ DragRichText — Lets the user to drag-and-drop data in RTF, HTML, and text formats.

❑ DragWithinApp — Lets the user drag data but only within this application.

❑ LabelDrag — Demonstrates very simple drag-and-drop.

❑ LabelDrag2 — Demonstrates very simple drag-and-drop while verifying that the dragged data comes in text format.

❑ PasteFileList — Displays a list of files copied to the clipboard.

❑ Chapter 24

  ❑ AddShields — Adds UAC shields to buttons, links, and menu items.

  ❑ ExecuteMe — Uses a manifest to require administrator privilege to run.

  ❑ NoPrivs — A simple program that doesn't use its manifest to require privileges. Program StartRunAs starts this program, requesting privilege elevation.

  ❑ ShellUAC — Displays a UAC shield and starts program ExecuteMe, which requires privilege elevation.

  ❑ StartRunAs — Uses `Process.Start` to start program NoPrivs. It sets the process's `Verb` to `runas` to require privilege elevation.

❑ Chapter 25

  ❑ There are no example programs for this chapter.

❑ Chapter 26

  ❑ CustomEvent — Demonstrates a custom event.

  ❑ FinalizeObjects — Demonstrates object finalization then the program ends.

  ❑ GarbageCollection — Creates objects until garbage collection occurs.

  ❑ StructuresAndClasses — Demonstrates the fact that setting a class variable equal to another makes them both point to the same object while setting a structure variable equal to another makes a separate copy of the structure.

  ❑ UseDispose — Demonstrates using a `Dispose` method.

❑ Chapter 27

  ❑ DrawDashes — Draws a dashed rectangle inside the form.

  ❑ DrawDashesImportsDashStyle — Draws a dashed rectangle inside the form. It imports the `DashStyle` enum to make the code easier to read.

❑ DrawDashesWithImports — Draws a dashed rectangle inside the form. It imports System. Drawing.Drawing2D to make the code easier to read.

❑ JobNamespaces — Demonstrates namespaces.

❑ NamespaceHierarchy — Defines a namespace hierarchy.

❑ Chapter 28

❑ ArraySpeeds — Compares the speed of normal arrays with `Array` objects.

❑ ArrayTests — Demonstrates the `Array` class methods `IndexOf`, `LastIndexOf`, `Reverse`, and `BinarySearch`. Also sorts integers, objects that implement `IComparable`, and objects that can be sorted with `IComparer` objects.

❑ GenericEmployeeList — Derives a strongly typed `EmployeeList` class from the generic `List(Of Employee)` class.

❑ GenericStringList — Demonstrates a generic `List(Of String)`.

❑ MakeEmployeeCollection — Builds a strongly typed collection of `Employee` objects.

❑ MakeEmployeeDictionary — Builds a strongly typed dictionary of `Employee` objects.

❑ MakeEmployeeListDictionary — Builds a strongly typed list dictionary of `Employee` objects.

❑ ShowSquares — Builds a normal array and an `Array` object containing squares of numbers.

❑ UseArrayList — Demonstrates `ArrayList` methods.

❑ UseCaseInsensitiveSortedList — Demonstrates a case-insensitive `SortedList`.

❑ UseNameValueCollection — Demonstrates the `NameValueCollection` class.

❑ UseQueue — Demonstrates a `Queue`.

❑ UseSortedList — Demonstrates the `SortedList` class.

❑ UseStack — Demonstrates a `Stack`.

❑ Chapter 29

❑ GenericEmployeeList — Derives a strongly typed `EmployeeList` class from the generic `List(Of Employee)` class.

❑ GenericMruList — Builds a generic `MostRecentList(Of ItemType)` class.

❑ GenericMruList2 — Builds a generic `MostRecentList(Of ItemType As IComparable)` class.

❑ GenericNumDistinct — Demonstrates a generic extension method.

❑ GenericPairDictionary — Builds a generic `PairDictionary(Of KeyType, DataType1, DataType2)` class.

❑ GenericTree — Builds a generic `Tree(Of DataType)` class and uses derived classes to make building objects easier.

- ❑ HatchStyles — Shows samples of the available hatch styles.
- ❑ LinearGradientBrushes — Demonstrates linear gradient brush features such as blends, sigma bell shape, and wrap mode.
- ❑ LineCaps — Displays samples of the available line caps.
- ❑ LineJoins — Demonstrates line join styles (miter, bevel, clipped).
- ❑ PathGradientBrushes — Demonstrates path gradient brushes.
- ❑ PenAlignments — Demonstrates pen alignments (insert or center).
- ❑ TransformedPen — Demonstrates a pen transformation.
- ❑ TransformedTextureBrush — Fills a polygon with a transformed image.
- ❑ UseDispose — Use the `Dispose` method to free Pen, Brush, and Graphics resources.
- ❑ UseSolidBrush — Demonstrates using stock solid brushes.
- ❑ UseUsing — Uses `Using` statements to free Pen, Brush, and Graphics resources.
- ❑ WrapModes — Demonstrates image tiling wrap modes.

❑ Chapter 32

- ❑ DirectionVertical — Draws text rotated 90 degrees.
- ❑ DrawStringCrLfTab — Draws text containing vbCrLf and tabs.
- ❑ DrawStringLayoutRect — Uses a layout rectangle to align text.
- ❑ DrawStringSimple — Draws a simple string.
- ❑ FontMetrics — Displays measurements for three fonts.
- ❑ MeasureCharacterRanges — Displays positions for the character in a string.
- ❑ MeasureString — Measures a string and draws a box showing its size.
- ❑ NoClipLineLimit — Demonstrates string formatting flags that determine how text is clipped.
- ❑ SetTabs — Sets tab stop positions and then draws text containing tabs.
- ❑ TransformedText — Draws text rotated 60 degrees.
- ❑ Trimming — Shows different ways to use the `StringFormat` object's `Trimming` property to control how text is trimmed.

❑ Chapter 33

- ❑ AutoRedraw — Draws an image when the form loads or resizes. Save the result in a `PictureBox`'s `Image` property so it doesn't need to handle `Paint` events.
- ❑ InvertImageGetSetPixels — Inverts the pixels in an image by using the `Bitmap` object's `GetPixel` and `SetPixel` methods.
- ❑ InvertImageUnsafe — Uses "unsafe" methods to invert an image's pixels.
- ❑ LoadPicture — Loads a picture from a file and copies it so the file isn't locked.

❑ MakeMetafile — Makes a metafile and draws it twice at different sizes.

❑ SaveJpeg — Saves an image in a JPEG file.

❑ Scribble — Lets the user draw with the mouse.

❑ Chapter 34

   ❑ CenterPicture — Prints a picture centered on the page.

   ❑ FitToMargins — Prints a picture enlarged to fit the page without distortion.

   ❑ PictureBoxPrint — Draws a picture on a form and displays a print preview scaled to fit the page without distortion.

   ❑ PrintBooklet — Prints a multi-page document with gutters and page numbers on alternating sides.

   ❑ PrintMargins — Draws rectangles around the page's margins and bounds.

   ❑ PrintSimple — Displays a print preview or print dialog, or prints a simple diamond shape.

   ❑ UsePrintPreviewControl — Demonstrates the `PrintPreviewControl` control.

   ❑ UsePrintPreviewDialog — Displays a print preview or print dialog, or prints three pages.

❑ Chapter 35

   ❑ TestScores — Displays an initial version of a Crystal Report.

   ❑ TestScores2 — Displays a reformatted version of a Crystal Report.

   ❑ TestScores3 — Loads a Crystal Report at runtime.

   ❑ TestScores4 — Demonstrates modifying a report at runtime.

❑ Chapter 36

   ❑ CatchThreadException — Uses `AddHandler` at runtime to add an event handler to catch thread exceptions.

   ❑ ConfigFile — Demonstrates properties bound to configuration file values.

   ❑ EmbeddedResources — Loads data from resources at runtime.

   ❑ EnvironmentVariableLevels — Gets and sets environment variables on the system, user, and process level.

   ❑ FilterMessages — Filters out the form's `WM_LBUTTONDOWN` messages so left-clicks are ignored.

   ❑ GetEnvironValue — Uses the `Environ` collection to list environment variables. When the user selects one, displays its value.

   ❑ ListEnviron — Uses the `Environ` collection to list environment variables and their values.

   ❑ ListEnvironValues — Uses the `Environ` collection to list environment variables and their values in a `ListView`.

   ❑ ListForms — Uses the `Application.OpenForms` collection to list the program's open forms.

❑ Localized — This program is localized for English and German. The system automatically picks the best localization for the system.

❑ LocalizedPickLanguage — Uses a `ComponentResourceManager` to change locales at runtime.

❑ LocalizedPickLanguage2 — Changes the current thread's `CurrentCulture` and `CurrentUICulture`, and then uses a `ComponentResourceManager` to change locales at runtime.

❑ LocalizedUseGerman — Uses a customized form constructor to select the German locale.

❑ MyComputerRegistry — Uses Registry objects to get, set, and delete Registry values.

❑ RegistrySettings — Uses `GetSetting`, `SaveSetting`, `GetAllSettings`, and `DeleteSetting` to get, set, and delete Registry values.

❑ SatelliteMain — Main program that loads resources from satellite assembly SatelliteResourcesDll.dll.

❑ SatelliteResourcesDll — Satellite resource-only assembly.

❑ SaveSettings — Demonstrates saving user-scope settings in My.Settings.

❑ ShowProductInfo — Displays the application's CompanyName, ProductName, and ProductVersion.

❑ ShowSettings — Displays a list of the program's settings.

❑ SystemEnvironment — Displays `System.Environment` values including a stack trace.

❑ UseResources — Loads values from resources at runtime.

❑ Chapter 37

❑ FileStreamWrite — Uses a `FileStream` to write "Hello world!" into a file.

❑ MemoryStreamWrite — Writes into a `MemoryStream`, seeks to its beginning, and reads the text back.

❑ OpenCreateAppendText — Shows how to see if a file exists, open an existing file, create a new file (overwriting the old one if it exists), and append to an existing file.

❑ ReadLines — Demonstrates the `StreamReader`'s `ReadLine` and `EndOfStream` methods.

❑ StreamWriterReader — Uses `StreamWriter` and `StreamReader` objects to write and then read a text file.

❑ StringWriterReader — Uses `StringWriter` and `StringReader` objects to write and then read a string.

❑ Chapter 38

❑ GetDriveInfo — Uses the `DriveInfo` class to get information about the system's drives.

❑ InvalidCharacters — Uses `Path.GetInvalidFileNameChars` and `Path.GetInvalidPathChars` to list characters that are not allowed in file names and paths.

❑ RandomAccessEmployees — Makes fixed-sized records in a file and then randomly accesses them.

❑ Appendix A

    ❑ DisplayRectangles — Shows a `GroupBox`'s `DisplayRectangle` and `ClientRectangle`.

    ❑ See the chapter listings for more examples that demonstrate control properties, methods, and events. In particular, see Chapter 8, "Selecting Windows Forms Controls," and Chapter 9, "Using Windows Forms Controls."

❑ Appendix G

    ❑ CustomColorDialog — Displays a color dialog with custom colors.

    ❑ FlowDirections — Demonstrates the `FlowLayoutPanel` control's `FlowDirection` property values `LeftToRight`, `RightToLeft`, `TopDown`, and `BottomUp`.

    ❑ ListViewCustomSort — Uses an `IComparer` class to implement a custom sort for the `ListView` control. Also shows how to let the user select different display modes.

    ❑ MultiLineLabel — Uses a multi-line label.

    ❑ RunTimeListView — Inserts data into a `ListView` control at runtime.

    ❑ UseBackgroundWorker — Demonstrates a `BackgroundWorker` component controlling a simulated long task.

    ❑ UseButton — Demonstrates a button.

    ❑ UseCheckedListBox — Displays a `CheckedListBox` that displays `Employee` objects (shows how to display objects in a `ListBox` or `ComboBox`). Shows how to enumerate the selected items.

    ❑ UseColorDialog — Shows how to let the user select a color.

    ❑ UseComboBox — Demonstrates the `ComboBox` control and its different `DropDownStyle` values.

    ❑ UseDataGrid — Demonstrates a `DataGrid` control attached to a database.

    ❑ UseDateTimePicker — Demonstrates the `DateTimePicker` control.

    ❑ UseDomainUpDown — Uses the `DomainUpDown` control to let the user select a month by name.

    ❑ UseErrorProvider — Use an `ErrorProvider` component to display an error indicator if the user doesn't enter a five-digit ZIP code.

    ❑ UseEventLog — Demonstrates the `EventLog` component. Note that you must have sufficient privileges to access the log.

    ❑ UseFolderBrowserDialog — Demonstrates the `FolderBrowserDialog` component.

    ❑ UseFontDialog — Demonstrates the `FontDialog`.

    ❑ UseFontDialogWithShowEffects — Demonstrates the `FontDialog`. Allows the user to click the Apply button to show the new font on the form, and then cancel or okay the changes.

    ❑ UseGroupBox — Demonstrates `GroupBoxes` containing `RadioButtons`.

❑ UseHelpProvider — Uses a `HelpProvider` to display a help popup if the user selects a field and presses F1.

❑ UseHScrollBar — Demonstrates the `HScrollBar` control.

❑ UseLinkLabel — Demonstrates the `LinkLabel` control and shows how to open a web site when the user clicks a link.

❑ UseListView — Demonstrates the `ListView` control and its display modes.

❑ UseMonthCalendar — Demonstrates the `MonthCalendar` control. Sets the control's minimum, maximum, and current dates; selects date range; and bolds Mondays.

❑ UseMonthCalendarInDialog — Shows how to make a dialog that displays a `MonthCalendar` control that shows two rows of three months. The dialog lets the user pick a date range and returns OK or Cancel.

❑ UseNotifyIcon — Demonstrates the `NotifyIcon` component and shows how to add a `ContextMenu` to the notification icon.

❑ UseNumericUpDown — Demonstrates the `NumericUpDown` control.

❑ UseOpenFileDialog — Demonstrates the `OpenFileDialog` component. Shows how to catch the `FileOk` event to validate the user's selection.

❑ UsePageSetupDialog — Demonstrates the `PageSetupDialog`.

❑ UsePanel — Demonstrates a `Panel` with AutoScroll. Lets the user set the control's `AutoScrollPosition`.

❑ UsePictureBox — Shows three ways to draw on `PictureBoxes`: by assigning an image to a `PictureBox`'s `Image` property, by drawing in the `PictureBox`'s `Paint` event handler, and when the code executes so the image is not refreshed later.

❑ UsePrintDialog — Demonstrates the `PrintDialog` component.

❑ UsePrintPreviewControl — Uses a `PrintPreviewControl` control to display three pages of printout inside a form.

❑ UsePrintPreviewDialog — Uses a `PrintPreviewDialog` to display three pages of printout in a dialog.

❑ UseProcess — Demonstrates the `Process` component by using it to start a new process running this program.

❑ UseProgressBar — Demonstrates the `ProgressBar` control.

❑ UsePropertyGrid — Displays `Employee` object data in a `ListBox` and a `PropertyGrid`.

❑ UseRadioButton — Demonstrates `RadioButton` controls inside `GroupBoxes`.

❑ UseRichTextBox — Demonstrates the `RichTextBox` control. Shows how to apply colors to selections and how to use the control's undo and redo features.

❑ UseSaveFileDialog — Demonstrates the `SaveFileDialog` component. Shows how to catch the `FileOk` event to validate the user's selection.

1175

❑ UseSplitContainer — Demonstrates a `SplitContainer` control containing two `PictureBoxes`. The two `Panels` automatically provide scroll bars if they are sized so their images don't fit.

❑ UseStatusStrip — Demonstrates a `StatusStrip` control containing a menu, progress bar, image, and label that displays the time.

❑ UseTabControl — Demonstrates the `TabControl`.

❑ UseTabControlOwnerDrawn — Demonstrates an owner-drawn `TabControl`.

❑ UseTableLayoutPanel — Demonstrates the `TableLayoutPanel` control. Its row heights are set to auto size so each row sizes itself to hold its contents.

❑ UseTextBox — Demonstrates `TextBoxes`. (This program is the same as UseTableLayoutPanel, which contains `TextBoxes`.)

❑ UseTimer — Demonstrates three `Timer` components running at different speeds.

❑ UseToolStrip — Demonstrates a `ToolStrip` containing a button, label, combo box, drop-down menu containing images, text box, and progress bar.

❑ UseToolStripContainer — Demonstrates a `ToolStripContainer` holding six `ToolStrip` controls including two oriented vertically (TextDirection = Vertical90 or TextDirection = Vertical270).

❑ UseToolStripContainer2 — Demonstrates a `ToolStripContainer` holding six `ToolStrip` controls. When you drag a `ToolStrip` to a new side of the container, the code sets the strip's orientation appropriately.

❑ UseToolTip — Demonstrates the `ToolTip` extender provider. Shows how to set `ToolTip` text at design time or runtime.

❑ UseTrackBar — Uses `TrackBar` controls to let the user set the red, green, and blue components of a color.

❑ UseTreeView — Demonstrates the `TreeView` control. Shows how to create `TreeView` nodes at runtime and how to allow the user to edit node labels except those at the top level.

❑ Appendix K

❑ Constructors — Demonstrates constructors and ways to initialize objects.

Index

Symbols

A

E

N

S